

TEST REPORT

Applicant:	Janam Technologies LLC
Address of Applicant:	100 CROSSWAYS PARK WEST, SUITE 105, WOODBURY, New York, United States 11797
Manufacturer:	Janam Technologies LLC
Address of Manufacturer:	100 CROSSWAYS PARK WEST, SUITE 105, WOODBURY, New York, United States 11797
Product name:	XM20 MOBILE BARCODE TERMINAL
Model:	XM20
Rating(s):	Lithium battery : DC 5.5V 1200mA
Trademark:	XM
FCC register number :	935596
Standards:	47 CFR PART 15 Subpart C: 2011 section 15.247 ANSI C63.4 : 2003
FCC ID:	UTWXM20
Data of Receipt:	2013-07-24
Date of Test:	2013-07-25~2013-08-01
Date of Issue:	2013-08-02
Test Result	Pass*

* In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:

Test by:

Jumy Qiu

Aug.01.2013 Jumy Qiu

Project Engineer

Reviewed by:

Pauler Li

Aug.02.2013

Pauler Li

Project Engineer

Date

Name/Position

Signature

Date

Name/Position

Signature

Possible test case verdicts:

test case does not apply to the test object ...: N/A

test object does meet the requirement: P (Pass)

test object does not meet the requirement ...: F (Fail)

Testing Laboratory information:

Testing Laboratory Name: I-Test Laboratory

Address: 1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City, Guangzhou, Guangdong Province, P.R. China

Testing location : Same as above

Tel : 0086-20-32209330

Fax : 0086-20-62824387

E-mail : itl@i-testlab.com

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Note:

N/A

1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
6 dB Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10: Clause 6.9 and KDB558074	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: Clause 6.10 and KDB558074 (Power Output Option 2-Method #1).	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10: Clause 6.11 and KDB558074 (PSD Option 1).	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.7 and KDB558074.	PASS
Radiated Spurious Emission 30 MHz to 25 GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & KDB558074	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10: Clause 6.9 & KDB558074.	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

2 Contents

	Page
TEST REPORT.....	1
1 TEST SUMMARY	3
2 CONTENTS.....	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF E.U.T.....	5
3.3 DETAILS OF E.U.T.....	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 TEST LOCATION.....	6
3.6 DEVIATION FROM STANDARDS	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
3.9 TEST FACILITY	6
3.10 MEASUREMENT UNCERTAINTY.....	6
4 INSTRUMENTS USED DURING TEST.....	7
5 TEST RESULTS.....	8
5.1 E.U.T. TEST CONDITIONS	8
5.2 ANTENNA EQUIREMENT	10
5.3 6 dB BANDWIDTH	11
5.4 MAXIMUM PEAK OUTPUT POWER	16
5.5 PEAK POWER SPECTRAL DENSITY	21
5.6 CONDUCTED SPURIOUS EMISSIONS.....	27
5.7 RADIATED SPURIOUS EMISSIONS	31
5.7.1 Harmonic and other spurious emissions	34
5.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	52
5.9 BAND EDGES REQUIREMENT	58
5.10 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30MHZ.....	62
5.10.1 Measurement Data.....	64

3 General Information

3.1 Client Information

Applicant: Janam Technologies LLC
Address of Applicant: 100 CROSSWAYS PARK WEST, SUITE 105, WOODBURY, New York, United States 11797

3.2 General Description of E.U.T.

Name: XM20 MOBILE BARCODE TERMINAL
Model No.: XM20
Trade Mark: XM
Operating Frequency: 2412MHz to 2462MHz for WIFI b/g

11 channels with 5MHz step

channel	Frequency	channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Channels: Type of Modulation
CCK, DQPSK, DBPSK for DSSS
64QAM, 16QAM, QPSK, BPSK for OFDM

Function: Barcode scan with Bluetooth and Wi-Fi transfer function
Antenna Type: Chip antenna

3.3 Details of E.U.T.

EUT Power Supply: Lithium battery :3.7Vx1
Adapter: /
Test mode: The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel lowest (2412MHz), middle (2437MHz) and highest (2462MHz) are chosen for full testing.
Power cord: /

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

3.5 Test Location

All tests were performed at:

Guangzhou ITL Co., Ltd.

1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City, Guangzhou, Guangdong Province, P.R. China

0086-20-32209330

itl@i-testlab.com

No tests were sub-contracted.

3.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS(Lab code:L4957)**
- **FCC (Registration No.:935596)**
- **IC (Registration NO.:8368A)**

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	$\pm 1.06 \times 10^{-7}$
total RF power, conducted	1.37 dB
RF power density , conducted	2.89 dB
All emissions, radiated	± 3.35 dB
Temperature	± 0.23 °C
Humidity	± 0.3 %
DC and low frequency voltages	± 0.3 %

4 Instruments Used during Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	Agilent	N9010A	MY51250936	2013.02.01	2014.01.31
2	Pre Amplifier	HP	8447F	3113A05905	2012.09.07	2013.09.06
3	Pre Amplifier	Mini-circuits	MLA-0120-A02-34	2648A04738	2013.06.08	2014.06.07
4	Biconilog Antenna	ETS•Lindgren	3142D	00108096	2013.01.29	2014.01.28
5	Horn Antenna	A-INFOMW	JXTXLB-10180-N	J203109061213 3	2012.12.18	2013.12.17
6	EMI Test Receiver	R&S	ESCI	100124	2013.06.08	2014.06.07
7	LISN	R&S	ENV216	100120	2013.06.08	2014.06.07
8	50Ω Coaxial Cable	Mini-circuits	CBL	ITL-115	2012.09.07	2013.09.06
9	Semi-Anechoic chamber	ETS•Lindgren	FACT3 2.0	ITL-100	2013.04.11	2014.04.10
10	Loop Antenna	ZHINAN	ZN30900A	002489	2013.01.23	2014.01.22
11	Horn Antenna	Schwarzbeck	BBHA 9170	ITL-118	2013.06.08	2014.06.07

5 Test Results

5.1 E.U.T. test conditions

Test Voltage:	DC 3.7V
Temperature:	23.2 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Requirements:	<p>15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.</p> <p>15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.</p>
Test frequencies and frequency range:	<p>According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:</p> <p>According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:</p>

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

Test frequencies are the lowest channel: 1 channel (2412MHz), middle channel: 6 channel(2437 MHz) and highest channel: 11 channel (2462 MHz)

5.2 Antenna requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is a Chip antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

Test result: The unit does meet the FCC requirements.


5.36 dB Bandwidth

Test Requirement: FCC Part 15 C section 15.247
(a)(2)Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method: ANSI C63.10: Clause 6.9 and KDB558074

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

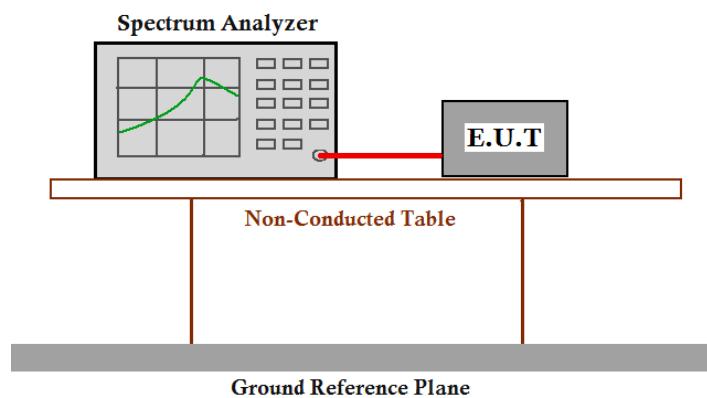

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.2dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=300KHz. VBW = 1MHz, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.


Channel No.	Frequency (MHz)	Mode	Data Rate	Measured 6dB bandwidth (MHz)	Limit	Result
1	2412	802.11b	1 Mbps	10.80	≥500KHz	Pass
6	2437		1 Mbps	10.96		Pass
11	2462		1 Mbps	11.12		Pass
1	2412	802.11g	6 Mbps	16.64	≥500KHz	Pass
6	2437		6 Mbps	16.64		Pass
11	2462		6 Mbps	16.72		Pass

6dB bandwidth:

Result plot as follows:

802.11b mode with 1Mbps data rate


Channel 1:2.412GHz:

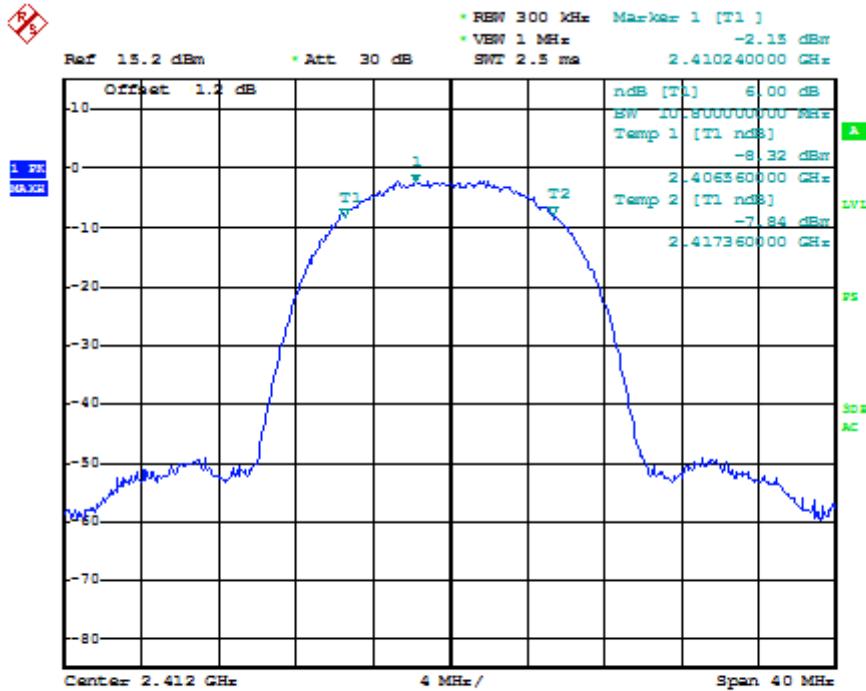

Date: 30.JUL.2013 00:57:27

802.11b mode with 1Mbps data rate


Channel 6:2.437GHz:

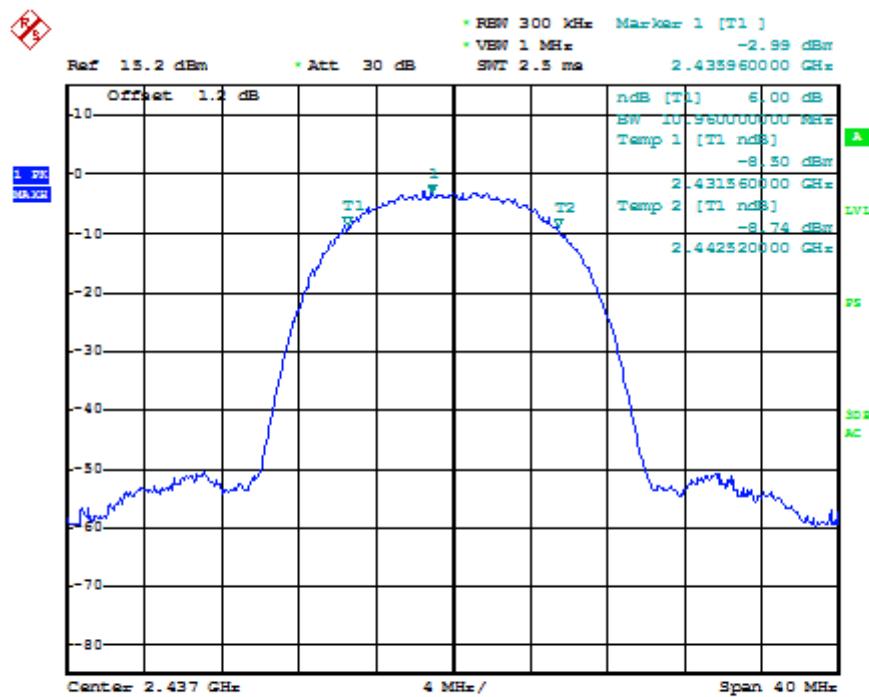

Date: 30.JUL.2013 00:58:25

802.11b mode with 1Mbps data rate


Channel 11:2.462GHz:

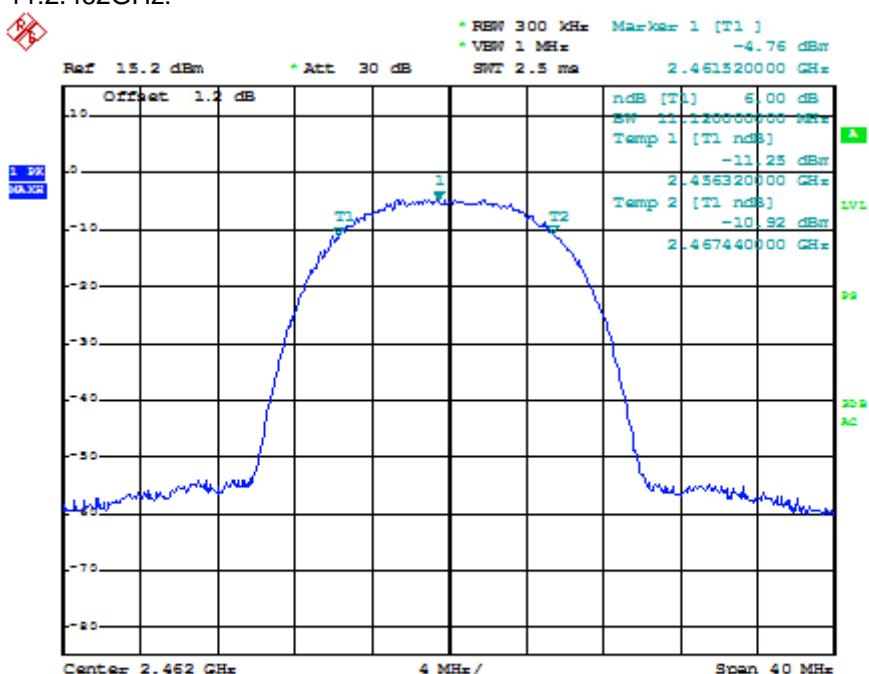

Date: 30.JUL.2013 00:59:43

802.11g mode with 6Mbps data rate


Channel 1:2.412GHz:

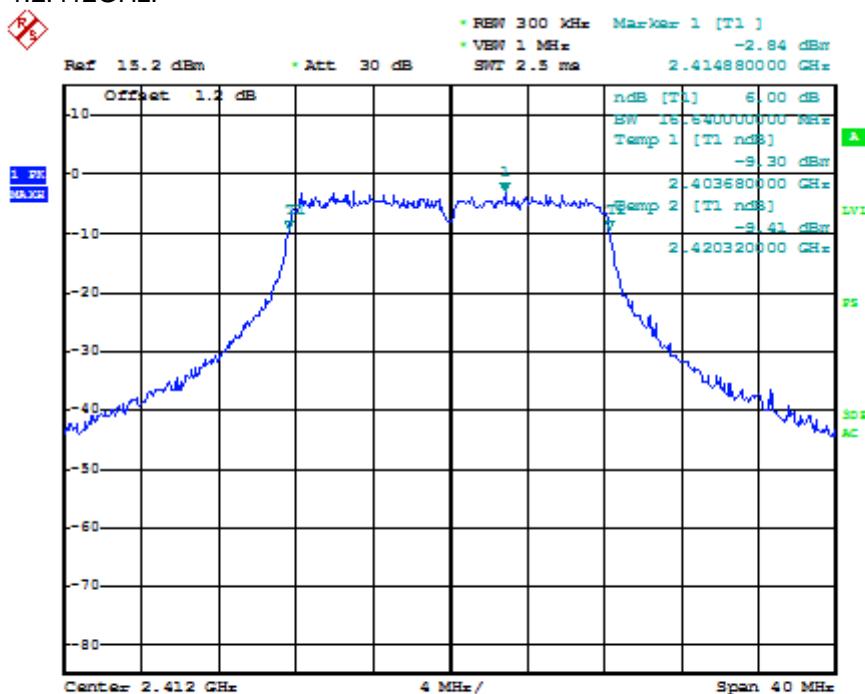

Date: 30.JUL.2013 01:01:07

802.11g mode with 6Mbps data rate


Channel 6:2.437GHz:

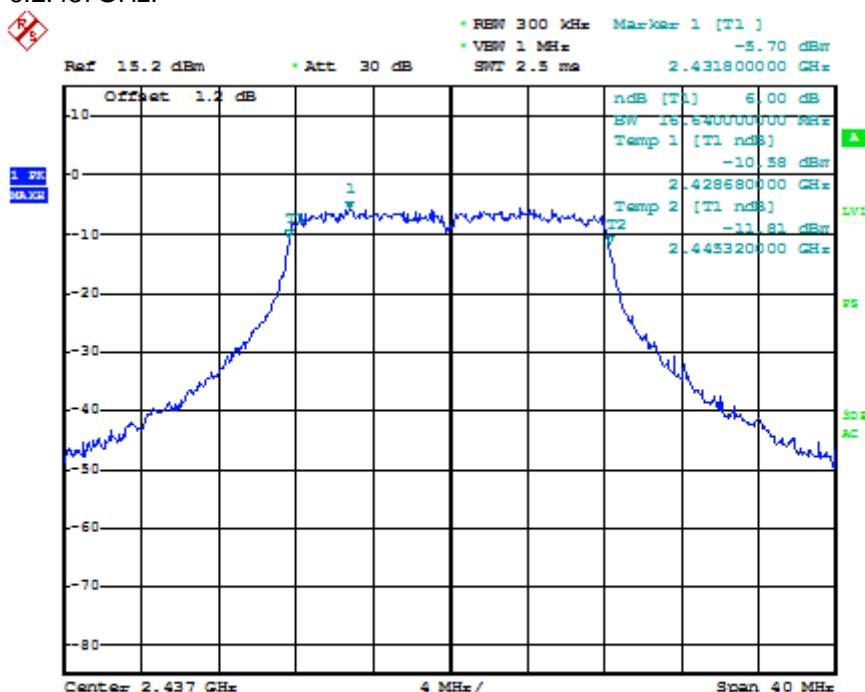

Date: 30.JUL.2013 01:02:04

802.11g mode with 6Mbps data rate

Channel 11:2.462GHz:

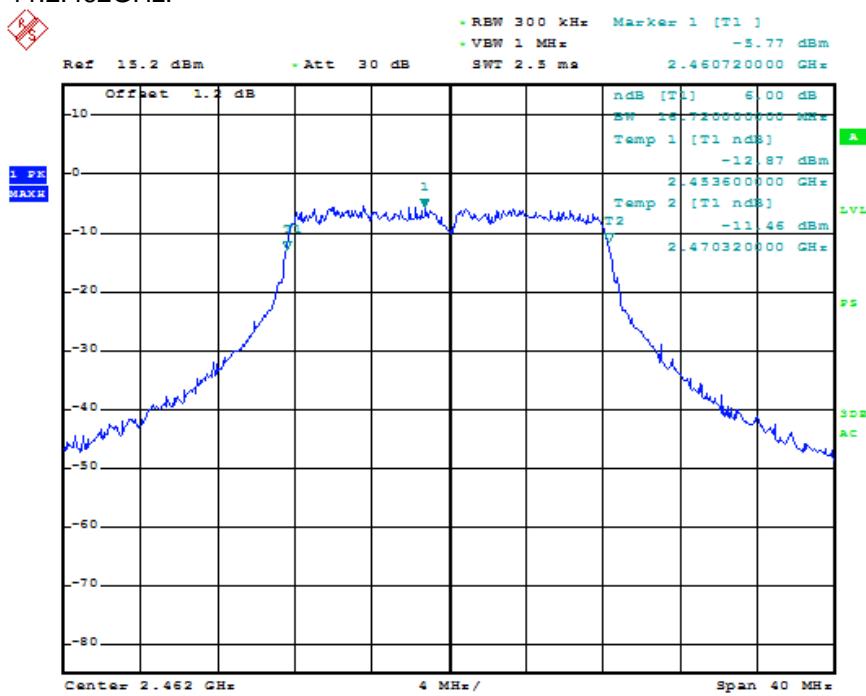

Date: 30.JUL.2013 01:03:03


5.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247
(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.
Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10: Clause 6.10 and KDB558074 (Power Output Option 2-Method #1).

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

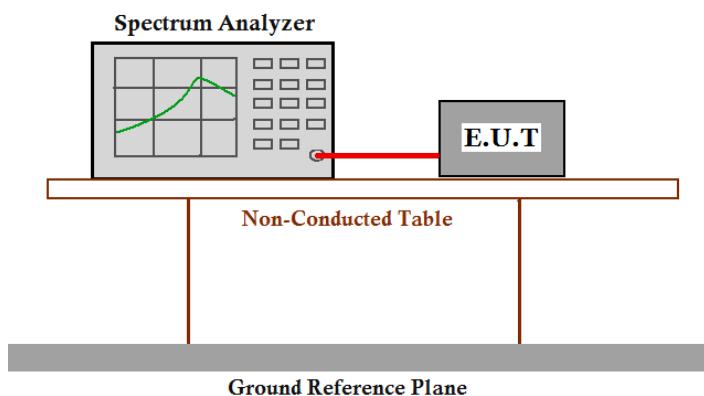

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss =1.2dB) from the antenna port to the spectrum.
2. Set span to encompass the entire emission bandwidth (EBW) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW \geq 3 MHz.
5. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) $<$ 0.5 RBW. Otherwise use peak detector mode.
6. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep.

If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run".

7. Trace average 100 traces in power averaging mode.
8. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
9. Measure the channel power of the test frequency with special test status.
10. Repeat until all the test status is investigated.
11. Report the worst case.

Channel No.	Frequency (MHz)	Mode	Data Rate	Measured Channel Power (dBm)	Limit (dBm)	Result
1	2412	802.11b	1 Mbps	10.28	30	Pass
6	2437		1 Mbps	9.27		Pass
11	2462		1 Mbps	9.08		Pass
1	2412	802.11g	6 Mbps	11.39	30	Pass
6	2437		6 Mbps	10.31		Pass
11	2462		6 Mbps	10.31		Pass


Pre-test all possible combinations between available modulations, data rates; find the worst case on 802.11b mode with 1Mbps data rate and 802.11g mode with 6Mbps data rate

The unit does meet the FCC requirements.

Result plot as follows:


802.11b mode with 1Mbps data rate

Channel 1: 2.412GHz:

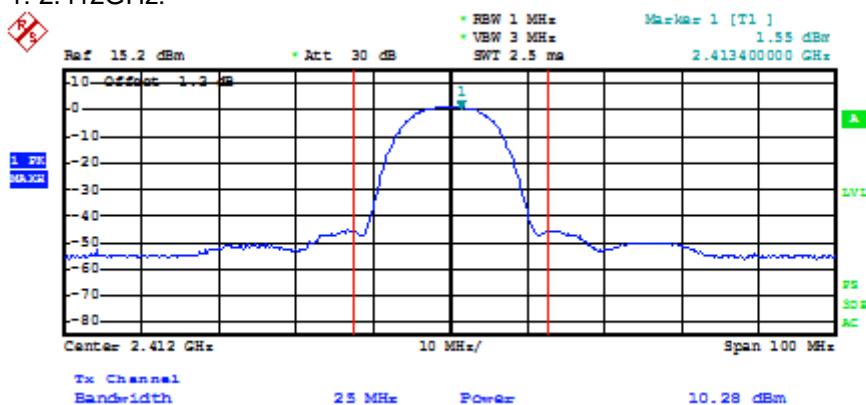


Date: 30.JUL.2013 00:48:16

Channel 6: 2.437GHz:

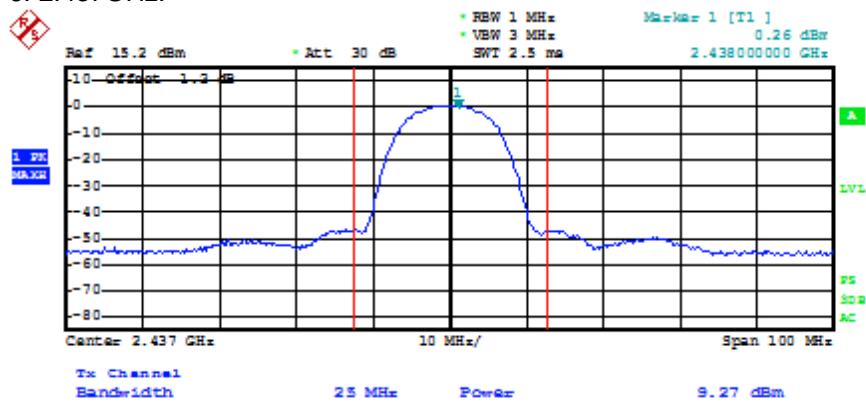

Date: 30.JUL.2013 00:47:30


Channel 11: 2.462GHz:

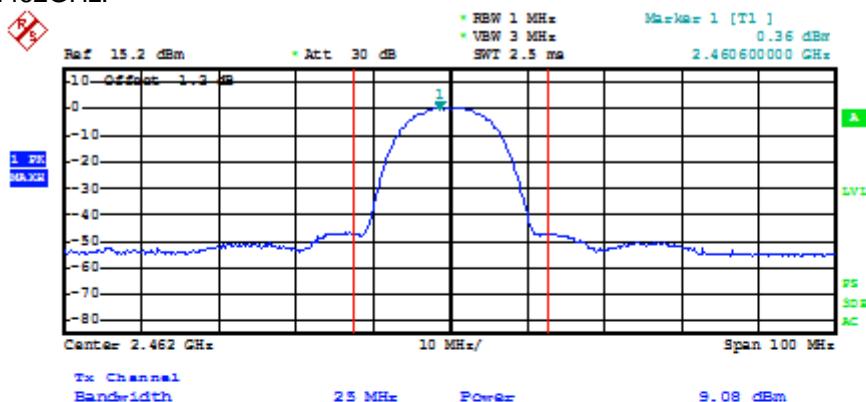

Date: 30.JUL.2013 00:46:51


802.11g mode with 6Mbps data rate

Channel 1: 2.412GHz:

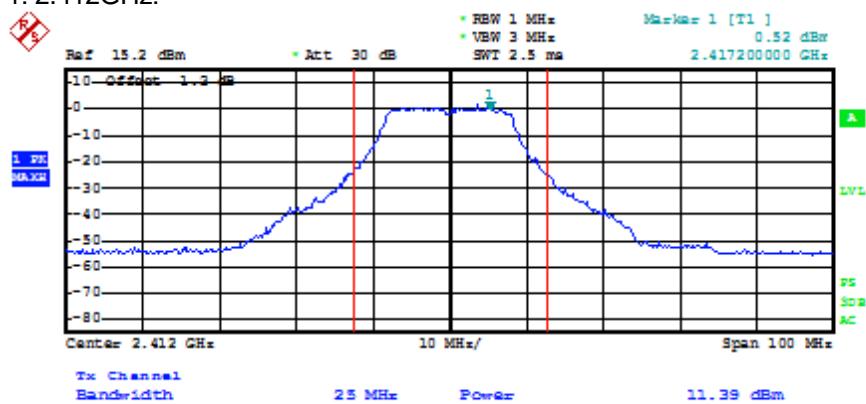


Date: 30.JUL.2013 00:43:11

Channel 6: 2.437GHz:

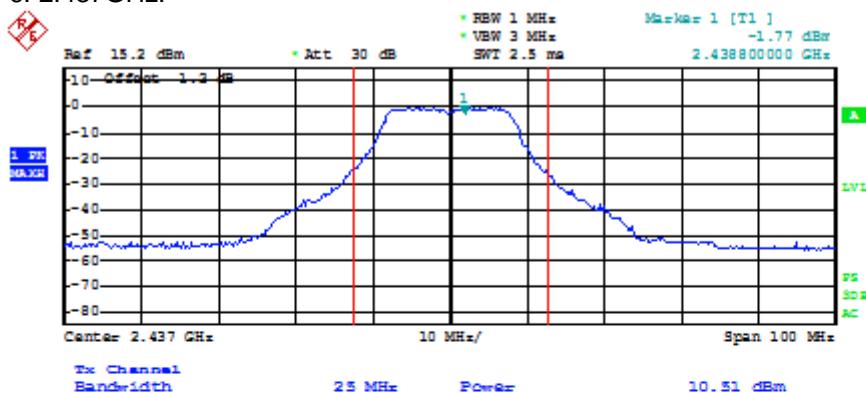

Date: 30.JUL.2013 00:42:21

Channel 11: 2.462GHz:

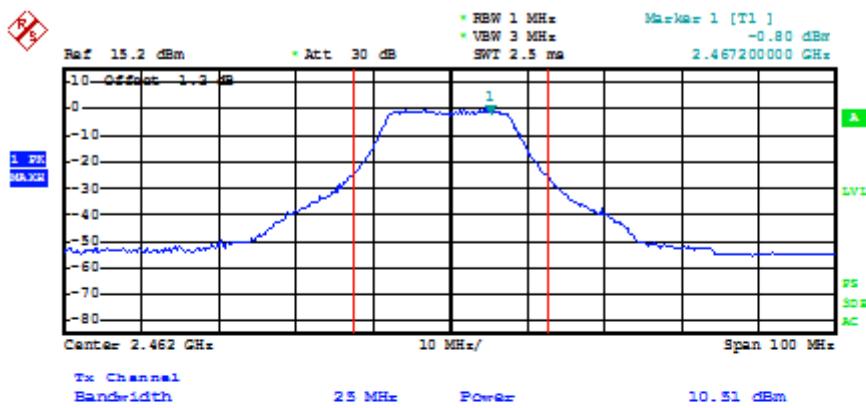

Date: 30.JUL.2013 00:36:46


5.5 Peak Power Spectral Density

Test Requirement: FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Method: ANSI C63.10: Clause 6.11 and KDB558074 (PSD Option 1).

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

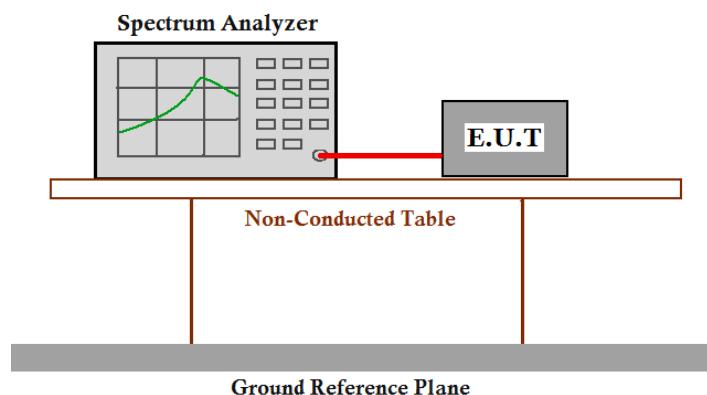

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.2 dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set CENTER FREQUENCY = Frequency from Power Spectral Density Test Matrix (see 6.10.2)
 - b) Set SPAN = 20 MHz (For devices with a nominal 40 MHz BW, 50 MHz span will be needed)
 - c) Set REFERENCE LEVEL = 20 dBm
 - d) Set ATTENUATION = 0 dB (add internal attenuation, if necessary)
 - e) Set SWEEP TIME = Coupled
 - f) Set RBW = 3 kHz
 - g) Set VBW = 10 kHz
 - h) Set DETECTOR = Peak
 - i) Set MKR = Center Frequency
 - j) Set TRACE = CLEAR WRITE

Place the radio in continuous transmit mode. Set the TRACE to MAX HOLD, and after the trace stabilizes, the TRACE to VIEW. Set the marker on the peak of the signal and then adjust the center frequency of the spectrum analyzer to the marker frequency.

After viewing the EUT waveform on the spectrum analyzer, perform the following spectrum analyzer functions to capture the trace:

Set SPAN = 300 kHz
Set SWEEP TIME = 100 s
Set TRACE = MAX HOLD
Set MKR = PEAK SEARCH

3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.

Test result:

Channel No.	Frequency (MHz)	Mode	Data Rate	Measured Peak Power Spectral Density (dBm/3kHz)	Limit	Result
1	2412	802.11b	1 Mbps	-3.49	8dBm/3kHz	Pass
6	2437		1 Mbps	-4.43		Pass
11	2462		1 Mbps	-17.17		Pass
1	2412	802.11g	6 Mbps	-23.93	8dBm/3kHz	Pass
6	2437		6 Mbps	-28.38		Pass
11	2462		6 Mbps	-29.93		Pass


Test result: Level = Read Level + Cable Loss.

The results does meet the FCC requirements.

Result plot as follows:


802.11b mode with 1Mbps data rate

Channel 1:2.412 GHz:

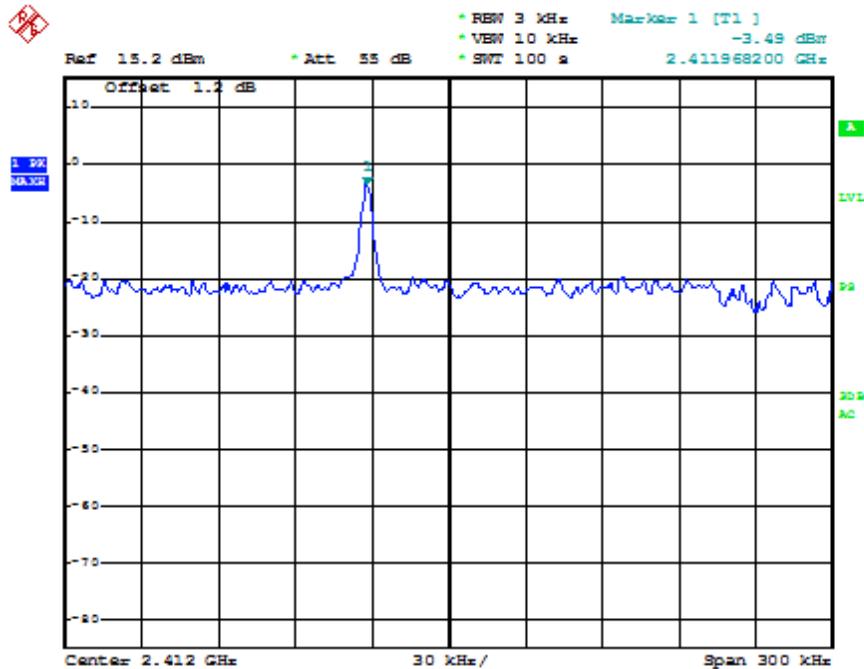


Date: 30.JUL.2013 01:13:16

Channel 6:2.437 GHz:

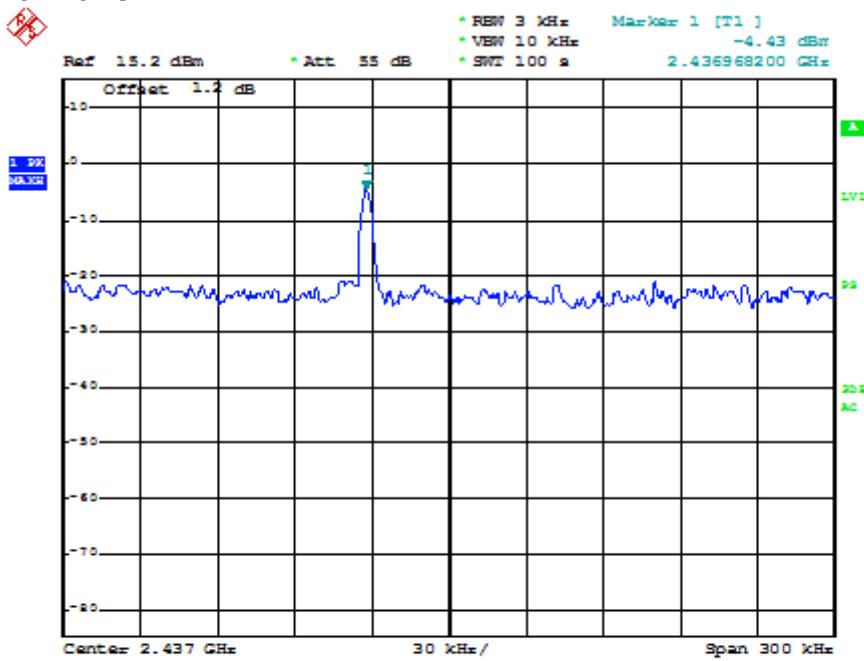

Date: 30.JUL.2013 01:15:28


Channel 11:2.462 GHz:

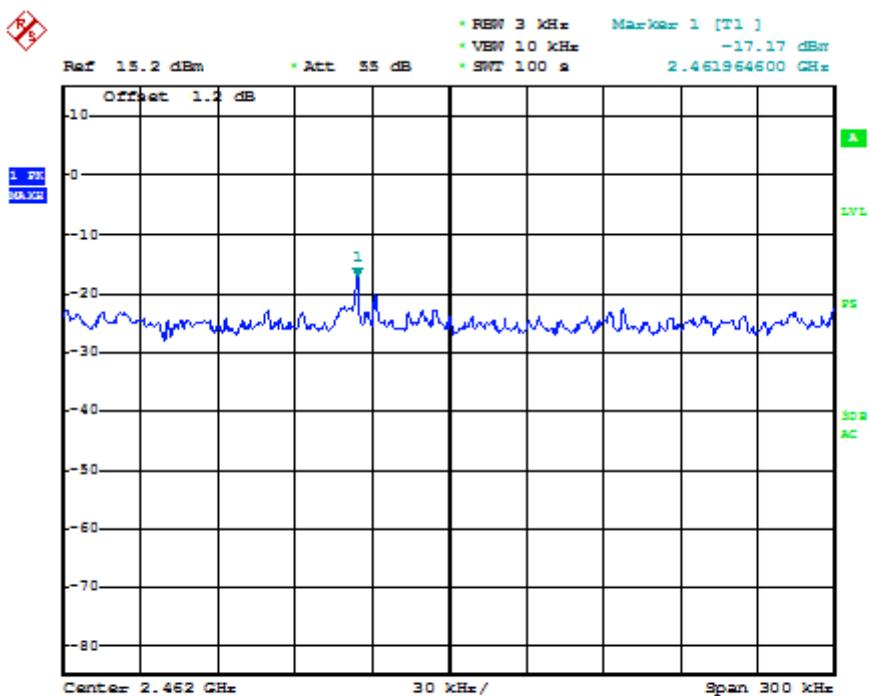

Date: 30.JUL.2013 01:16:59


802.11g mode with 6Mbps data rate

Channel 1:2.412 GHz:

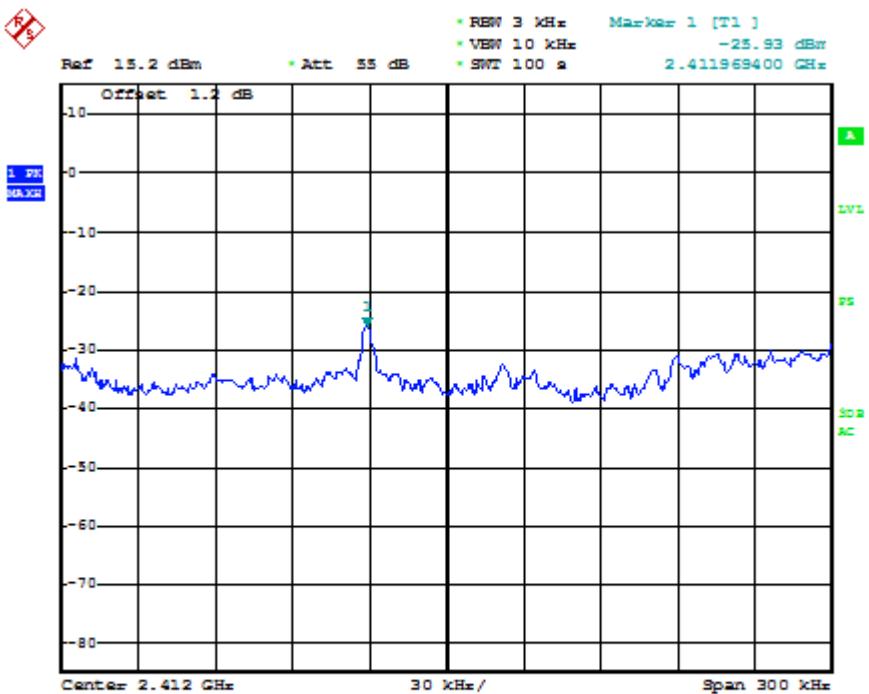


Date: 30.JUL.2013 01:21:40

Channel 6:2.437 GHz:

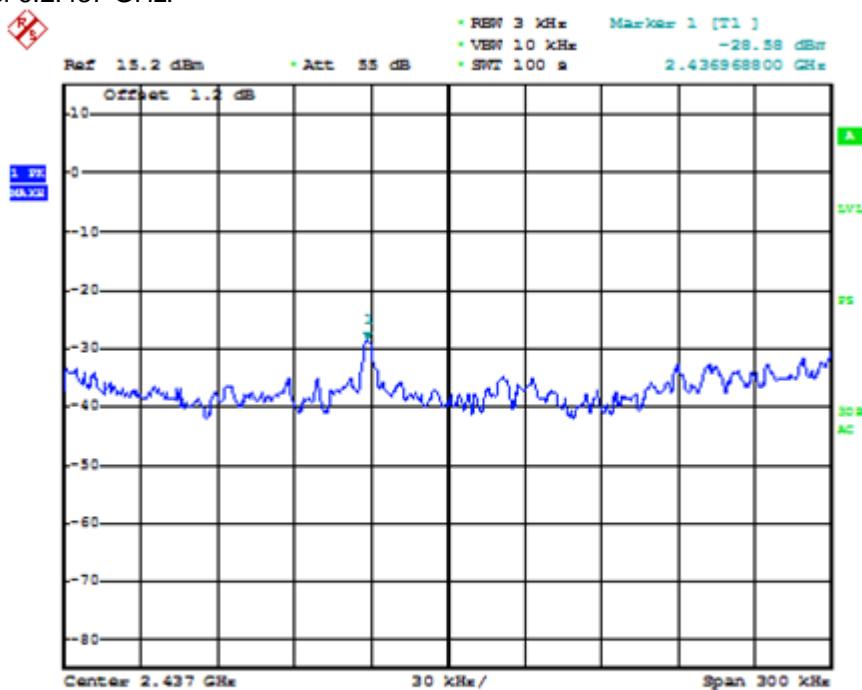

Date: 30.JUL.2013 01:22:43

Channel 11:2.462 GHz:

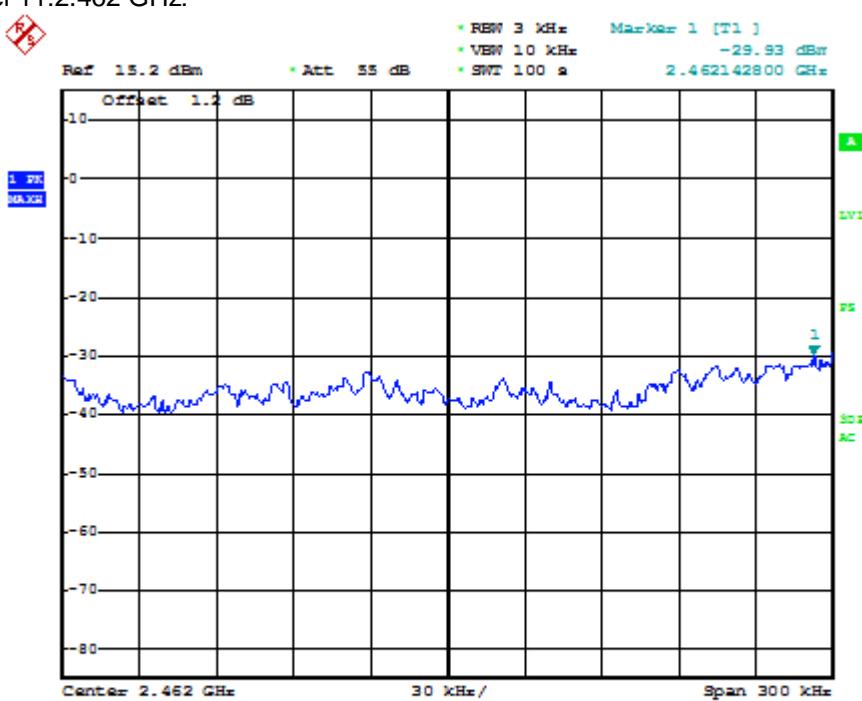

Date: 30.JUL.2013 01:24:22

5.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10: Clause 6.7 and KDB558074.

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

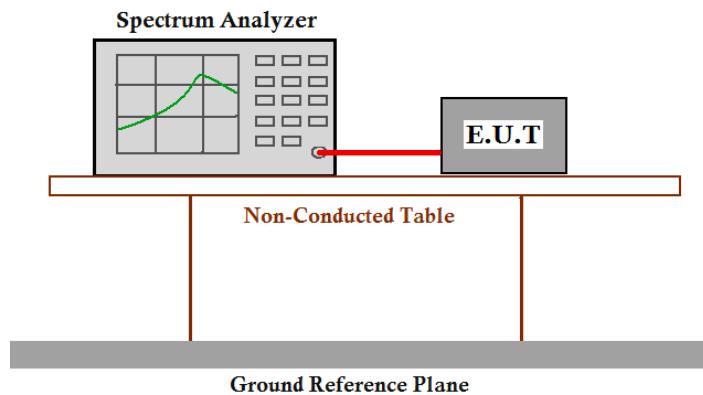

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.

Result plot as follows:

802.11b mode with 1Mbps data rate

Channel 1: 2.412 GHz



Channel 6: 2.437 GHz



Channel 11: 2.462 GHz



802.11g mode with 6Mbps data rate

Channel 1: 2.412 GHz



Channel 6: 2.437 GHz



Channel 11: 2.462 GHz




The results does meet the FCC requirements.

5.7 Radiated Spurious Emissions


Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & KDB558074
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Detector: For PK value:	<p>RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz</p> <p>VBW \geq RBW</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p>
For AV value:	<p>RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9kHz for <30 MHz</p> <p>VBW = 10Hz</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p>
15.209 Limit:	40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz

Test Configuration:


- 1) 9kHz to 30MHz emissions:

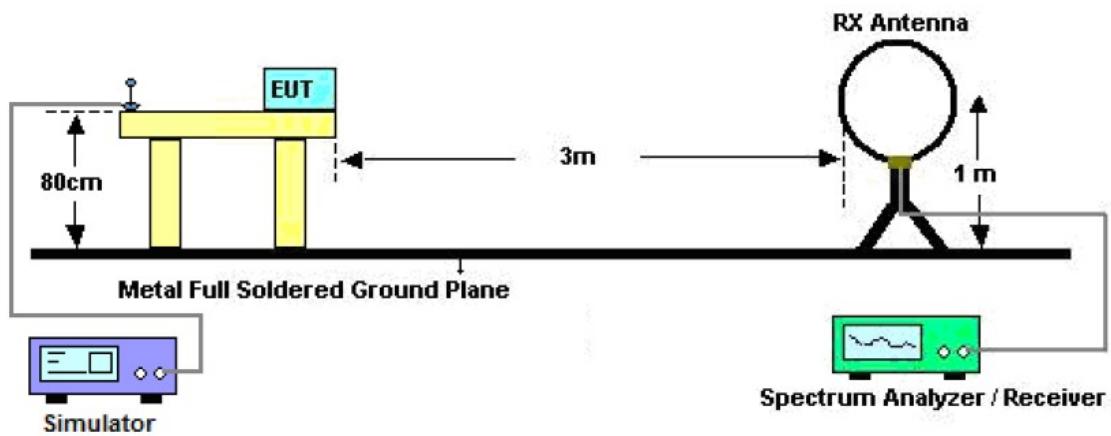

- 2) 30 MHz to 1 GHz emissions:

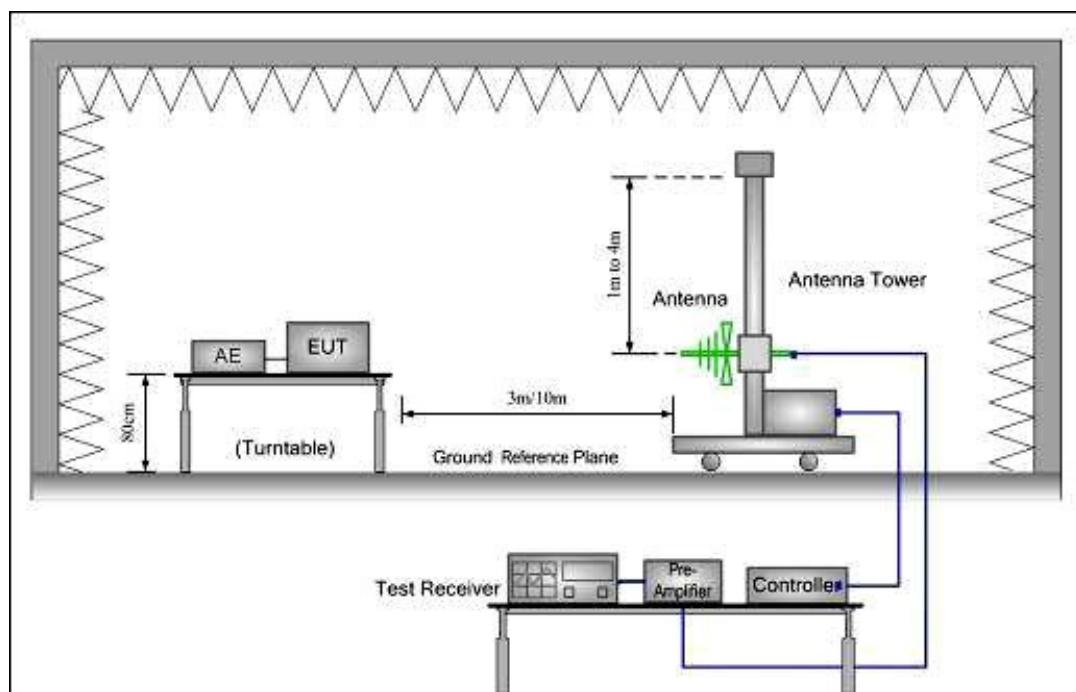

3) 1 GHz to 40 GHz emissions:

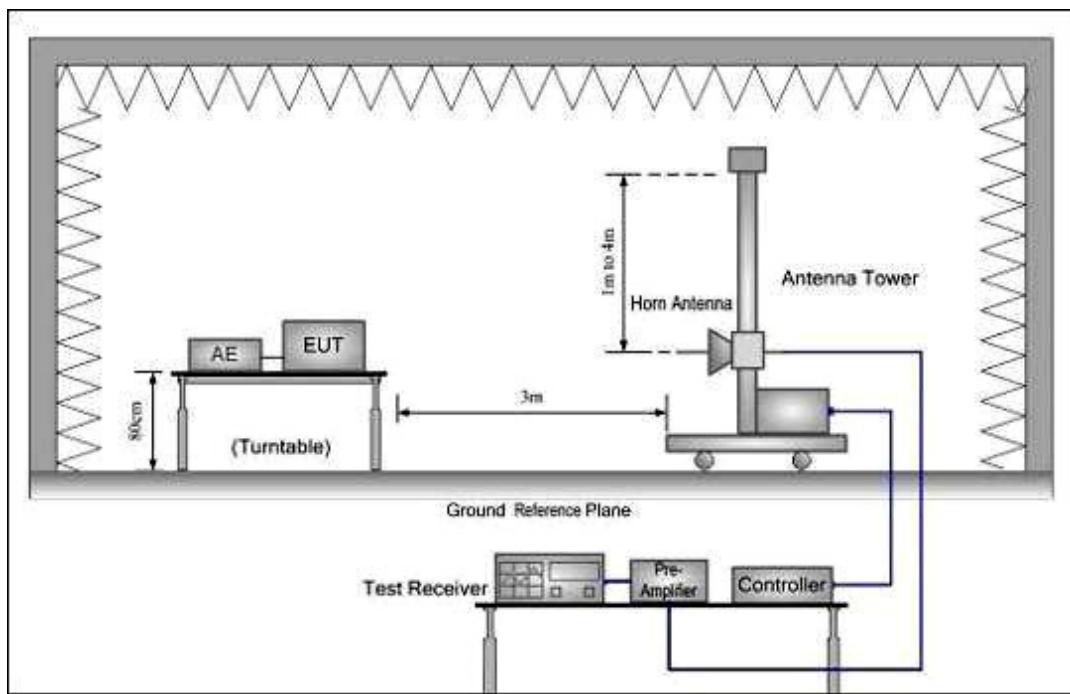**Test Procedure:**

The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

From 30MHz to 1GHz, read the Quasi-Peak field strength of the emissions with receiver QP detector
RBW=120KHz.

Above 1GHz, read the Peak field strength and Average field strength.

Read the Peak field strength through RBW=1MHz, VBW=3MHz in spectrum analyzer setting; Read the Average field strength through RBW=1MHz, VBW=10Hz in spectrum analyzer setting; While maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the average field strength reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

5.7.1 Harmonic and other spurious emissions

802.11b mode with 1Mbps data rate

Test at Channel 1 (2.412 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

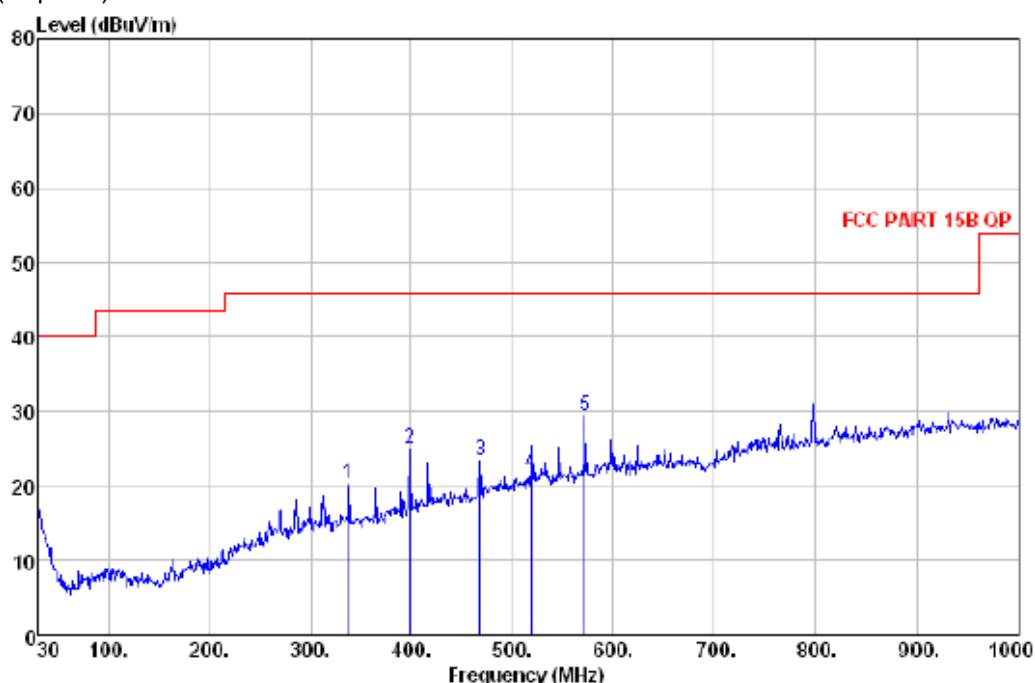


Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dB μ V/m	Margin dB	A/pos cm	T/pos deg
1	338.460	20.36	QP	13.75	2.25	46.00	-25.64	100	6
2	398.600	25.05	QP	15.94	2.44	46.00	-20.95	100	15
3	468.440	23.33	QP	17.89	2.68	46.00	-22.67	100	48
4	518.880	21.62	QP	18.76	2.83	46.00	-24.38	200	159
5	572.230	29.44	QP	19.64	2.98	46.00	-16.56	200	127

Level=Read Level + Antenna Factor + Cable Loss

Vertical:

Peak scan

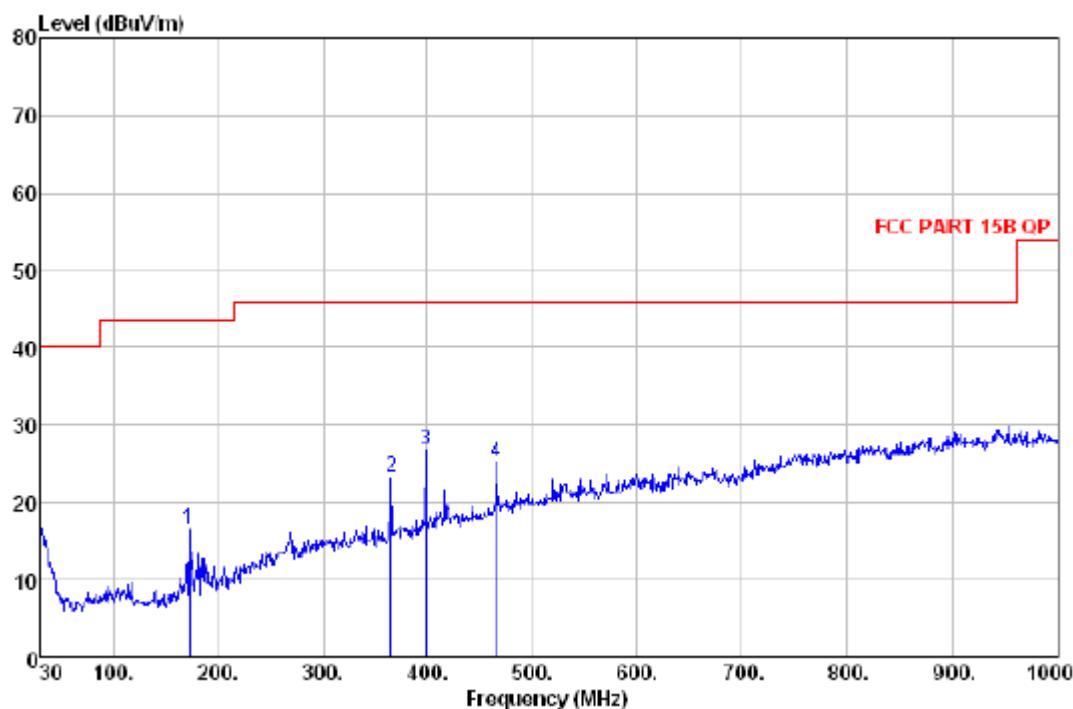Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/n	Cable Loss dB	Limit Line dB μ V/m	Margin dB	A/pos cm	T/pos deg
1	172.590	16.51	QP	8.30	1.57	43.50	-26.93	100	4
2	365.620	23.18	QP	14.68	2.33	46.00	-22.82	100	99
3	398.600	26.82	QP	15.94	2.44	46.00	-19.18	200	12
4	465.630	25.28	QP	17.69	2.67	46.00	-20.72	200	78

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4824.000	34.32	9.60	27.62	36.39	52.69	74	V
7236.000	34.74	12.16	27.33	34.67	54.24	74	V
4824.000	34.32	9.60	27.62	32.45	48.75	74	H
7236.000	34.74	12.16	27.33	35.94	55.51	74	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4824.000	34.32	9.60	27.62	23.01	39.31	54	V
7236.000	34.74	12.16	27.33	22.71	42.28	54	V
4824.000	34.32	9.60	27.62	22.21	38.51	54	H
7236.000	34.74	12.16	27.33	23.04	42.61	54	H

Test at Channel6 (2.437 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

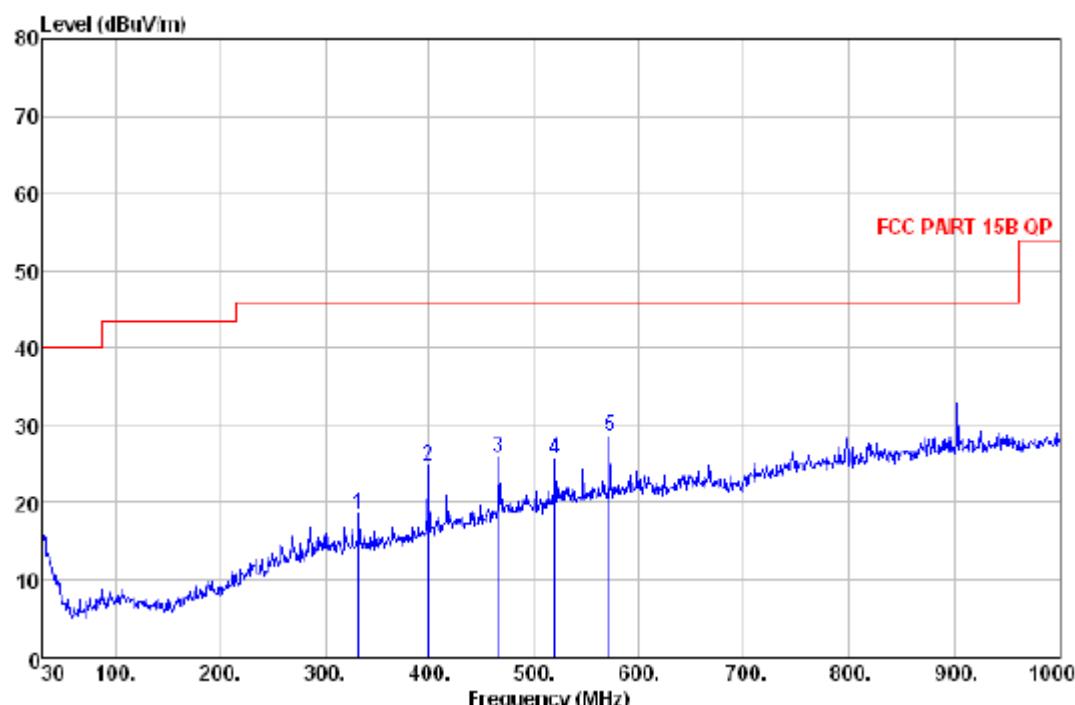


Quasi-peak measurement

No.	Freq MHz	Level dB μ V/n	Remark	Antenna Factor dB/n	Cable Loss dB	Limit Line dB μ V/m	Margin dB	A/pos cm	T/pos deg
1	332.640	18.59	QP	13.92	2.23	46.00	-27.41	100	2
2	398.600	24.83	QP	15.94	2.44	46.00	-21.17	100	78
3	465.530	25.74	QP	17.09	2.67	46.00	-20.26	200	76
4	519.850	25.57	QP	18.79	2.83	46.00	-20.43	200	88
5	672.230	28.44	QP	19.64	2.98	46.00	-17.56	200	123

Level=Read Level + Antenna Factor + Cable Loss

Vertical:

Peak scan

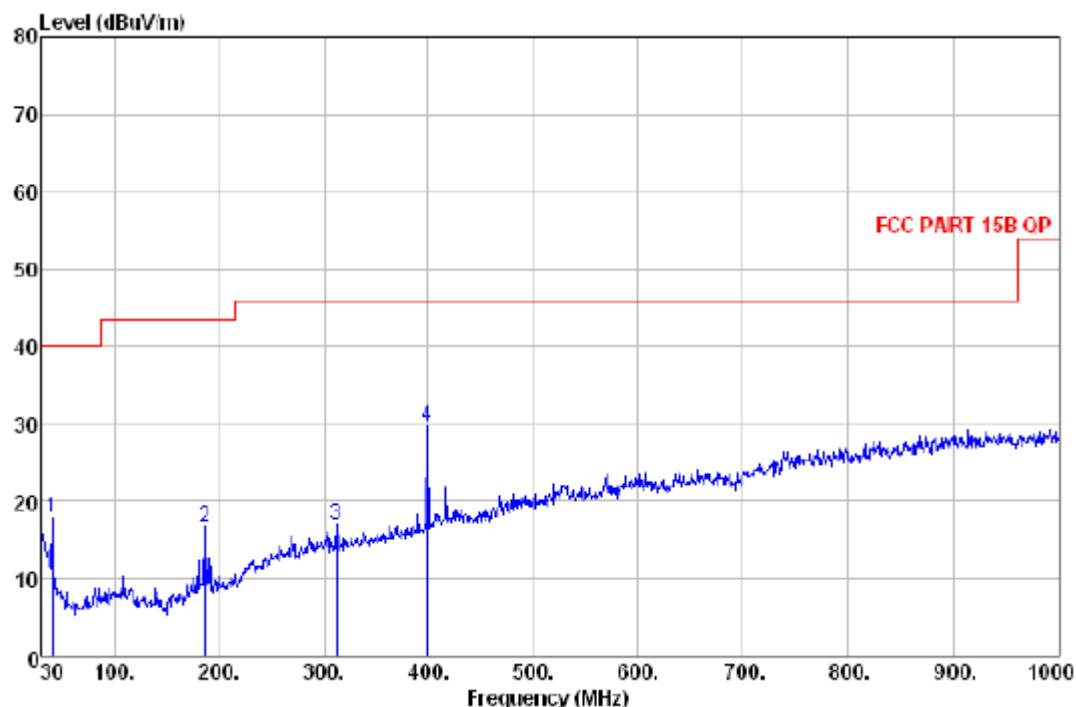Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/n	Cable Loss dB	Limit Line dBuV/m	Margin dB	A/pos cm	I/pos deg
1	40.670	17.80	QP	11.86	0.72	40.00	-22.20	100	9
2	186.170	16.66	QP	8.44	1.64	43.50	-26.84	100	78
3	312.270	16.89	QP	13.69	2.17	46.00	-29.11	200	6
4	398.600	29.62	QP	15.94	2.44	46.00	-16.38	200	179

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4874.00	34.37	9.66	27.61	35.12	51.54	74.00	V
7311.00	35.07	12.23	27.33	34.03	54.00	74.00	V
4874.00	34.37	9.66	27.61	36.86	53.28	74.00	H
7311.00	35.07	12.23	27.33	37.62	57.59	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4874.00	34.37	9.66	27.61	23.74	40.16	54.00	V
7311.00	35.07	12.23	27.33	26.97	46.94	54.00	V
4874.00	34.37	9.66	27.61	25.03	41.45	54.00	H
7311.00	35.07	12.23	27.33	27.18	47.15	54.00	H

Test at Channel11 (2.462 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

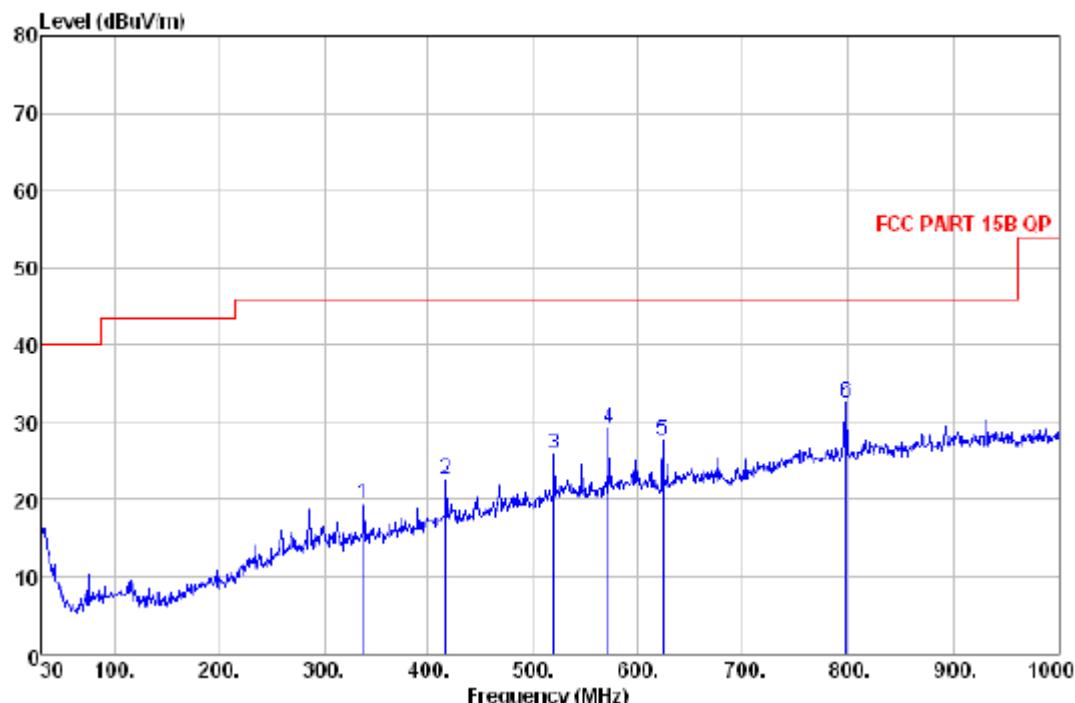


Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dB μ V/m	Margin A/pos dB	T/pos cm	T/pos deg
				dB/m	dB	dB μ V/m	dB	cm	deg
1	338.460	19.31	QP	13.75	2.25	46.00	-26.69	100	88
2	416.060	22.51	QP	16.40	2.51	46.00	-23.43	100	73
3	519.850	25.76	QP	18.79	2.83	46.00	-20.24	100	189
4	572.230	29.11	QP	19.64	2.98	46.00	-16.89	200	81
5	623.640	27.73	QP	20.07	3.13	46.00	-18.27	200	123
6	798.240	32.52	QP	22.58	3.56	46.00	-13.48	200	17

Level=Read Level + Antenna Factor + Cable Loss

Vertical:

Peak scan

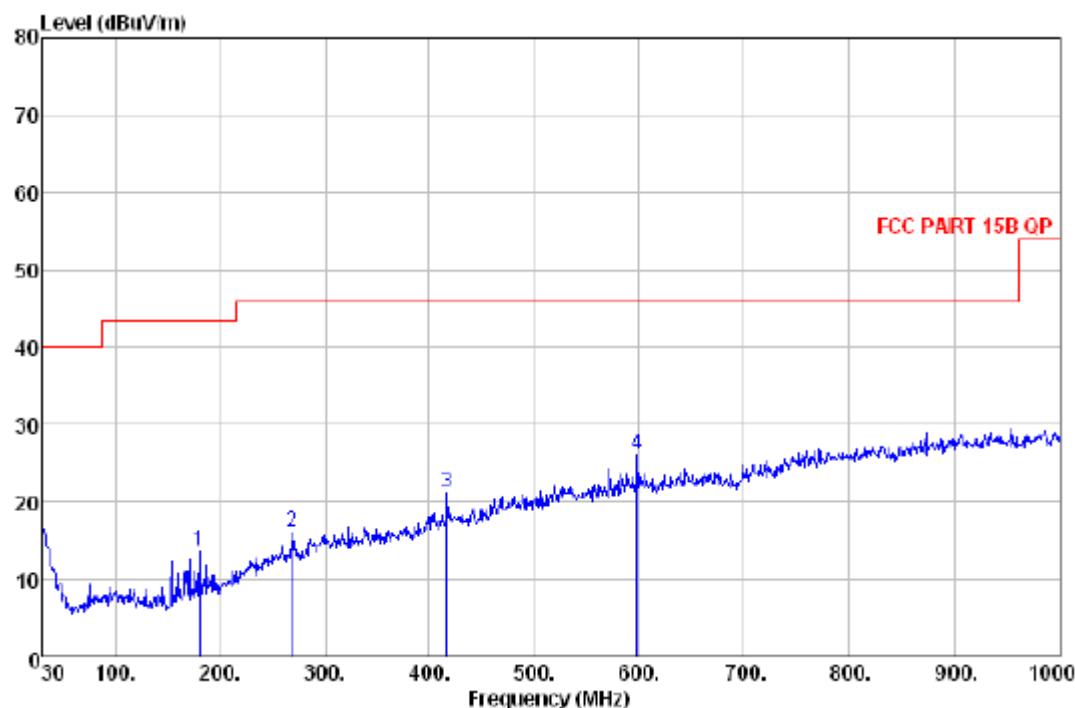Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/ μ V	Cable Loss dB	Limit dB μ V/m	Margin dB	A/pos cm	I/pos deg
1	180.350	13.53	QP	8.30	1.61	43.50	-29.97	100	232
2	269.590	15.99	QP	12.95	2.01	46.00	-30.01	100	5
3	416.060	21.26	QP	16.40	2.51	46.00	-24.74	200	18
4	598.420	25.97	QP	19.86	3.05	46.00	-20.03	200	96

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4924.00	34.42	9.71	27.60	31.31	47.84	74.00	V
7386.00	35.40	12.31	27.32	34.68	55.07	74.00	V
4924.00	34.42	9.71	27.60	35.02	51.55	74.00	H
7386.00	35.40	12.31	27.32	34.13	54.52	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4924.00	34.42	9.71	27.60	22.05	38.58	54.00	V
7386.00	35.40	12.31	27.32	23.09	43.48	54.00	V
4924.00	34.42	9.71	27.60	24.23	40.76	54.00	H
7386.00	35.40	12.31	27.32	26.17	46.56	54.00	H

802.11g mode with 6Mbps data rate

Test at Channel 1 (2.412 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

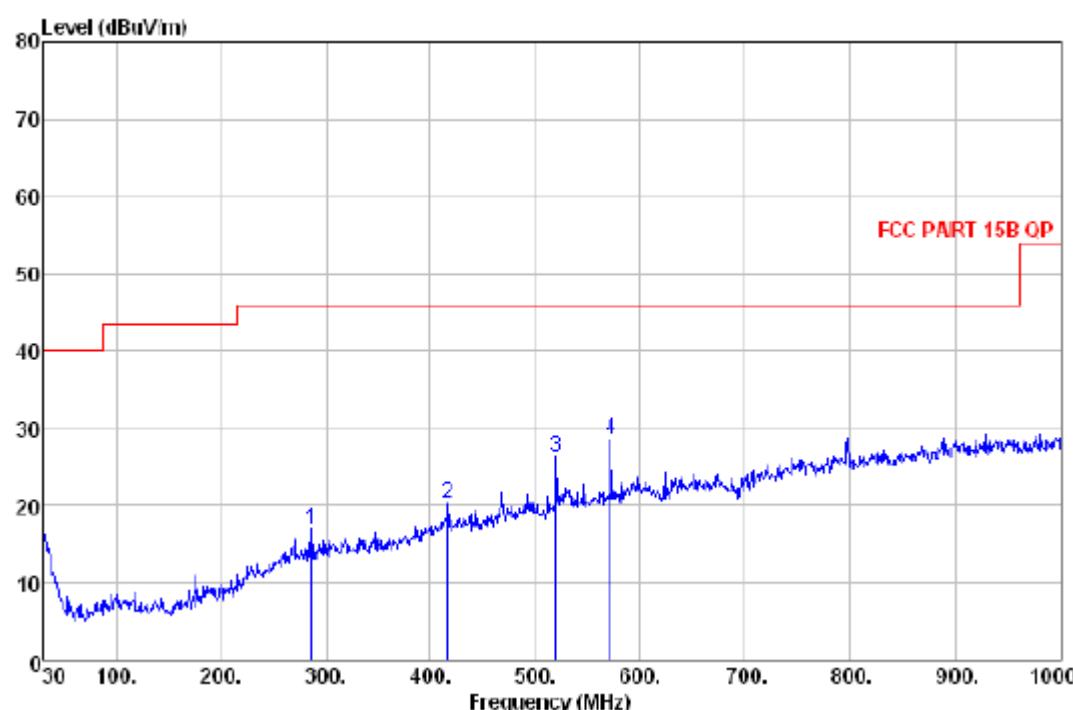


Quasi-peak measurement

No.	Freq MHz	Level dB μ V/n	Remark	Antenna Factor dB/n	Cable Loss dB	Limit Line dB μ V/m	Margin dB	A/pos cm	T/pos deg
1	286.080	16.99	QP	13.53	2.07	46.00	-29.01	100	99
2	416.060	20.36	QP	16.40	2.51	46.00	-25.64	100	4
3	519.850	26.37	QP	18.79	2.83	46.00	-19.63	200	78
4	572.230	28.62	QP	19.64	2.98	46.00	-17.38	200	89

Level=Read Level + Antenna Factor + Cable Loss

Vertical:

Peak scan

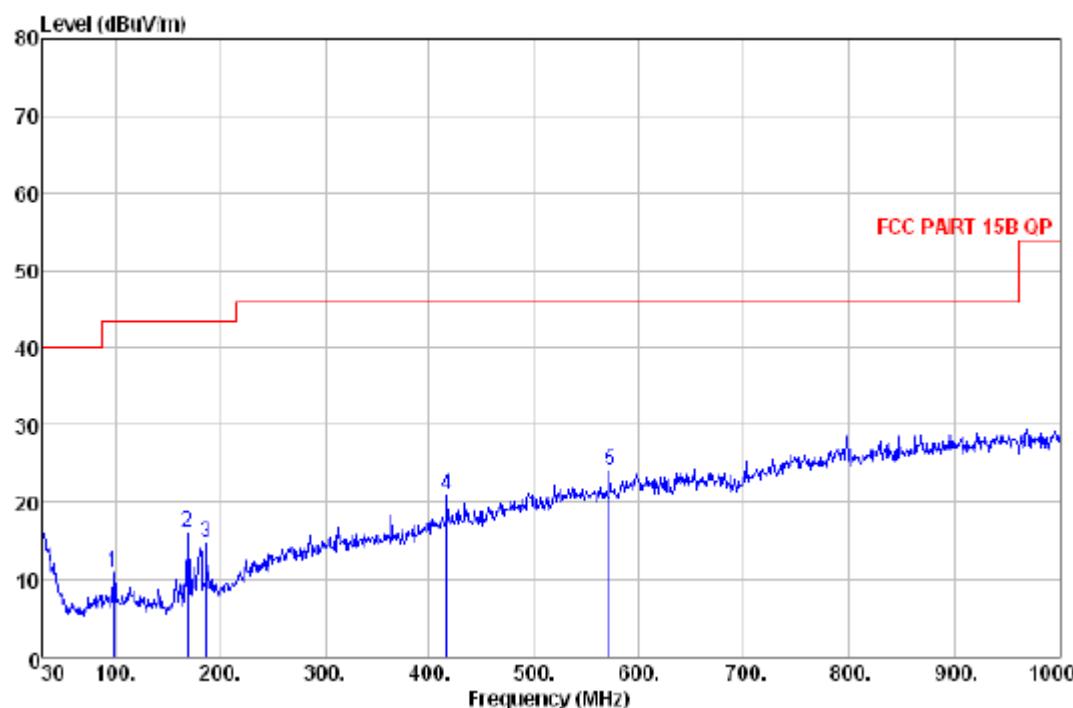Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dB μ V/m	Margin dB	A/pos cm	I/pos deg
1	98.870	10.95	QP	8.63	1.16	43.50	-32.55	100	78
2	168.710	16.11	QP	8.17	1.55	43.50	-27.39	100	6
3	186.170	14.74	QP	8.44	1.64	43.50	-28.76	100	123
4	416.060	21.05	QP	16.40	2.61	46.00	-24.95	200	71
5	572.230	24.17	QP	19.64	2.98	46.00	-21.83	200	359

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4824.00	34.32	9.60	27.62	32.46	48.76	74.00	V
7236.00	34.74	12.16	27.33	34.52	54.09	74.00	V
4824.00	34.32	9.60	27.62	32.76	49.06	74.00	H
7326.00	34.74	12.16	27.33	36.51	56.08	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4824.00	34.32	9.60	27.62	22.70	39.00	54.00	V
7236.00	34.74	12.16	27.33	22.21	41.78	54.00	V
4824.00	34.32	9.60	27.62	22.95	39.25	54.00	H
7326.00	34.74	12.16	27.33	23.21	42.78	54.00	H

Test at Channel 6 (2.437 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

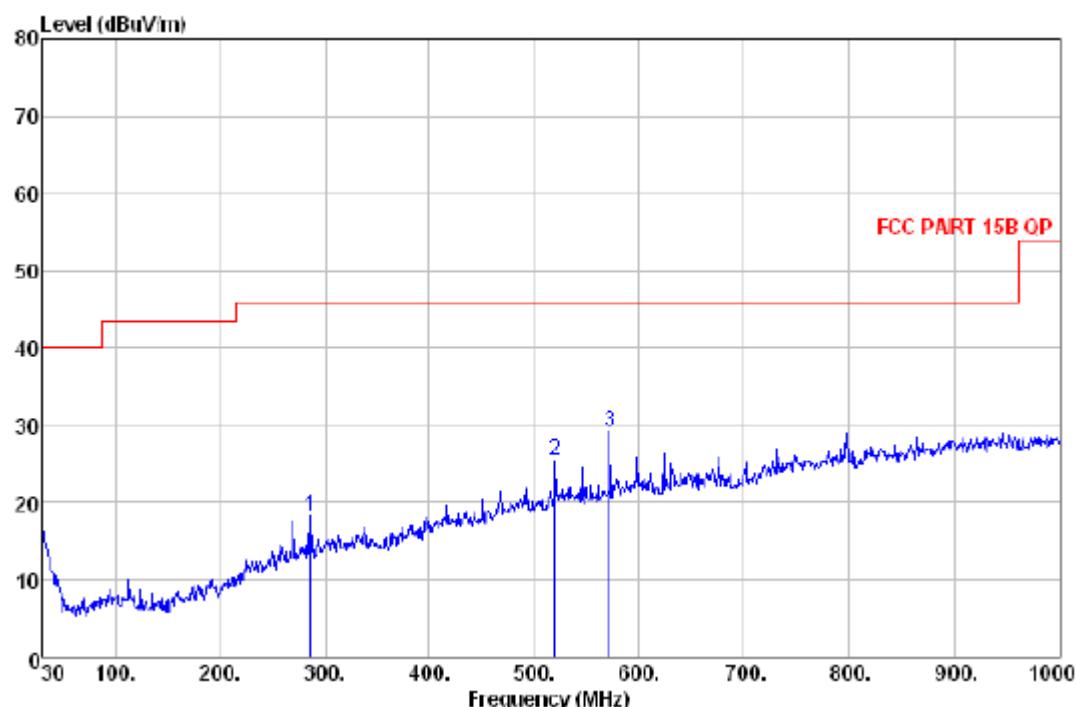


Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor dB/m	Cable Loss dB	Limit Line dB μ V/m	Margin A/pos dB	T/pos cm	T/pos deg
1	286.080	18.23	QP	13.53	2.07	46.00	-27.77	100	96
2	519.850	25.51	QP	18.79	2.83	46.00	-20.49	100	8
3	572.230	29.25	QP	19.64	2.98	46.00	-16.75	203	360

Level=Read Level + Antenna Factor + Cable Loss

Vertical:

Peak scan

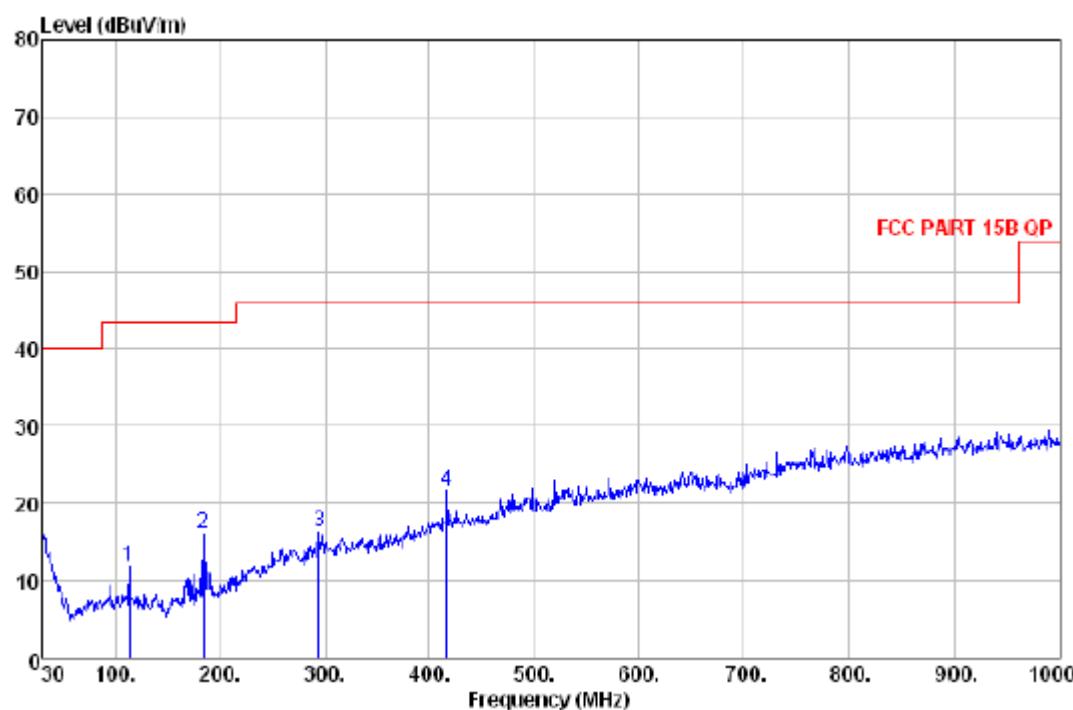Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna Factor	Cable Loss dB/m	Limit dB μ V/m	Margin dB	A/pos cm	I/pos deg
1	113.420	11.82	QP	8.20	1.25	43.50	-31.68	100	96
2	184.250	15.97	QP	8.30	1.63	43.50	-27.53	100	15
3	294.810	16.27	QP	13.68	2.10	46.00	-29.73	200	55
4	416.060	21.58	QP	16.40	2.51	46.00	-24.42	200	25

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4874.00	34.37	9.66	27.61	33.57	49.57	74.00	V
7311.00	35.07	12.23	27.33	35.07	54.40	74.00	V
4874.00	34.37	9.66	27.61	34.72	52.60	74.00	H
7311.00	35.07	12.23	27.33	36.06	50.59	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4874.00	34.37	9.66	27.61	22.70	39.12	54.00	V
7311.00	35.07	12.23	27.33	23.32	43.29	54.00	V
4874.00	34.37	9.66	27.61	22.84	39.26	54.00	H
7311.00	35.07	12.23	27.33	23.61	43.58	54.00	H

Test at Channel 11 (2.462 GHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

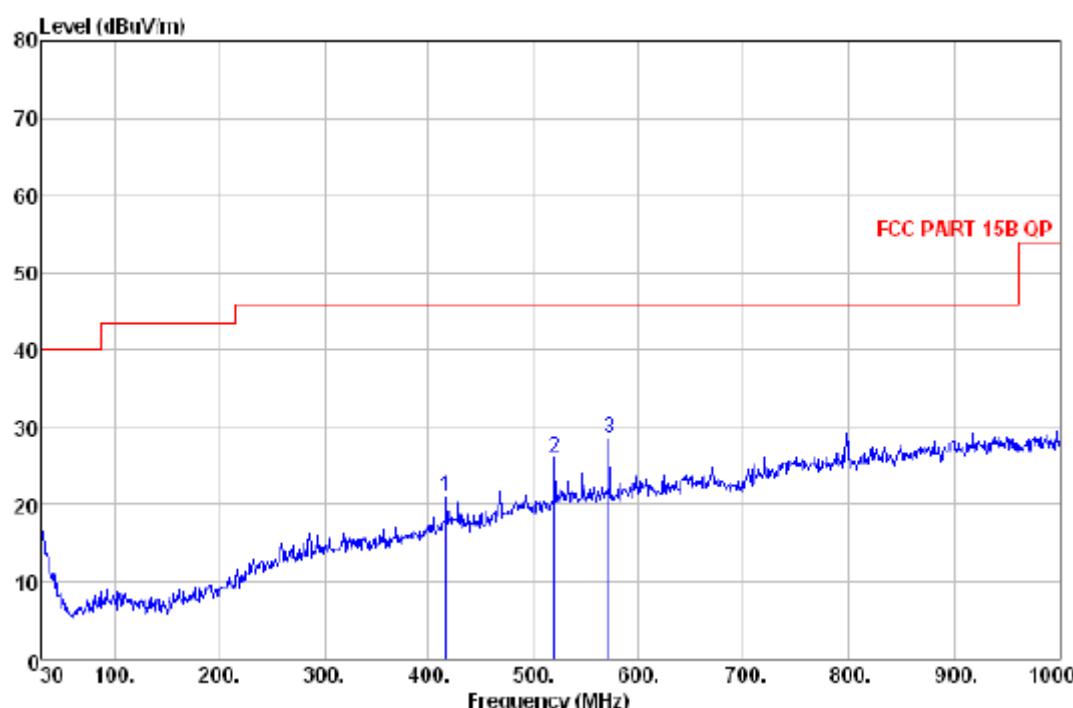


Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna	Cable Loss dB	Limit Line dB μ V/m	Margin dB	A/pos cm	T/pos deg
				Factor dB/m					
1	416.060	20.92	QP	16.40	2.51	46.00	-25.08	100	58
2	519.850	26.03	QP	18.79	2.83	46.00	-19.97	200	99
3	572.230	28.42	QP	19.64	2.98	46.00	-17.58	200	178

Level=Read Level + Antenna Factor + Cable Loss

Vertical:

Peak scan

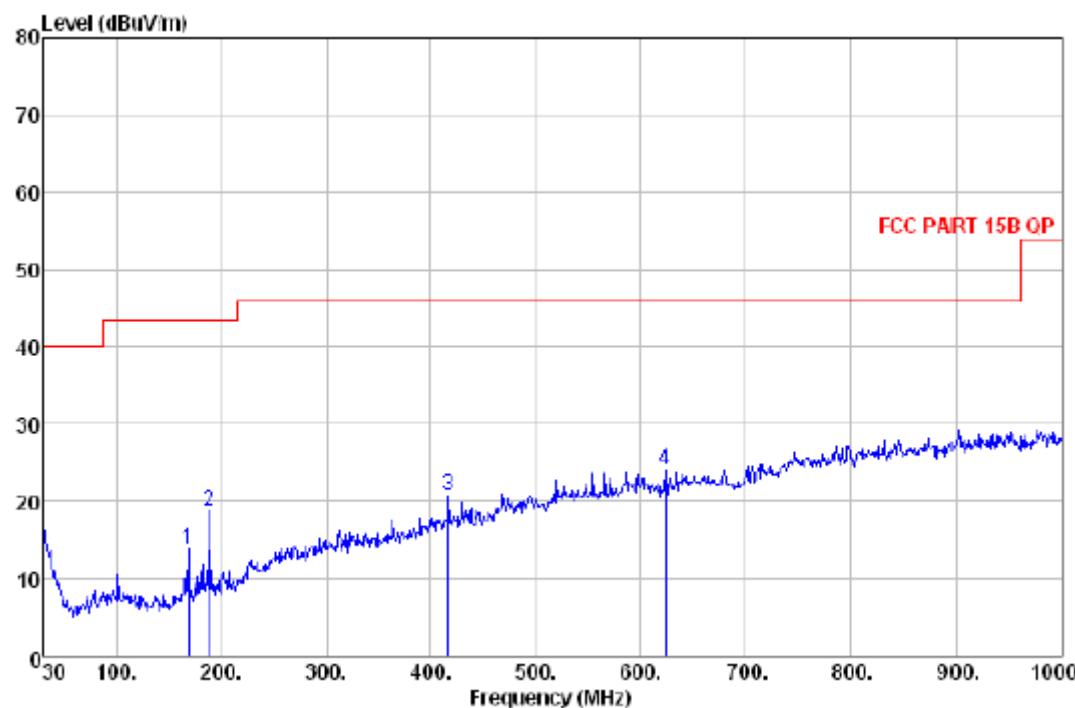Level (dB μ V/m)

Quasi-peak measurement

No.	Freq MHz	Level dB μ V/m	Remark	Antenna	Cable	Limit	Margin	A/pos	T/pos
				Factor dB/n	Loss dB	Line dB μ V/m	dB	cm	deg
1	168.710	13.73	QP	8.17	1.55	43.50	-29.77	100	123
2	188.110	18.78	QP	8.68	1.85	43.50	-24.72	100	8
3	416.060	20.73	QP	16.40	2.51	46.00	-25.27	200	88
4	623.640	23.97	QP	20.07	3.13	46.00	-22.03	200	12

Level=Read Level + Antenna Factor + Cable Loss

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4924.00	34.42	9.71	27.60	35.52	52.05	74.00	V
7386.00	35.40	12.31	27.32	36.61	57.00	74.00	V
4924.00	34.42	9.71	27.60	34.52	51.05	74.00	H
7386.00	35.40	12.31	27.32	36.30	56.69	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4924.00	34.42	9.71	27.60	22.85	39.38	54.00	V
7386.00	35.40	12.31	27.32	22.21	42.60	54.00	V
4924.00	34.42	9.71	27.60	22.23	38.76	54.00	H
7386.00	35.40	12.31	27.32	22.05	42.44	54.00	H

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

Remark:

- 1) For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3rd harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

5.8 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247
	(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: Clause 6.4, 6.5 and 6.6 & KDB558074
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Result:**802.11b mode with 1Mbps data rate**

Test at Channel 1 (2.412 GHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	34.02	20.26	39.34	25.58
2390.000	26.56	6.46	27.79	32.84	21.30	38.07	26.53
2500.000	25.70	6.62	27.80	34.08	21.01	38.60	25.53
2483.500	25.79	6.61	27.80	35.69	22.30	40.29	26.90

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	34.01	22.30	39.33	27.62
2390.000	26.56	6.46	27.79	37.58	22.56	42.81	27.79
2500.000	25.70	6.62	27.80	37.45	23.32	41.97	27.84
2483.500	25.79	6.61	27.80	37.29	22.79	41.89	27.39

Test at Channel 6 (2.437 GHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	38.09	22.50	43.41	27.82
2390.000	26.56	6.46	27.79	35.99	24.34	41.22	29.57
2500.000	25.70	6.62	27.80	36.14	22.49	40.66	27.01
2483.500	25.79	6.61	27.80	35.22	22.89	39.82	27.49

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	36.50	23.41	41.82	28.73
2390.000	26.56	6.46	27.79	35.40	20.44	40.63	25.67
2500.000	25.70	6.62	27.80	35.02	21.51	39.54	26.03
2483.500	25.79	6.61	27.80	34.42	22.99	39.02	27.59

Test at Channel 11 (2.462 GHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	32.60	20.88	37.92	26.20
2390.000	26.56	6.46	27.79	33.32	20.76	38.55	25.99
2500.000	25.70	6.62	27.80	36.66	22.13	41.18	26.65
2483.500	25.79	6.61	27.80	36.02	22.22	40.62	26.82

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	33.30	22.05	38.62	27.37
2390.000	26.56	6.46	27.79	36.42	23.45	41.65	28.68
2500.000	25.70	6.62	27.80	32.15	22.59	36.67	27.11
2483.500	25.79	6.61	27.80	37.32	21.53	41.92	26.13

802.11g mode with 6Mbps data rate

Test at Channel 1 (2.412 GHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	32.03	21.26	37.35	26.58
2390.000	26.56	6.46	27.79	33.95	21.42	39.18	26.65
2500.000	25.70	6.62	27.80	36.30	21.00	40.82	25.52
2483.500	25.79	6.61	27.80	34.47	21.32	39.07	25.92

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	32.00	20.30	37.32	25.62
2390.000	26.56	6.46	27.79	34.47	22.45	39.70	27.68
2500.000	25.70	6.62	27.80	34.36	22.41	38.88	26.93
2483.500	25.79	6.61	27.80	36.23	21.58	40.83	26.18

Test at Channel 6 (2.437 GHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	34.09	22.64	39.41	27.96
2390.000	26.56	6.46	27.79	35.88	23.31	41.11	28.54
2500.000	25.70	6.62	27.80	36.22	21.49	40.74	26.01
2483.500	25.79	6.61	27.80	35.23	22.97	39.83	27.57

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	36.53	22.42	41.85	27.74
2390.000	26.56	6.46	27.79	35.40	22.44	40.63	27.67
2500.000	25.70	6.62	27.80	35.02	23.63	39.54	28.15
2483.500	25.79	6.61	27.80	35.52	23.52	40.12	28.12

Test at Channel 11 (2.462 GHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	37.09	21.64	42.41	26.96
2390.000	26.56	6.46	27.79	35.99	22.33	41.22	27.56
2500.000	25.70	6.62	27.80	36.25	21.49	40.77	26.01
2483.500	25.79	6.61	27.80	34.21	21.86	38.81	26.46

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Average Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)	Average Emission Level (dB μ V/m)
2310.000	26.65	6.45	27.78	32.52	21.43	37.84	26.75
2390.000	26.56	6.46	27.79	34.41	21.46	39.64	26.69
2500.000	25.70	6.62	27.80	35.31	21.65	39.83	26.17
2483.500	25.79	6.61	27.80	35.55	23.59	40.15	28.19

5.9 Band Edges Requirement

Test Requirement:

FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Frequency Band:

2400 MHz to 2483.5 MHz


Test Method:

ANSI C63.10: Clause 6.9 & KDB558074.

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

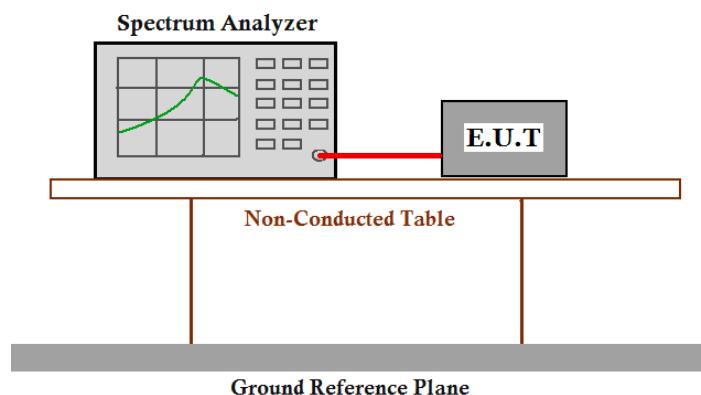

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW=1000 kHz, VBW=3000 KHz, suitable frequency span including 1000 kHz bandwidth from band edge.
3. Measure the Conducted Spurious Emissions and Radiated Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse.

Test result with plots as follows:

The band edges was measured and recorded Result:


The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.


Result plot as follows:

802.11b mode with 1 Mbps data rate

Channel1: 2.412 GHz

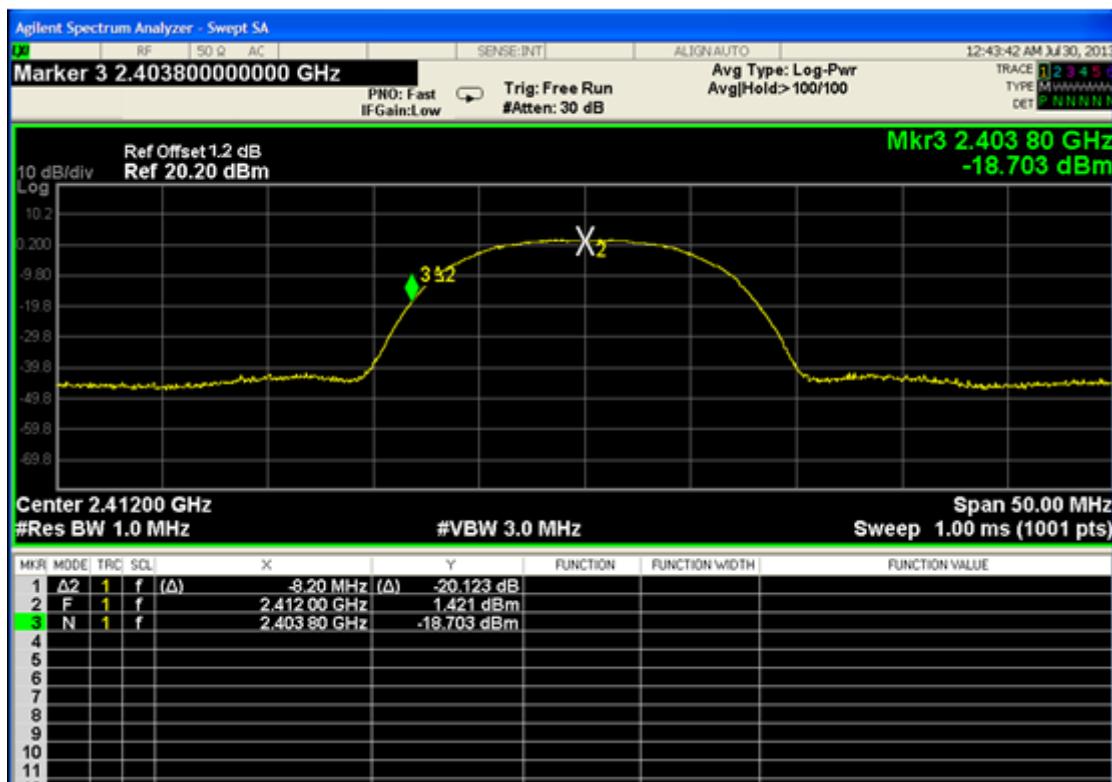

Channel11: 2.462 GHz

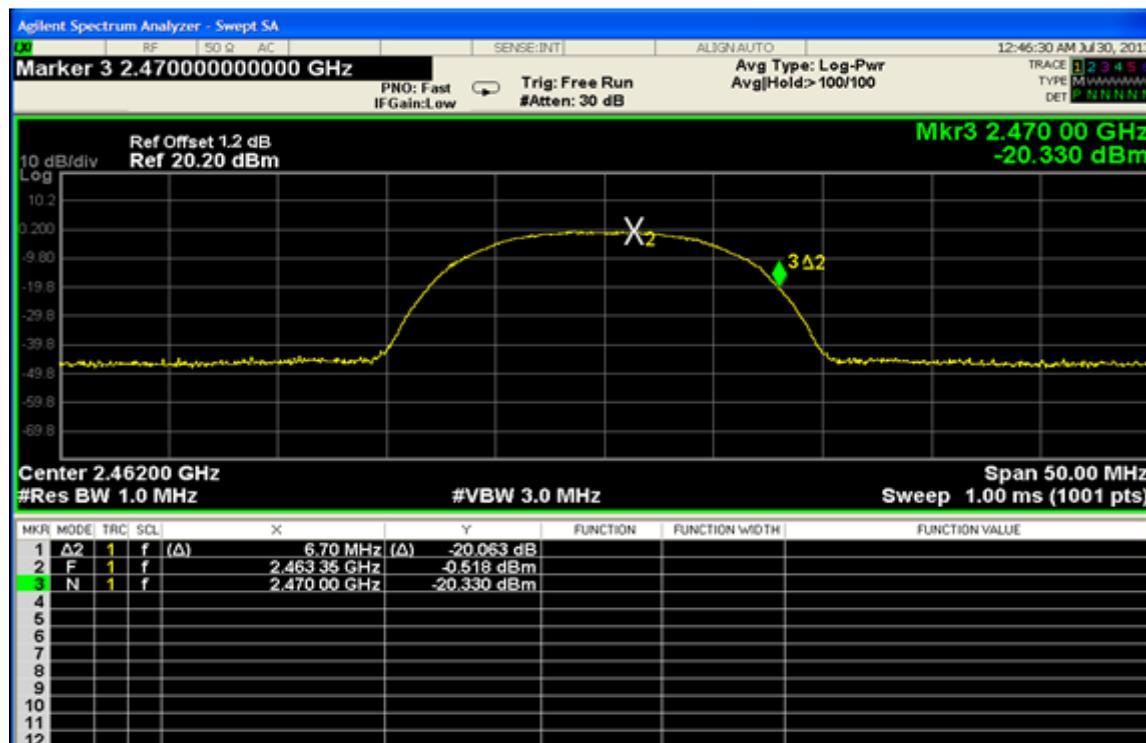

Result plot as follows:

802.11g mode with 6 Mbps data rate

Channel1: 2.412 GHz



Channel11: 2.462 GHz



5.10 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

Test Requirement: FCC Part 15 C section 15.207

Test Method: ANSI C63.10: Clause 6.2

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit


Limits for conducted disturbance at the mains ports of class B

Frequency Range	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

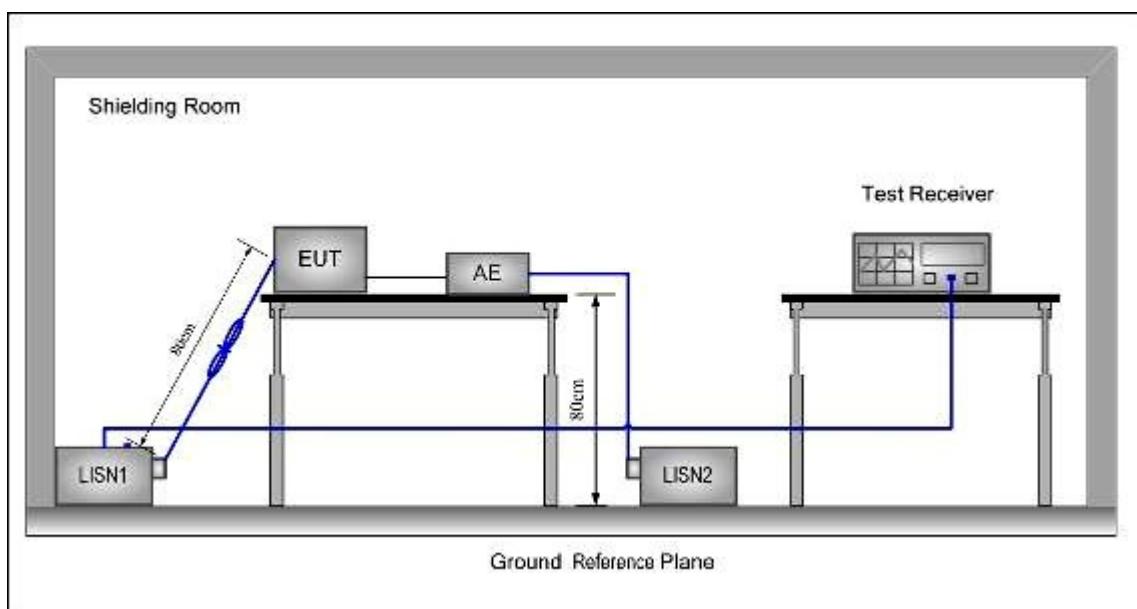

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

5.10.1 Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT
Live line

Peak Scan:

Level (dB μ V)

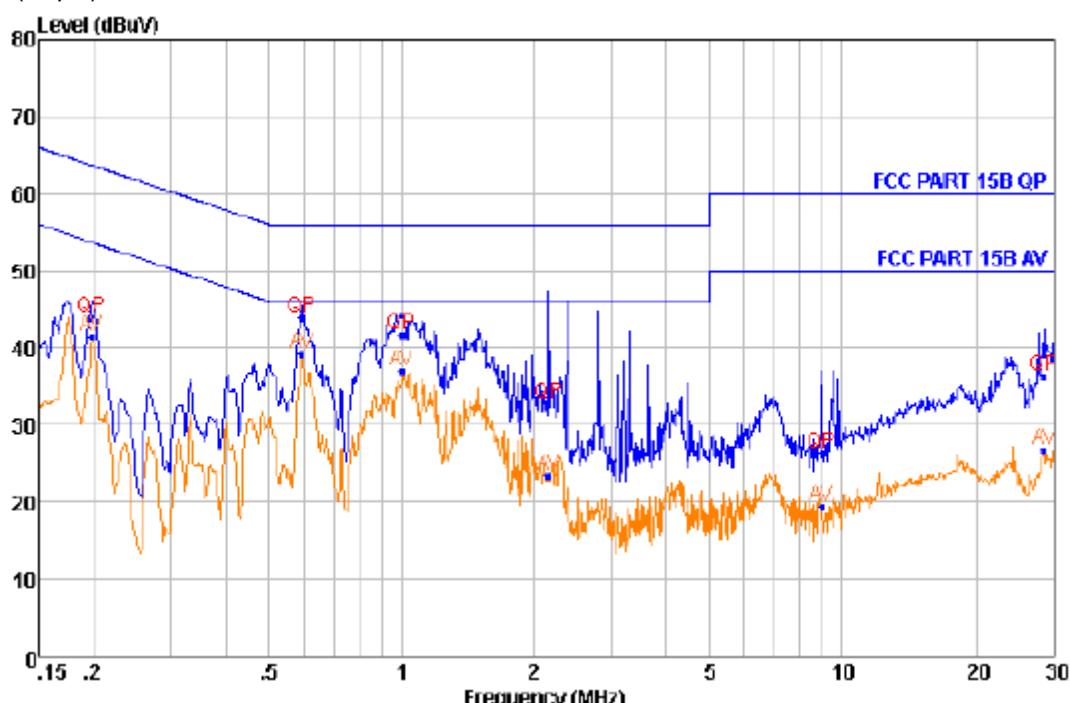


Quasi-peak and Average measurement

NO.	Freq MHz	Level dB μ V	Remark	LISM Factor dB	Cable Loss dB	Limit Line dB μ V	Margin dB
1	0.197	43.91	QP	9.68	0.22	63.73	-19.82
2	0.198	41.43	Average	9.68	0.22	66.00	-24.57
3	0.594	43.84	QP	9.68	0.28	56.00	-12.16
4	0.594	39.14	Average	9.68	0.28	60.00	-20.86
5	1.003	41.59	QP	9.67	0.31	56.00	-14.41
6	1.003	36.89	Average	9.67	0.31	60.00	-23.11
7	2.150	32.74	QP	9.65	0.35	56.00	-23.26
8	2.150	23.48	Average	9.65	0.35	60.00	-36.52
9	8.990	26.26	QP	9.66	0.43	60.00	-33.74
10	8.990	19.33	Average	9.66	0.43	60.00	-40.67
11	28.540	36.42	QP	9.66	0.50	60.00	-23.58
12	28.540	26.85	Average	9.66	0.50	60.00	-33.15

Note: 1. Margin = Limit Line - Level
 2. Level = Read level + LISM Factor + Cable Loss

Neutral Line

Peak Scan:

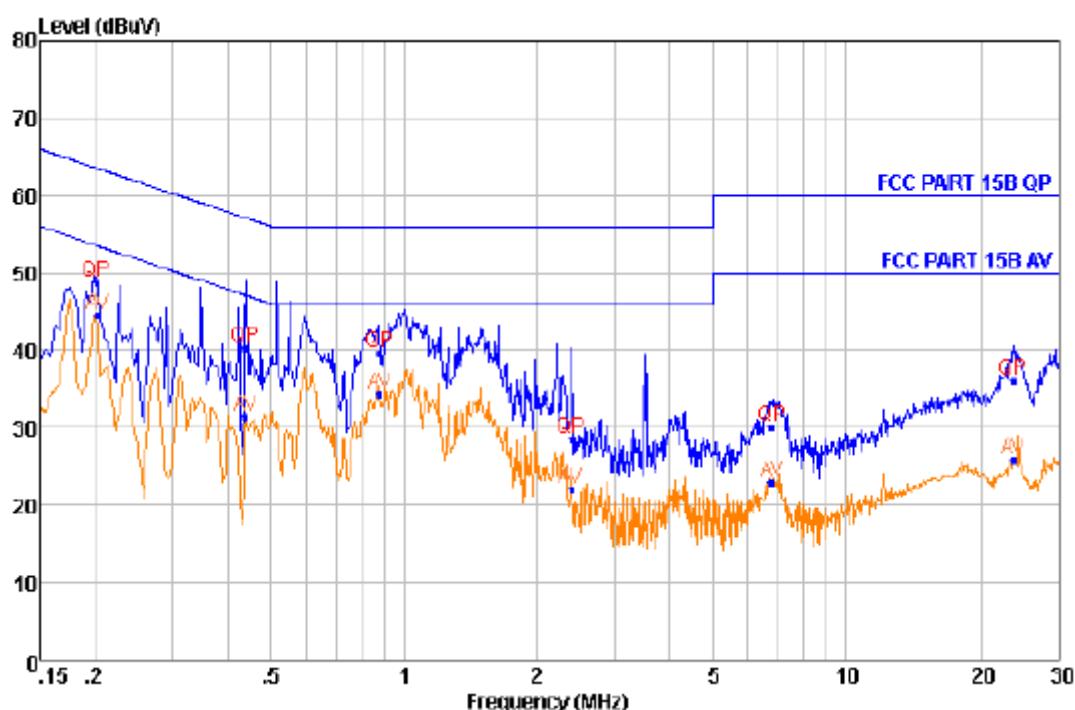Level (dB μ V)

Quasi-peak and Average measurement

NO.	Freq MHz	Level dB μ V	Remark	LISN Factor dB	Cable Loss dB	Limit Line dB μ V	Margin dB
1	0.201	48.80	QP	9.63	0.22	63.55	-14.75
2	0.202	44.56	Average	9.63	0.22	53.54	-8.98
3	0.436	40.24	QP	9.66	0.26	57.13	-16.89
4	0.436	31.52	Average	9.66	0.26	47.13	-15.61
5	0.878	39.75	QP	9.63	0.30	56.00	-16.25
6	0.878	34.30	Average	9.63	0.30	46.00	-11.70
7	2.391	28.42	QP	9.62	0.36	56.00	-27.58
8	2.391	22.11	Average	9.62	0.36	46.00	-23.89
9	6.793	30.14	QP	9.62	0.42	60.00	-29.86
10	6.793	22.94	Average	9.62	0.42	50.00	-27.06
11	23.701	36.02	QP	9.63	0.49	60.00	-23.98
12	23.701	25.76	Average	9.63	0.49	50.00	-24.26

Note: 1. Margin = Limit Line - Level
2. Level = Read level + LISN Factor + Cable Loss