



FCC RF Test Report

FCC ID : UZ7EM45B1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : FCC Part 15 Subpart C §15.225

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

TABLE OF CONTENTS	2
REVISION HISTORY	3
SUMMARY OF THE TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test	5
1.2 EUT Information(Referenced Model).....	5
1.3 Product Specification of Equipment Under Test	6
1.4 Modification of EUT	6
1.5 Testing Location	7
1.6 Test Software	7
1.7 Applicable Standards.....	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Table for Supporting Units.....	9
2.4 EUT Operation Test Setup	9
3. TEST RESULTS.....	10
3.1 AC Power Line Conducted Emissions Measurement	10
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	12
3.3 Frequency Stability Measurement	13
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	14
3.5 Radiated Emissions Measurement	16
3.6 Antenna Requirements.....	19
4. LIST OF MEASURING EQUIPMENT	20
5. UNCERTAINTY OF EVALUATION	21
APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST	
APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS	
B1. Test Result of 20dB Spectrum Bandwidth	
B2. Test Result of Frequency Stability	
APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	
APPENDIX D. SETUP PHOTOGRAPHS	
APPENDIX E. SPOT CHECK EVALUATION ON EM45B1	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR460508-02D	Rev. 01	Initial issue of report	Jan. 22, 2025



SUMMARY OF THE TEST RESULT

Report Section	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 8.70 dB at 13.56 MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 20.61 dB μ V/m at 13.56 MHz @30m
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Complies	Under limit 3.83 dB at 60.07 MHz
3.6	15.203	Antenna Requirements	Complies	-

Conformity Assessment Condition:

- ECR inquiry for data referencing from UZ7EM45B2 has been approved by FCC. The ECR inquiry and the associated document are submitted in the confidential exhibit.
- UZ7EM45B1 is different from FCC ID: UZ7EM45B2 (Reference model), in the following:
 - The only difference is depopulate RFID function and RFID components
- All the test results are referenced from UZ7EM45B2 (Sporton Test Report FR460508D), and spot check results to justify data referencing is presented in the Appendix E.
- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B1
FCC ID	UZ7EM45B1
IMEI Code	Conducted: 350332150060484 Conduction: 350332150060096/350332150064049 Radiation: 350332150060260/350332150063959 CBP/DFS: 350332150060575
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

1.2 EUT Information(Referenced Model)

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B2
FCC ID	UZ7EM45B2
IMEI Code	Conducted:350854420027373/350854420027385 Conduction: 350854420026896/350854420028314 Radiation: 350854420030062/350854420030070
HW Version	EV2.5
SW Version	13-32-02.00-TG-U06-STD-ATH-04
MFD	02AUG24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory			
Battery	Brand Name	Zebra	Model
			BT-000501
			Part Number
			BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH

Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.48 KHz
99%OBW	2.11 KHz
Antenna Type	Loop Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)				
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158				
Test Site No.	Sporton Site No.			FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	03CH07-KS	CO01-KS	CN1257	314309
Test Engineer	Long Wu	Feng	Amos Zhang		
Temperature	22~24	21~22	25.3~26.2		
Relative Humidity	53~55	41~42	38~40		

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013

2. Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 2.4G Link + Bluetooth Link + USB Cable 1 + AC Adapter 1 + NFC Tx
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1.	

2.2 Connection Diagram of Test System

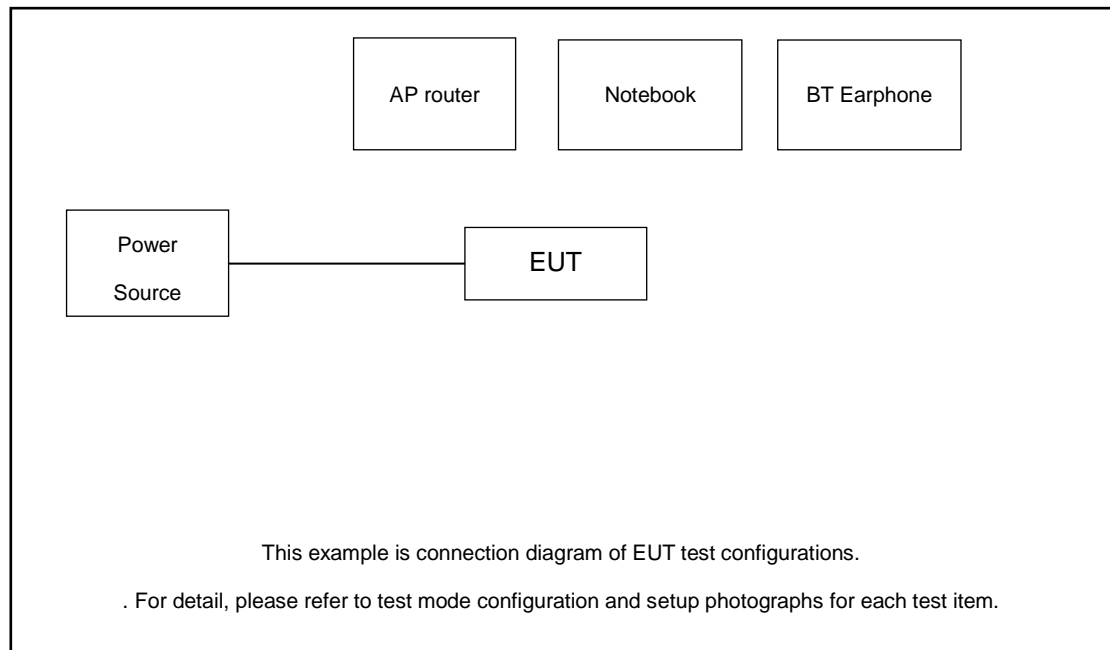

2.3 Table for Supporting Units

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m

2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 0 cm gap to the EUT.

3. Test Results

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

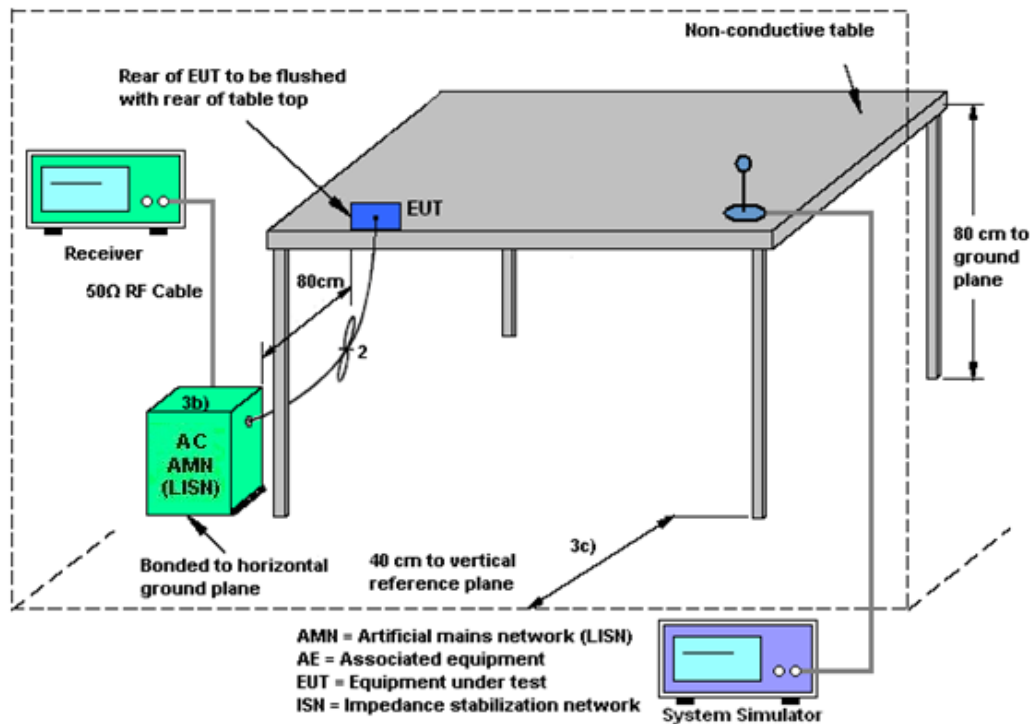

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup



3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

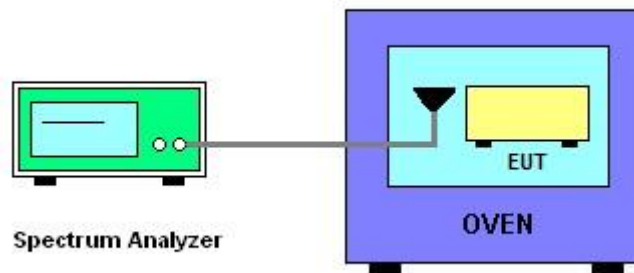

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225	
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.	
Freq. of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$) at 30m	Field Strength ($\text{dB}\mu\text{V}/\text{m}$) at 30m
1.705~13.110	30	29.5
13.110~13.410	106	40.5
13.410~13.553	334	50.5
13.553~13.567	15848	84.0
13.567~13.710	334	50.5
13.710~14.010	106	40.5
14.010~30.000	30	29.5

3.4.2 Measuring Instruments


See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.
Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).
7. The field strength is tested at 3m distance then convert to 30m by adding distance factor $40 \cdot \log(d_1/d_2)$.

3.4.4 Test Setup

For radiated emissions below 30MHz

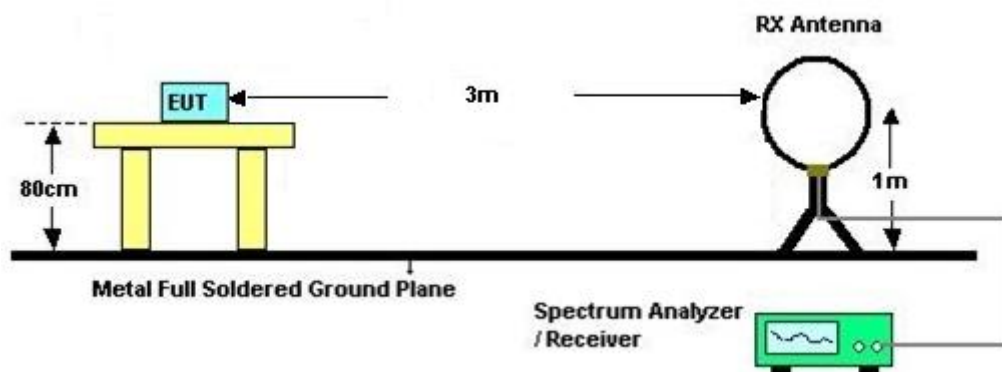

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

<FCC Limit>

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


8. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
9. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
10. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
11. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
12. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
13. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
14. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

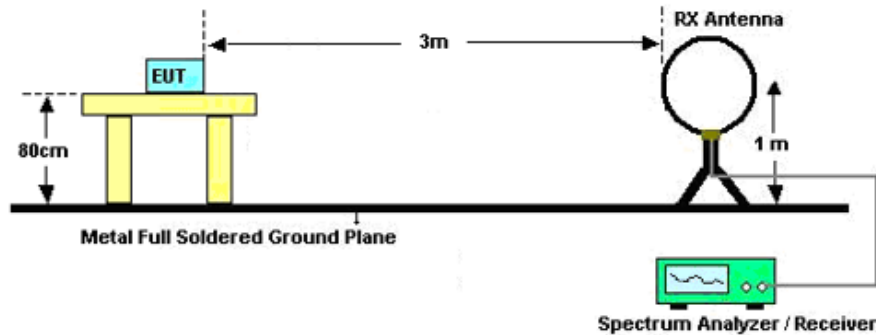

For radiated emissions above 30MHz

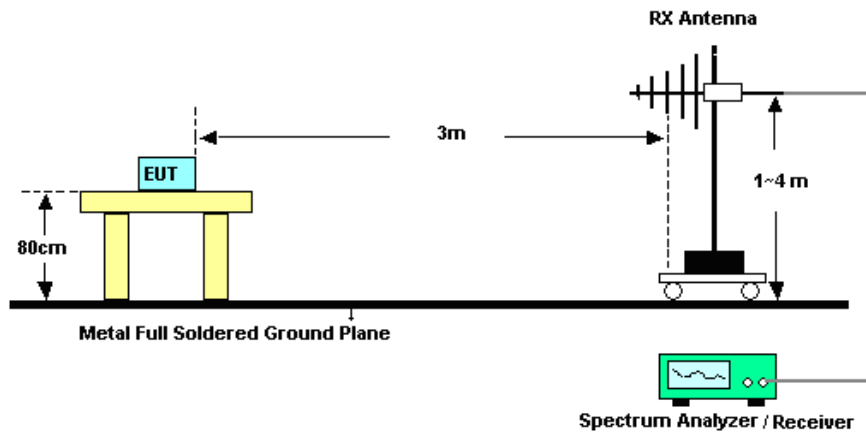

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

Note:

1. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: parallel, perpendicular, and ground-parallel. Pre-scanned the three antenna orientations, the worst case is parallel & perpendicular polarization, and test data of two mode was reported. (Parallel: The loop antenna is placed vertical axis and aligned along the site axis; Perpendicular: The loop antenna is placed vertical axis and orthogonal to the axis; ground-parallel: The loop antenna is placed horizontal axis and parallel with the ground).

3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Jan. 05, 2024	Jul. 11, 2024	Jan. 04, 2025	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 11, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2023	Jul. 10, 2024 ~Jul. 13, 2024	Oct. 10, 2024	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jul. 10, 2024 ~Jul. 13, 2024	Sep. 10, 2024	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 19, 2023	Jul. 10, 2024 ~Jul. 13, 2024	Aug. 18, 2024	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 04, 2024	Jul. 10, 2024 ~Jul. 13, 2024	Jan. 03, 2025	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jul. 10, 2024 ~Jul. 13, 2024	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Jul. 10, 2024 ~Jul. 13, 2024	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Jul. 10, 2024 ~Jul. 13, 2024	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr 18, 2024	Jul. 21, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Jul. 21, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr 18, 2024	Jul. 21, 2024	Apr 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Jul. 21, 2024	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required

5. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Occupied Channel Bandwidth	$\pm 0.1\%$
Frequency	± 0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.84dB
--	--------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.30dB
--	--------


Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.06dB
--	--------

----- THE END -----

Appendix A. Test Results of Conducted Emission Test

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

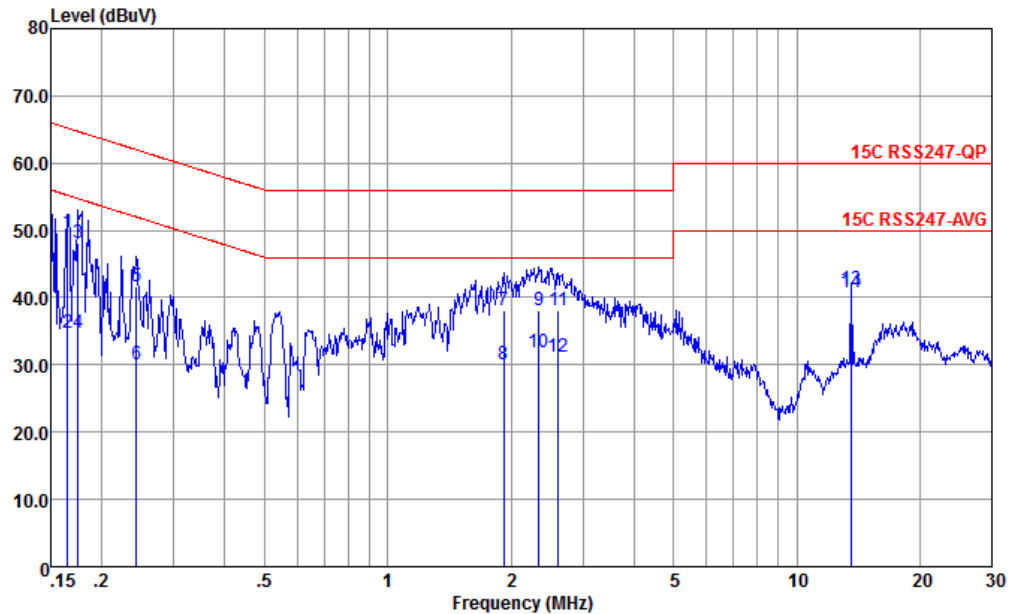


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.165	49.72	-15.49	65.21	39.19	0.11	10.42	QP
2	0.165	34.72	-20.49	55.21	24.19	0.11	10.42	Average
3	0.175	48.11	-16.61	64.72	37.60	0.10	10.41	QP
4	0.175	34.81	-19.91	54.72	24.30	0.10	10.41	Average
5	0.243	41.66	-20.34	62.00	31.21	0.08	10.37	QP
6	0.243	30.06	-21.94	52.00	19.61	0.08	10.37	Average
7	1.918	38.06	-17.94	56.00	28.20	-0.22	10.08	QP
8	1.918	30.06	-15.94	46.00	20.20	-0.22	10.08	Average
9	2.346	38.08	-17.92	56.00	28.21	-0.20	10.07	QP
10	2.346	31.78	-14.22	46.00	21.91	-0.20	10.07	Average
11	2.608	38.09	-17.91	56.00	28.20	-0.18	10.07	QP
12	2.608	31.09	-14.91	46.00	21.20	-0.18	10.07	Average
13	13.560	41.21	-18.79	60.00	30.30	-0.20	11.11	QP
14 *	13.560	40.81	-9.19	50.00	29.90	-0.20	11.11	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

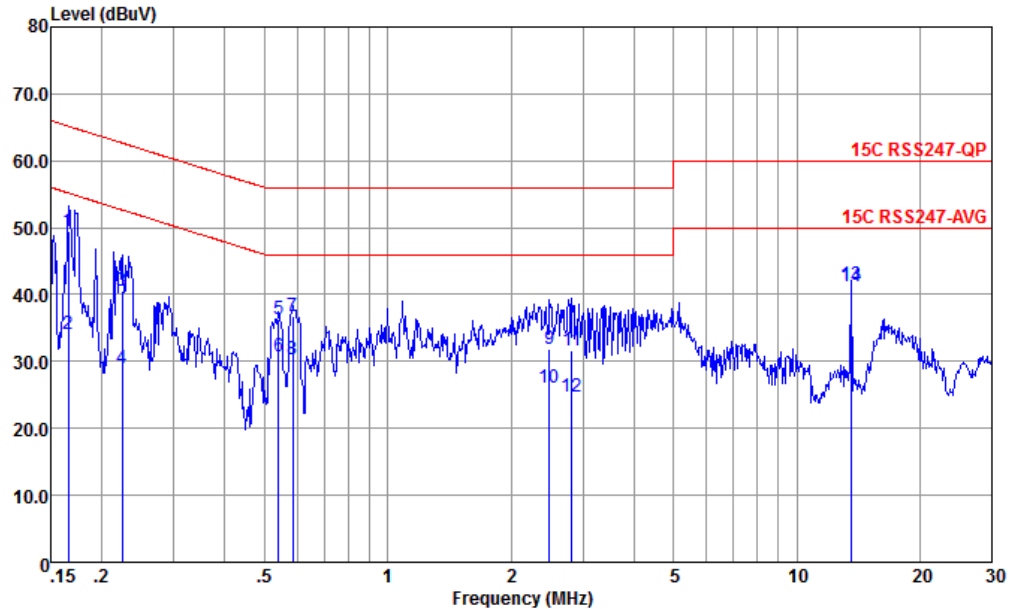

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.166	49.44	-15.72	65.16	38.90	0.12	10.42	QP
2	0.166	34.14	-21.02	55.16	23.60	0.12	10.42	Average
3	0.224	40.65	-22.01	62.66	30.20	0.06	10.39	QP
4	0.224	28.95	-23.71	52.66	18.50	0.06	10.39	Average
5	0.541	36.25	-19.75	56.00	26.20	-0.15	10.20	QP
6	0.541	30.65	-15.35	46.00	20.60	-0.15	10.20	Average
7	0.585	36.83	-19.17	56.00	26.81	-0.16	10.18	QP
8	0.585	30.23	-15.77	46.00	20.21	-0.16	10.18	Average
9	2.487	31.97	-24.03	56.00	22.10	-0.20	10.07	QP
10	2.487	26.17	-19.83	46.00	16.30	-0.20	10.07	Average
11	2.824	31.66	-24.34	56.00	21.80	-0.21	10.07	QP
12	2.824	24.76	-21.24	46.00	14.90	-0.21	10.07	Average
13	13.560	41.50	-18.50	60.00	30.60	-0.21	11.11	QP
14 *	13.560	41.30	-8.70	50.00	30.40	-0.21	11.11	Average

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

Note:

- Level(dBuV) = Read Level(dBuV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBuV) – Limit Line(dBuV)



Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

Test mode		NFC Tx		Test Frequency (MHz)		13.56																																																									
<div><div>Spectrum</div><div>Ref Level 10.00 dBm</div><div>Att 20 dB RBW 1 kHz</div><div>SWT 20 ms VBW 3 kHz</div><div>Mode Auto FFT</div><div>IPk View</div><div><div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div><div>-80 dBm</div></div><div><div>M1</div><div>T1</div><div>T2</div></div><div><div>M1[1]</div><div>ndB</div><div>Bw</div><div>Q factor</div></div><div><div>-4.25 dBm</div><div>13.5597110 MHz</div><div>20.00 dB</div><div>2.475000000 kHz</div><div>5479.4</div></div></div></div> <div><div>CF 13.56 MHz</div><div>691 pts</div><div>Span 10.0 kHz</div></div> <div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>13.559711 MHz</td><td>-4.25 dBm</td><td>ndB down</td><td>2.475 kHz</td></tr><tr><td>T1</td><td>1</td><td>1</td><td>13.55848 MHz</td><td>-24.18 dBm</td><td>ndB</td><td>20.00 dB</td></tr><tr><td>T2</td><td>1</td><td>1</td><td>13.560955 MHz</td><td>-24.07 dBm</td><td>Q factor</td><td>5479.4</td></tr></table></div> <div><div>Measuring...</div><div></div></div> <div><div>Date: 11.JUL.2024</div><div>02:22:06</div></div>				Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	13.559711 MHz	-4.25 dBm	ndB down	2.475 kHz	T1	1	1	13.55848 MHz	-24.18 dBm	ndB	20.00 dB	T2	1	1	13.560955 MHz	-24.07 dBm	Q factor	5479.4	<div><div>Spectrum</div><div>Ref Level 10.00 dBm</div><div>Att 20 dB RBW 1 kHz</div><div>SWT 20 ms VBW 3 kHz</div><div>Mode Auto FFT</div><div>IPk View</div><div><div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div><div>-80 dBm</div></div><div><div>M1</div><div>T1</div><div>T2</div></div><div><div>M1[1]</div><div>Occ Bw</div></div><div><div>-4.35 dBm</div><div>13.5597110 MHz</div><div>2.112879884 kHz</div></div></div></div> <div><div>CF 13.56 MHz</div><div>691 pts</div><div>Span 10.0 kHz</div></div> <div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td>1</td><td>13.559711 MHz</td><td>-4.35 dBm</td><td></td><td></td></tr><tr><td>T1</td><td>1</td><td>1</td><td>13.5586541 MHz</td><td>-18.40 dBm</td><td>Occ Bw</td><td>2.112879884 kHz</td></tr><tr><td>T2</td><td>1</td><td>1</td><td>13.560767 MHz</td><td>-18.42 dBm</td><td></td><td></td></tr></table></div> <div><div>Measuring...</div><div></div></div> <div><div>Date: 11.JUL.2024</div><div>02:03:07</div></div>				Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	13.559711 MHz	-4.35 dBm			T1	1	1	13.5586541 MHz	-18.40 dBm	Occ Bw	2.112879884 kHz	T2	1	1	13.560767 MHz	-18.42 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																									
M1	1	1	13.559711 MHz	-4.25 dBm	ndB down	2.475 kHz																																																									
T1	1	1	13.55848 MHz	-24.18 dBm	ndB	20.00 dB																																																									
T2	1	1	13.560955 MHz	-24.07 dBm	Q factor	5479.4																																																									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																									
M1	1	1	13.559711 MHz	-4.35 dBm																																																											
T1	1	1	13.5586541 MHz	-18.40 dBm	Occ Bw	2.112879884 kHz																																																									
T2	1	1	13.560767 MHz	-18.42 dBm																																																											
20dB Bandwidth (kHz)		2.475		99% OccupiedBW(kHz)		2.113																																																									
Frequency range (MHz)		f _L > 13.553		13.558480		Test Result																																																									
		f _H < 13.567		13.560955		Complies																																																									

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

**B2. Test Result of Frequency Stability****Startup:**

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.85V	13.55971050	-20	13.55971050
3.5V	13.55971750	-10	13.55971050
4.41V	13.55971050	0	13.55971050
		10	13.55971750
		20	13.55971050
		30	13.55971050
		40	13.55971050
		50	13.55971050
Max.Deviation (MHz)	-0.00028950	Max.Deviation (MHz)	-0.00028950
Max.Deviation (ppm)	-21.3496	Max.Deviation (ppm)	-21.3496
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS

2MIN:

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.85V	13.55971050	-20	13.55971050
3.5V	13.55971050	-10	13.55971050
4.41V	13.55971050	0	13.55971050
		10	13.55971050
		20	13.55971750
		30	13.55971050
		40	13.55971050
		50	13.55971050
Max.Deviation (MHz)	-0.00028950	Max.Deviation (MHz)	-0.00028950
Max.Deviation (ppm)	-21.3496	Max.Deviation (ppm)	-21.3496
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



5MIN:

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.85V	13.55971050	-20	13.55971050
3.5V	13.55971050	-10	13.55971050
4.41V	13.55971050	0	13.55971050
		10	13.55971050
		20	13.55971050
		30	13.55971050
		40	13.55971050
		50	13.55971050
Max.Deviation (MHz)	-0.00028950	Max.Deviation (MHz)	-0.00028950
Max.Deviation (ppm)	-21.3496	Max.Deviation (ppm)	-21.3496
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS

10MIN:

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (V)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
3.85V	13.55971050	-20	13.55971050
3.5V	13.55971050	-10	13.55971050
4.41V	13.55971050	0	13.55971050
		10	13.55971050
		20	13.55971050
		30	13.55971050
		40	13.55971050
		50	13.55971050
Max.Deviation (MHz)	-0.00028950	Max.Deviation (MHz)	-0.00028950
Max.Deviation (ppm)	-21.3496	Max.Deviation (ppm)	-21.3496
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS





Appendix C. Test Results of Radiated Test Items

C.1 Test Result of Field Strength of Fundamental Emissions

Frequency (MHz)	Level @3m (dBuV/m)	Distance Factor (dB)	Corrected Level @30m (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
13.56	60.61	40	20.61	83.9	-63.29	39.94	20.39	0.28	QP	Perpendicular
13.56	56.73	40	16.73	83.9	-67.17	36.06	20.39	0.28	QP	Parallel

Note: The field strength is tested at 3m distance then convert to 30m by adding distance factor $40 \cdot \log(d1/d2)$.

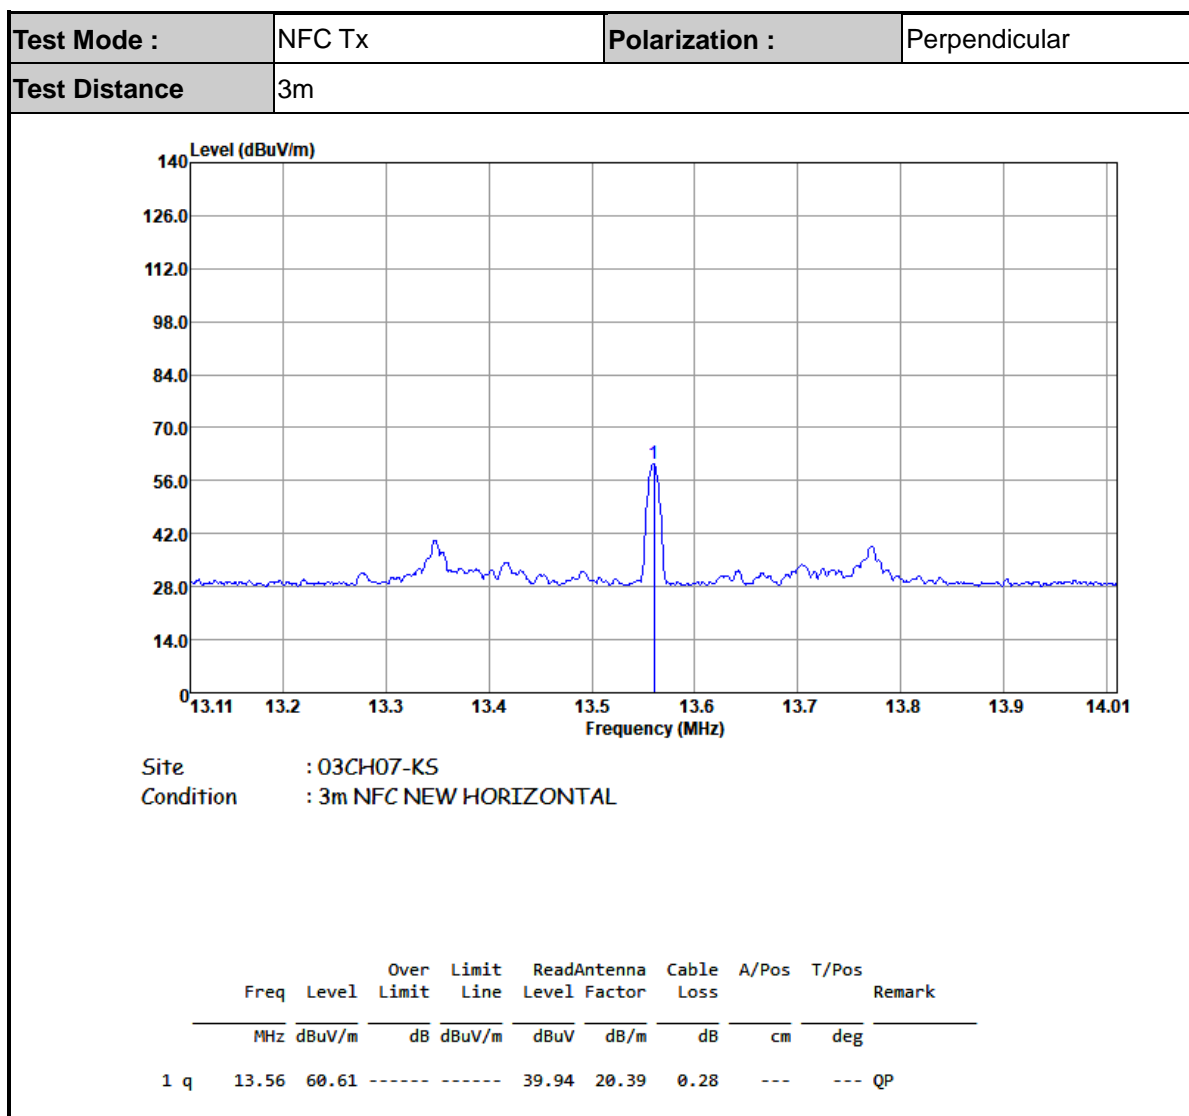

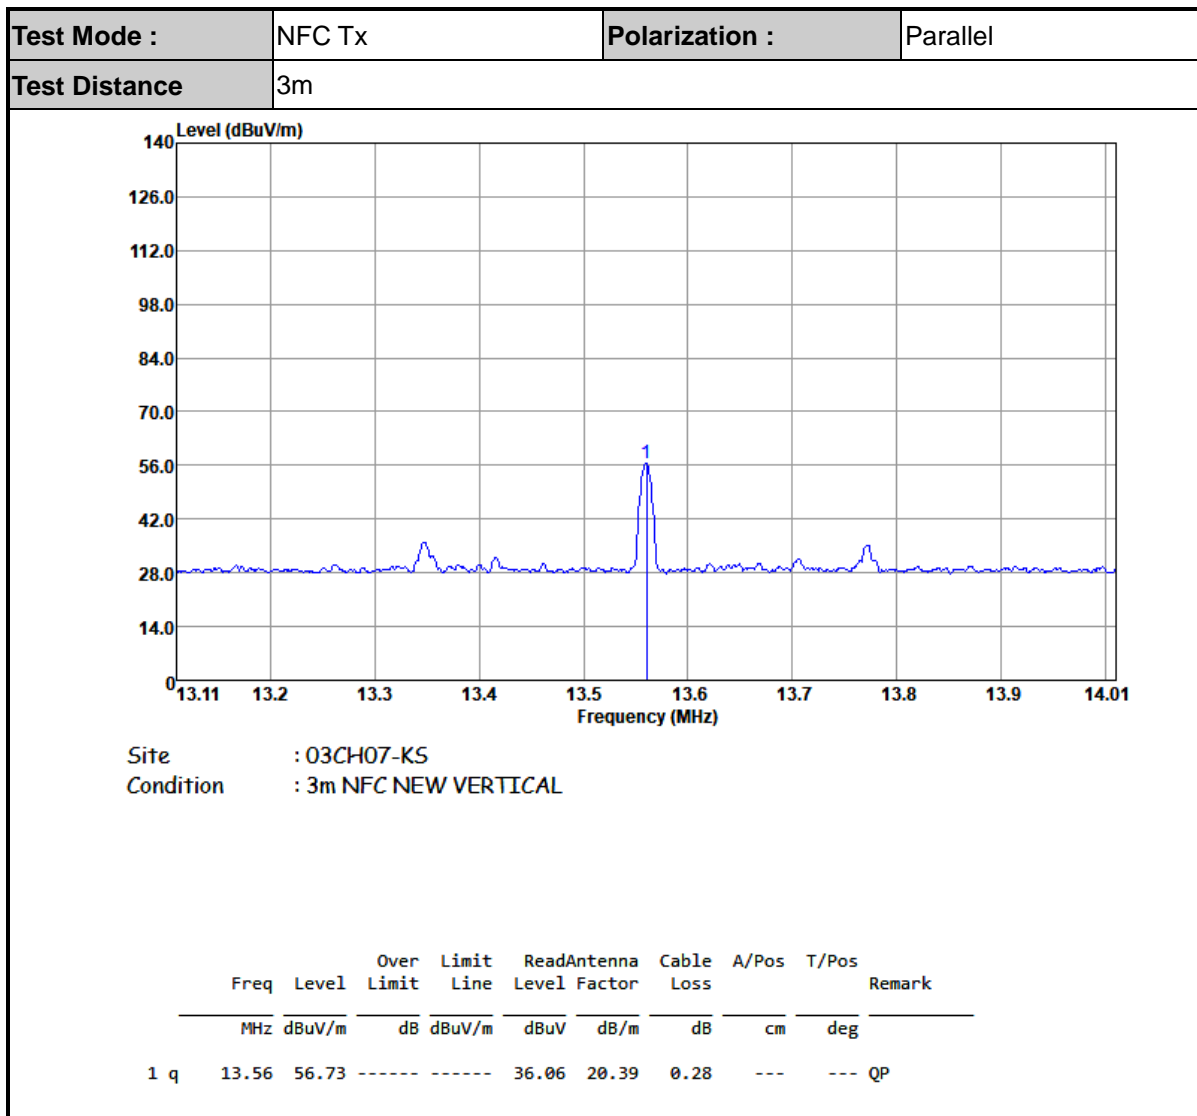

Note:

1. Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
4. Corrected Level = Level @3m (dBμV/m) - distance extrapolation factor.

C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :		NFC Tx					Polarization :		Perpendicular		
Frequency (MHz)	Level @3m (dBμV/m)	Distance Factor (dB)	Corrected Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.03	56.9	80	-23.1	-60.04	36.94	36.2	20.61	0.09	-	-	Average
0.04	53.26	80	-26.74	-62.50	35.76	32.56	20.61	0.09	-	-	Average
1.08	56.44	40	16.44	-10.49	26.93	36.05	20.29	0.1	-	-	QP
2.74	39.86	40	-0.14	-29.64	29.5	19.46	20.28	0.12	-	-	QP
8.60	29.86	40	-10.14	-39.64	29.5	9.36	20.3	0.27	-	-	QP
29.47	31.55	40	-8.45	-37.95	29.5	9.64	21.38	0.49	-	-	QP

Test Mode :		NFC Tx					Polarization :		Parallel		
Frequency (MHz)	Level @3m (dBμV/m)	Distance Factor (dB)	Corrected Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.04	52.7	80	-27.3	-63.06	35.76	32	20.61	0.09	-	-	Average
0.06	48.55	80	-31.45	-63.70	32.25	27.94	20.52	0.09	-	-	Average
0.59	58.2	40	18.2	-14.03	32.23	37.79	20.32	0.1	-	-	QP
2.73	40.16	40	0.16	-29.34	29.5	19.76	20.28	0.12	-	-	QP
19.92	32.31	40	-7.69	-37.19	29.5	11.35	20.58	0.28	-	-	QP
29.62	32.32	40	-7.68	-37.18	29.5	10.39	21.4	0.51	-	-	QP

Note:

1. 13.56 MHz is fundamental signal which can be ignored.
2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
4. Corrected Level = Level @3m (dBμV/m) - distance extrapolation factor.

C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

Test Mode :		NFC Tx				Polarization :		Horizontal		
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
78.5	26.46	-13.54	40	44.15	13.22	1.16	32.07			Peak
173.56	30.47	-13.03	43.5	45.41	15.27	1.91	32.12			Peak
271.53	28.65	-17.35	46	39.52	18.79	2.4	32.06			Peak
384.05	27.73	-18.27	46	35.84	21.13	2.86	32.1			Peak
623.64	26.45	-19.55	46	28.84	26.29	3.64	32.32			Peak
948.59	30.24	-15.76	46	25.85	30.88	4.48	30.97			Peak

Test Mode :		NFC Tx				Polarization :		Vertical		
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
60.07	36.17	-3.83	40	55.47	11.87	0.91	32.08			Peak
125.06	29.95	-13.55	43.5	42.94	17.44	1.62	32.05			Peak
168.71	32.44	-11.06	43.5	46.99	15.68	1.88	32.11			Peak
457.77	24.07	-21.93	46	30.06	23.04	3.12	32.15			Peak
638.19	24.95	-21.05	46	27.04	26.51	3.68	32.28			Peak
950.53	30.76	-15.24	46	26.3	30.93	4.48	30.95			Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.

Appendix E. Spot Check Evaluation on EM45B1

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH00)	Number of Channels	79	79	0	3
	Hopping Channel Separation	1.135	0.996	0.139	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.95	0.01	3
	99% Bandwidth	0.851	0.89	0.039	3
	Conducted Band Edges	-41.78	-43.72	1.94	3
	Conducted Spurious Emission	-44.27	-46.4	2.13	3
BT 1Mbps (CH00)	Radiated Band Edges and Radiated Spurious Emission	56.93	55.71	1.22	3
BT	AC Conducted Emission	14.81	13.96	0.85	3
BLE 1Mbps (CH39)	6dB Bandwidth	0.68	0.69	0.01	3
	99% Bandwidth	1.027	1.035	0.008	3
	Power Spectral Density	-5.44	-6.6	1.16	3
	Conducted Band Edges	-57.54	-58.86	1.32	3
	Conducted Spurious Emission	-44.23	-45.77	1.54	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	46.49	48.90	2.41	3
BLE	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.56	8.56	0	3
	99% Bandwidth	13.187	13.307	0.12	3
	Power Spectral Density	-1.37	-1.5	0.13	3
	Conducted Band Edges	-47.92	-48.21	0.29	3
	Conducted Spurious Emission	-43.71	-46.01	2.3	3
WIFI 2.4G (802.11g CH01)	Radiated Band Edges and Spurious Emission	51.90	52.85	1.95	3
WIFI 2.4G	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.15	19.29	0.14	3
	99% Bandwidth	16.705	16.705	0	3
	Power Spectral Density	6.94	6.92	0.02	3
	Unwanted Emissions	16.31	16.33	0.02	3
WIFI 5G (11ax HE160 Ch50)	Radiated Band Edges and Spurious Emission	50.75	52.88	2.13	3
WIFI 5G	AC Conducted Emission	11.52	14.22	2.70	3
WIFI 5G (802.11a CH116)	DFS	0.862829	0.935231	0.073	3
WIFI 6G UNII-5 (802.11ax HE160 CH15 6025MHz)-6CD Indoor Client	26dB Emission Bandwidth	165.79	166.17	0.38	3
	99% Occupied Bandwidth	156.8	156.495	0.305	3
	Fundamental Maximum EIRP	17.64	17.39	0.25	3
	Fundamental Power Spectral	-2.95	-3.42	0.47	3



WIFI 6G UNII-5 (802.11ax HE20 CH1 5955MHz)-6CD Standard Client	Density				
	In-Band Emissions	-12.59	-11.73	0.86	3
	26dB Emission Bandwidth	21.15	21.25	0.1	3
	99% Occupied Bandwidth	19.048	19.086	0.038	3
	Fundamental Maximum EIRP	17.68	17.58	0.10	3
	Fundamental Power Spectral Density	5.13	4.38	0.75	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	In-Band Emissions	-19.18	-18.83	0.35	3
WIFI 6G (802.11ax HE20 Ch233)	Contention Based Protocol	-64.77	-66.92	2.15	3
WIFI 6G	Radiated Band Edges and Spurious Emission	66.90	67.00	0.1	3
	AC Conducted Emission	14.72	16.18	1.46	3
	20dB Spectrum Bandwidth	2.48	2.49	0.01	3
	99% OBW Spectrum Bandwidth	2.11	2.11	0	3
	Frequency Stability	-21.3496	-22.382	1.0324	3
	Field Strength of Fundamental Emissions	60.61	60.41	0.2	3
	Radiated Spurious Emissions	36.17	36.86	0.69	3
NFC	AC Conducted Emission	14.22	16.01	1.79	3

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power(dBm) BT & BLE	BT BR/EDR	9.57	9.11	0.46	3
	BLE 1Mbps	9.57	9.10	0.47	3
	BLE 2Mbps	9.58	9.24	0.34	3
Conducted Power(dBm) WIFI 2.4G	11b, 2.4GHz	25.04	24.97	0.07	3
	11g, 2.4GHz	28.45	28.36	0.09	3
	11n HT20, 2.4GHz	28.38	28.34	0.04	3
	11ac VHT20, 2.4GHz	28.30	28.25	0.05	3
	11ax HE20, 2.4GHz	28.56	28.51	0.05	3
Conducted Power(dBm) WIFI 5G	11a, 5.2GHz	22.53	22.38	0.15	3
	11a, 5.3GHz	22.62	22.15	0.47	3
	11a, 5.5GHz	22.19	21.74	0.45	3
	11a, 5.8GHz	21.69	21.47	0.22	3
	11n HT20, 5.2GHz	21.34	21.26	0.08	3
	11n HT20, 5.3GHz	20.98	20.62	0.36	3
	11n HT20, 5.5GHz	21.32	21.26	0.06	3
	11n HT20, 5.8GHz	21.37	21.33	0.04	3
	11ac VHT20, 5.2GHz	21.41	21.29	0.12	3
	11ac VHT20, 5.3GHz	21.04	20.69	0.35	3
	11ac VHT20, 5.5GHz	21.36	21.33	0.03	3
	11ac VHT20, 5.8GHz	21.41	21.36	0.05	3
	11ax HE20, 5.2GHz	21.47	21.34	0.13	3
	11ax HE20, 5.3GHz	21.09	20.72	0.37	3
	11ax HE20, 5.5GHz	21.39	21.37	0.02	3
	11ax HE20, 5.8GHz	21.45	21.39	0.06	3
	11n HT40, 5.2GHz	20.76	20.71	0.05	3
	11n HT40, 5.3GHz	20.71	20.53	0.18	3
	11n HT40, 5.5GHz	20.62	20.58	0.04	3
	11n HT40, 5.8GHz	20.36	20.28	0.08	3
	11ac VHT40, 5.2GHz	20.82	20.76	0.06	3
	11ac VHT40, 5.3GHz	20.77	20.56	0.21	3
	11ac VHT40, 5.5GHz	20.67	20.62	0.05	3
	11ac VHT40, 5.8GHz	20.42	20.32	0.10	3



	11ax HE40, 5.2GHz	20.86	20.81	0.05	3
	11ax HE40, 5.3GHz	20.83	20.61	0.22	3
	11ax HE40, 5.5GHz	20.73	20.68	0.05	3
	11ax HE40, 5.8GHz	20.48	20.36	0.12	3
	11ac VHT80, 5.2GHz	20.07	19.99	0.08	3
	11ac VHT80, 5.3GHz	20.14	19.91	0.23	3
	11ac VHT80, 5.5GHz	20.32	20.08	0.24	3
	11ac VHT80, 5.8GHz	20.17	20.10	0.07	3
	11ax HE80, 5.2GHz	20.12	20.05	0.07	3
	11ax HE80, 5.3GHz	20.22	19.96	0.26	3
	11ax HE80, 5.5GHz	20.38	20.12	0.26	3
	11ax HE80, 5.8GHz	20.24	20.15	0.09	3
	11ac VHT160, 5.3GHz	19.81	19.66	0.15	3
	11ac VHT160, 5.5GHz	19.79	19.63	0.16	3
	11ax HE160, 5.3GHz	19.92	19.70	0.22	3
	11ax HE160, 5.5GHz	19.88	19.69	0.19	3
Conducted Power(dBm) WIFI 6G Indoor Client	6CD 11a, U-NII-5	7.05	6.75	0.30	3
	6CD 11a, U-NII-6	7.97	7.86	0.11	3
	6CD 11a, U-NII-7	6.64	6.58	0.06	3
	6CD 11a, U-NII-8	5.82	5.78	0.04	3
	6CD 11ax HE20, U-NII-5	10.85	10.84	0.01	3
	6CD 11ax HE20, U-NII-6	11.28	11.21	0.07	3
	6CD 11ax HE20, U-NII-7	10.12	10.07	0.05	3
	6CD 11ax HE20, U-NII-8	9.61	9.57	0.04	3
	6CD 11ax HE40, U-NII-5	13.76	13.74	0.02	3
	6CD 11ax HE40, U-NII-6	13.74	13.59	0.15	3
	6CD 11ax HE40, U-NII-7	13.04	13.01	0.03	3
	6CD 11ax HE40, U-NII-8	12.65	12.60	0.05	3
	6CD 11ax HE80, U-NII-5	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-6	16.82	16.77	0.05	3
	6CD 11ax HE80, U-NII-7	16.36	16.30	0.06	3
	6CD 11ax HE80, U-NII-8	15.76	15.71	0.05	3
	6CD 11ax HE160, U-NII-5	17.29	17.04	0.25	3
	6CD 11ax HE160, U-NII-6	17.01	16.95	0.06	3
	6CD 11ax HE160, U-NII-7	17.06	17.01	0.05	3
	6CD 11ax HE160, U-NII-8	16.89	16.83	0.06	3
Conducted Power(dBm) WIFI 6G Standard Client	6CD 11a, U-NII-5	17.29	17.21	0.08	3
	6CD 11a, U-NII-7	17.11	17.07	0.04	3
	6CD 11ax HE20, U-NII-5	17.33	17.23	0.10	3
	6CD 11ax HE20, U-NII-7	17.08	17.04	0.04	3
	6CD 11ax HE40, U-NII-5	17.23	17.16	0.07	3
	6CD 11ax HE40, U-NII-7	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-5	17.26	17.14	0.12	3
	6CD 11ax HE80, U-NII-7	16.96	16.92	0.04	3
	6CD 11ax HE160, U-NII-5	17.34	17.10	0.24	3
	6CD 11ax HE160, U-NII-7	17.12	17.07	0.05	3



List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 06, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 06, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 06, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 06, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 06, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 06, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 27, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 27, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	DFS (DFS01-KS)

NCR: No Calibration Required.

-THE END-