

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

RF Emissions

FCC Part 22, 24, and 27

Test Report

C2PC

For

Kyocera Communication Inc.

Product:	Tri-Band CDMA Phone
Model:	M6000

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

TABLE OF CONTENTS

1	SUMMARY OF TESTING	4
2	EQUIPMENT UNDER TEST INFORMATION.....	4
3	TEST FACILITIES.....	5
4	TEST SETUP	5
4.1	Test Configuration	6
5	tty compliance	7
6	Conducted RF OUTPUT POWER.....	7
6.1	Test Configuration	7
6.2	Test Results.....	7
7	OCCUPIED BANDWIDTH	8
7.1	Test Configuration	8
7.2	Test Result	8
8	Spurious Emissions At Antenna Terminals	15
8.1	Test Configuration	15
8.2	Test Result	15
9	Transmitter Radiated Spurious Emissions	25
9.1	Test Configuration and Result	25
10	Receiver Spurious Emissions	25
10.1	Receiver Spurious Emissions.....	25
11	Exposure of Humans to RF Fields (SAR)	26
11.1	Test Configuration and Result	26
12	TEST EQUIPMENT.....	26

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Product:	Tri-Band CDMA Cellular Phone with Bluetooth and WLAN
Model #:	M6000
FCC ID:	V65M6000
Tested in accordance with:	FCC Part 22, 24 & 27
Test performed by:	CompTest Services LLC
Test Requested by:	Kyocera Communication Inc 9520 Town Center Drive San Diego, CA 92121 United States
Date of Test:	January 17, 2011

Responsible Engineer

Benjamin Nguyen

Benjamin Nguyen
Test Engineer

Reviewed and approved by:



Tammy To
Quality Manager

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
6	FCC § 2.1046	Conducted Power	Pass
7	FCC § 2.1049, 22.917 (b)(d), 24.238	Occupied Bandwidth	Pass
8	FCC § 2.1051, 22.917(e)(f), 24.238	Spurious Emissions at Antenna Terminals	Pass
9	FCC § 2.1053, 22.91, 24.238	Transmitter Radiated Spurious Emissions	Pass
10	FCC § 15.109	Receiver Spurious Emissions	Pass
11	FCC § 2.1093	Exposure of Humans to RF Fields	Pass

2 EQUIPMENT UNDER TEST INFORMATION


EUT Serial Number:	A0000012B71F5E		
Type:	[] Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production		
Equipment Category:	Portable		
RF Exposure Environment:	General Population / Uncontrolled		
Antenna:	Internal Antenna		
Detachable Antenna:	No		
External Input:	Audio/Digital Data		
Quantity:	Quantity production is planned		
Multiple Access Scheme:	CDMA		
Emission Designators:	1M25F9W		
FCC Rule Parts:	§22H	§27L	§24E
Modes:	800 CDMA	1700 CDMA	1900 CDMA
TX Frequency (MHz):	824 – 849	1710 - 1755	1850 - 1910

3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 8611 Balboa Avenue, San Diego, CA 92123, USA

4 TEST SETUP

All CDMA measurements were conducted with a base station simulator to establish a CDMA link with the equipment under test (EUT). To investigate the response of the EUT the main antenna RF output port of the EUT was connected to the input of the spectrum analyzer with a RF cable. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as a power supply voltage, except for the Transmitter RF Carrier Frequency Stability test a dummy battery connected to a power supply was used.

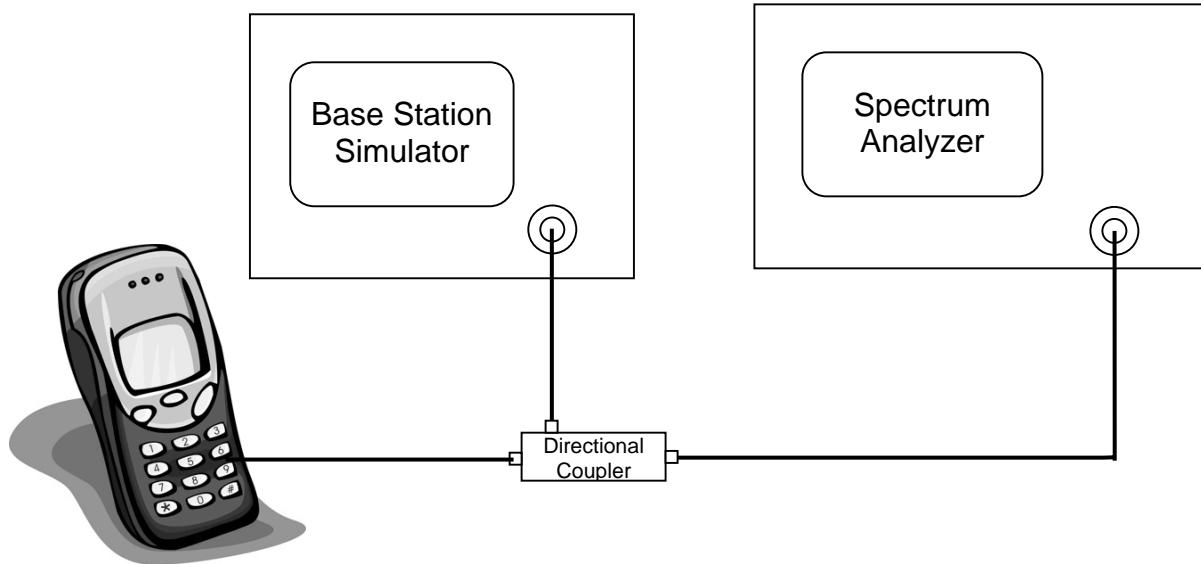

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

4.1 Test Configuration

To justify on the selection of applicable configurations, the EUT was pre-tested under all Radio Configuration and Service Option operation modes to determine the worst-case scenario.

The following configuration was determined and reported as worst-case for all measurements:

Radio Configuration:	RC1
Service Options:	SO55
Data Rate:	Full Rate

CONFIGURATION Peak Power	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	29.07	28.70	28.69	29.85	29.31	28.75	29.64	29.32	29.59
SO2, RC3 Full Rate	28.64	28.51	28.42	29.24	28.84	28.44	29.24	28.96	29.06
SO55, RC1 Full Rate	29.16	28.85	28.81	29.94	29.48	28.85	29.75	29.51	29.68
SO55, RC3 Full Rate	28.98	28.83	28.80	29.21	29.00	28.74	29.34	28.93	29.13
TDSO SO32, RC3 (+SCH) Full Rate	28.59	28.48	28.44	29.12	28.89	28.34	29.26	28.95	29.12
TDSO SO32, RC3 (+F- SCH) Full Rate	28.49	28.49	28.29	29.22	28.87	28.41	29.10	29.18	28.94

CONFIGURATION Average Power	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg
SO2, RC1 Full Rate	24.15	24.31	23.91	24.19	24.23	24.24	24.18	24.18	24.18
SO2, RC3 Full Rate	24.16	24.38	23.90	24.17	24.20	24.25	24.17	24.13	24.13
SO55, RC1 Full Rate	24.20	24.48	23.91	24.18	24.20	24.23	24.15	24.11	24.18
SO55, RC3 Full Rate	24.21	24.48	23.93	24.20	24.21	24.26	24.12	24.21	24.20
TDSO SO32, RC3 (+SCH) Full Rate	24.18	24.46	23.90	24.20	24.18	24.25	24.15	24.13	24.19
TDSO SO32, RC3 (+F- SCH) Full Rate	24.16	24.45	23.93	24.20	24.19	24.26	24.10	24.15	24.20



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

5 TTY COMPLIANCE

FCC: § 255 of the Telecom Act

The EUT has been designed for TTY Compliance with Cellular Compatibility Standard.

6 CONDUCTED RF OUTPUT POWER

6.1 Test Configuration

FCC: § 2.1046

IC: RSS132 §4.4; RSS133 §6.4

The EUT was connected to a Universal Power Meter through a RF cable. The cable loss was taken into account for accurate power measurement. The EUT was set at low, mid, high channels and each frequency band to investigate the conducted power.

6.2 Test Results

Mode	Frequency (MHz)	Channel	Conducted Power (dBm)
CDMA 800	824.70	1013	24.21
	836.52	383	24.48
	848.31	777	23.93
CDMA 1700	1711.25	25	24.20
	1732.5	450	24.21
	1753.75	875	24.26
CDMA 1900	1851.25	25	24.12
	1880	600	24.19
	1908.75	1175	24.20

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

7 OCCUPIED BANDWIDTH

7.1 Test Configuration

FCC: § 2.1049, § 22.917(b)(d), § 24.238, § 27.53(g)(1)

IC: RSS132 §4.5; RSS133 §6.5

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.

For Digital: Modulate with full rate all up power control bit.

S.A. Setting	RBW	VBW
Bandwidth Measurement	30KHz	300kHz
Band Edge Measurement	100KHz	100KHz

Limits: Bandwidth: N/A

Bandedge: -13dBm

7.2 Test Result

Figure	Description	Mode	Result
7-1	CDMA @ Ch383	CDMA 800	Pass
7-2	Lower Band Edge @ Ch 1013		Pass
7-3	Upper Band Edge @ Ch 777		Pass
7-4	CDMA @ CH450	CDMA 1700	Pass
7-5	Lower Band Edge @ CH 25		Pass
7-6	Upper Band Edge @ CH 875		Pass
7-7	CDMA @ CH600	CDMA 1900	Pass
7-8	Lower Band Edge @ CH 25		Pass
7-9	Upper Band Edge @ CH 1175		Pass



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

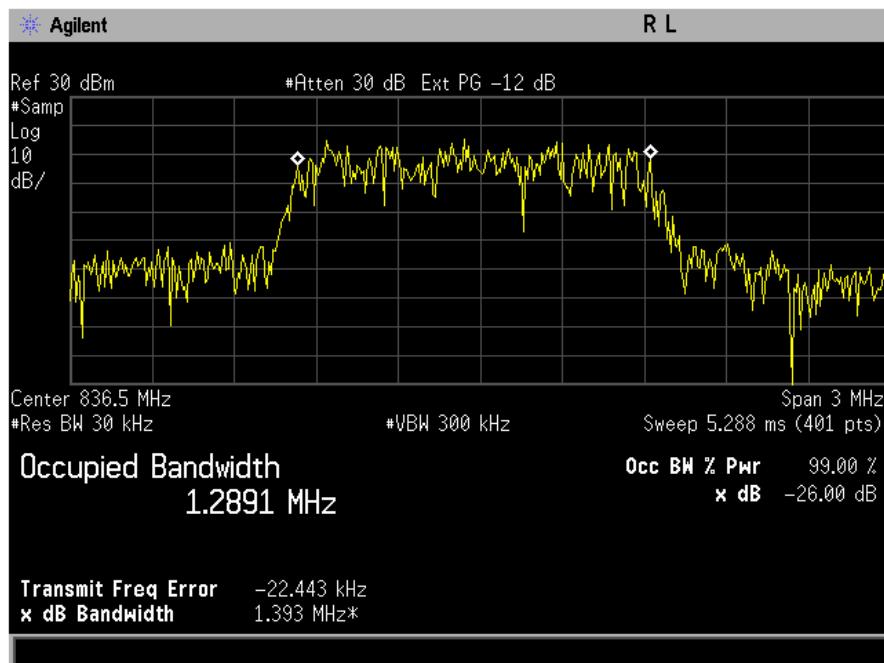


Figure 7-1 CDMA 800 @ CH 383



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

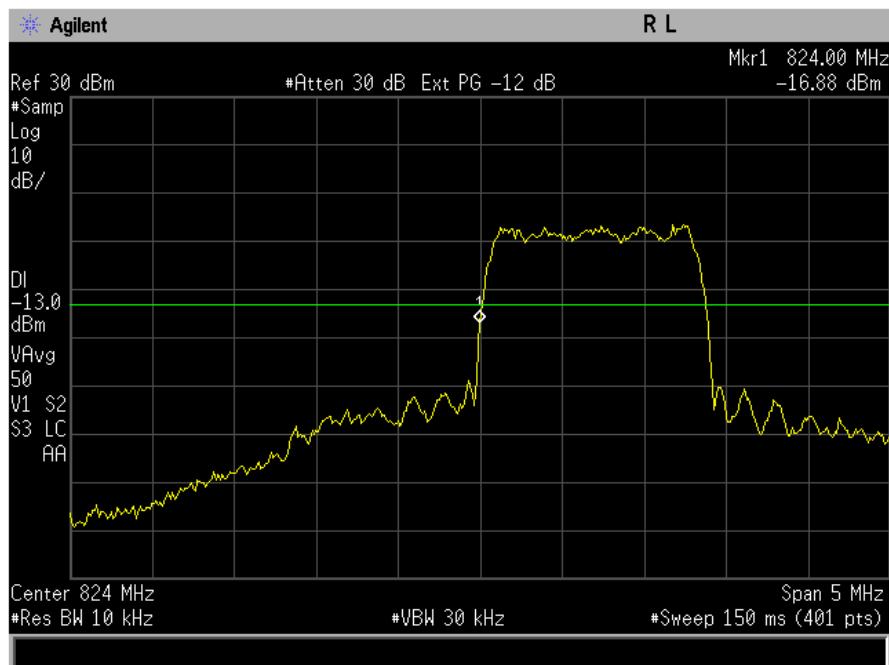


Figure 7-2 CDMA 800 Lower Band Edge @ CH 1013

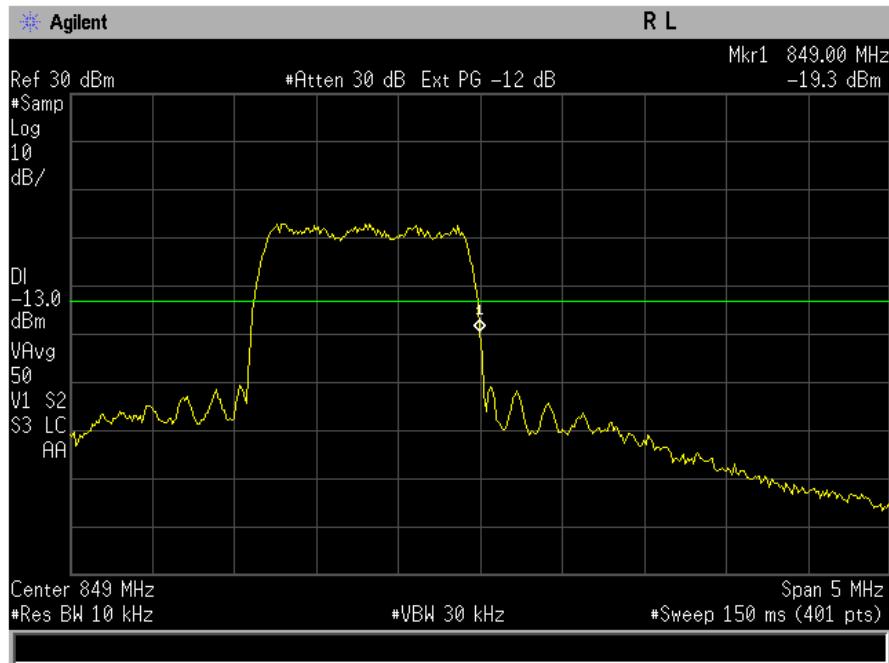


Figure 7-3 CDMA 800 Lower Band Edge @ CH 777



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

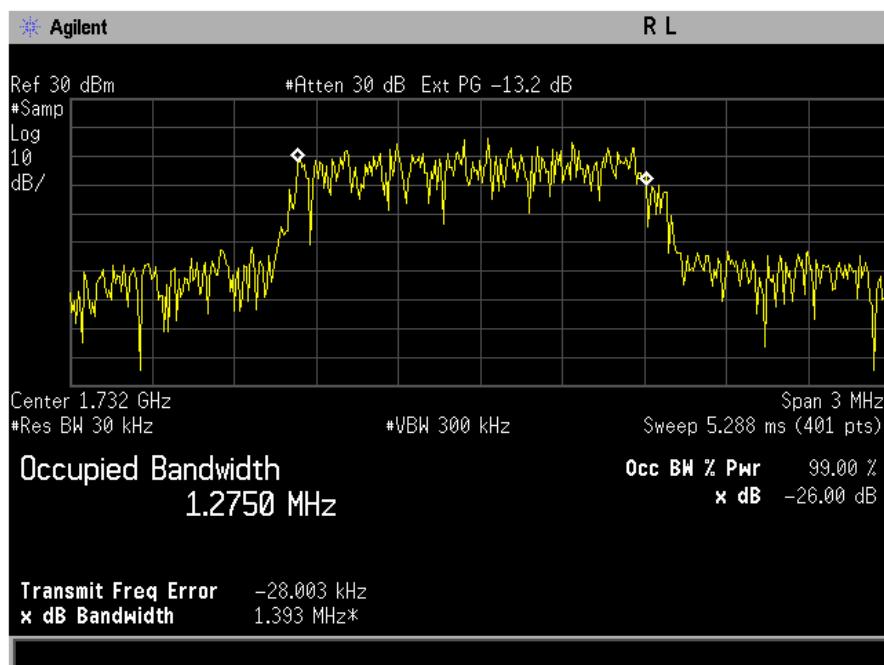


Figure 7-4 CDMA 1700 @ CH 450



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

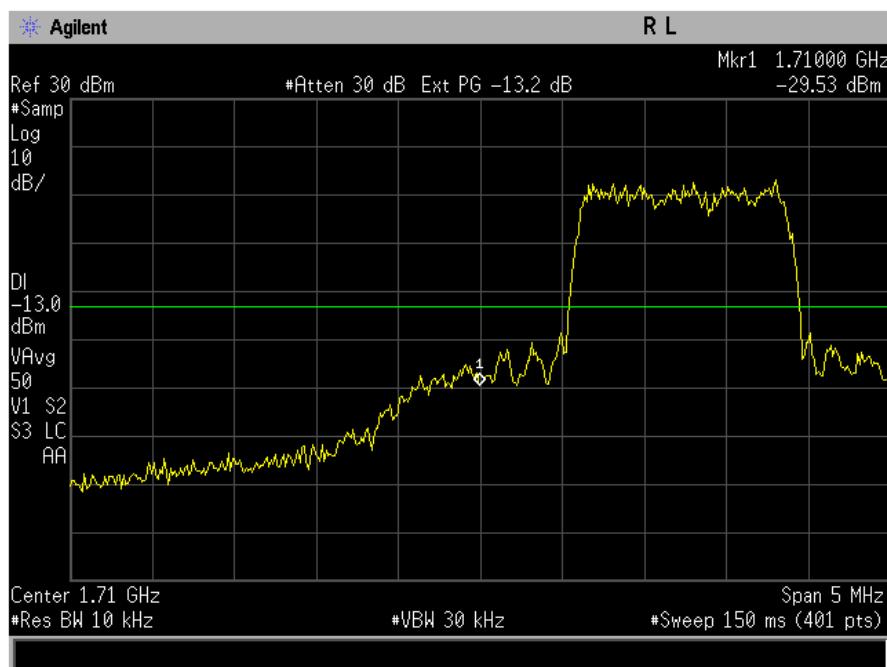


Figure 7-5 CDMA 1700 Lower Band Edge @ CH 25

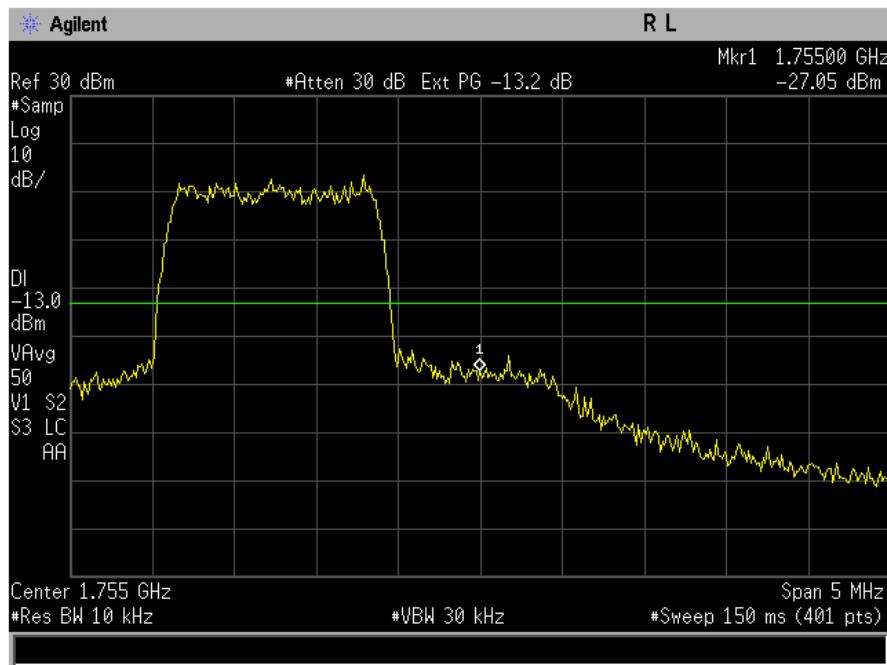


Figure 7-6 CDMA 1700 Upper Band Edge @ CH 875



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

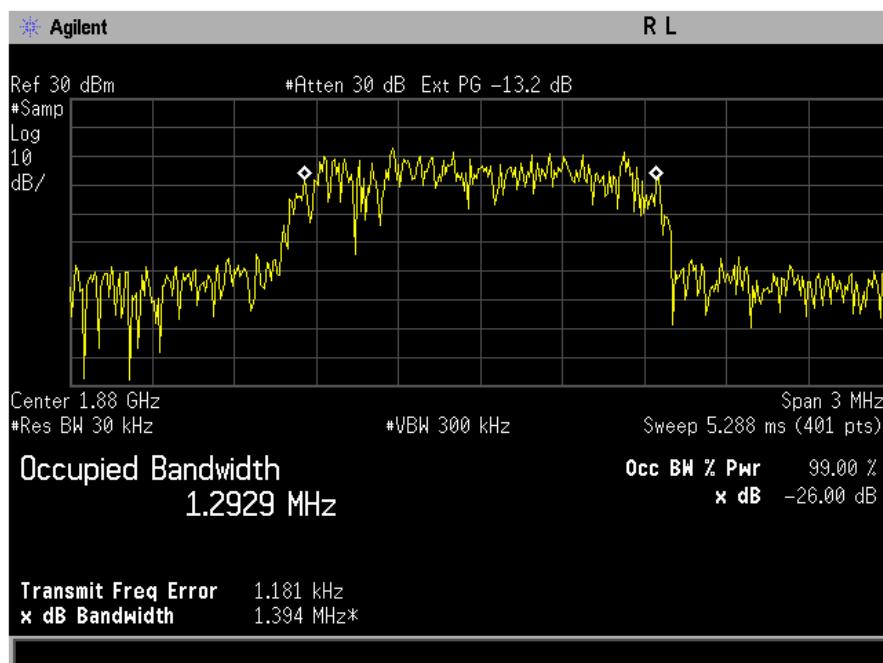


Figure 7-7 CDMA 1900 @ CH 600



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

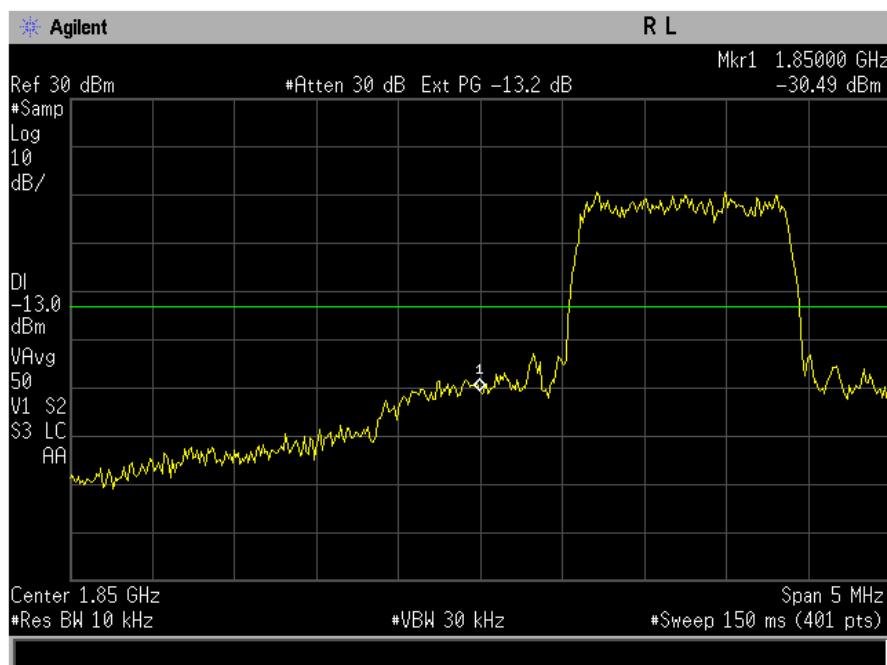


Figure 7-8 CDMA 1900 Lower Band Edge @ CH 25

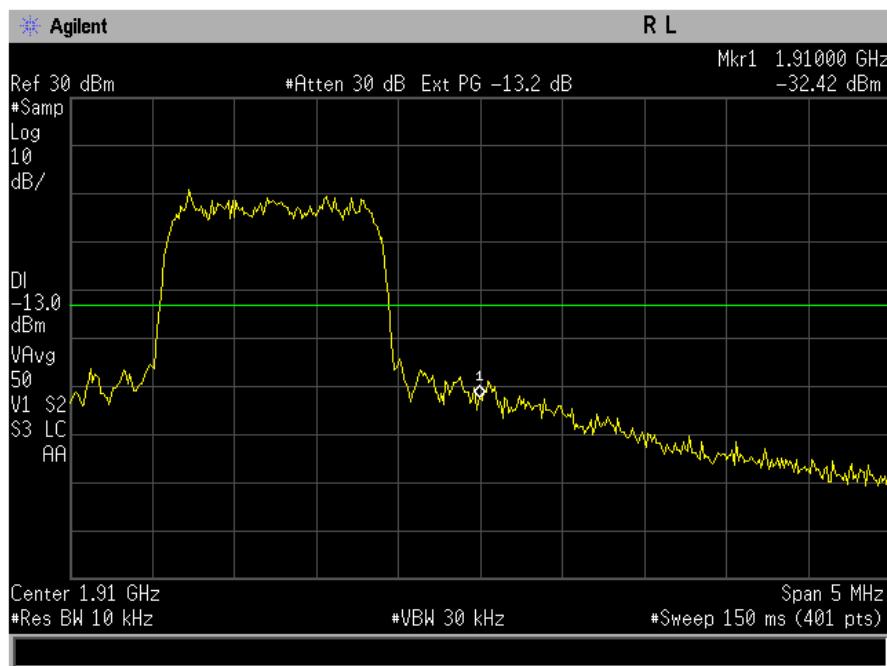


Figure 7-9 CDMA 1900 Upper Band Edge @ CH 1175

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

8 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

8.1 Test Configuration

FCC: § 2.1051, § 22.917(e)(f), § 24.238

IC: RSS132 §4.5; RSS133 §6.5

Measurement Procedures:

Out of Band: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.

S.A. Setting	RBW	VBW
Spurious Emissions Measurement	1MHz	1MHz

Limits: -13dBm

8.2 Test Result

Figure	Channel	Plot Description	Result
8-1	1013	CDMA 800 Conducted spurious emissions 9kHz to 10GHz	Pass
8-2	383		Pass
8-3	777		Pass
8-4	25	CDMA 1700 Conducted spurious emissions 9kHz to 20GHz	Pass
8-5	450		Pass
8-6	875		Pass
8-7	25	CDMA 1900 Conducted spurious emissions 9kHz to 20GHz	Pass
8-8	600		Pass
8-9	1175		Pass



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

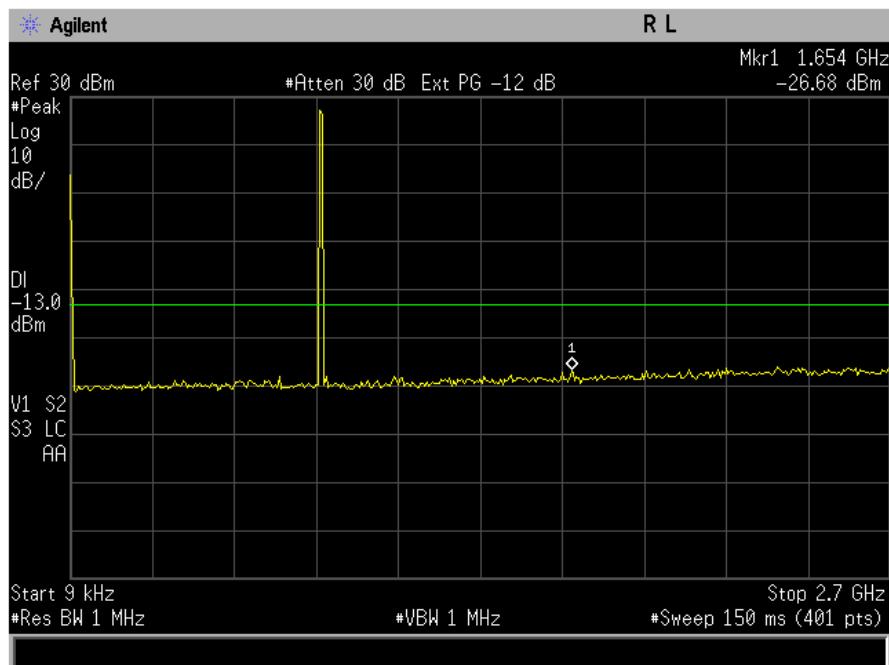


Figure 8-1a CDMA 800 – Conducted Spurious Emission (CH 1013)

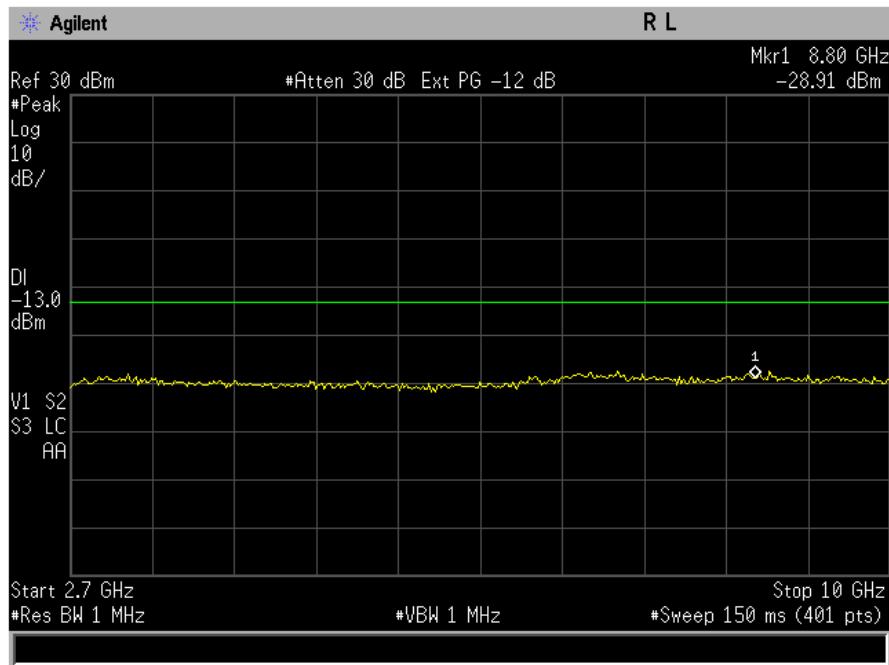


Figure 8-1b CDMA 800 – Conducted Spurious Emission (CH 1013)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

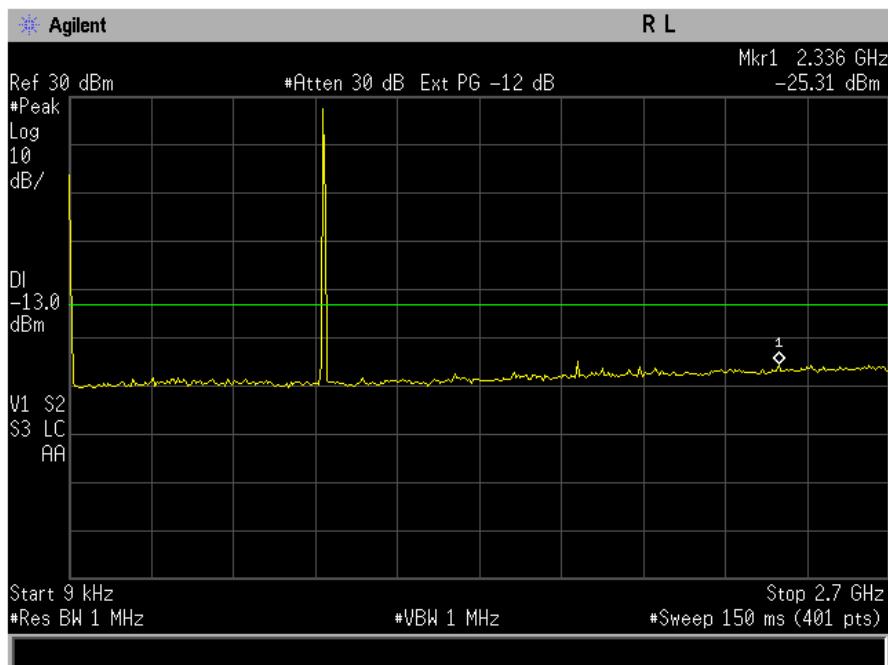


Figure 8-2a CDMA 800 – Conducted Spurious Emission (CH 383)

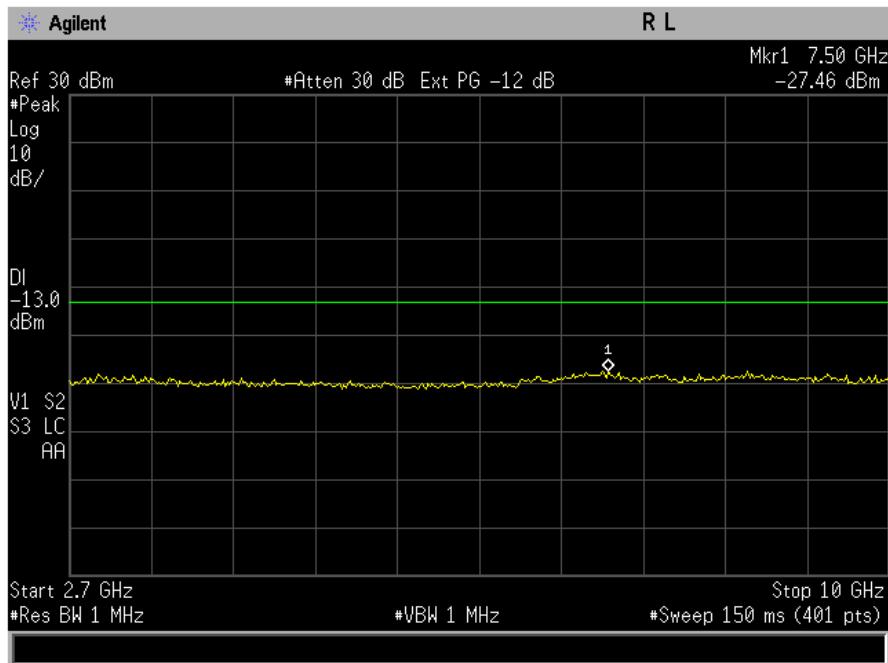


Figure 8-2b CDMA 800 – Conducted Spurious Emission (CH 383)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

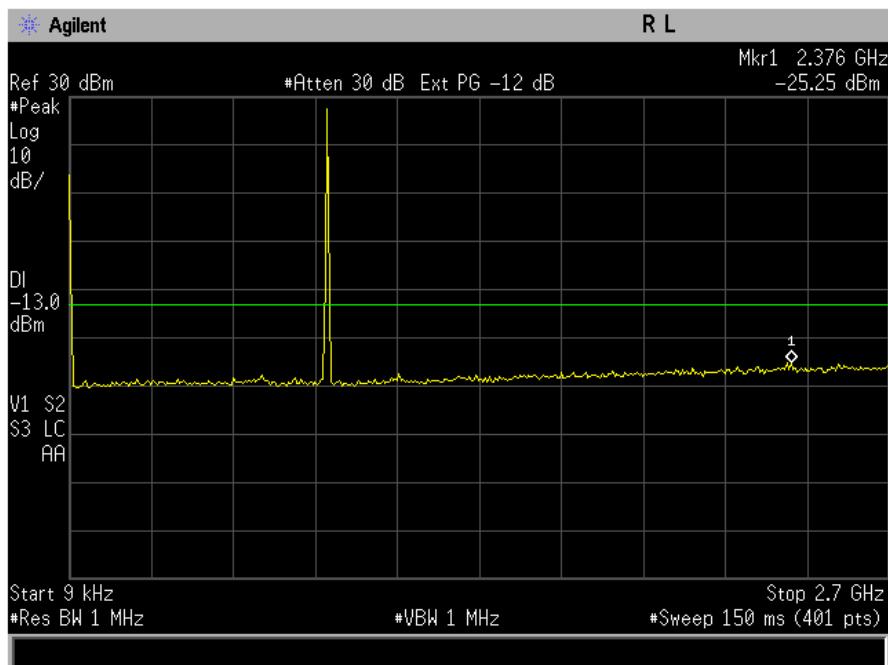


Figure 8-3a CDMA 800 – Conducted Spurious Emission (CH 777)

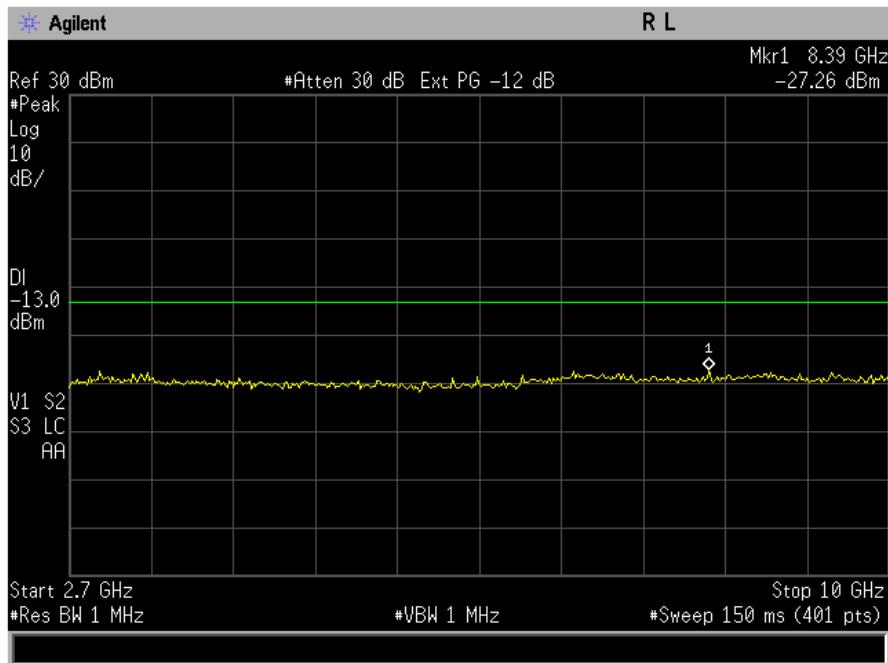


Figure 8-3b CDMA 800 – Conducted Spurious Emission (CH 777)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

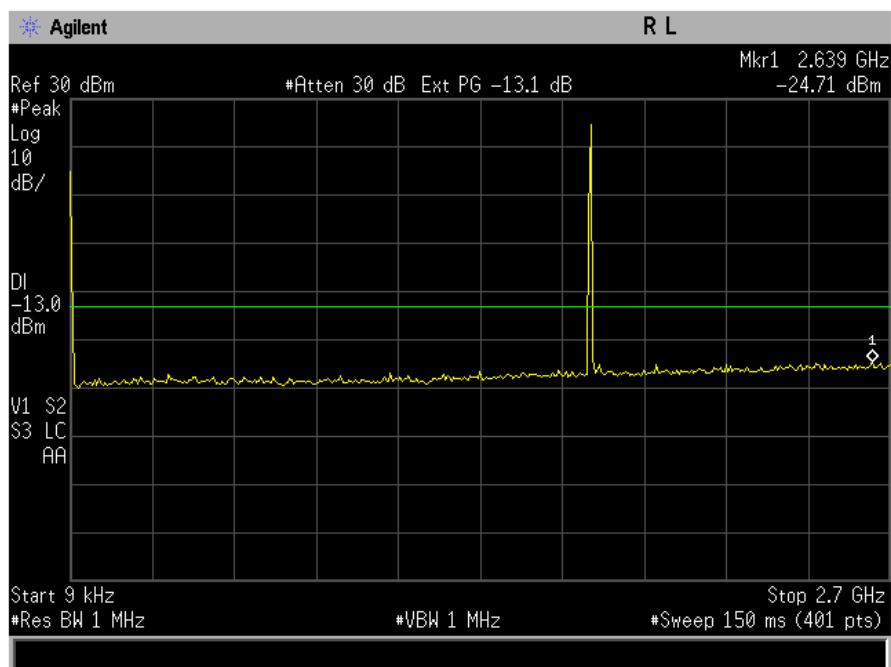


Figure 8-4a CDMA 1700 - Conducted Spurious Emission (CH 25)

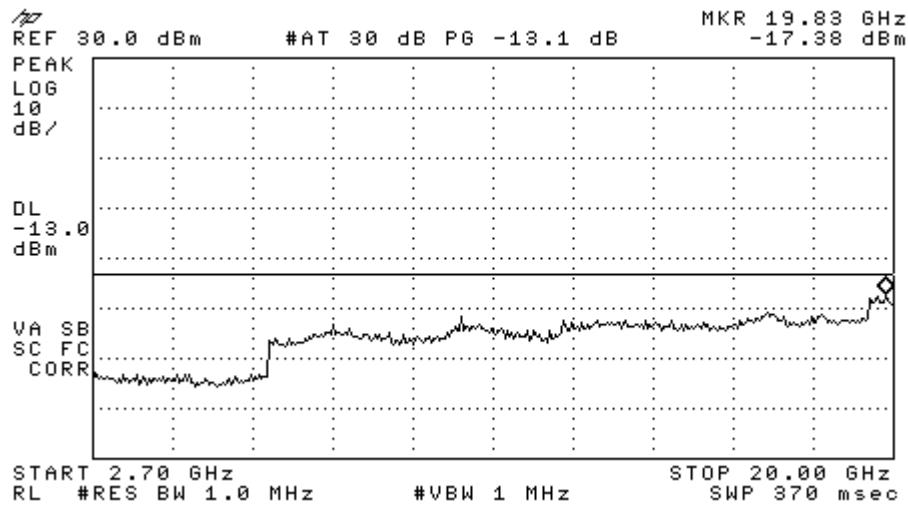


Figure 8-4b CDMA 1700 - Conducted Spurious Emission (CH 25)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

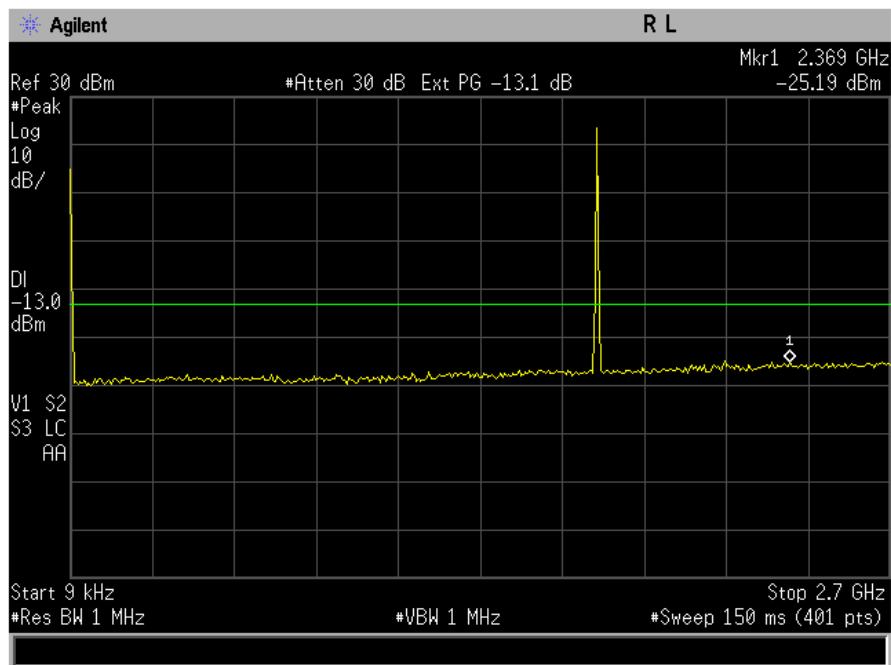


Figure 8-5a CDMA 1700 - Conducted Spurious Emission (CH 450)

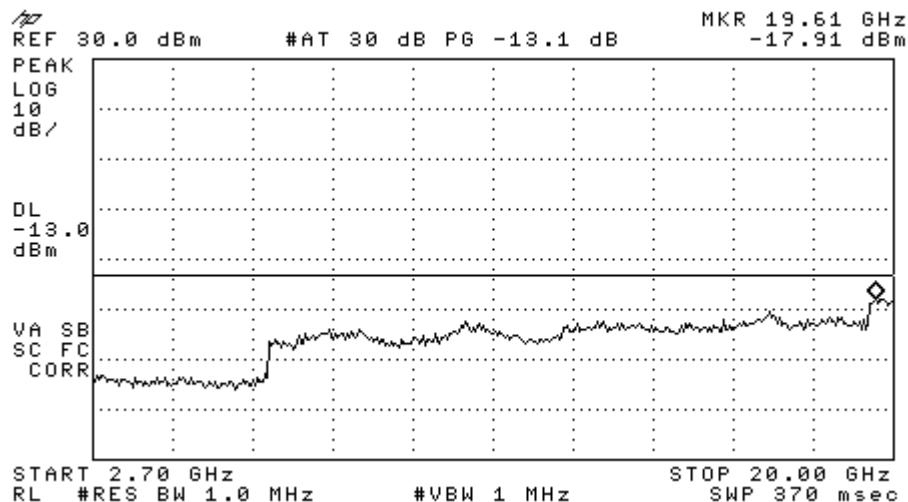


Figure 8-5b CDMA 1700 - Conducted Spurious Emission (CH 450)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

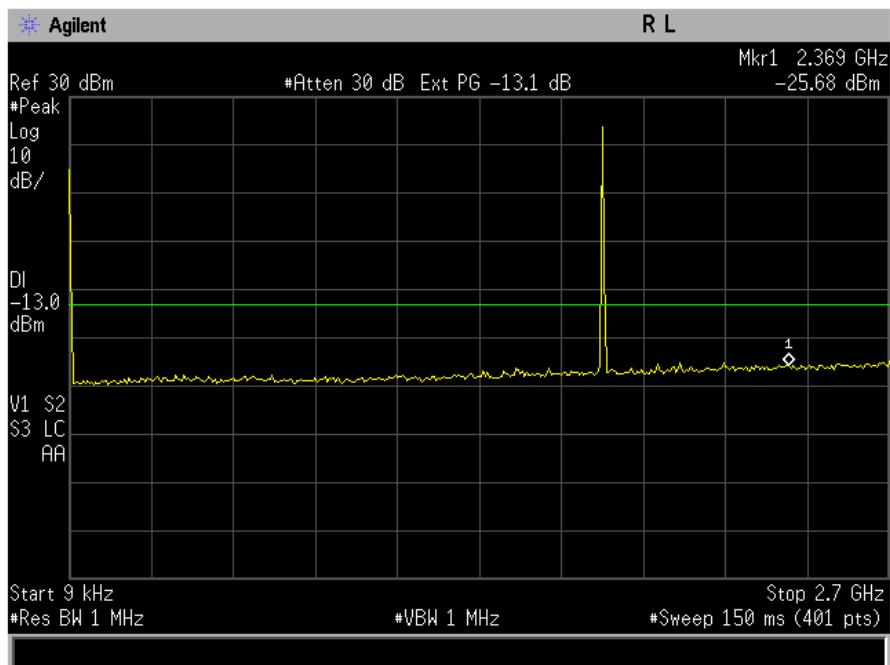


Figure 8-6a CDMA 1700 - Conducted Spurious Emission (CH 875)

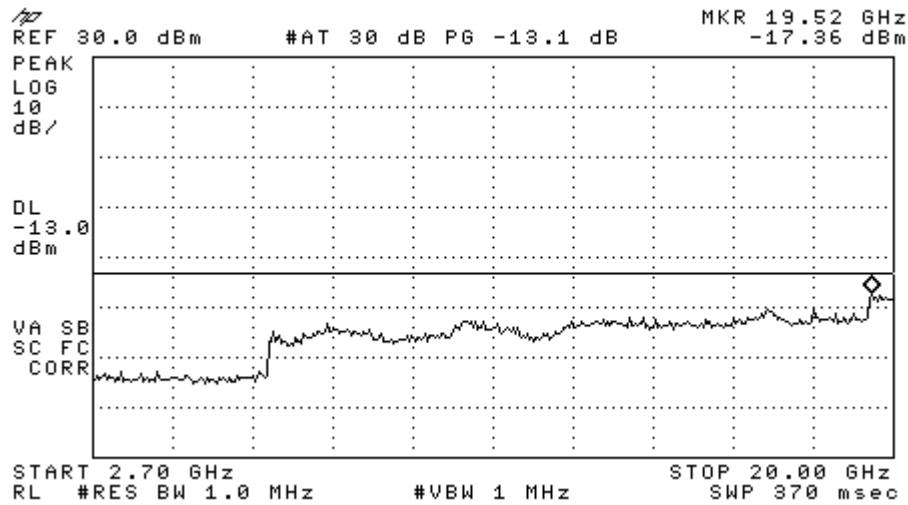


Figure 8-6b CDMA 1700 - Conducted Spurious Emission (CH 875)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

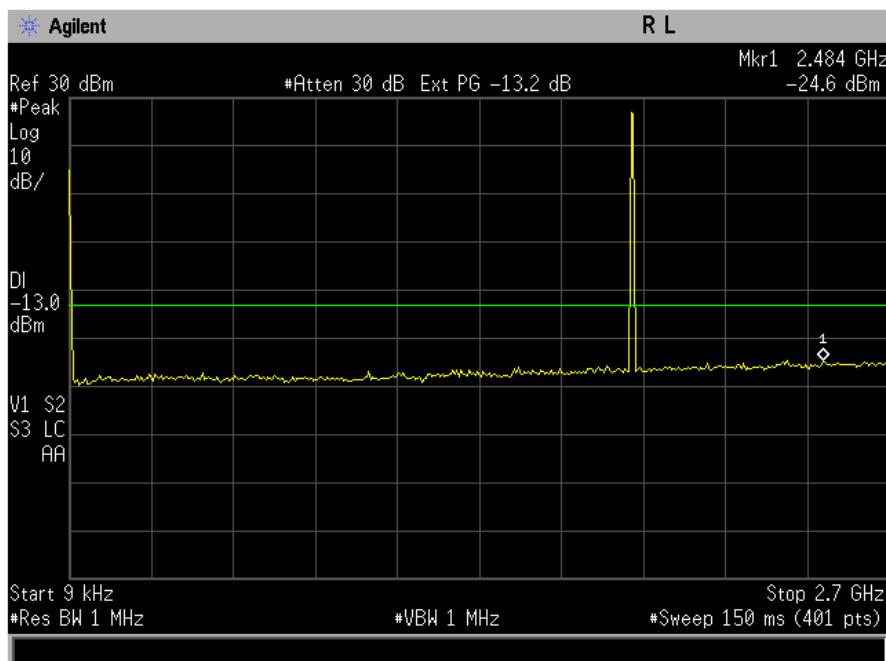


Figure 8-7a CDMA 1900 - Conducted Spurious Emission (CH 25)

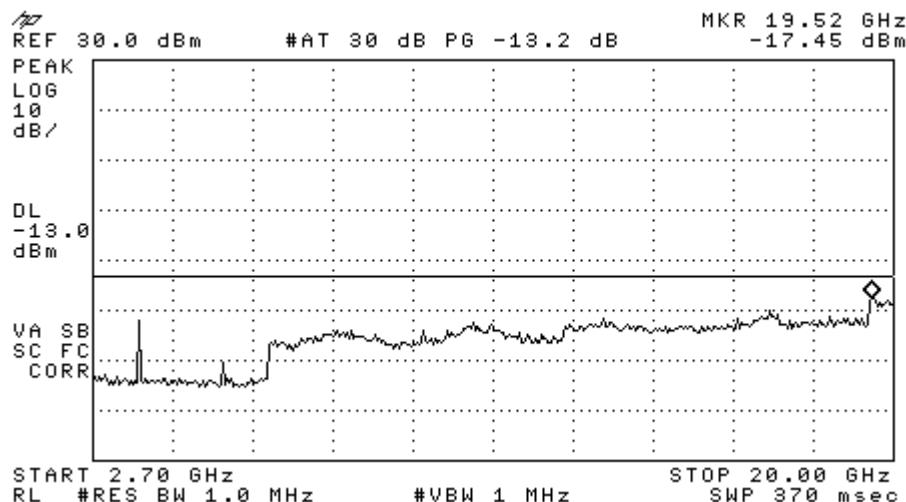


Figure 8-7b CDMA 1900 - Conducted Spurious Emission (CH 25)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

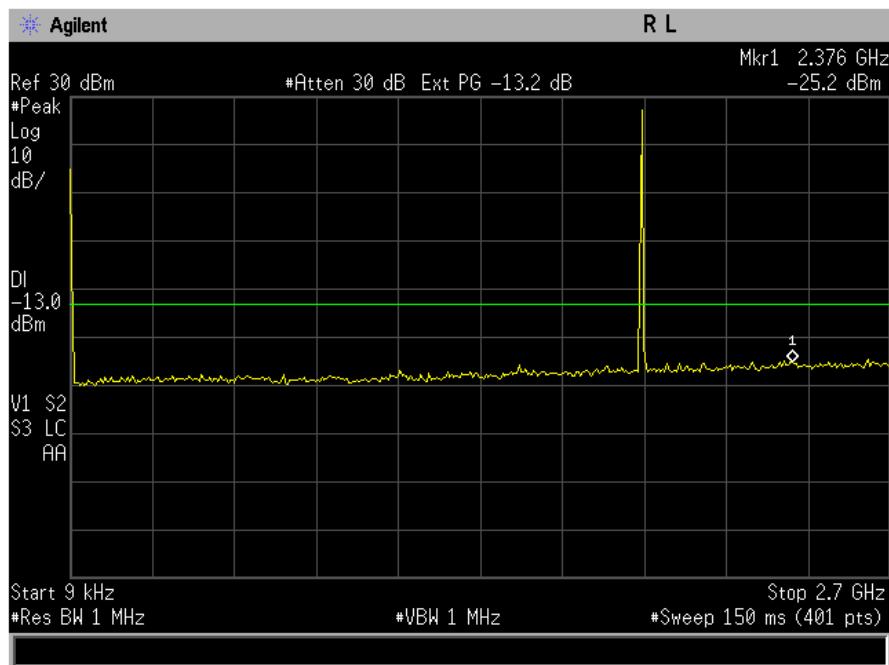


Figure 8-8a CDMA 1900 - Conducted Spurious Emission (CH 600)

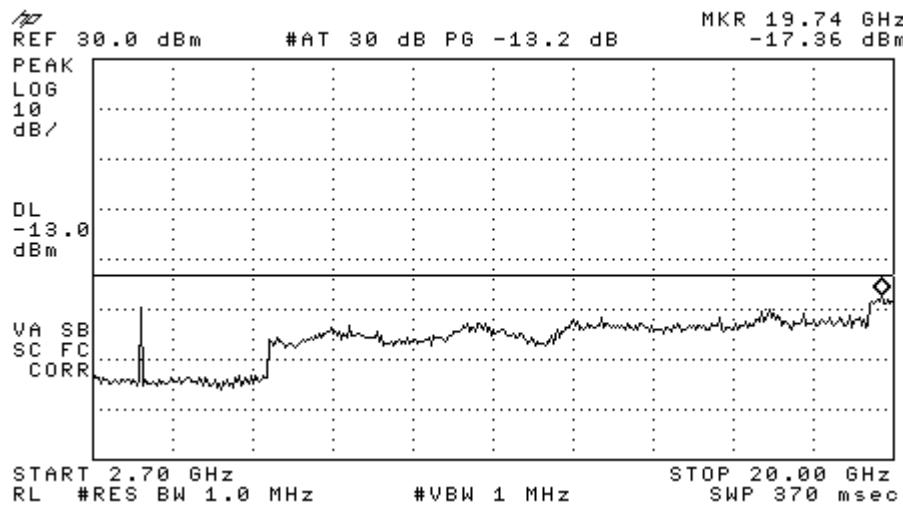


Figure 8-8b CDMA 1900 - Conducted Spurious Emission (CH 600)



Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

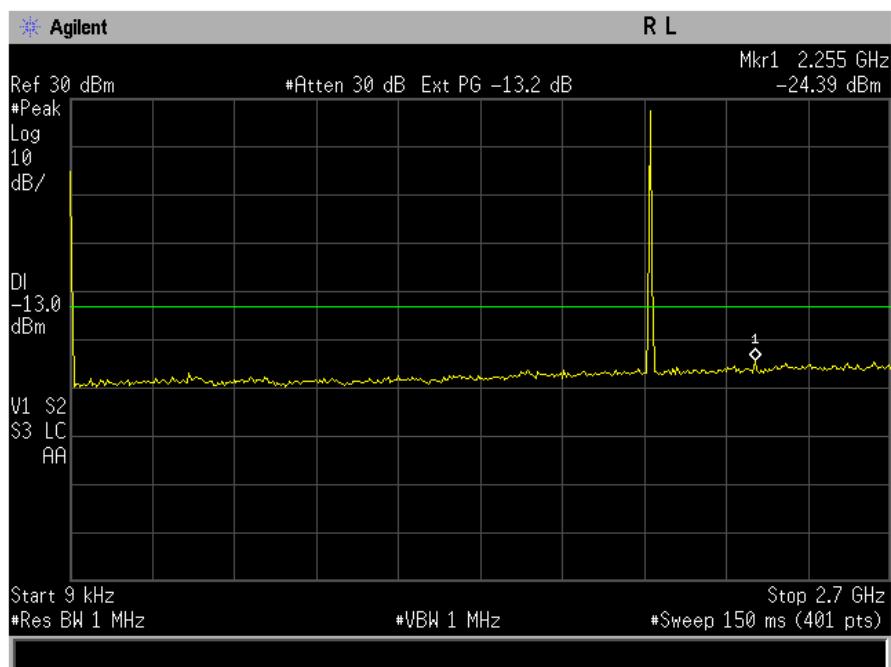


Figure 8-9a CDMA 1900 - Conducted Spurious Emission (CH 1175)

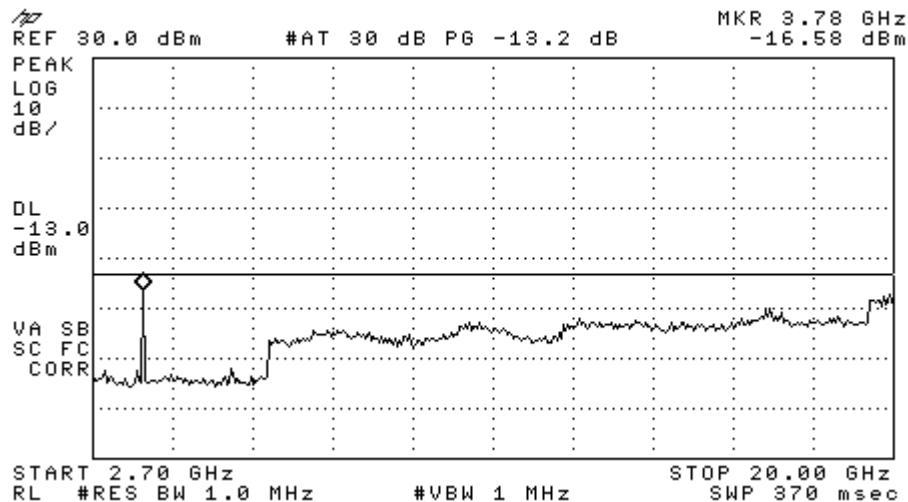


Figure 8-9b CDMA 1900 - Conducted Spurious Emission (CH 1175)

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

9 TRANSMITTER RADIATED SPURIOUS EMISSIONS

9.1 Test Configuration and Result

FCC: § 2.1053, § 22.91, § 24.238, §27.53(g)

IC: RSS132 §4.5; RSS133 §6.5

The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

10 RECEIVER SPURIOUS EMISSIONS

10.1 Receiver Spurious Emissions

FCC: § 15.109

IC: RSS-GEN

The receiver radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

Applicant:	Kyocera
FCC ID:	V65M6000
Report #:	CT-M6000 C2PC-10A-0111-R0

11 EXPOSURE OF HUMANS TO RF FIELDS (SAR)

11.1 Test Configuration and Result

FCC: § 2.1093

IC: RSS102

The SAR test report is attached in a separate attachment.

12 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Power Meter	Giga-tronics	8541C	1831306	03/29/11
Spectrum Analyzer	Agilent	E4405B	US41441217	05/26/12
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	06/09/12
Wireless Communications Test Set	Agilent	8960	GB44052789	08/17/11