

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*of*

**Controller**

**MODEL No.: XQ019, XQ006, XQ009, XQ013, XQ014,  
XQ062, XQ067, XQ057, XQ043, XQ073**

**BRAND NAME: N/A**

**FCC ID: VCMXQ019**

**REPORT NO: STEE070426420001**

**ISSUE DATE: May 11, 2007**

*Prepared for*

**XQ Toys  
Laimei Industrial District, Chenghai Shantou City,  
Guangdong, China**

*Prepared by*

**CENTRE TESTING INTERNATIONAL  
1F., BUILDING C, HONGWEI INDUSTRIAL ZONE,  
BAOAN 70 DISTRICT, SHENZHEN, CHINA  
TEL: 86-755-3368 3668  
FAX: 86-755-3368 3385**

**This report shall not be reproduced, except in full, without the written approval of  
CENTRE TESTING INTERNATIONAL**

## VERIFICATION OF COMPLIANCE

Applicant:	XQ TOYS Laimei Industrial District, Chenghai Shantou City, Guangdong, China
Product Description:	Controller
Brand Name:	N/A
Model Number:	XQ019, XQ006, XQ009, XQ013, XQ014, XQ062, XQ067, XQ057, XQ043, XQ073
Serial Number:	N/A
File Number:	STEE070426420001
Date of Test:	May 10, 2007

### We hereby certify that:

The above equipment was tested by Centre Testing International (CTI). The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.227.

The test results of this report relate only to the tested sample identified in this report.

*Approved By*

---

*Q.A. Manager*  
CENTRE TESTING INTERNATIONAL

## Table of Contents

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
1.5 SPECIAL ACCESSORIES .....	4
1.6 EQUIPMENT MODIFICATIONS.....	4
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
2.1 EUT CONFIGURATION .....	5
2.2 EUT EXERCISE.....	5
2.3 TEST PROCEDURE .....	5
2.4 LIMITATION.....	6
2.5 CONFIGURATION OF TESTED SYSTEM .....	7
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>7</b>
<b>5. CONDUCTED EMISSIONS TEST (NOT APPLICABLE IN THIS REPORT).....</b>	<b>7</b>
5.1 MEASUREMENT PROCEDURE: .....	7
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	7
5.3 MEASUREMENT EQUIPMENT USED:.....	8
5.4 MEASUREMENT RESULT: .....	8
5.5 CONDUCTED MEASUREMENT PHOTOS:.....	8
<b>6. RADIATED EMISSION TEST .....</b>	<b>8</b>
6.1 MEASUREMENT PROCEDURE .....	8
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	9
6.4 FIELD STRENGTH CALCULATION.....	10
<b>7. OCCUPIED BANDWIDTH.....</b>	<b>13</b>
7.1 MEASUREMENT PROCEDURE .....	13
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
7.3 MEASUREMENT EQUIPMENT USED:.....	13
7.4 MEASUREMENT RESULTS: .....	13
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>14</b>
<b>APPENDIX 2 PHOTOGRAPHS OF EUT .....</b>	<b>16</b>

## **1. GENERAL INFORMATION**

### **1.1 Product Description**

The Controller. Model: XQ019, XQ006, XQ009, XQ013, XQ014, XQ062, XQ067, XQ057, XQ043, XQ073 (referred to as the EUT in this report). The EUT is a short range, lower power. It designed as an “Input Device”. It is designed by way of utilizing the FSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 49.859 MHz ,one channel.
- B). Modulation: FSK
- C). Antenna Designation: Non-User Replaceable (Fixed)
- D). Power Supply: DC 9.0 V by battery.
- E). Description of Difference model: They have the difference color.

### **1.2 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for FCC ID: VCMXQ019 filing to comply with Section 15.227 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a DOC procedure.

### **1.3 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003).

Radiated testing was performed at an antenna to EUT distance 3 meters.

### **1.4 Test Facility**

The open area test site and conducted measurement facility used to collect the radiated data is located on the address: No. 6, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China. The Open Area Test Sites and the Line conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. And the test firm: Compliance Engineering Service (China) .

### **1.5 Special Accessories**

Not available for this EUT intended for grant.

### **1.6 Equipment Modifications**

Not available for this EUT intended for grant.

## **2. SYSTEM TEST CONFIGURATION**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The Controller was operated in the normal operating mode. the TX frequency was fixed which was for the purpose of the measurements.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions (Not apply in the report)**

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

## 2.4 Limitation

### (1) Conducted Emission (Not applicable in this report)

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range	Limits dB(uV)	
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note:1.The lower limit shall apply at the transition frequencies  
 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### (2) Radiated Emission

- The field strength of any emission within this band (section 15.227 frequency between 26.96MHz -27.28MHz) shall not exceed 10000 micro volts/meter at 3 meters. (80dB $\mu$ V at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209(Intentional Radiators general limit).as below.

Frequency (MHz)	Field strength $\mu$ V/m	Distance(m)	Field strength at 3m dB $\mu$ V/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark:

- Emission level in dB $\mu$ V/m=20 log ( $\mu$ V/m)
- Measurement was performed at an antenna to the closed point of EUT distance of meters.
- Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205
- Emission spurious frequency which appearing within the Restricted Bands specified in provision of  $\xi$ 15.205, then the general radiated emission limits in  $\xi$  15.209 apply.

## 2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Controller	N/A	XQ019	N/A	EUT

## 3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§ 15.207	Conducted Emission	N/A
§ 15.227	Radiated Emission	Compliant
§ 15.227	26 dB Bandwidth	Compliant

## 4. Description of test modes

1. The EUT has been tested under normal operating condition.
2. The EUT stay in continuous transmitting mode. The channel (49.859 MHz) is chosen for testing.

## 5. Conducted Emissions Test (Not applicable in this report)

### 5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

### 5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	HP	8546A	3448A00232	02/08/2007	02/07/2008
Spectrum Analyzer	ADVANTEST	R3132	120901472	02/08/2007	02/07/2008
LISN	EMCO	3825/2	1371	02/08/2007	02/07/2008
LISN	EMCO	3825/2	8901-1459	02/08/2007	02/07/2008

### 5.4 Measurement Result: N/A

### 5.5 Conducted Measurement Photos: N/A


## 6. Radiated Emission Test

### 6.1 Measurement Procedure


- 1) The EUT was placed on a turn table which is 0.8m above ground plane.
- 2) Maximum procedure was performed on the twelve highest emissions to ensure EUT compliance.
- 3) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4) Repeat above procedures until all frequency measured were complete.

## 6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

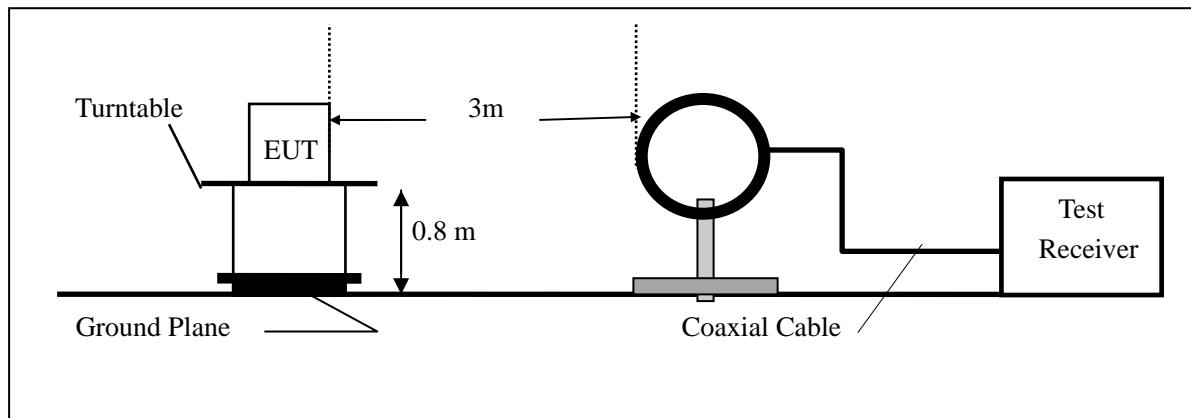

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

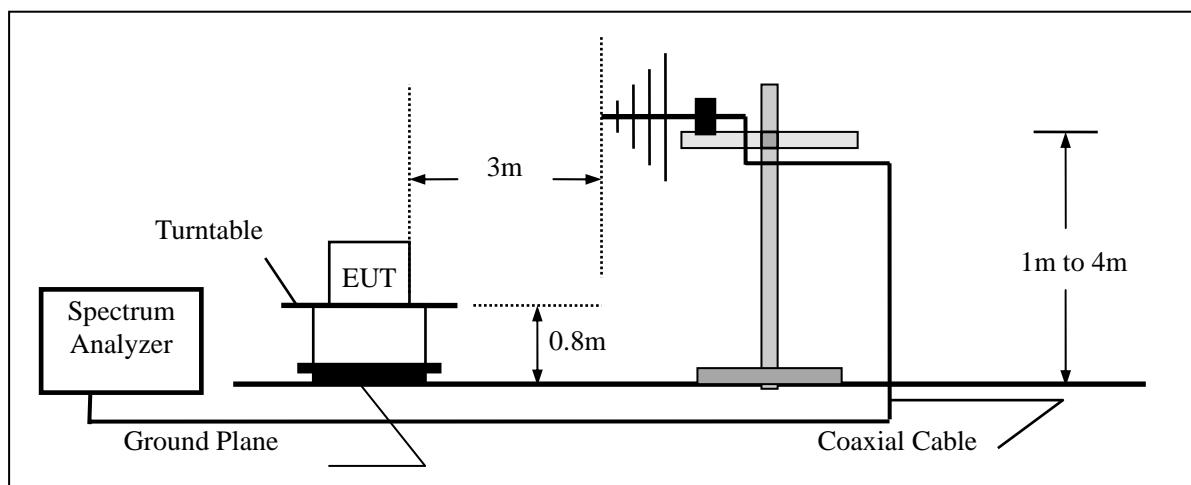

### 6.3 Measurement Equipment Used:

Open Area Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	ADVANTEST	R3132	120901472	02/08/2007	02/07/2008
EMI Test Receiver	HP	8546A	3448A00232	02/08/2007	02/07/2008
Pre-Amplifier	HP	8447D	2944A07999	02/08/2007	02/07/2008
Bi-log Antenna	EMCO	3142	9910-1436	02/08/2007	02/07/2008
Loop Antenna	ARA	PLA-1030/B	1029	02/08/2007	02/07/2008

### 6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

## 6.5 Measurement Result

Operation Mode:	Transmitting Mode	Test Date :	May.10, 2007
Fundamental Frequency:	49.859 MHz	Test By:	Winter
Temperature :	22 °C	Pol:	Vertical
Humidity :	60 %		

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Factor CF(dB)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
49.8590	V	Peak	66.66	9.26	80.00	-4.08	F
49.810	V	Peak	18.22	9.23	40.00	-12.55	E
49.910	V	Peak	18.54	9.29	40.00	-12.17	E
99.5167	V	Peak	17.47	10.40	43.50	-15.63	H
232.0833	V	Peak	9.10	13.49	46.00	-23.41	H
312.9166	V	Peak	9.53	16.36	46.00	-20.11	H
422.8500	V	Peak	8.92	18.52	46.00	-18.56	H
563.5000	V	Peak	9.87	21.45	46.00	-14.68	H

### Remark:

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 25MHz to 30MHz was 9KHz; 30MHz to 1GHz was 120KHz.

Operation Mode: Transmitting Mode      Test Date : May.10, 2007  
 Fundamental Frequency: 49.859 MHz      Test By: Winter  
 Temperature : 22 °C      Pol: Horizontal  
 Humidity : 60 %

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Factor CF(dB)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
49.8590	H	Peak	49.80	9.26	80.00	-20.94	F
49.810	H	Peak	10.22	9.23	40.00	-20.55	E
49.910	H	Peak	10.18	9.29	40.00	-20.53	E
99.5167	H	Peak	12.02	10.40	43.50	-21.08	H
180.3499	H	Peak	9.27	11.76	43.50	-22.47	H
264.4166	H	Peak	9.31	14.52	54.00	-30.17	H
346.8666	H	Peak	9.63	17.51	54.00	-26.86	H
455.1832	H	Peak	9.37	19.28	46.00	-17.35	H

**Remark:**

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 25MHz to 30MHz was 9KHz; 30MHz to 1GHz was 120KHz.

## 7. Occupied Bandwidth

### 7.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Set SPA Center Frequency = fundamental frequency , RBW,VBW= 1.8KHz, Span =200KHz.
4. Set SPA Max hold. Mark peak, -26dB.

### 7.2 Test SET-UP (Block Diagram of Configuration)

Same as 4.2 Radiated Emission Measurement.


### 7.3 Measurement Equipment Used:

Same as 4.2 Radiated Emission Measurement.

### 7.4 Measurement Results:


26dB bandwidth = 15.004 KHz on channel 1.

Refer to attached data chart.

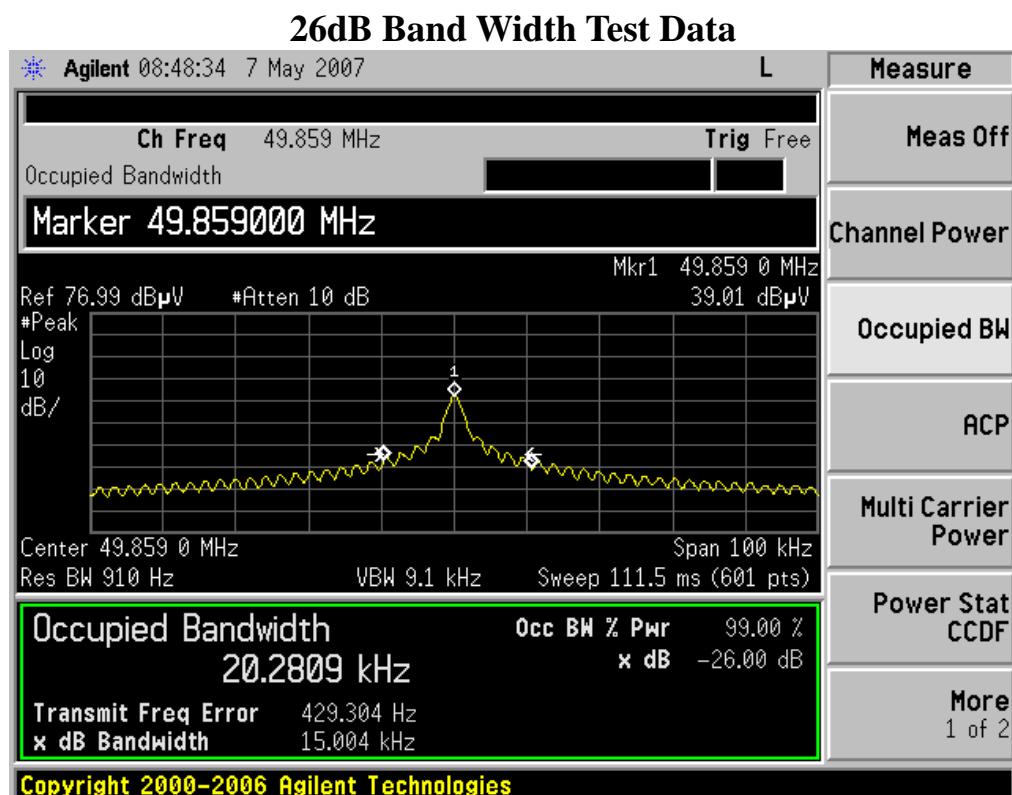

## **APPENDIX 1 PHOTOGRAPHS OF TEST SETUP**

## TEST SETUP OF RADIATED EMISSION

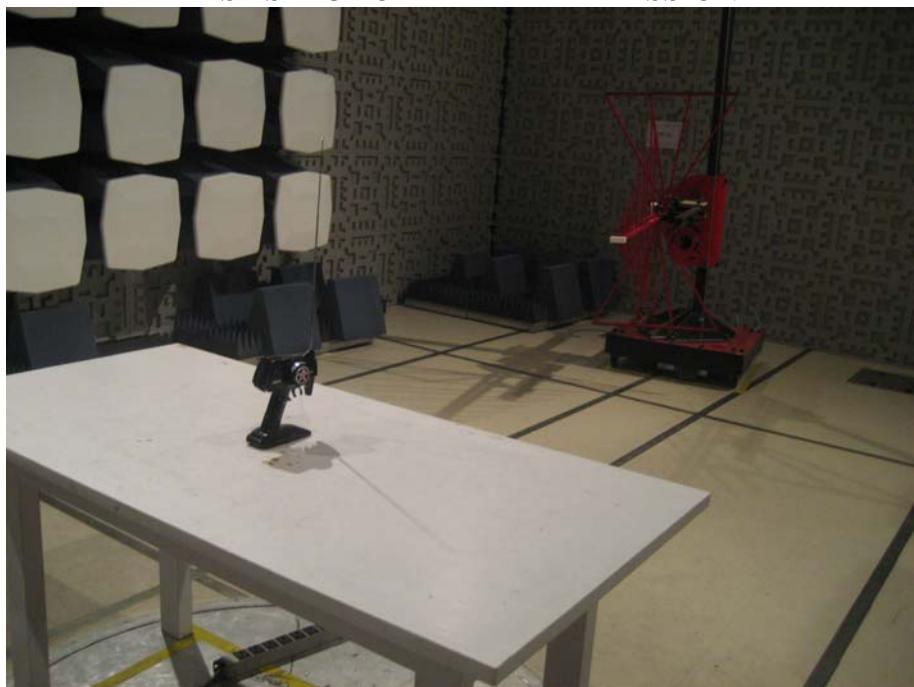

## **APPENDIX 2 PHOTOGRAPHS OF EUT**

TOP VIEW OF SAMPLE




BOTTOM VIEW OF SAMPLE



INTERIOR VIEW OF TX - 1



INTERIOR VIEW OF TX - 2

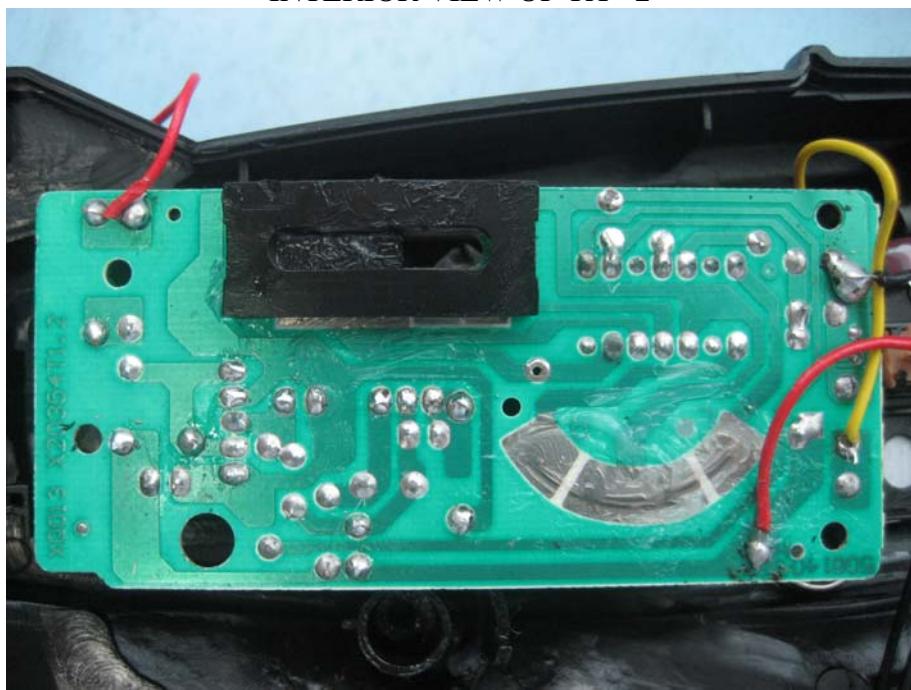

----End of the report----