

**FCC PART 18  
TEST REPORT**

For

**Jiangxi Midea Guiya Green Lighting Electrical Co., Ltd.**

Guixi Industrial District, Guixi, Jiangxi, China

**FCC ID: VGZMSP15-26W**

<b>Report Type:</b> Original Report	<b>Product Type:</b> CFL
<b>Test Engineer:</b> Phase Zhang	<i>Phase Zhang</i>
<b>Report Number:</b> RSZ110921535-00	
<b>Report Date:</b> 2011-11-18	
<b>Reviewed By:</b> Lisa Zhu EMC Engineer	<i>Lisa Zhu</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

## TABLE OF CONTENTS

<b>GENERAL INFORMATION .....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S) .....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
JUSTIFICATION.....	5
EUT EXERCISE SOFTWARE.....	5
SPECIAL ACCESSORIES .....	5
EQUIPMENT MODIFICATIONS.....	5
EXTERNAL CABLE .....	5
CONFIGURATION OF TEST SETUP.....	5
BLOCK DIAGRAM OF TEST SETUP.....	6
<b>FCC §18.307 - AC LINE CONDUCTED EMISSIONS .....</b>	<b>7</b>
APPLICABLE STANDARD.....	7
MEASUREMENT UNCERTAINTY .....	7
EUT SETUP .....	7
EMI TEST RECEIVER SETUP .....	8
TEST PROCEDURE.....	8
TEST EQUIPMENT LIST AND DETAILS .....	8
TEST RESULTS SUMMARY .....	8
TEST DATA.....	9
<b>FCC §18.305 – FIELD STRENGTH .....</b>	<b>17</b>
MEASUREMENT UNCERTAINTY .....	17
EUT SETUP .....	17
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP .....	18
TEST PROCEDURE.....	18
TEST EQUIPMENT LIST AND DETAILS .....	18
CORRECTED AMPLITUDE CALCULATION .....	18
TEST DATA.....	18
<b>PRODUCT SIMILARTITY DECLARATION LETTER.....</b>	<b>21</b>

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The Jiangxi Midea Guiya Green Lighting Electrical Co., Ltd's model: MDESLMSP15W-E26, MDESLMSP18W-E26, MDESLMSP23W-E26, MDESLMSP26W-E26 (FCC ID: VGZMSP15-26W) (the "EUT") in this report was a CFL, which was measured approximately:

MDESLMSP15W-E26: 11.0 cm (L) x 6.0 cm (D),

MDESLMSP18W-E26: 11.5 cm (L) x 6.0 cm (D),

MDESLMSP23W-E26: 12.5 cm (L) x 6.0 cm (D),

MDESLMSP26W-E26: 13.0 cm (L) x 6.0 cm (D),

the rated input voltage: AC 120V/60Hz.

*Note: The serial product, model MDESLMSP15W-E26, MDESLMSP18W-E26, MDESLMSP23W-E26 and MDESLMSP26W-E26 are electrically identical, they just have different power, which was explained in the attached declaration letter.*

*\* All measurement and test data in this report was gathered from production sample serial number: 1109038 (Assigned by BACL, Shenzhen). The EUT was received on 2011-09-21.*

### Objective

This test report is prepared on behalf of Jiangxi Midea Guiya Green Lighting Electrical Co., Ltd in accordance with Part 2-Subpart J, and Part 18-Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

No exercise software.

### Special Accessories

The special accessories were supplied by Bay Area Compliance Laboratories Corp.


### Equipment Modifications

No modifications were made to the unit tested.


### External Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable AC Power Cable	1.2	EUT	LISN

### Configuration of Test Setup



### Block Diagram of Test Setup

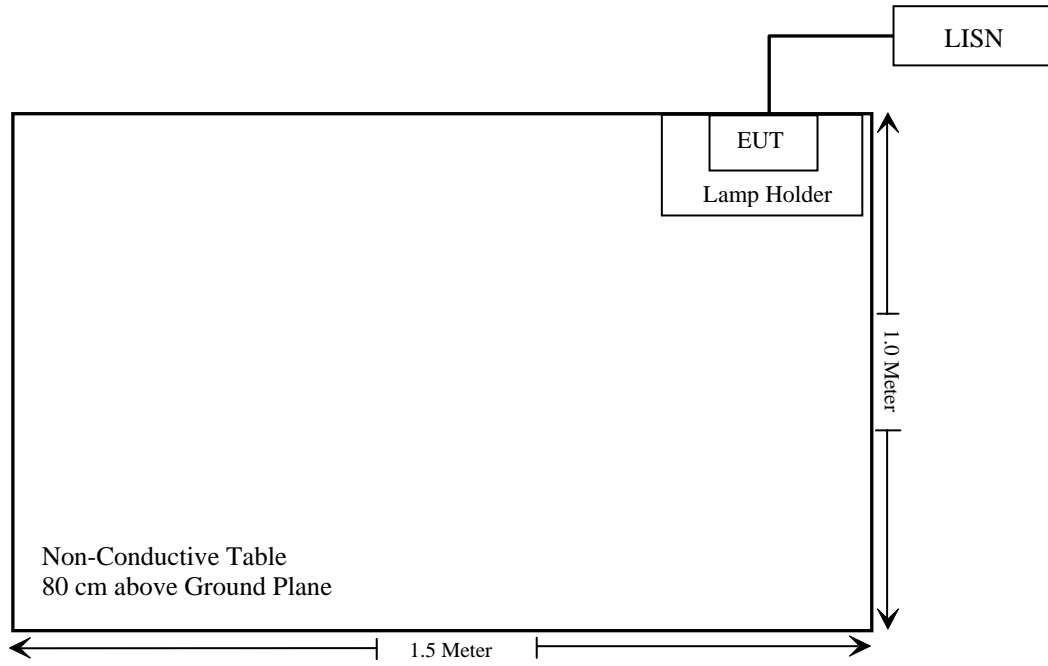

## FCC §18.307 - AC LINE CONDUCTED EMISSIONS

### Applicable Standard

Conduction limits. For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).


Frequency (MHz)	Maximum RF line voltage measured with a 50 $\mu$ H/50 ohm LISN (uV)
Non-consumer equipment:	
0.45 to 1.6	1,000
1.6 to 30	3,000
Consumer equipment:	
0.45 to 2.51	250
2.51 to 3.0	3,000
3.0 to 30	250

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. is  $\pm 2.4$  dB (k=2, 95% level of confidence).

### EUT Setup

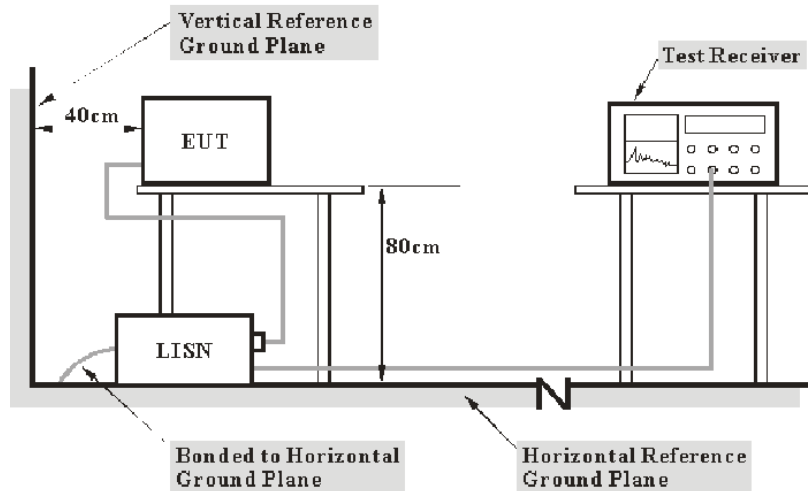

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The EUT was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IFBW</u>
450 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the EUT was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-Peak detection mode.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

**10.02 dB** at **0.540 MHz** in the **Neutral** conducted mode for mode MDESLMSP15W-E26

**12.16 dB** at **0.525 MHz** in the **Neutral** conducted mode for mode MDESLMSP18W-E26

**4.16 dB** at **1.000 MHz** in the **Line** conducted mode for mode MDESLMSP23W-E26

**3.79 dB** at **0.925 MHz** in the **Neutral** conducted mode for mode MDESLMSP26W-E26



**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	100.0 kPa

Testing was performed by Phase Zhang on 2011-09-24.

Test Mode: On


Model: MDESLMSP15W-E26

AC 120V/60 Hz, Line:

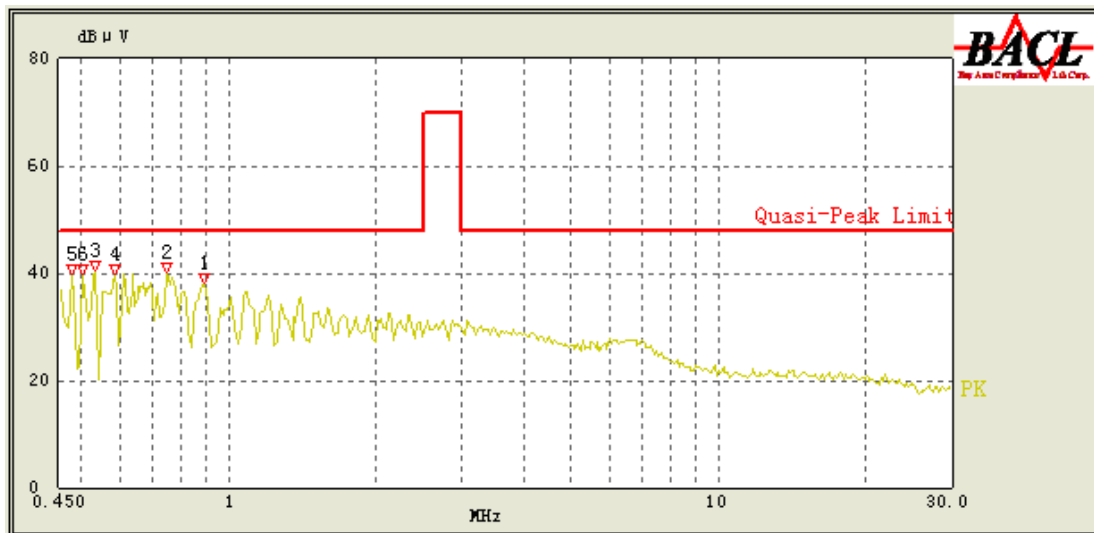

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
0.535	35.36	10.10	48.00	12.64
0.890	35.33	10.10	48.00	12.67
0.472	34.97	10.10	48.00	13.03
0.508	33.88	10.10	48.00	14.12
0.585	32.43	10.10	48.00	15.57
0.745	32.12	10.10	48.00	15.88


**AC 120V/ 60 Hz, Neutral:**

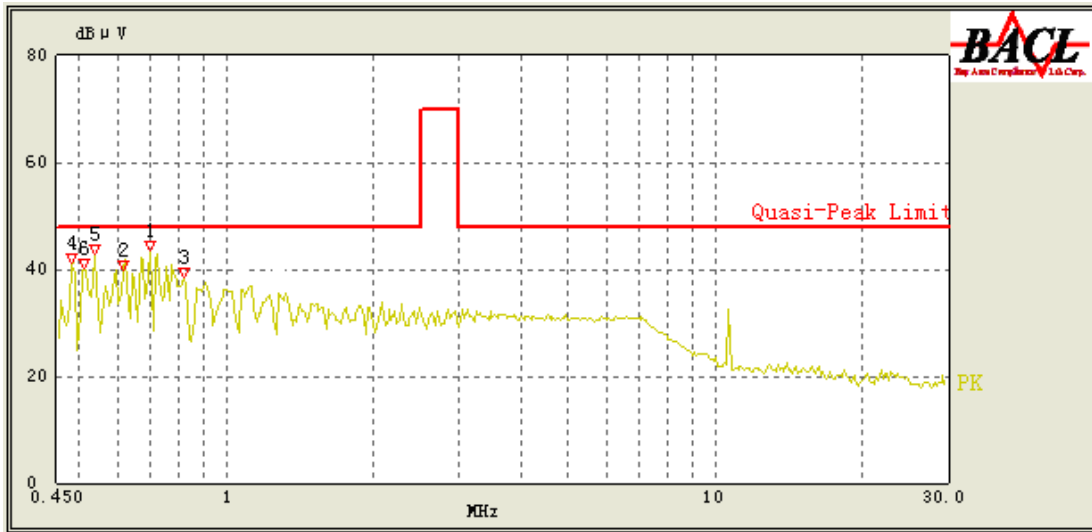

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
0.540	37.98	10.10	48.00	10.02
0.471	37.48	10.10	48.00	10.52
0.615	36.80	10.10	48.00	11.20
0.700	36.74	10.10	48.00	11.26
0.513	34.10	10.10	48.00	13.90
0.820	32.01	10.10	48.00	15.99


Model: MDESLMSP18W-E26

AC 120V/60 Hz, Line:

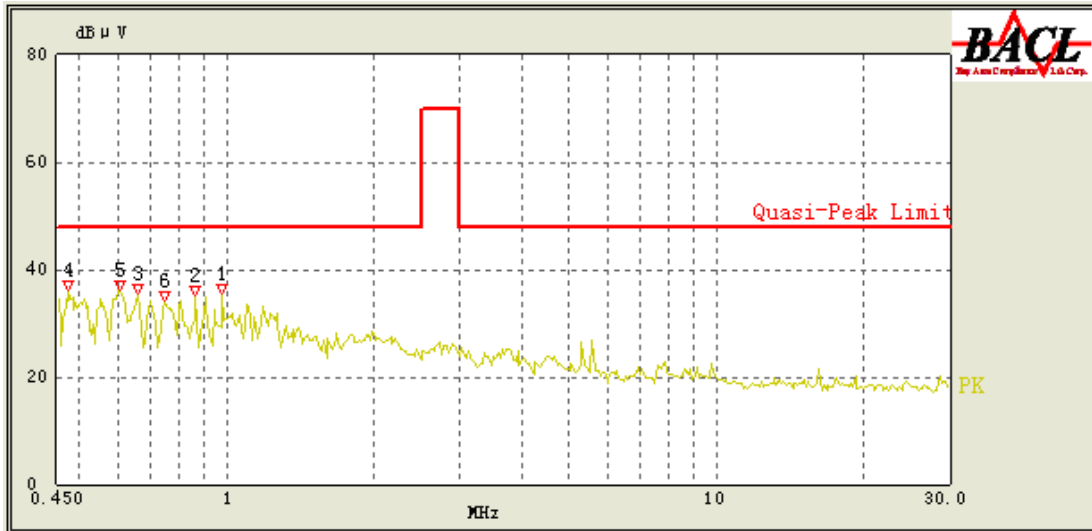

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
0.605	35.67	10.10	48.00	12.33
0.482	34.16	10.10	48.00	13.84
0.660	33.03	10.10	48.00	14.97
0.745	32.24	10.10	48.00	15.76
0.865	29.79	10.10	48.00	18.21
0.980	27.36	10.10	48.00	20.64


**AC 120V/ 60 Hz, Neutral:**

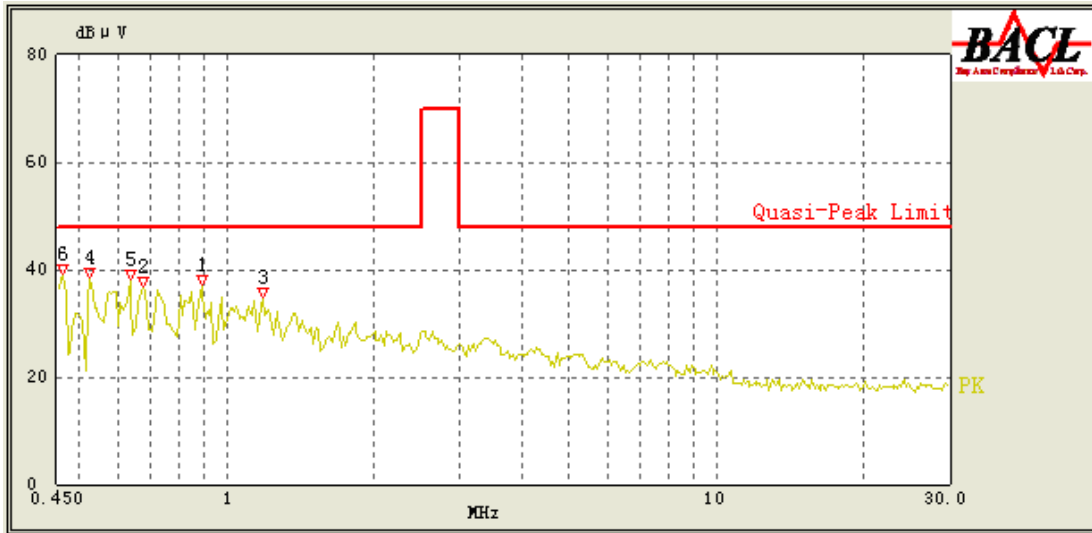

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
0.525	35.84	10.10	48.00	12.16
0.468	34.69	10.10	48.00	13.31
0.675	34.00	10.10	48.00	14.00
0.890	33.93	10.10	48.00	14.07
0.637	33.32	10.10	48.00	14.68
1.185	30.08	10.10	48.00	17.92


Model: MDESLMSP23W-E26

AC 120V/60 Hz, Line:

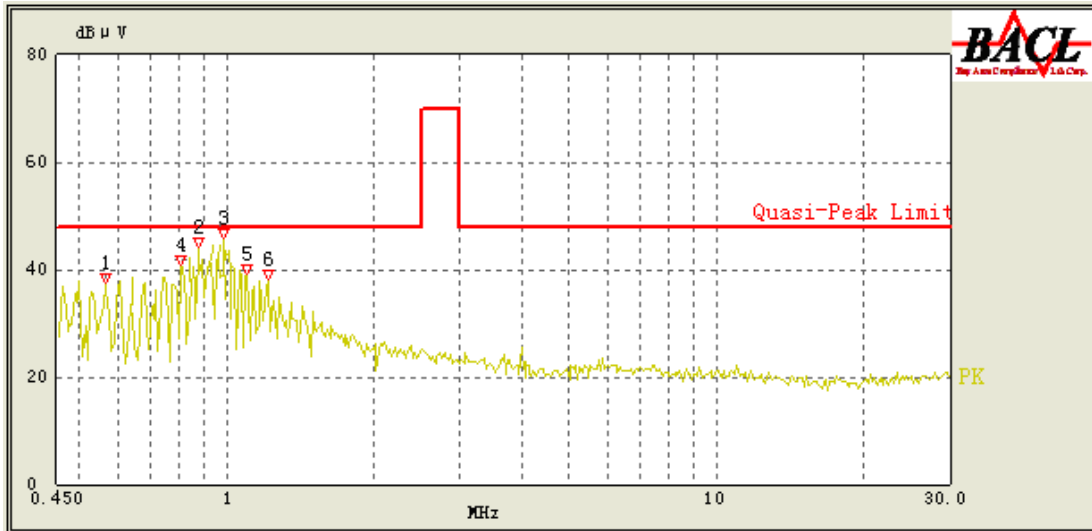

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)
1.000	43.84	10.10	48.00	4.16
0.875	40.26	10.10	48.00	7.74
1.110	39.25	10.10	48.00	8.75
0.810	38.85	10.10	48.00	9.15
1.370	38.22	10.10	48.00	9.78
0.575	33.31	10.10	48.00	14.69


**AC 120V/ 60 Hz, Neutral:**

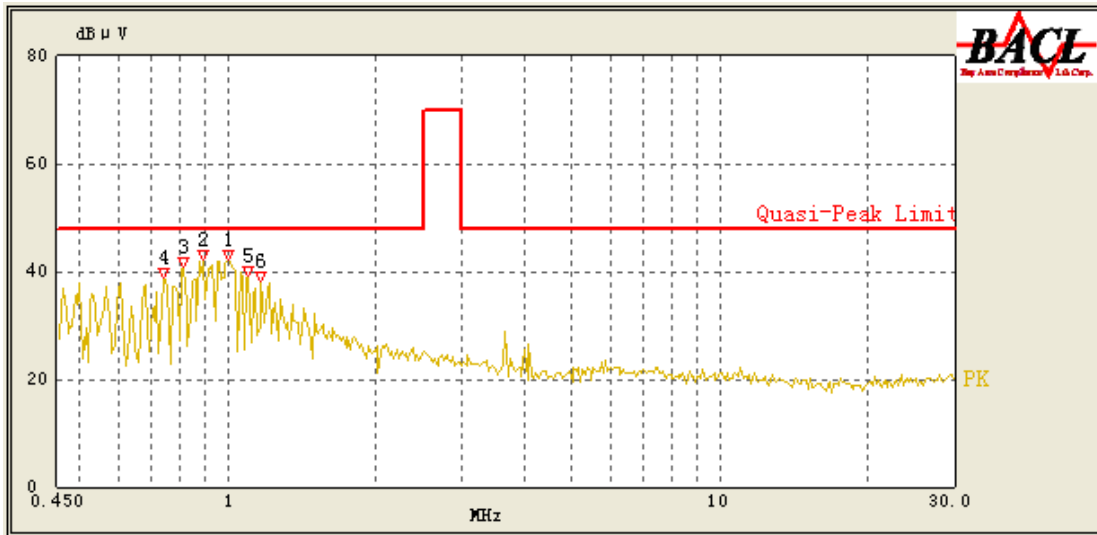

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
1.000	38.61	10.10	48.00	9.39
0.895	37.36	10.10	48.00	10.64
0.815	35.84	10.10	48.00	12.16
1.100	33.15	10.10	48.00	14.85
0.740	32.75	10.10	48.00	15.25
1.170	32.24	10.10	48.00	15.76


Model: MDESLMSP26W-E26

AC 120V/60 Hz, Line:

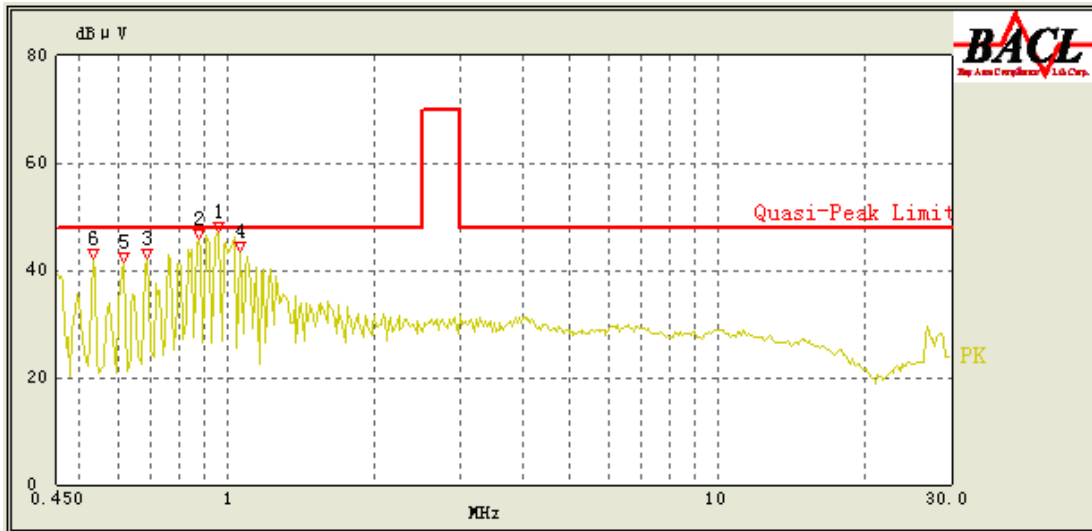

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
0.960	43.90	10.10	48.00	4.10
0.875	43.09	10.10	48.00	4.91
1.065	38.16	10.10	48.00	9.84
0.535	36.99	10.10	48.00	11.01
0.690	35.01	10.10	48.00	12.99
0.615	32.99	10.10	48.00	15.01

**AC 120V/ 60 Hz, Neutral:**

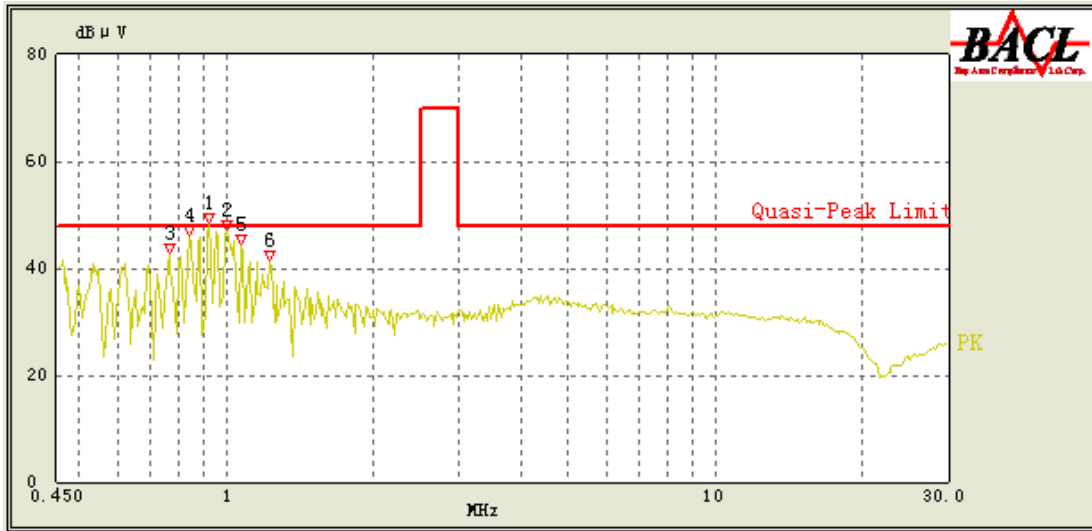

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)
0.925	44.21	10.10	48.00	3.79
1.000	43.72	10.10	48.00	4.28
0.840	42.77	10.10	48.00	5.23
1.070	42.36	10.10	48.00	5.64
1.230	40.90	10.10	48.00	8.10
0.765	39.63	10.10	48.00	8.37




## FCC §18.305 – FIELD STRENGTH

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 4.0$  dB ( $k=2$ , 95% level of confidence).

### EUT Setup

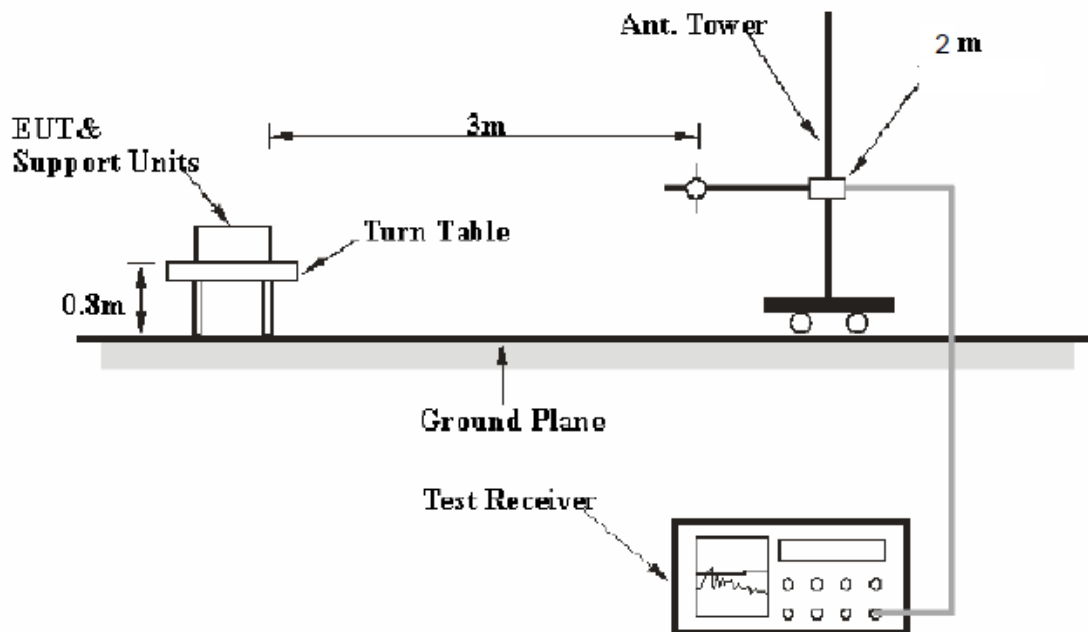

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5.

The EUT was connected to 120 VAC/60 Hz power source.

## EMI Test Receiver Setup and Spectrum Analyzer Setup

The system was investigated from 9 kHz to 30 MHz.

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

<i>Frequency Range</i>	<i>R B/W</i>	<i>Video B/W</i>	<i>IF B/W</i>
9kHz– 150kHz	300 Hz	1 kHz	200Hz
150kHz– 30 MHz	10 kHz	30 kHz	9 kHz

## Test Procedure

During the conducted emission test, the EUT was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-Peak detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-LINDGREN	Passive Loop Antenna	6512	00029604	2011-07-14	2012-07-13
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

## Corrected Amplitude Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Phase Zhang on 2011-09-24.*

Test Mode: On

Model: MDESLMSP15W-E26

Frequency (MHz)	Meter Reading (dBµA/m)	Detector (PK/QP/Ave.)	Direction (Degree)	Height (m)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Amplitude	
							(dBµA/m)	(dBµV/m)
0.0398	-43.74	QP	26.00	2.00	24.6	0.1	-19.04	32.46
0.0447	-35.61	QP	157.00	2.00	21.7	0.1	-13.81	37.69
0.0459	-33.01	QP	47.00	2.00	21.5	0.1	-11.41	40.09
0.0501	-32.37	QP	96.00	2.00	20.3	0.1	-11.97	39.53
0.0523	-42.07	QP	183.00	2.00	19.8	0.1	-22.17	29.33
0.0564	-41.76	QP	104.00	2.00	19.2	0.1	-22.46	29.04

Model: MDESLMSP18W-E26

Frequency (MHz)	Meter Reading (dBµA/m)	Detector (PK/QP/Ave.)	Direction (Degree)	Height (m)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Amplitude	
							(dBµA/m)	(dBµV/m)
0.0307	-45.49	QP	185.00	2.00	26.7	0.1	-18.69	32.81
0.0412	-44.15	QP	185.00	2.00	23.4	0.1	-20.65	30.85
0.0432	-33.43	QP	190.00	2.00	23.2	0.1	-10.13	41.37
0.0456	-38.06	QP	191.00	2.00	21.0	0.1	-16.96	34.54
0.0458	-32.65	QP	190.00	2.00	21.6	0.1	-10.95	40.55
0.0502	-46.65	QP	191.00	2.00	20.2	0.1	-26.35	25.15

Model: MDESLMSP23W-E26

Frequency (MHz)	Meter Reading (dBµA/m)	Detector (PK/QP/Ave.)	Direction (Degree)	Height (m)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Amplitude	
							(dBµA/m)	(dBµV/m)
0.0324	-43.45	QP	118.00	2.00	26.2	0.1	-17.15	34.35
0.0356	-42.32	QP	45.00	2.00	26.0	0.1	-16.22	35.28
0.0427	-31.40	QP	213.00	2.00	21.5	0.1	-9.80	41.70
0.0437	-30.55	QP	141.00	2.00	21.2	0.1	-9.25	42.25
0.0475	-35.06	QP	187.00	2.00	21.0	0.1	-13.96	37.54
0.0540	-44.25	QP	56.00	2.00	19.6	0.1	-24.55	26.95

Model: MDESLMSP26W-E26

Frequency (MHz)	Meter Reading (dB $\mu$ A/m)	Detector (PK/QP/Ave.)	Direction (Degree)	Height (m)	Antenna Factor (dB/m)	Cable Loss (dB)	Corrected Amplitude	
							(dB $\mu$ A/m)	(dB $\mu$ V/m)
0.0330	-45.49	QP	18.00	2.00	26.1	0.1	-19.29	32.21
0.0332	-44.15	QP	147.00	2.00	25.7	0.1	-18.35	33.15
0.0376	-43.43	QP	96.00	2.00	25.3	0.1	-18.03	33.47
0.0436	-38.06	QP	141.00	2.00	21.8	0.1	-16.16	35.34
0.0473	-32.65	QP	241.00	2.00	21.5	0.1	-11.05	40.45
0.0512	-46.65	QP	17.00	2.00	20.3	0.1	-26.25	25.25

Note:  $dB\mu V/m = dB\mu A/m + 51.5$

## PRODUCT SIMILARTITY DECLARATION LETTER



### Jiangxi Midea Guiya Green Lighting Electrical Co.,Ltd

Add: Guixi Industrial District, Guixi, Jiangxi, China

Tel: 0701-3338713

Fax: 0701-3338767

### Different Declaration

We, Jiangxi Midea Guiya Green Lighting Electrical Co.,Ltd, declare that the CFL. The Model No MDESLMSP15W-E26, MDESLMSP18W-E26, MDESLMSP23W-E26, MDESLMSP26W-E26 are tested by BACL. They have the same circuit diagram, PCB layout in side and only different in the Power. Thank you!

Model No	Power
MDESLMSP15W-E26	15W
MDESLMSP18W-E26	18W
MDESLMSP23W-E26	23W
MDESLMSP26W-E26	26W

Date:2011-11-15

Sincerely,

Zhang Wei

Manager



张伟

\*\*\*\*END OF REPORT\*\*\*\*