



toll-free: (866) 311-3268
fax: (480) 926-3598
<http://www.flomlabs.com>
info@flomlabs.com

Date: September 20, 2007

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Ecotech Marine
Equipment: MP40W
FCC ID: VKB271828
FCC Rules: 15.247

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Hoosamuddin S. Bandukwala, Lab Director

List Of Exhibits
(FCC Certification (Transmitters) - Revised 9/28/98)

Applicant: Ecotech Marine

FCC ID: VKB271828

By Applicant:

1. Letter Of Authorization
2. Identification Drawings
 - Id Label
 - Location Info
 - Attestation Statement(S)
 - Location of Compliance Statement
3. Documentation: 2.1033(B)
 - (3) User Manual(S)
 - (4) Operational Description
 - (5) Block Diagram
 - (5) Schematic Diagram
 - (7) External Photographs
Internal Photographs
Parts List
Active Devices

By F.T.L. Inc.

- A. Testimonial & Statement of Certification
- B. Statement of Qualifications



toll-free: (866)311-3268
fax: (480)926-3598
<http://www.flomlabs.com>
info@flomlabs.com

Transmitter Certification

of

FCC ID: VKB271828
Model: MP40W

to

Federal Communications Commission


Rule Part(s) 15.247

Date Of Report: September 20, 2007

On the Behalf of the Applicant: Ecotech Marine
532 East 4th Street
Bethlehem, PA 18015

Attention of: Justin Lawyer
Ph: (610)954-8480
Fax: (484)229-0578
email: Justin@ecotechmarine.com

Supervised By:


Hoosamuddin S. Bandukwala, Lab Director

Flom Test Labs
3356 N. San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(866) 311-3268 phone, (480) 926-3598 fax

p0790001, d0790018

The applicant has been cautioned as to the following:**15.21 Information to User.**

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Testimonial And Statement Of Certification

This is to certify that:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:



Hoosamuddin S. Bandukwala, Lab Director

Table Of Contents

Rule	Description	Page
	Test Report	1
2.1033(c)	General Information Required	2
	Standard Test Conditions and Engineering Practices	4
	Test Results Summary	5
15.247(b)	Peak Output Power	6
15.247(d)	Conducted Spurious Emissions	6
15.247(d),	Radiated Spurious Emissions	13
15.247(d),	Emissions At Band Edges	13
15.247(a)(2)	Occupied Bandwidth	17
15.247(d)	Transmitter Power Spectral Density (PSD)	21
15.207	A/C Powerline Conducted Emissions	23
	Test Equipment Utilized	24

Required information per ISO 17025-2005, paragraph 5.10.2:
a) **Test Report**

b) Laboratory: Flom Test Lab, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044A-1) Chandler, AZ 85225

c) Report Number: d0790018

d) Client: Ecotech Marine

e) Identification: MP40W
FCC ID: VKB271828
Description: Propeller Pump

f) EUT Condition: Not required unless specified in individual tests.


g) Report Date: September 20, 2007
EUT Received:

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with FTL internal quality manual.

m) Supervised by:



Hoosamuddin S. Bandukwala, Lab Director

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

List Of General Information Required For Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

15.247

Sub-Part 2.1033

(c)(1):

Name and Address of Applicant: Ecotech Marine

(c)(2): **FCC ID:** VKB271828

Model Number: MP40W

(c)(3): **Instruction Manual(s):**

Please See Attached Exhibits

(c)(4): **Type of Emission:** DTS

(c)(5): **FREQUENCY RANGE, MHz:** 2405-2480 MHz

(c)(6): **Power Rating, W:** 315 uW
____ Switchable ____ Variable N/A

(c)(7): **Maximum Power Rating, W:** 1W

15.203: Antenna Requirement:

The antenna is permanently attached to the EUT
 The antenna uses a unique coupling
 The EUT must be professionally installed
 The antenna requirement does not apply

The unit was tested with a SMT Chip antenna with a gain of 1.2 dBi.

Subpart 2.1033 (continued)**(c)(8): Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please See Attached Exhibits

(c)(9): Label Information:

Please See Attached Exhibits

(c)(10): Photographs:

Please See Attached Exhibits

(c)(11): Digital Modulation Description:

Attached Exhibits
 N/A

(c)(12): Test And Measurement Data:

Follows

Sub-part

2.1033(b):

Test And Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2 and the following individual Parts:

15.247 Operation within bands 2400-2483.5 MHz (spread spectrum)

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-2004, FCC DTS Guide March 23, 2005, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.

A2LA

"A2LA has accredited Flom Test Labs, Inc. Chandler, AZ for technical competence in the field of Electrical testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO 17025:2005 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Please refer to www.a2la.org for current scope of accreditation.

Certificate number: 2152.01



IC O.A.T.S. Number: 2044A-1

Flom Test Labs

3356 N. San Marcos Place, Suite 107

Chandler, Arizona 85225-7176

(866) 311-3268 phone, (480) 926-3598 fax

Page 4 of 24
p0790001, d0790018

Test Results Summary


Specification	Test Name	Pass, Fail, N/A	Comments
15.247(b)	Peak Output Power	Pass	
15.247(d)	Conducted Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Radiated Spurious Emissions	Pass	
15.247(d), 15.209(a), 15.205	Emissions At Band Edges	Pass	
15.247(a)(2)	Occupied Bandwidth	Pass	
15.247(e)	Transmitter Power Spectral Density	Pass	
15.207	A/C Powerline Conducted Emissions	Pass	

Name of Test: Peak Output Power
Specification: 15.247(b)
Test Equipment Utilized i00228, i00317

Test Procedure

The UUT was connected directly to a power meter input. The peak readings were taken and the result was then compared to the limit.

Test Setup



Transmitter Peak Output Power

Tuned Frequency MHz	Recorded Measurement	Specification Limit	Result
2405	305 μ W	1 W	Pass
2440	315 μ W	1 W	Pass
2480	302 μ W	1 W	Pass


Name of Test: Conducted Spurious Emissions
Specification: 15.247(d)
Spec. Limit -20 dBc
Test Equipment Utilized i00029

Test Procedure

The UUT was connected directly to a spectrum analyzer to verify that the UUT met the requirements for spurious emissions. The reference level was offset for the peak power output with the resolution bandwidth set for 1 MHz. The frequency range from 30 MHz to the 10th harmonic of the fundamental transmitter was observed. Only detectable spurious emissions were recorded and plotted. The reference level is added to the recorded measurement to provide the corrected level dBc

Only the worst case is recorded in the Conducted Spurious Emissions Summary Test Table.



Test Setup

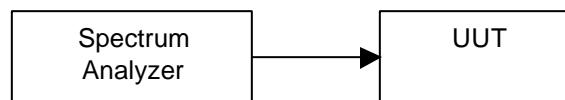


Conducted Spurious Emissions Summary Test Table


Tuned Frequency MHz	Emission Frequency MHz	Recorded Measurement	Reference Level	Corrected Measurement	Specification Limit	Result
2405	4809	-45.56 dBm	-6.7 dBm	-38.86 dBc	-20 dBc	Pass
2440	4884	-44.96 dBm	-7.0 dBm	-37.96 dBc	-20 dBc	Pass
2480	4967	-45.80 dBm	-7.1 dBm	-38.70 dBc	-20 dBc	Pass



Conducted Spurious Emissions 2405 MHz

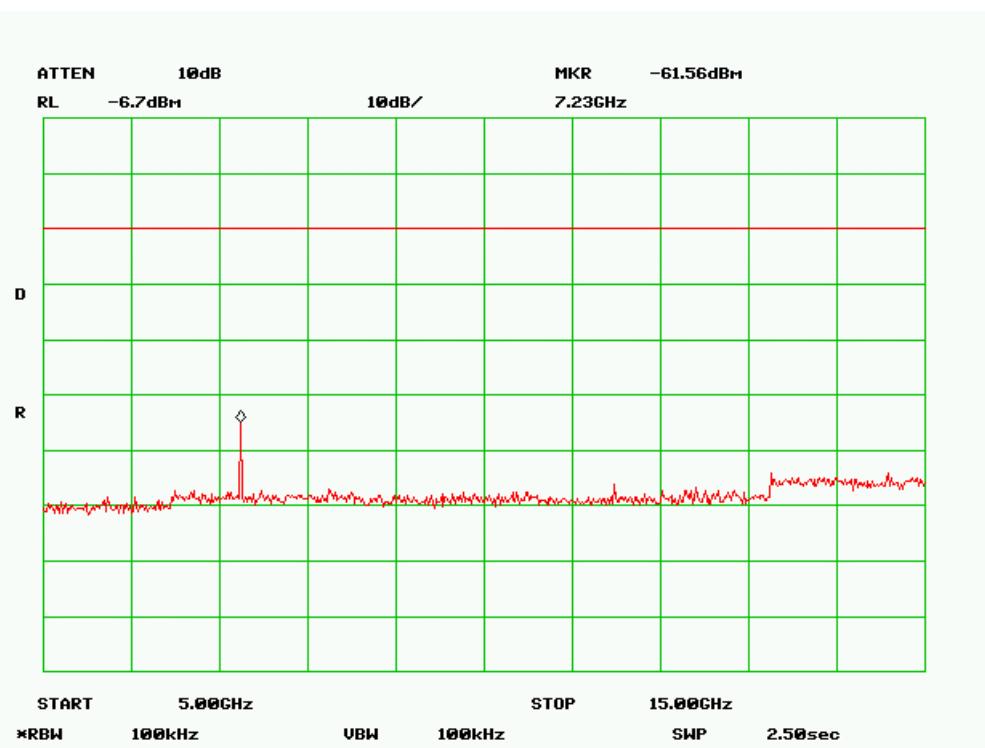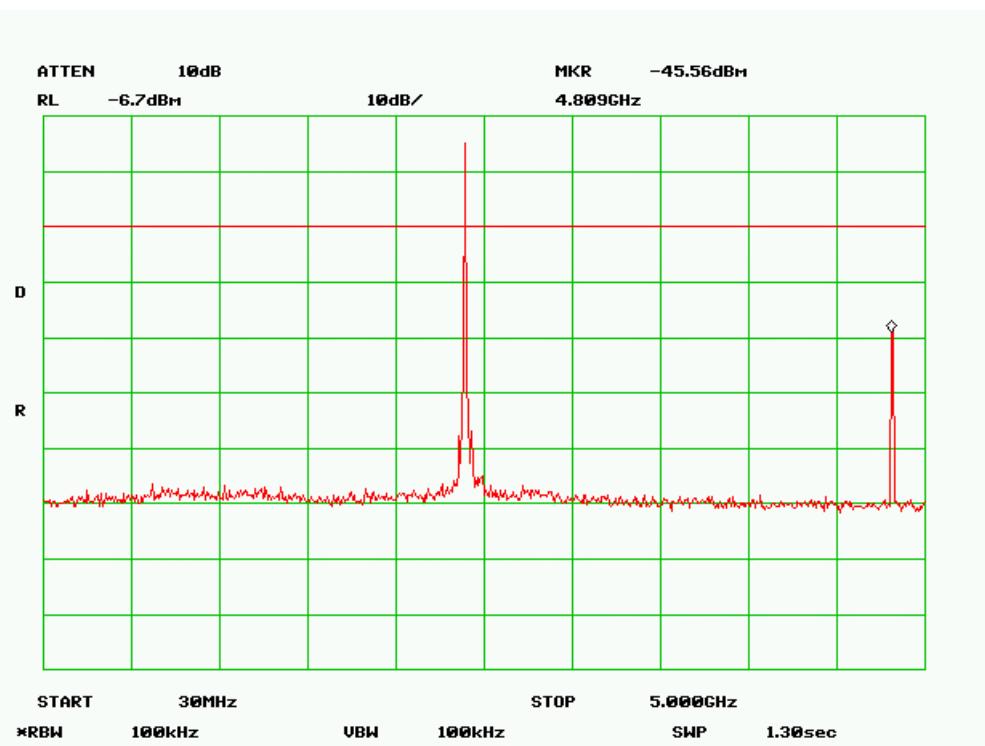


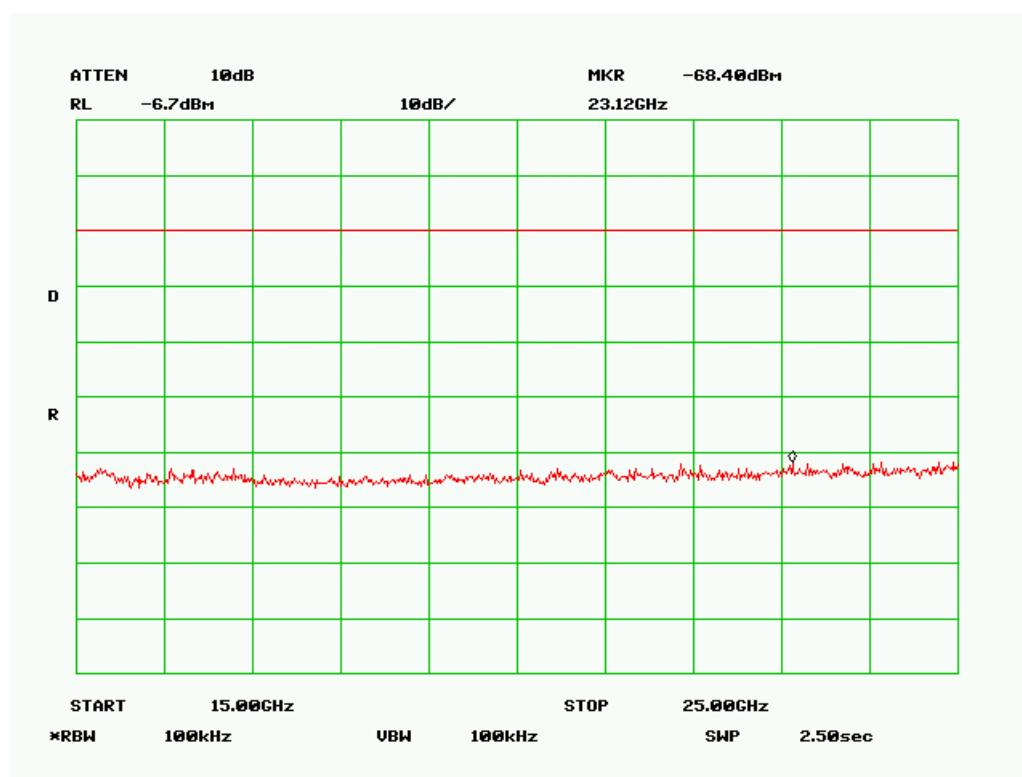



Conducted Spurious Emissions 2440 MHz

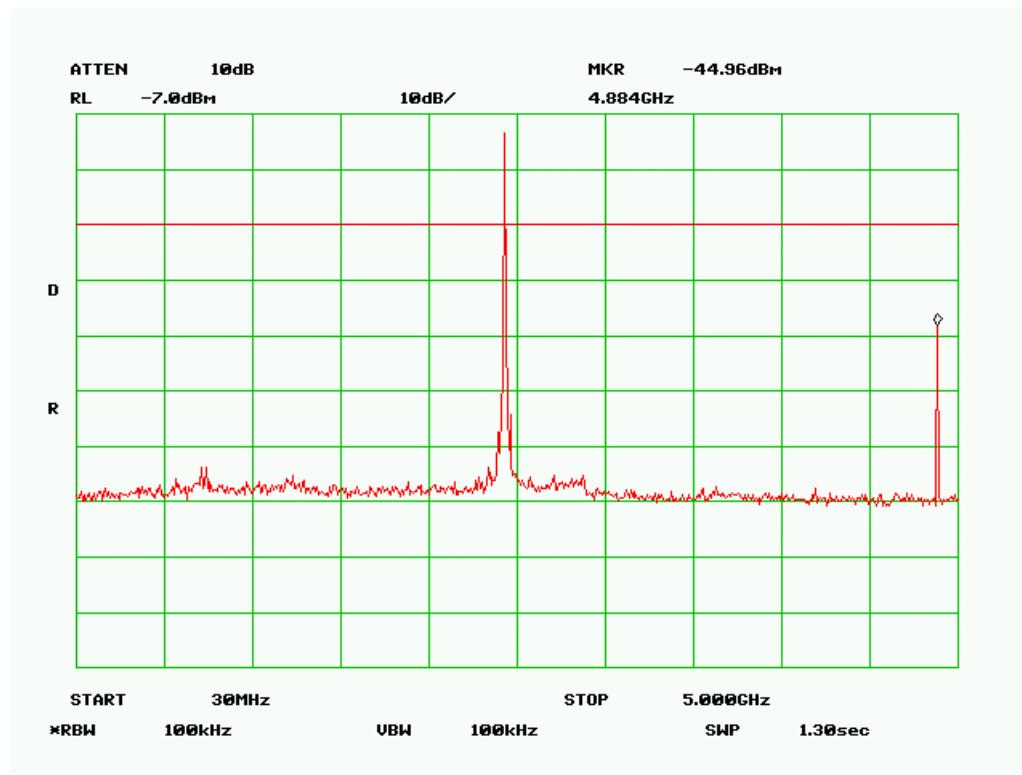

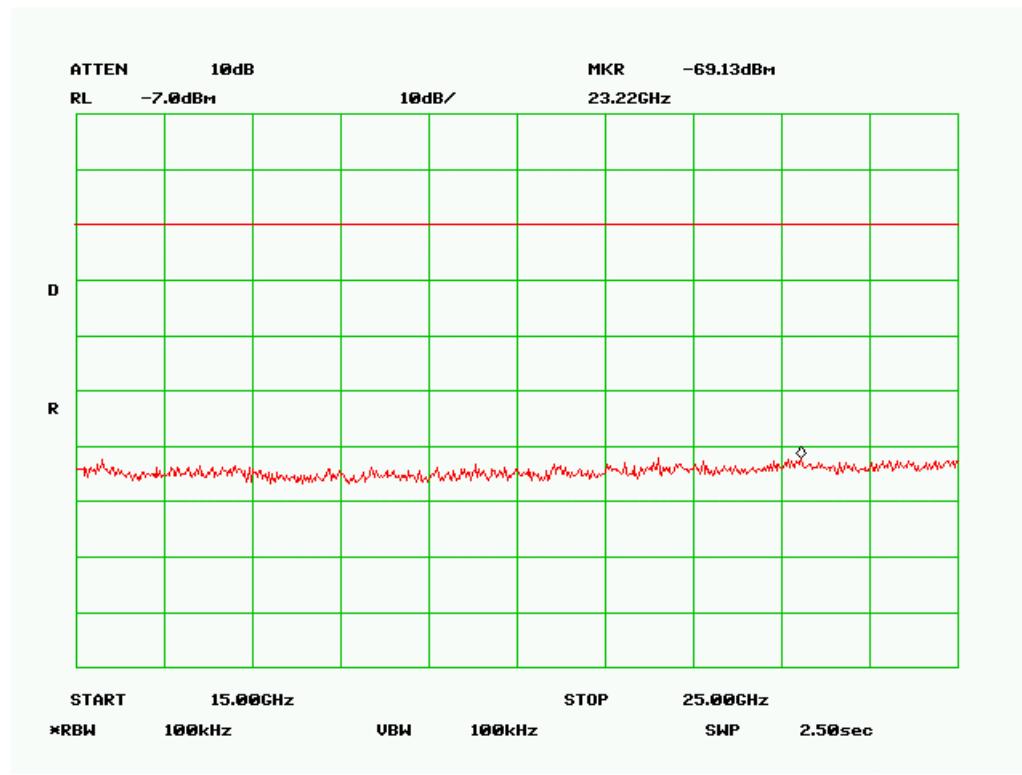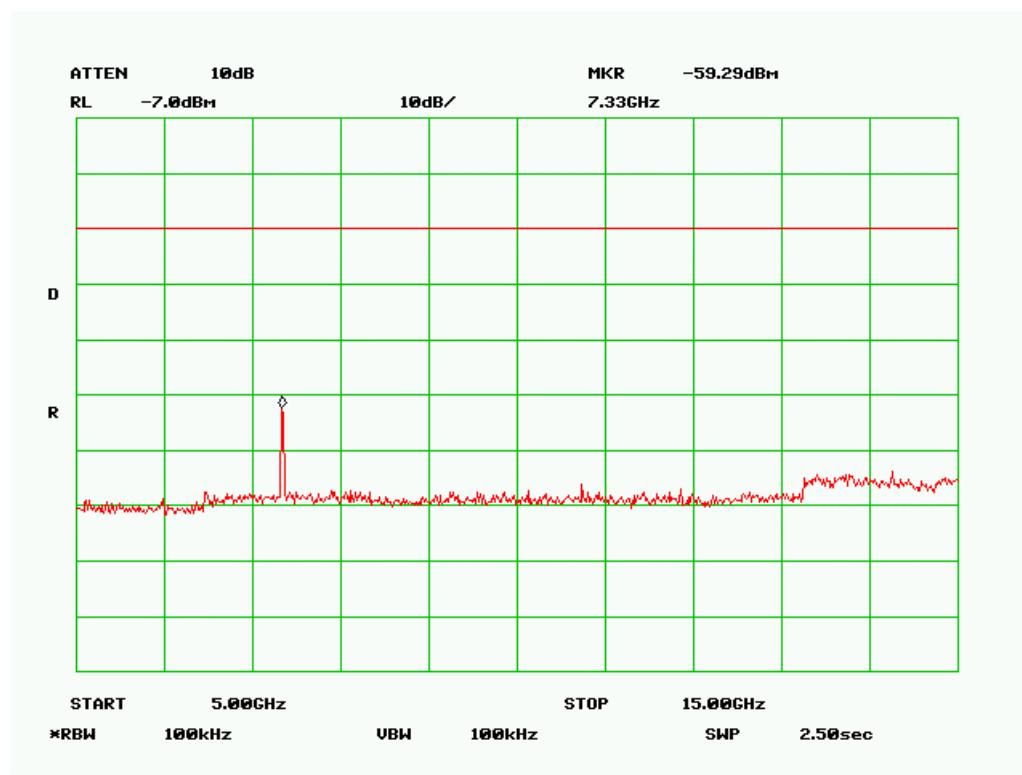

Conducted Spurious Emissions 2480 MHz

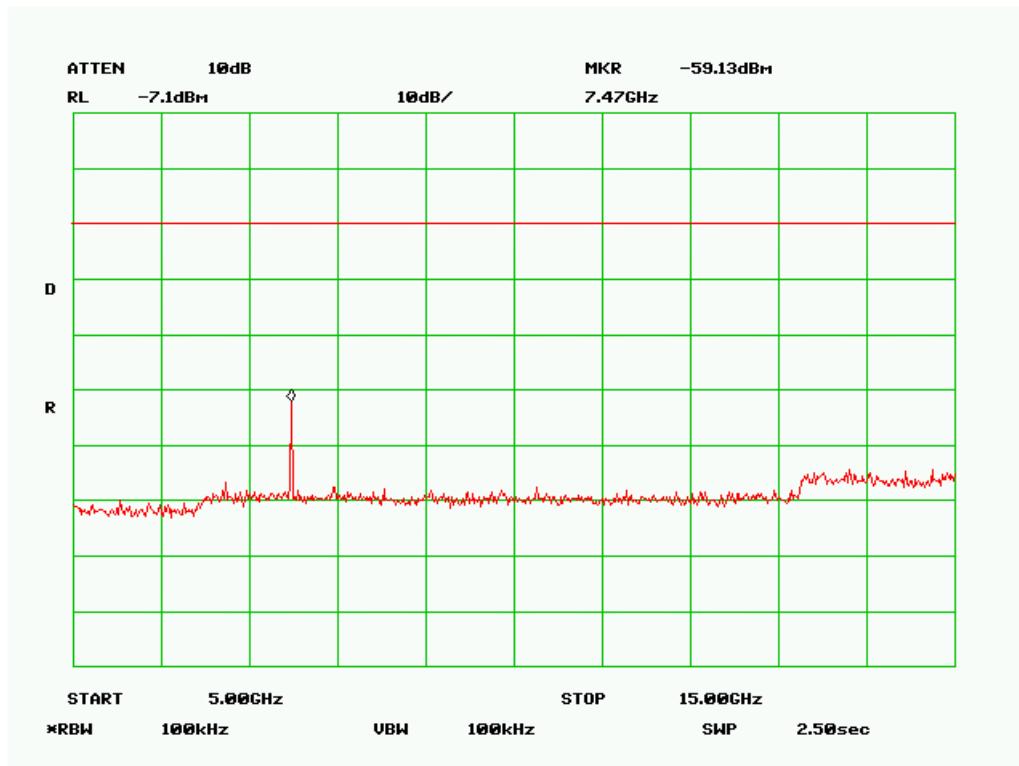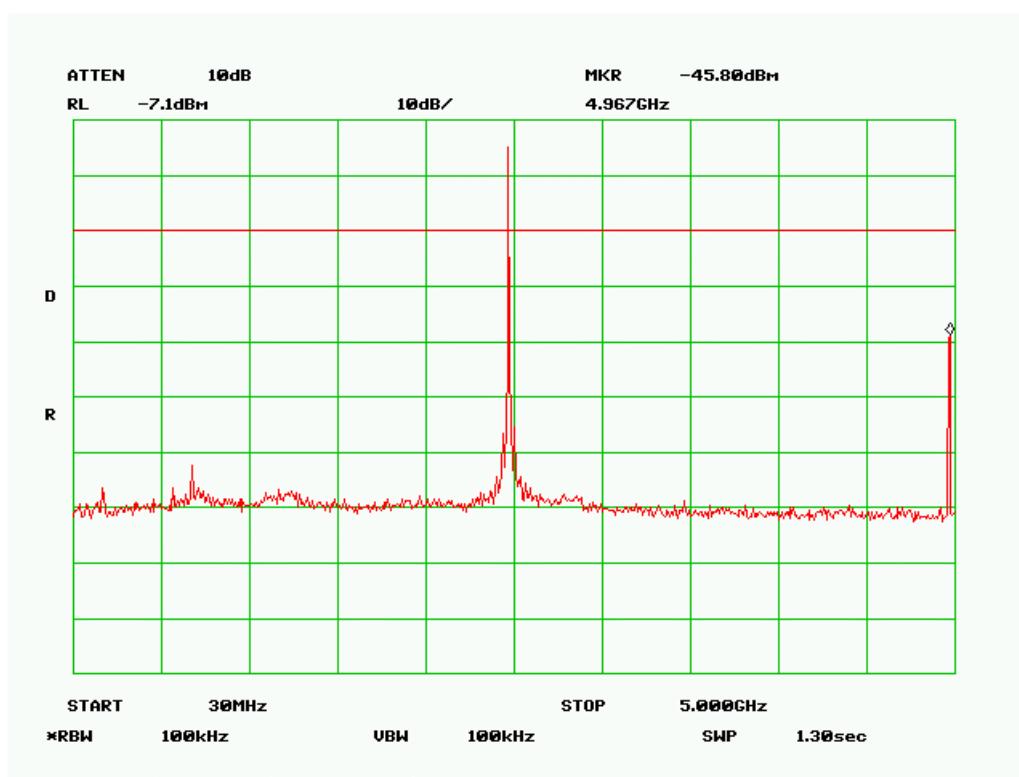

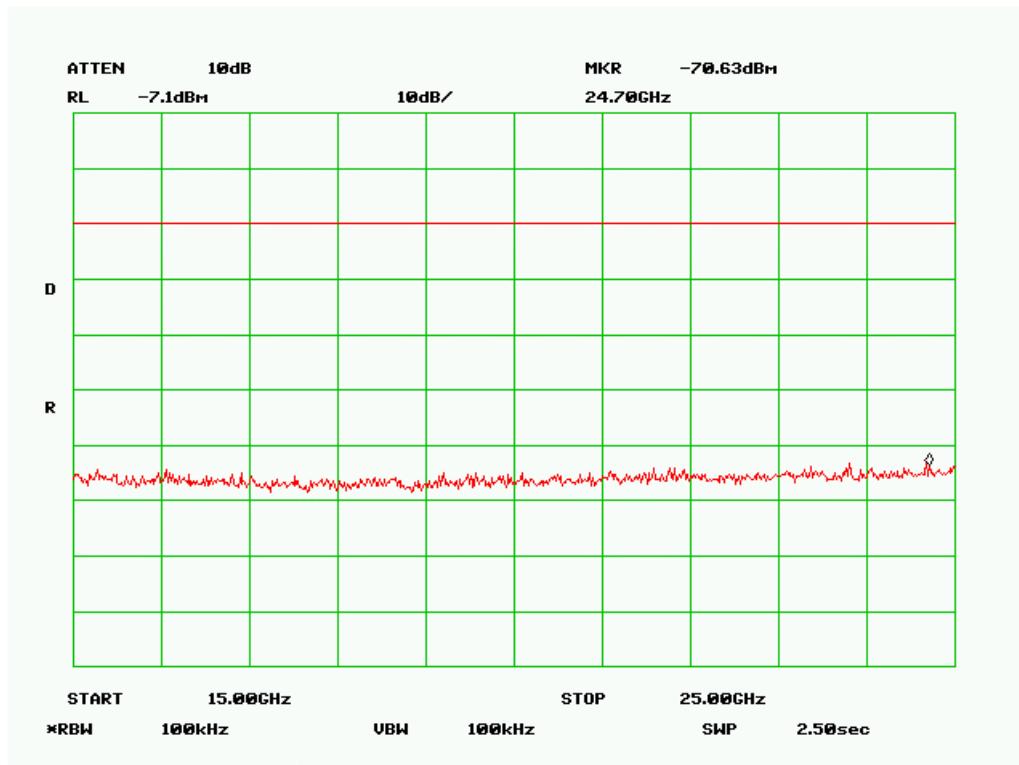


Name of Test: Radiated Spurious Emissions
Specification: 15.247(d), 15.209(a), 15.205
Spec. Limit
Test Equipment Utilized See Table
 i00028, i00029, i00103

Test Procedure

The UUT was tested in a semi-anechoic chamber set 3m from the receiving antenna. A spectrum analyzer was used to verify that the UUT met the requirements for Radiated Spurious Emissions. The antenna and cable correction factors were summed with the amplifier gain and input into the spectrum analyzer as an offset to ensure accurate readings. The spectrum for each tuned frequency was examined to the 10th harmonic.

Test Setup



Analyzer Offset = Antenna Correction Factor + Cable Loss – Amplifier gain

Sample Calculation $1.2 \text{ dB} = 28.6 \text{ dB} + 2.1 \text{ dB} - 29.5 \text{ dB}$

Detector Settings	RBW	VBW	Span
Peak	1 MHz	1 MHz	as necessary
Average	1 MHz	10 Hz	0 Hz

Radiated Spurious Emissions

Tuned Freq (MHz)	Emission Freq (MHz)	Peak Monitored Level (dBuV/m)	Peak Limit (dBuV/m)	Average Monitored Level (dBuV/m)	Average Limit (dBuV/m)	Result
2405	4810	52.9	74.0	48.6	54.0	Pass
2405	7215	45.6	74.0	35.5	54.0	Pass
2440	4880	53.0	74.0	49.2	54.0	Pass
2440	7320	46.4	74.0	36.4	54.0	Pass
2480	4960	51.8	74.0	48.3	54.0	Pass
2480	7440	45.9	74.0	36.1	54.0	Pass


No other emissions were detectable.

Name of Test: Emissions At Band Edges
Specification: 15.247(d), 15.209(a), 15.205
Limit -20 dBc and for restricted band 54 dBuV average and 74 dBuV peak
Test Equipment Utilized i00028, i00103, i00290

Test Procedure

The UUT was tested in a semi-anechoic chamber set 3m from the receiving transducer. A spectrum analyzer was used to verify that the UUT met the requirements for band edge with both peak and average measurements. The cable and transducer correction factors were input into the analyzer as a reference level offset to ensure accurate readings were obtained.

Test Setup




Analyzer Offset = Antenna Correction Factor + Cable Loss – Amplifier gain

Sample Calculation $1.2 \text{ dB} = 28.6 \text{ dB} + 2.1 \text{ dB} - 29.5 \text{ dB}$


Band Edge Emissions Summary

Tuned Freq (MHz)	Emission Freq (MHz)	Monitored Level	Detector	Limit	Result
2405	2400	-35.7 dBc	Peak	-20 dBc	Pass
2480	2483.5	-34.1 dBc	Peak	-20 dBc	Pass

Band Edge 2400 MHz


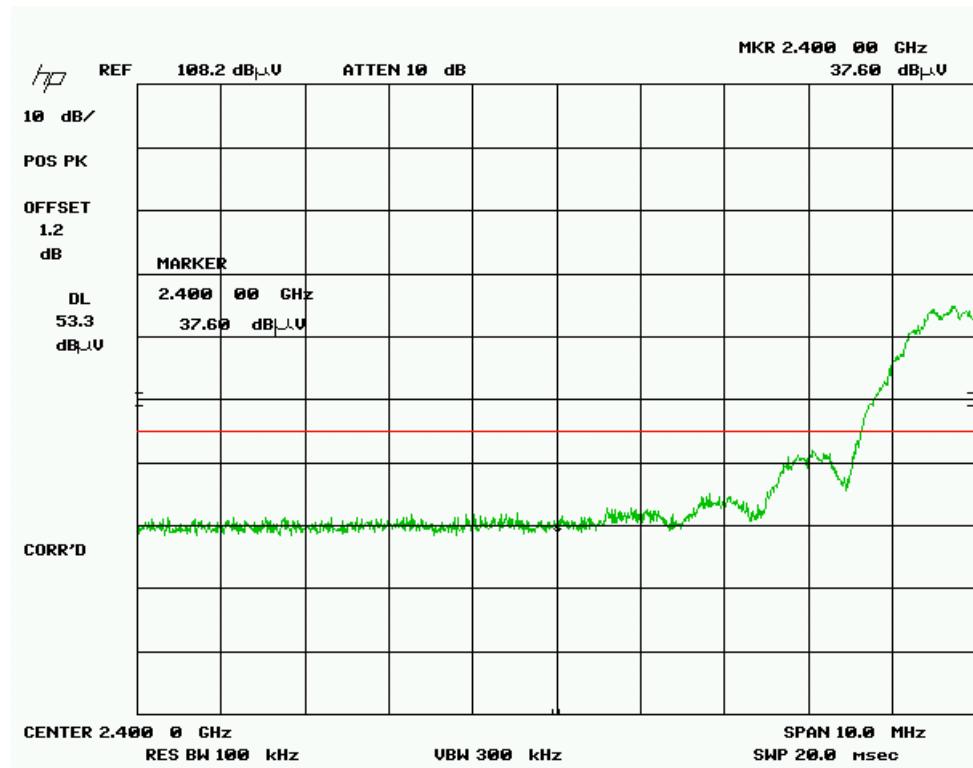


Band Edge 2483.5 MHz

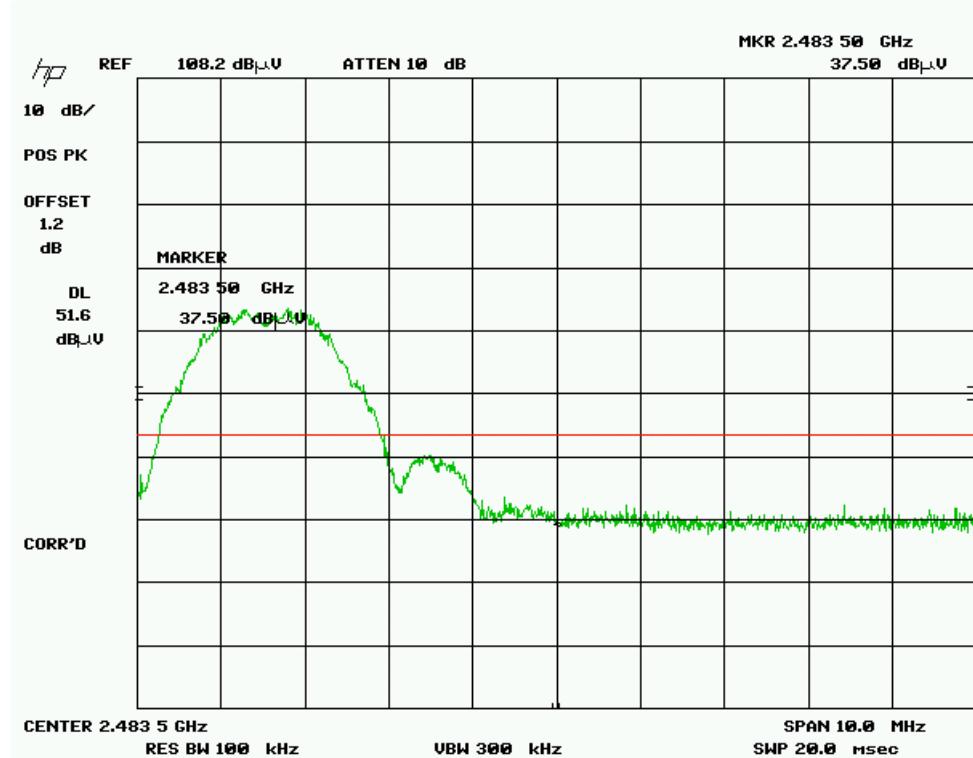

Restricted Band Emissions Summary

Tuned Freq (MHz)	Emission Freq (MHz)	Monitored Level (dB _u V/m)	Detector	Limit (dB _u V/m)	Result
2405	2390	47.20	Peak	74	Pass
2480	2483.5	50.20	Peak	74	Pass

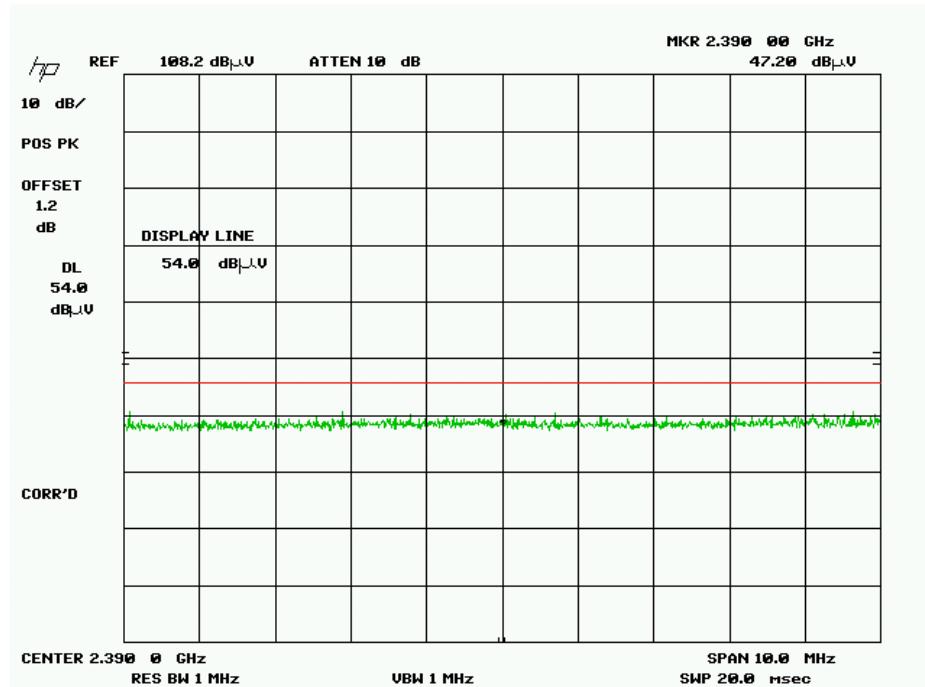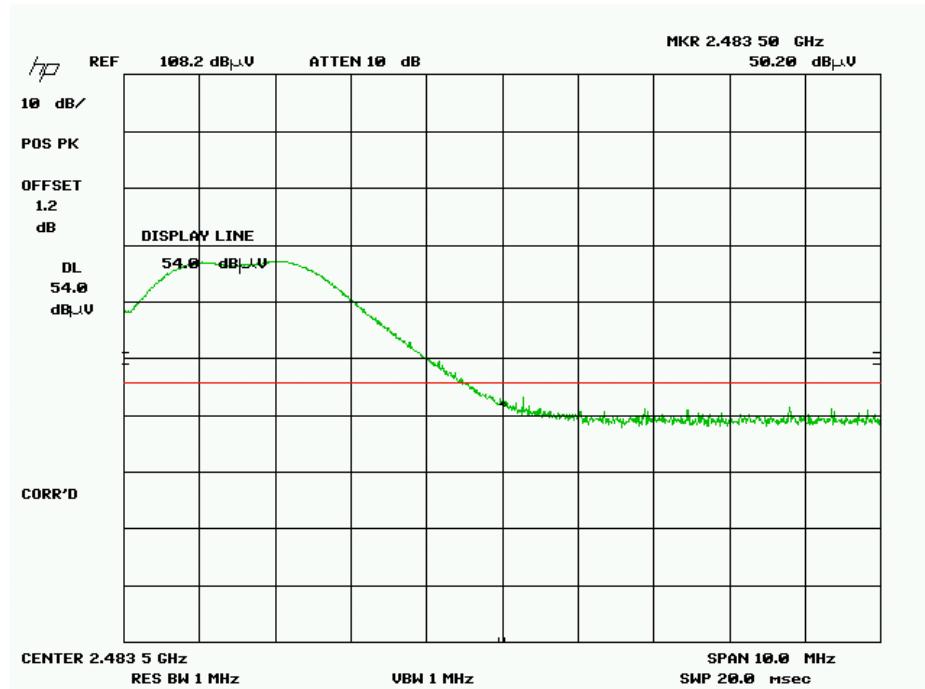
Restricted Band 2390 MHz

Restricted Band 2483.5 MHz


Name of Test: Occupied Bandwidth
Specification: 15.247(a)(2)
Limit BW = 500 KHz
Test Equipment Utilized i00029

Test Procedure



The UUT was connected directly to a spectrum analyzer. The Span was set wide enough to capture the entire transmit spectrum and the resolution bandwidth was set to at least 1% of the span. The analyzer was set to max hold and when the entire spectrum was captured the 6dB and 99% bandwidths were measured to verify the bandwidth met the specification. The 99% bandwidth was measured 26 dB down from the peak emission.



Test Setup





Occupied Bandwidth Summary

Frequency MHz	Recorded Measurement	Specification Limit	Result
2405	1.60 MHz	= 500 KHz	Pass
2440	1.58 MHz	= 500 KHz	Pass
2480	1.62 MHz	= 500 KHz	Pass

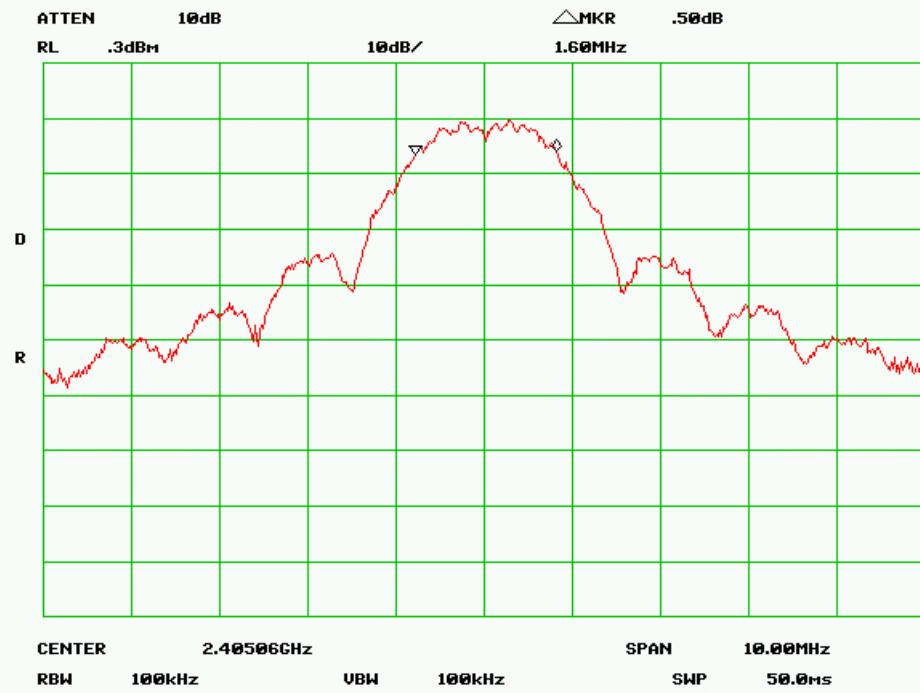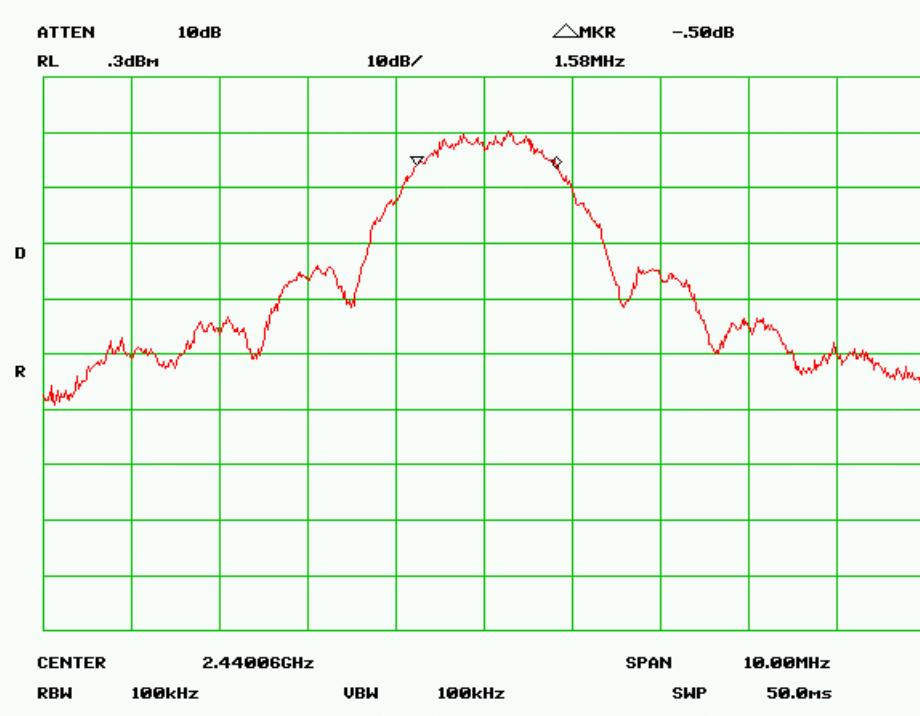6dB Bandwidth 2405 MHz

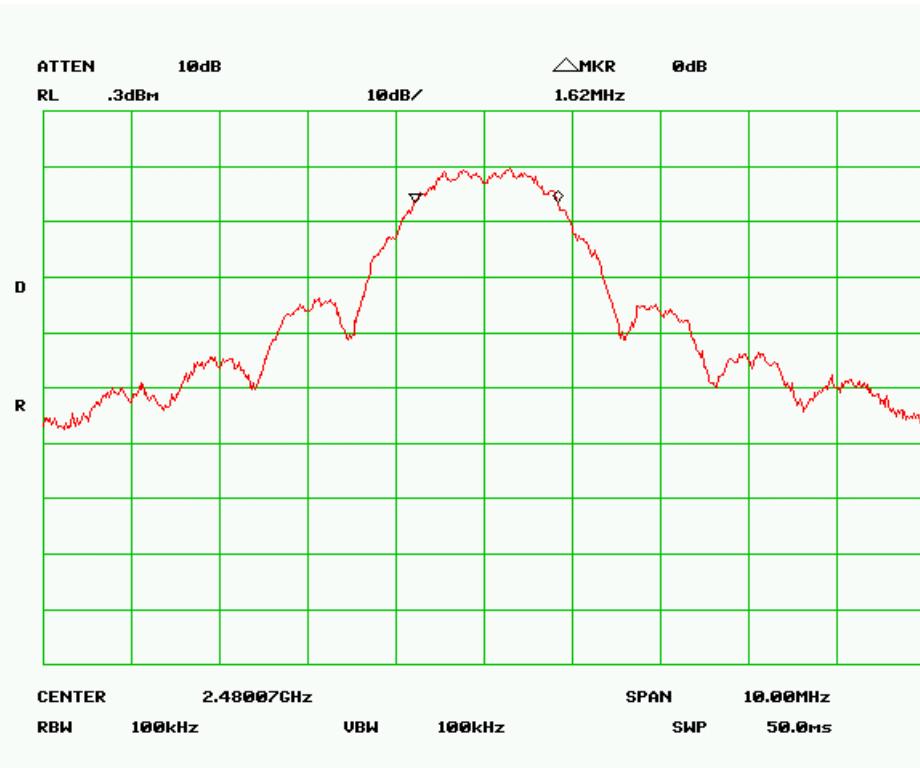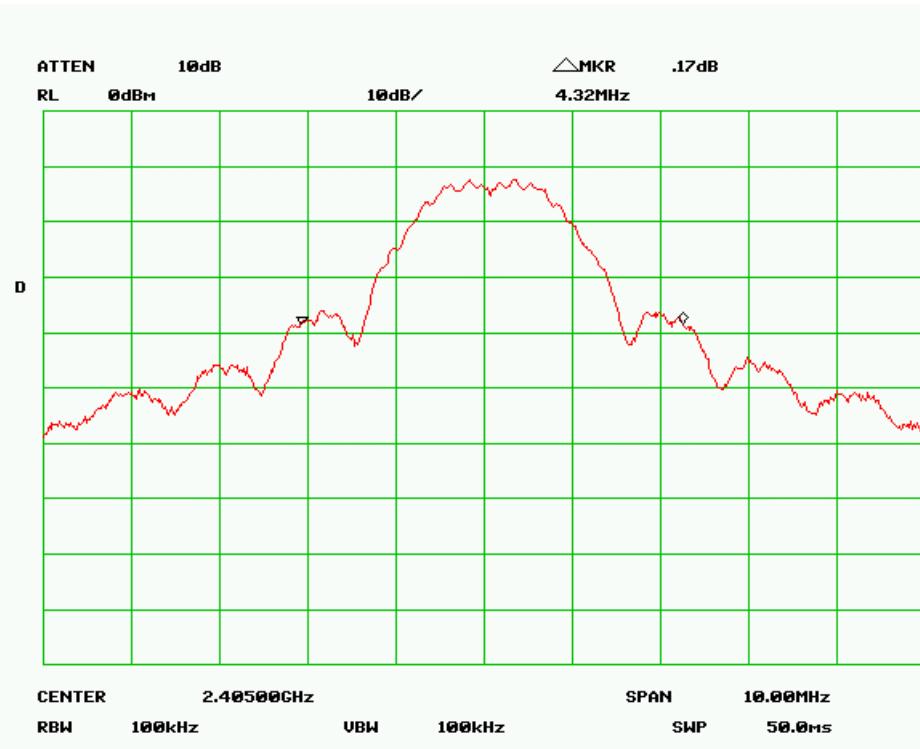6dB Bandwidth 2440 MHz

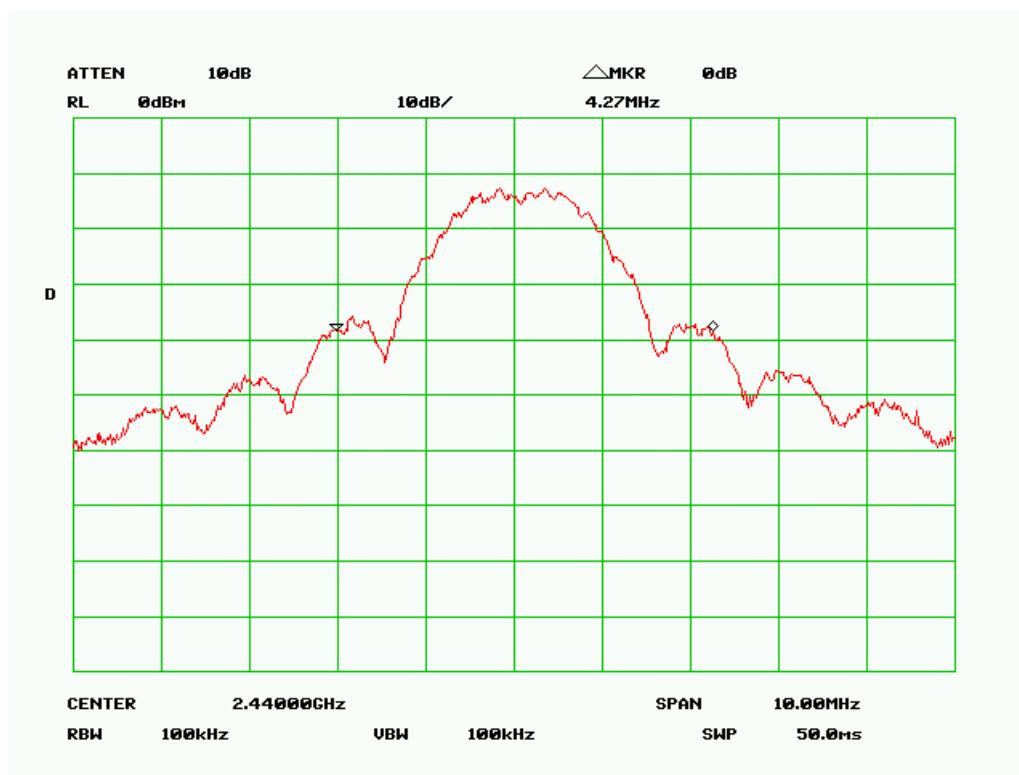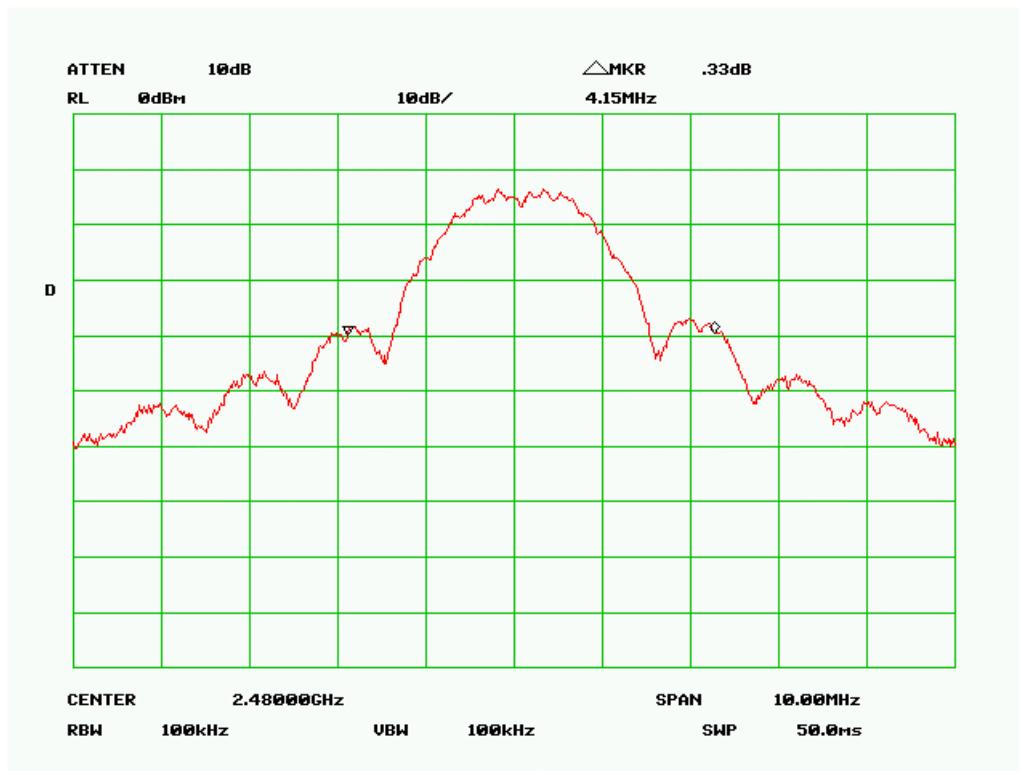
6dB Bandwidth 2480 MHz

99% Bandwidth 2405 MHz



99% Bandwidth 2440 MHz

99% Bandwidth 2480 MHz


Name of Test: Transmitter Power Spectral Density (PSD)
Specification: 15.247(d)
Limit 8 dBm in any 3 kHz Bandwidth
Test Equipment Utilized i00329

Test Procedure

The UUT was connected directly to a spectrum analyzer. The Span was set to 1.5 MHz and the resolution bandwidth was set to 3 KHz. The analyzer was set for a sweep time of 500 seconds. When the entire spectrum was captured the marker peak function of the analyzer was utilized to verify the PSD met the specification.


Test Setup





PSD Summary

Frequency MHz	Recorded Measurement	Specification Limit	Result
2404.613	-21.7 dBm	8 dBm	Pass
2439.613	-21.5 dBm	8 dBm	Pass
2479.615	-21.9 dBm	8 dBm	Pass

PSD 2405 MHz

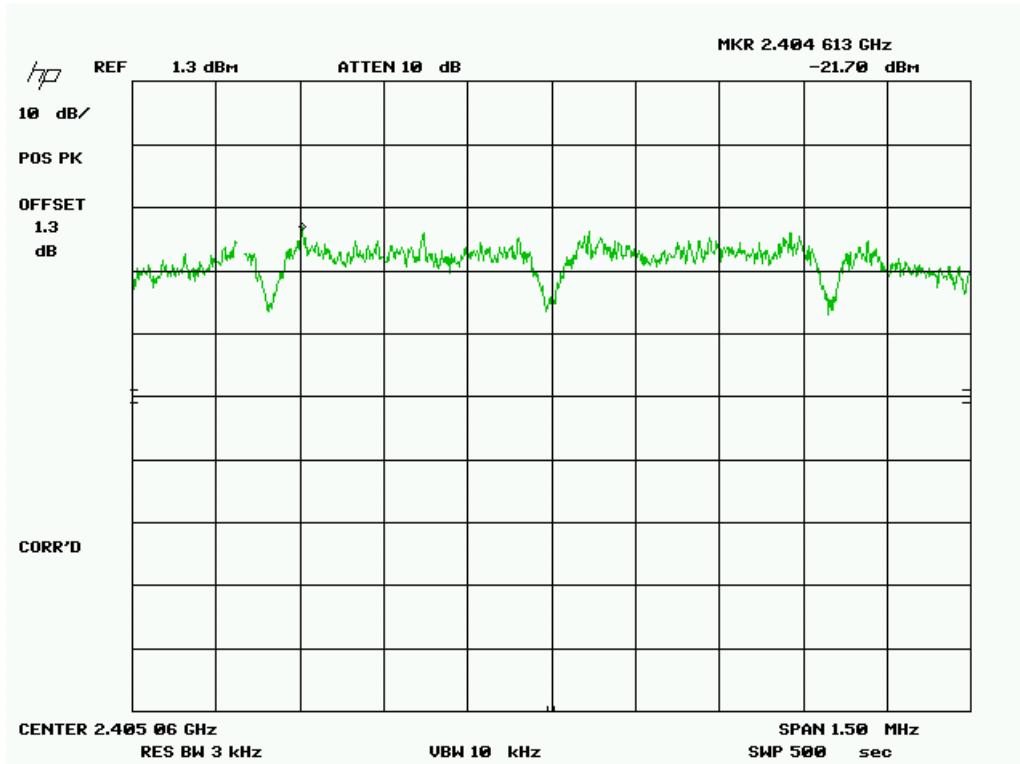


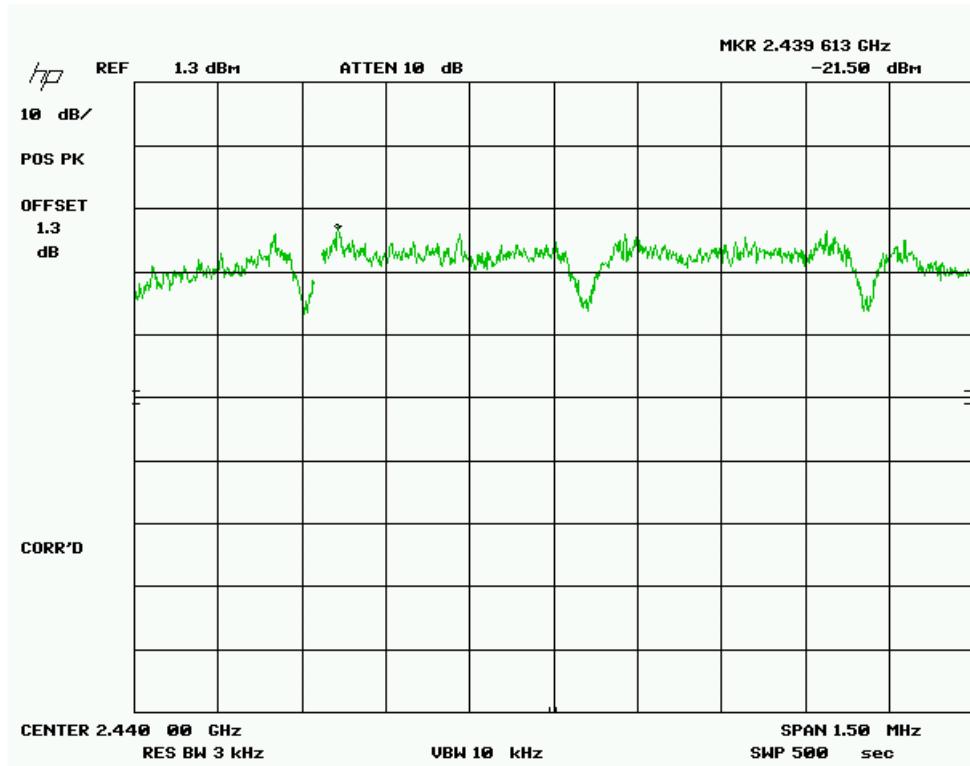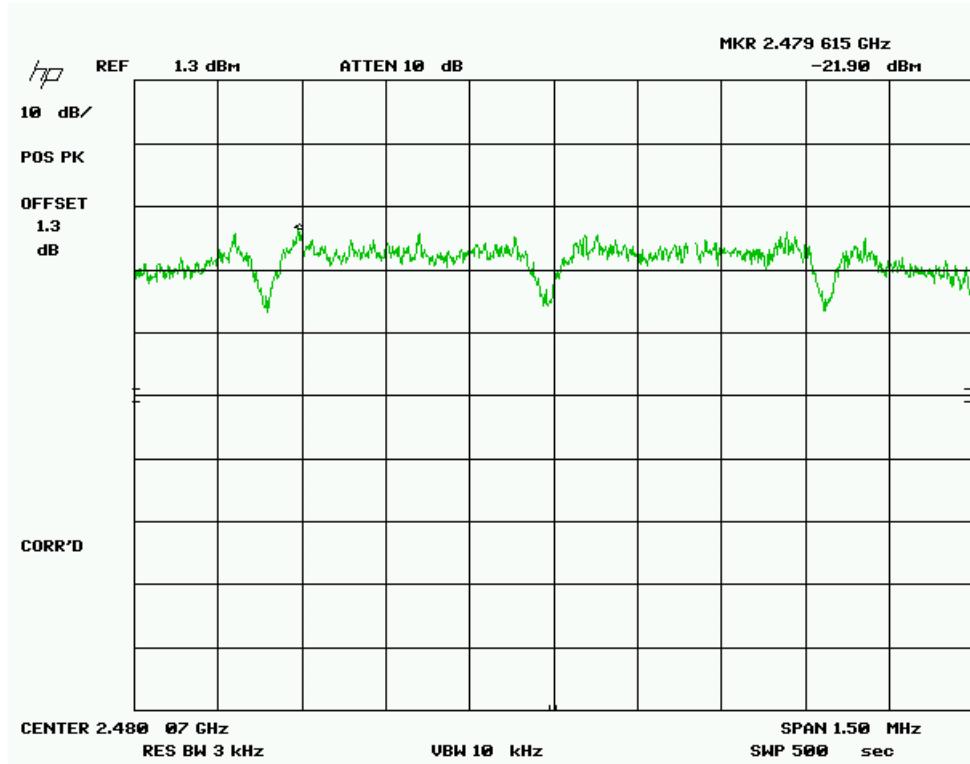PSD 2440 MHz

PSD 2480 MHz


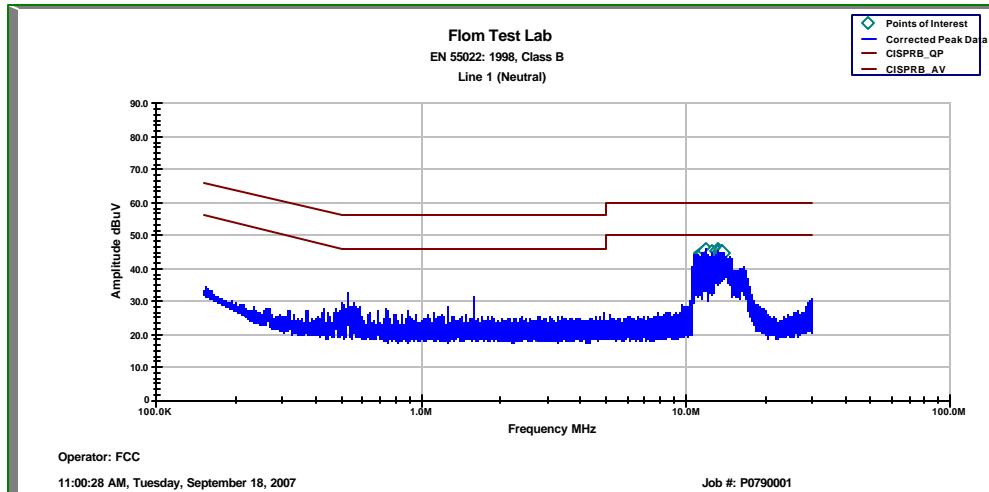
Name of Test: A/C Powerline Conducted Emissions
Specification: 15.207
Test Equipment Utilized i00049, i00270

Test Procedure

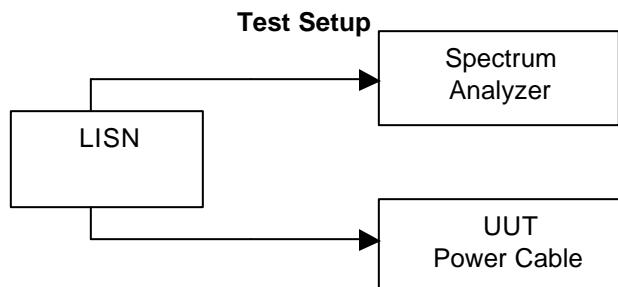
The UUT power cable connected to a LISN and the monitored output of the LISN was connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were monitored and compared to the specification limits. All peak emissions were below the Quasi-peak limits.



Line 1 Test Results



Line 2 Test Results

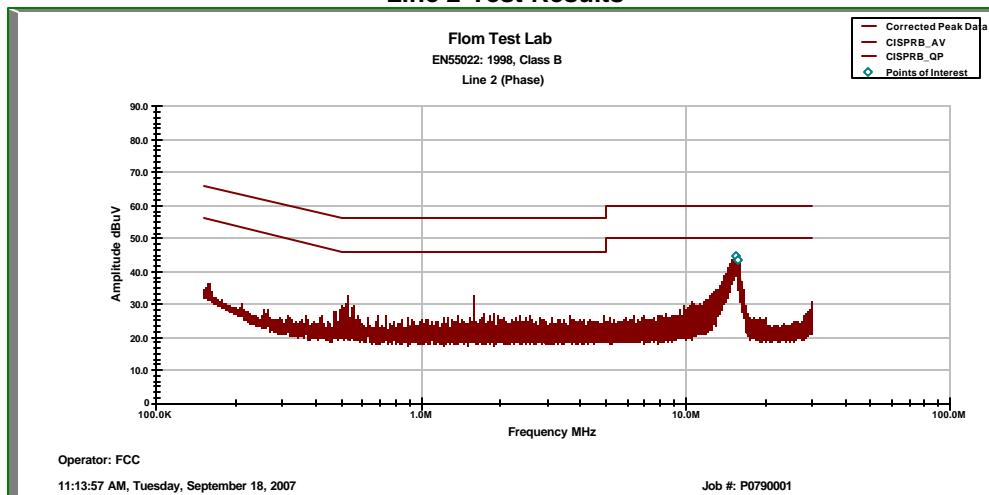

Test Equipment Utilized

Description	MFG	Model Number	FTL Asset Number	Last Cal Date	Cal Due Date
RF Pre-Amplifier	HP	8449	i00028	1/23/07	1/23/09
Spectrum Analyzer	HP	8563E	i00029	3/9/07	3/9/08
Spectrum Analyzer	HP	8566B	i00049	8/18/07	8/18/08
Horn Antenna	EMCO	3115	i00103	9/5/06	9/5/08
Power Meter	HP	E4418B	i00228	9/6/07	9/6/08
LISN	FCC	FCC-LISN-50-32-2-01	i00270	10/25/05	10/25/07
Spectrum Analyzer	HP	8566B	i00290	8/7/07	8/7/08
Power sensor	HP	8481A	i00317	9/6/07	9/6/08
Spectrum Analyzer	HP	8566B	i00329	4/16/07	4/16/08

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT