

## TEST REPORT

BNetzA-CAB-02/21-102

Test report no.: 1-2063/21-01-10

### Testing laboratory

**CTC advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <https://www.ctcadvanced.com>

e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**Roche Diagnostics GmbH**

Sandhofer Str. 116

68305 Mannheim / GERMANY

Phone: +49 621 759-3409

Contact: Bernhard Lieske

e-mail: [bernhard.lieske@roche.com](mailto:bernhard.lieske@roche.com)

### Manufacturer

**Roche Diagnostics GmbH**

Sandhofer Str. 116

68305 Mannheim / GERMANY

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 2      Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**      **blood measuring instrument**

**Model name:**      **CoaguChek Pro II**

**FCC ID:**      **VO9-CCPROII**

**IC:**      **3100B-CCPROII**

**Frequency:**      5150 MHz to 5250 MHz & 5725 MHz to 5850 MHz

**Technology tested:**      IEEE 802.11 (W-LAN)

**Antenna:**      Integrated antenna

**Power supply:**      3.7 V DC by Li-Ion battery

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:



René Oelmann  
Lab Manager  
Radio Communications

### Test performed:



David Lang  
Lab Manager  
Radio Communications

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	4
2.1	Notes and disclaimer .....	4
2.2	Application details .....	4
2.3	Test laboratories sub-contracted .....	4
3	Test standard/s, references and accreditations .....	5
4	Reporting statements of conformity – decision rule .....	6
5	Test environment .....	7
6	Test item.....	7
6.1	General description .....	7
6.2	Additional information .....	7
7	Description of the test setup.....	8
7.1	Shielded semi anechoic chamber .....	9
7.2	Shielded fully anechoic chamber.....	10
7.3	Radiated measurements > 18 GHz.....	11
7.4	Conducted measurements with peak power meter & spectrum analyzer .....	12
8	Sequence of testing .....	13
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz .....	13
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz .....	14
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz .....	15
8.4	Sequence of testing radiated spurious above 18 GHz .....	16
9	Measurement uncertainty .....	17
10	Summary of measurement results .....	18
11	Additional comments.....	19
12	Measurement results .....	21
12.1	Identify worst case data rate .....	21
12.2	Antenna gain.....	22
12.3	Duty cycle .....	22
12.4	Maximum output power.....	23
12.4.1	Maximum output power according to FCC requirements .....	23
12.4.2	Maximum output power according to ISSED requirements .....	25
12.5	Power spectral density .....	27
12.5.1	Power spectral density according to FCC requirements.....	27
12.5.2	Power spectral density according to ISSED requirements .....	29
12.6	Minimum emission bandwidth for the band 5.725-5.85 GHz.....	31
12.7	Spectrum bandwidth / 26 dB bandwidth.....	32
12.8	Occupied bandwidth / 99% emission bandwidth .....	34
12.9	Band edge compliance radiated .....	36
12.10	Spurious emissions radiated below 30 MHz.....	38
12.11	Spurious emissions radiated 30 MHz to 1 GHz .....	44
12.12	Spurious emissions radiated 1 GHz to 40 GHz .....	55

13	Observations .....	73
14	Glossary .....	73
15	Document history.....	74
16	Accreditation Certificate – D-PL-12076-01-04.....	74
17	Accreditation Certificate – D-PL-12076-01-05.....	75

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order: 2021-04-13

Date of receipt of test item: 2021-07-30

Start of test:\* 2021-08-18

End of test:\* 2021-11-26

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5 incl. Amendment 1 & 2	February 2021	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
KDB 789033 D02	v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 996369 D04	v02	MODULAR TRANSMITTER INTEGRATION GUIDE GUIDANCE FOR HOST PRODUCT MANUFACTURERS

Accreditation	Description
D-PL-12076-01-04	Telecommunication and EMC Canada <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf</a>
D-PL-12076-01-05	Telecommunication FCC requirements <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>



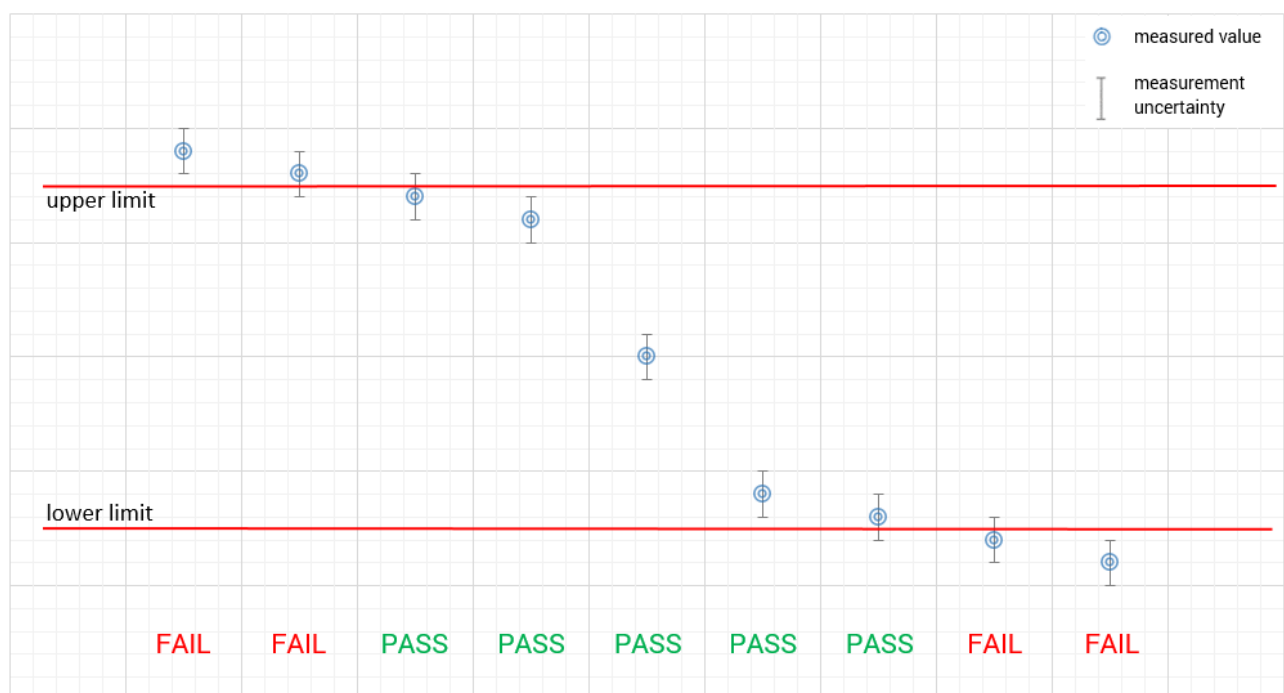
ISED Testing Laboratory Recognized Listing Number: DE0001  
 FCC designation number: DE0002

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict



## 5 Test environment

Temperature :	$T_{nom}$ $T_{max}$ $T_{min}$	+22 °C during room temperature tests No testing under extreme temperature conditions required. No testing under extreme temperature conditions required.
Relative humidity content :		55 %
Barometric pressure :		1021 hpa
Power supply :	$V_{nom}$ $V_{max}$ $V_{min}$	3.7 V DC by Li-Ion battery No testing under extreme voltage conditions required. No testing under extreme voltage conditions required.

## 6 Test item

### 6.1 General description

Kind of test item :	blood measuring instrument
Model name :	CoaguChek Pro II
HMN :	-/-
PMN :	CoaguChek Pro II
HVIN :	CC Pro II 4.5
FVIN :	-/-
S/N serial number :	Rad. 21072705 Cond. 21072707
Hardware status :	HBM4.50
Software status :	04.07.00-Dev1
Firmware status :	-/-
Frequency band :	5150 MHz to 5250 MHz & 5725 MHz to 5850 MHz
Type of radio transmission :	OFDM
Use of frequency spectrum :	
Type of modulation :	CCK, (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels :	9 (20 MHz) & 4 (40 MHz)
Antenna :	Integrated antenna; 1.5dBi (as declared by the manufacturer)
Power supply :	3.7 V DC by Li-Ion battery

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

1-2063/21-01-01\_AnnexA  
 1-2063/21-01-01\_AnnexB  
 1-2063/21-01-01\_AnnexD

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

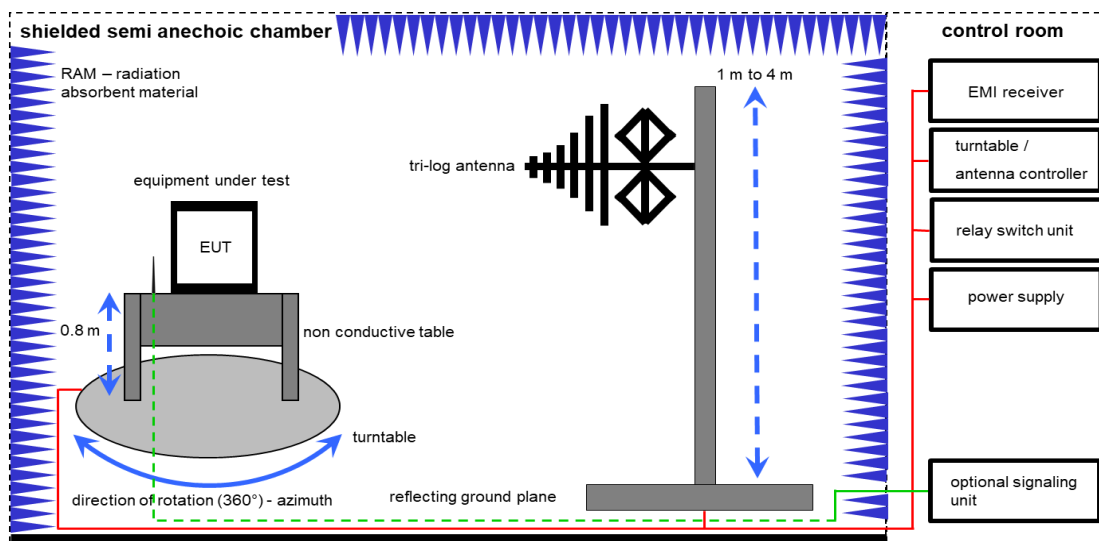
### **Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress



## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

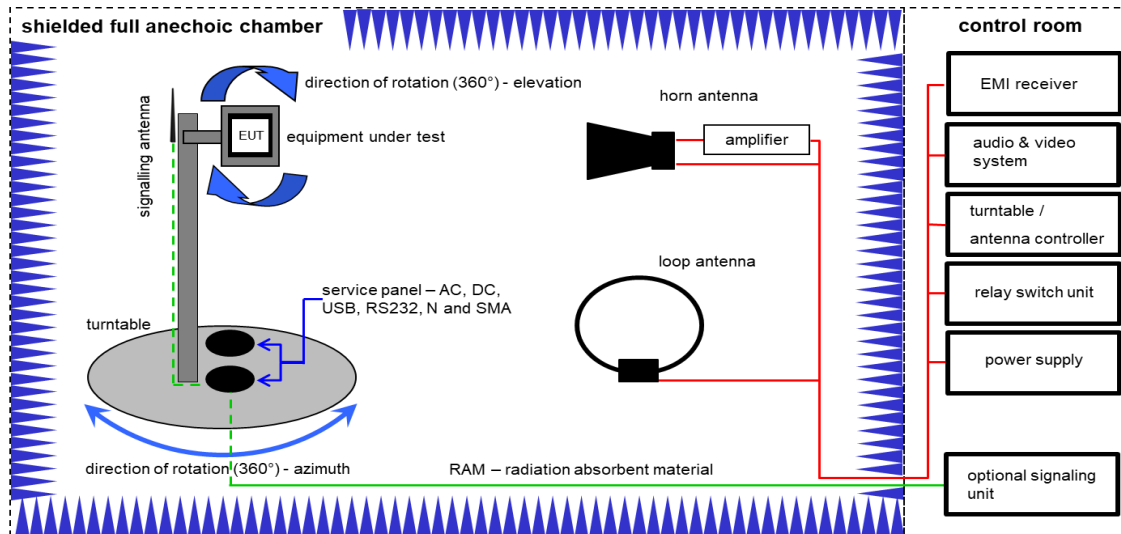
Example calculation:

FS [dB $\mu$ V/m] = 12.35 [dB $\mu$ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB $\mu$ V/m] (35.69  $\mu$ V/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Semi anechoic chamber	3000023	MWB AG		300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	01029	300005379	vIKI!	18.08.2021	17.08.2023
7	A	Turntable	2089-4.0	EMCO		300004394	ne	-/-	-/-
8	A	PC	TecLine	F+W		300004388	ne	-/-	-/-
9	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	10.12.2020	09.12.2021

## 7.2 Shielded fully anechoic chamber



Measurement distance: horn antenna 3 meter; loop antenna 3 meter

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

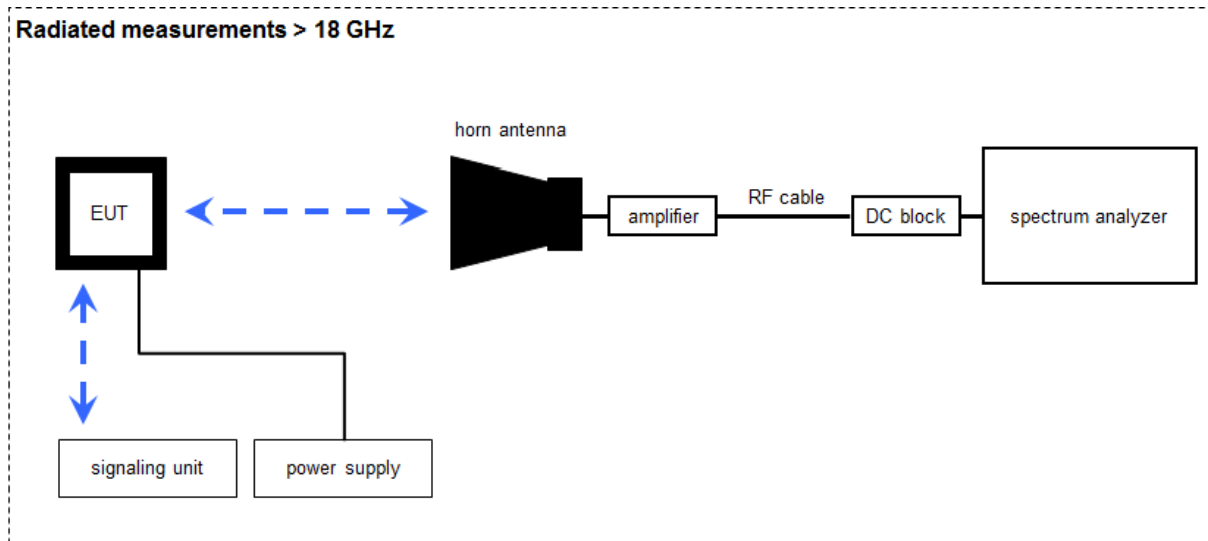
Example calculation:

FS [dBμV/m] = 40.0 [dBμV/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dBμV/m] (71.61 μV/m)

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vKI!	13.06.2019	12.06.2022
2	B, C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vKI!	12.03.2021	11.03.2023
4	B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	B	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev	-/-	-/-
6	B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2020	10.12.2021
7	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
8	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
9	B	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	371	300003854	vKI!	14.01.2020	13.01.2022
10	B	High Pass Filter	VHF-3500+	Mini Circuits	-/-	400000193	ne	-/-	-/-
11	B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
12	B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
13	B, C	NEXIO EMV-Software	BAT EMC V3.20.0.26	EMCO		300004682	ne	-/-	-/-
14	B, C	PC	ExOne	F+W		300004703	ne	-/-	-/-
15	B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-

### 7.3 Radiated measurements > 18 GHz



Measurement distance: horn antenna 50 cm

FS = UR + CA + AF

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

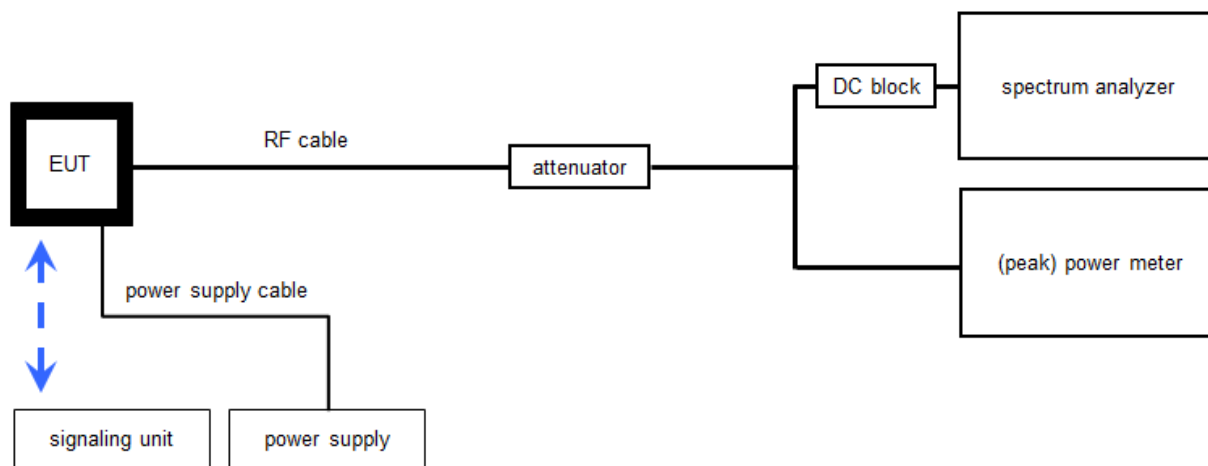
FS [dBμV/m] = 40.0 [dBμV/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dBμV/m] (6.79 μV/m)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vIKI!	21.01.2020	20.01.2022
3	A	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	82-16	300000510	vIKI!	23.01.2020	22.01.2022
4	A	Broadband Low Noise Amplifier 18-50 GHz	CBL18503070-XX	CERNEX	19338	300004273	ev	-/-	-/-
5	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	07.12.2020	06.12.2021
6	A	RF-Cable	ST18/SMAm/SMAm /48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
7	A	RF-Cable	ST18/SMAm/SMAm /48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
8	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-

## 7.4 Conducted measurements with peak power meter & spectrum analyzer

### Conducted measurements normal conditions



WLAN tester version: 1.1.13; LabView2015

OP = AV + CA

(OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor	Schwarzbeck Mess - Elektronik	2V2403033A4523	300004589	ne	-/-	-/-
2	A	RF-Cable	ST18/SMAM/SMAM/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
3	A	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits		400001186	ev	-/-	-/-
4	A	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-
5	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	07.12.2020	06.12.2021

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 8.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.



## 9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	$\pm 3$ dB	
Power spectral density	$\pm 1.56$ dB	
DTS bandwidth	$\pm 100$ kHz (depends on the used RBW)	
Occupied bandwidth	$\pm 100$ kHz (depends on the used RBW)	
Maximum output power conducted	$\pm 1.56$ dB	
Detailed spurious emissions @ the band edge - conducted	$\pm 1.56$ dB	
Band edge compliance radiated	$\pm 3$ dB	
Spurious emissions conducted	> 3.6 GHz	$\pm 1.56$ dB
	> 7 GHz	$\pm 1.56$ dB
	> 18 GHz	$\pm 2.31$ dB
	$\geq 40$ GHz	$\pm 2.97$ dB
Spurious emissions radiated below 30 MHz	$\pm 3$ dB	
Spurious emissions radiated 30 MHz to 1 GHz	$\pm 3$ dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	$\pm 3.7$ dB	
Spurious emissions radiated above 12.75 GHz	$\pm 4.5$ dB	
Spurious emissions conducted below 30 MHz (AC conducted)	$\pm 2.6$ dB	

## 10 Summary of measurement results

<input type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input checked="" type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Title 47 Part 15 RSS 247, Issue 2	See table	2022-01-21	Reduced test plan according customers specification.

Test specification clause	Test case	C	NC	NA	NP	Remark
-/-	Output power verification (cond.)	-/-				Declared
-/-	Antenna gain	-/-				Declared
U-NII Part 15	Duty cycle	-/-				-/-
§15.407(a) RSS - 247 (6.2.x.1)	Maximum output power (conducted & radiated)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(a) RSS - 247 (6.2.x.1)	Power spectral density	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS - 247 (6.2.4.1)	Spectrum bandwidth 6dB bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(a) RSS - 247 (6.2.x.2)	Spectrum bandwidth 26dB bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 6.6	Spectrum bandwidth 99% bandwidth	-/-				-/-
§15.205 RSS - 247 (6.2.x.2)	Band edge compliance radiated	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407(b) RSS - 247 (6.2.x.2)	TX spurious emissions radiated	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions radiated	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Spurious emissions conducted emissions< 30 MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.407 RSS - 247 (6.3)	DFS	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-/-

Notes:

<b>C:</b>	Compliant	<b>NC:</b>	Not compliant	<b>NA:</b>	Not applicable	<b>NP:</b>	Not performed
-----------	-----------	------------	---------------	------------	----------------	------------	---------------

## 11 Additional comments

Reference documents: Module specification: WM PAN9026 Product Specification V1.3

Special test descriptions: None

Configuration descriptions: Operating mode vs. data rate vs. power setting:

Test mode:	Data rate:	Power setting:
a-mode	6 Mbps	20
nHT20-mode	MCS0	20
nHT40-mode	MCS0	20

EUT selection: ☒ Only one device available

☐ Devices selected by the customer

☐ Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz) channel number & center frequency					
channel	<b>36</b>	<b>40</b>	44	<b>48</b>	-/-
f <sub>c</sub> / MHz	<b>5180</b>	<b>5200</b>	5220	<b>5240</b>	

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency					
channel	<b>149</b>	153	<b>157</b>	161	<b>165</b>
f <sub>c</sub> / MHz	<b>5745</b>	5765	<b>5785</b>	5805	<b>5825</b>

Channels with 40 MHz channel bandwidth:

U-NII-1 & U-NII-2A (5150 MHz to 5250 MHz) channel number & center frequency			
channel	<b>38</b>	<b>46</b>	-/-
f <sub>c</sub> / MHz	<b>5190</b>	<b>5230</b>	

U-NII-3 (5725 MHz to 5850 MHz) channel number & center frequency		
channel	<b>151</b>	<b>159</b>
f <sub>c</sub> / MHz	<b>5755</b>	<b>5795</b>

Note: The channels used for the tests were marked in bold in the list.

Test mode:

- ☐ No test mode available.  
Iperf is used to transmit data to a companion device
- ☒ Special software is used.  
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

- ☒ Operating mode 1 (single antenna)
  - Equipment with 1 antenna,
  - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
  - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
- ☐ Operating mode 2 (multiple antennas, no beamforming)
  - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
- ☐ Operating mode 3 (multiple antennas, with beamforming)
  - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.  
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

## 12 Measurement results

### 12.1 Identify worst case data rate

Measurement:

All modes of the module will be measured with an average power meter to identify the maximum transmission power on mid channel. In the case that only one or two channels are available, only these will be measured.

In further tests only the identified worst case modulation scheme or bandwidth will be measured.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace mode:	Max hold
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Results:

OFDM – mode	Modulation scheme / bandwidth					
	U-NII-1		U-NII-2C		U-NII-3	
	lowest channel	highest channel	lowest channel	highest channel	lowest channel	highest channel
a – mode	6 Mbit/s	6 Mbit/s	-/-	-/-	6 Mbit/s	6 Mbit/s
n/ac HT20 – mode	MCS 0	MCS 0	-/-	-/-	MCS 0	MCS 0
n/ac HT40 – mode	MCS 0	MCS 0	-/-	-/-	MCS 0	MCS 0

## 12.2 Antenna gain

Maximum antenna gain: 1.5dBi (as per manufacturers declaration, see referenced documents section 10).

## 12.3 Duty cycle

Description:

The duty cycle is necessary to compute the maximum power during an actual transmission. The shown plots and values are to show an example of the measurement procedure. The real value is measured direct during the power measurement or power density measurement. The correction value is shown in each plot of these measurements.

Measurement:

Measurement parameter	
According to: KDB789033 D02, B.	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Results:

Duty cycle and correction factor:

OFDM – mode	Calculation method			
	$T_{on} (D2_{plot}) * 100 / T_{complete} (D3_{plot}) = \text{duty cycle}$ $10 * \log(\text{duty cycle}) = \text{correction factor}$			
	$T_{on} (D2_{plot})$	$T_{complete} (D3_{plot})$	Duty cycle	Correction factor
a – mode	-/-	-/-	99.9%	0dB
n/ac HT20 – mode	-/-	-/-	99.9%	0dB
n/ac HT40 – mode	-/-	-/-	99.9%	0dB

## 12.4 Maximum output power

### 12.4.1 Maximum output power according to FCC requirements

Description:

Measurement of the maximum output power conducted

Measurement:

Measurement parameter	
According to: KDB789033 D02, E.2.e.	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Limits:

Radiated output power	Conducted output power for mobile equipment
Conducted power + 6 dBi antenna gain	250mW 5.150-5.250 GHz The lesser one of 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 26dB Bandwidth [MHz]) 1W 5.725-5.85 GHz

Results:

a	Maximum output power conducted [dBm]		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	11.3	12.8	10.9
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	6.2	7.4	5.9

Results:

n/ac HT20	Maximum output power conducted [dBm]		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	10.4	11.9	10.2
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	6.3	7.5	5.9

Results:

n/ac HT40	Maximum output power conducted [dBm]	
	U-NII-1 (5150 MHz to 5250 MHz)	
	Lowest channel	Highest channel
	10.3	8.9
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	5.2	6.4



## 12.4.2 Maximum output power according to ISED requirements

Description:

Measurement of the maximum output power conducted + radiated

Measurement:

Measurement parameter	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf ISED Max Output Power and PSD
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Limits:

Radiated output power	Conducted output power for mobile equipment
The lesser one of 200 mW or 10 dBm + 10 log Bandwidth 5.150-5.250 GHz 1 W or 17 dBm + 10 log Bandwidth 5.250-5.350 GHz 1 W or 17 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 99% Bandwidth [MHz]) Conducted power + 6dBi antenna gain 5.725-5.825 GHz	The lesser one of 250mW or 11 dBm + 10 log Bandwidth 5.250-5.350 GHz 250mW or 11 dBm + 10 log Bandwidth 5.470-5.725 GHz (where Bandwidth is the 99% Bandwidth [MHz]) 1W 5.725-5.825 GHz

## Results:

a	Maximum output power [dBm]		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	Conducted		
	11.2	12.7	10.8
	Radiated (calculated – see chapter antenna gain)		
	12.7	14.2	12.3
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	Conducted		
	6.1	7.3	5.7
	Radiated (calculated – see chapter antenna gain)		
	7.6	8.8	7.2

## Results:

n/ac HT20	Maximum output power [dBm]		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	Conducted		
	10.3	11.8	10.1
	Radiated (calculated – see chapter antenna gain)		
	11.8	13.3	11.6
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	Conducted		
	6.2	7.4	5.9
	Radiated (calculated – see chapter antenna gain)		
	7.7	8.9	7.4

## Results:

n/ac HT40	Maximum output power [dBm]	
	U-NII-1 (5150 MHz to 5250 MHz)	
	Lowest channel	Highest channel
	Conducted	
	10.2	8.9
	Radiated (calculated – see chapter antenna gain)	
	11.7	10.4
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	Conducted	
	5.0	6.4
	Radiated (calculated – see chapter antenna gain)	
	6.5	7.9

## 12.5 Power spectral density

### 12.5.1 Power spectral density according to FCC requirements

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to: KDB789033 D02, F.	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf FCC Part 15.407 Max Output Power and PSD
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Limits:

Power Spectral Density
power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5150 – 5250 MHz)
power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5250 – 5350 MHz)
power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5470 – 5725 MHz)
power spectral density conducted $\leq 30$ dBm in any 500 kHz band (band 5725 – 5850 MHz)

Results:

a	Power spectral density (dBm/1MHz or dBm/500kHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	0.7	1.8	0.6
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	-7.4	-6.6	-8.1

Results:

n/ac HT20	Power spectral density (dBm/1MHz or dBm/500kHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	-0.3	0.6	-0.4
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	-7.5	-6.7	-8.2

Results:

n/ac HT40	Power spectral density (dBm/1MHz or dBm/500kHz)	
	U-NII-1 (5150 MHz to 5250 MHz)	
	Lowest channel	Highest channel
	-4.0	-4.9
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	-11.1	-10.3

## 12.5.2 Power spectral density according to ISED requirements

### Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated at the lowest, middle and highest channel.

### Measurement:

Measurement parameter	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf ISED Max Output Power and PSD
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

### Limits:

Power Spectral Density
power spectral density e.i.r.p. $\leq 10$ dBm in any 1 MHz band (band 5150 – 5250 MHz)
power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5250 – 5350 MHz)
power spectral density conducted $\leq 11$ dBm in any 1 MHz band (band 5470 – 5725 MHz)
power spectral density conducted $\leq 30$ dBm in any 500 kHz band (band 5725 – 5850 MHz)

## Results:

a	Power spectral density (dBm/1MHz or dBm/500kHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	Conducted		
	0.7	1.8	0.6
	Radiated (calculated – see chapter antenna gain)		
	2.2	3.3	2.1
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	-7.4	-6.6	-8.1

## Results:

n/ac HT20	Power spectral density (dBm/1MHz or dBm/500kHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	Conducted		
	-0.3	0.6	-0.4
	Radiated (calculated – see chapter antenna gain)		
	1.2	2.1	1.1
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	-7.5	-6.7	-8.3

## Results:

n/ac HT40	Power spectral density (dBm/1MHz or dBm/500kHz)	
	U-NII-1 (5150 MHz to 5250 MHz)	
	Lowest channel	Highest channel
	Conducted	
	-4.1	-4.8
	Radiated (calculated – see chapter antenna gain)	
	-2.6	-3.3
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	-11.1	-10.3

## 12.6 Minimum emission bandwidth for the band 5.725-5.85 GHz

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.2.	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf FCC Part 15.407 & ISSED Minimum Emission BW
Used test setup:	See chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Limits:

FCC	ISED
The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

a	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	16.4	16.3	16.4

Results:

n/ac HT20	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	17.6	17.3	17.6

Results:

n/ac HT40	6 dB emission bandwidth (MHz)		
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Highest channel	
	36.3	36.3	

## 12.7 Spectrum bandwidth / 26 dB bandwidth

Description:

Measurement of the 26 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to: KDB789033 D02, C.1.	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf FCC Part 15.407 & ISSED Bandwidths
Used test setup:	see chapter 7.4 – A
Measurement uncertainty:	See chapter 9

Limits:

Spectrum Bandwidth – 26 dB Bandwidth
<b>IC:</b> Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.
<b>FCC:</b> Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.



Results:

a	26 dB bandwidth (MHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	19.9	20.4	20.2
	Lowest frequency		Highest frequency
	5171.7		5250.2*
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	21.0	20.0	22.55
	Lowest frequency		Highest frequency
	5736.5		5836.8

\* As per KDB 789033 D2 the 99% BW is used in lieu of the 26dB BW

Results:

n/ac HT20	26 dB bandwidth (MHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	20.6	20.6	20.4
	Lowest frequency		Highest frequency
	5171.2		5249.0
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	20.9	20.7	22.1
	Lowest frequency		Highest frequency
	5734.6		5836.9

Results:

n/ac HT40	26 dB bandwidth (MHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel		Highest channel
	40.5		40.8
	Lowest frequency		Highest frequency
	5171.2		5248.2
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel		Highest channel
	40.3		40.1
	Lowest frequency		Highest frequency
	5736.0		5814.8

## 12.8 Occupied bandwidth / 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
External result file(s)	1-2063_21-01-10_Annex_MR_A_1.pdf FCC Part 15.407 & ISED Bandwidths
Test setup:	See sub clause 7.4 – B
Measurement uncertainty:	See chapter 9

Usage:

-/-	ISED
OBW is necessary for Emission Designator	

Results:

a	99% bandwidth (kHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	16883	16783	16883
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	16933	16833	16983

Results:

n/ac HT20	99% bandwidth (kHz)		
	U-NII-1 (5150 MHz to 5250 MHz)		
	Lowest channel	Middle channel	Highest channel
	17782	17732	17832
	U-NII-3 (5725 MHz to 5850 MHz)		
	Lowest channel	Middle channel	Highest channel
	17882	17782	17932

Results:

n/ac HT40	99% bandwidth (kHz)	
	U-NII-1 (5150 MHz to 5250 MHz)	
	Lowest channel	Highest channel
	36763	37063
	U-NII-3 (5725 MHz to 5850 MHz)	
	Lowest channel	Highest channel
	37063	36763

## 12.9 Band edge compliance radiated

### Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3m.

### Measurement:

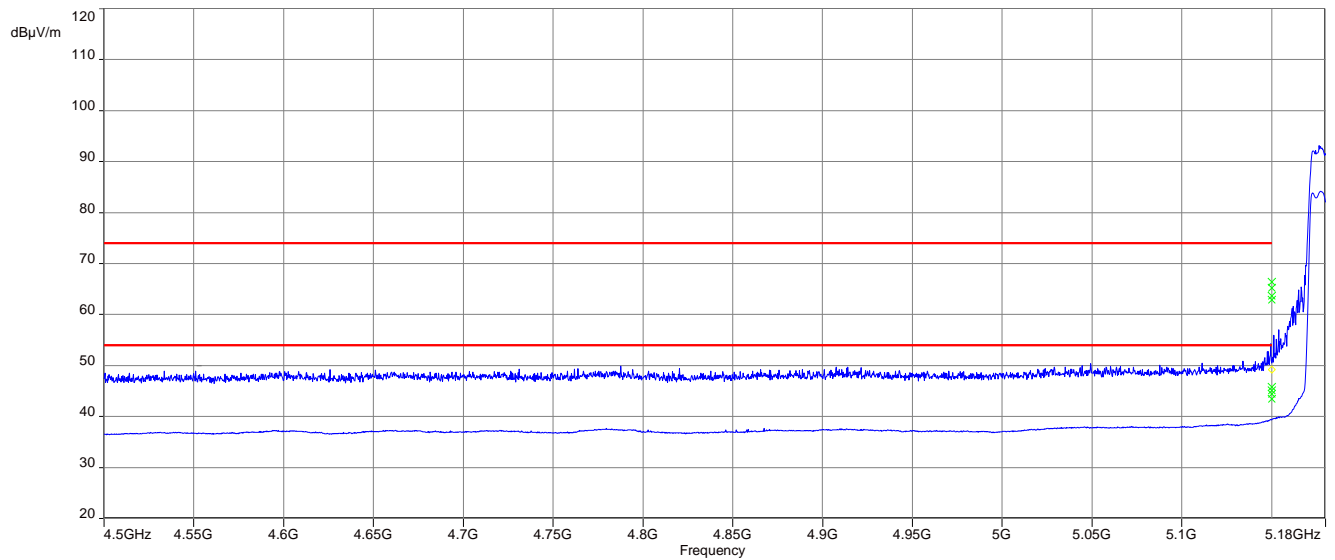
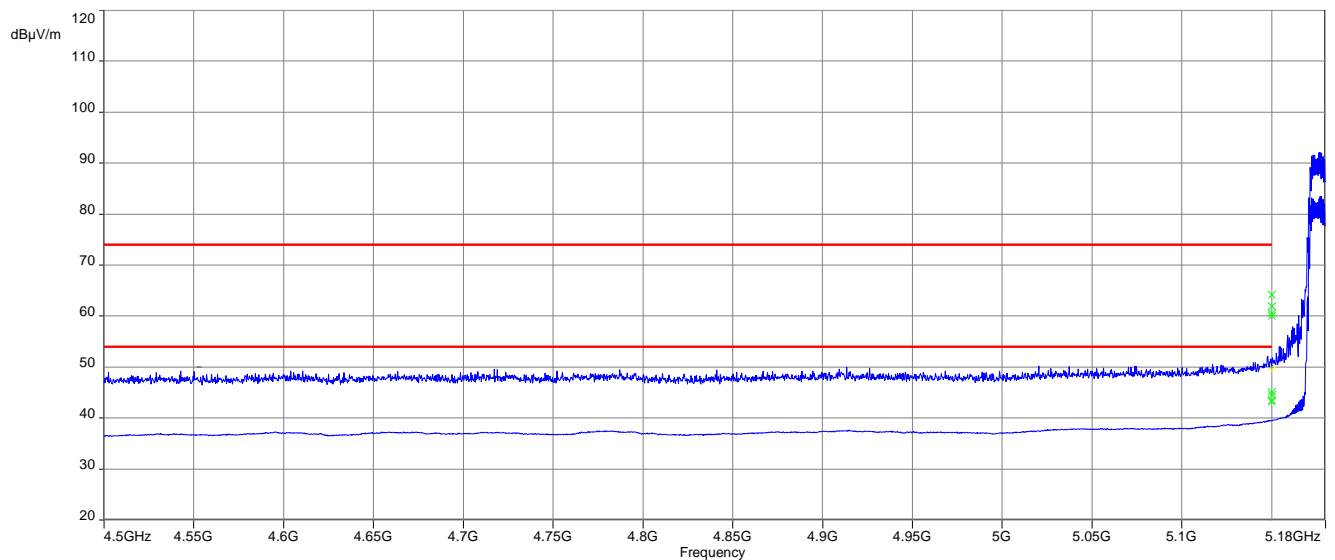
Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	$\geq 3 \times \text{RBW}$
Span:	See plots!
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – B
Measurement uncertainty:	See chapter 9

### Limits:

Band Edge Compliance Radiated
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
74 dB $\mu$ V/m (peak) 54 dB $\mu$ V/m (average)

### Result:

Scenario	Band Edge Compliance Radiated [dB $\mu$ V/m]
band edge	< 74 dB $\mu$ V/m (peak) < 54 dB $\mu$ V/m (average)

**Plots:****Plot 1:** lower band edge; U-NII-1; lowest channel; 20 MHz channel bandwidth**Plot 2:** lower band edge; U-NII-1; lowest channel; 40 MHz channel bandwidth

## 12.10 Spurious emissions radiated below 30 MHz

### Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are re-calculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

### Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – C
Measurement uncertainty:	See chapter 9

### Limits:

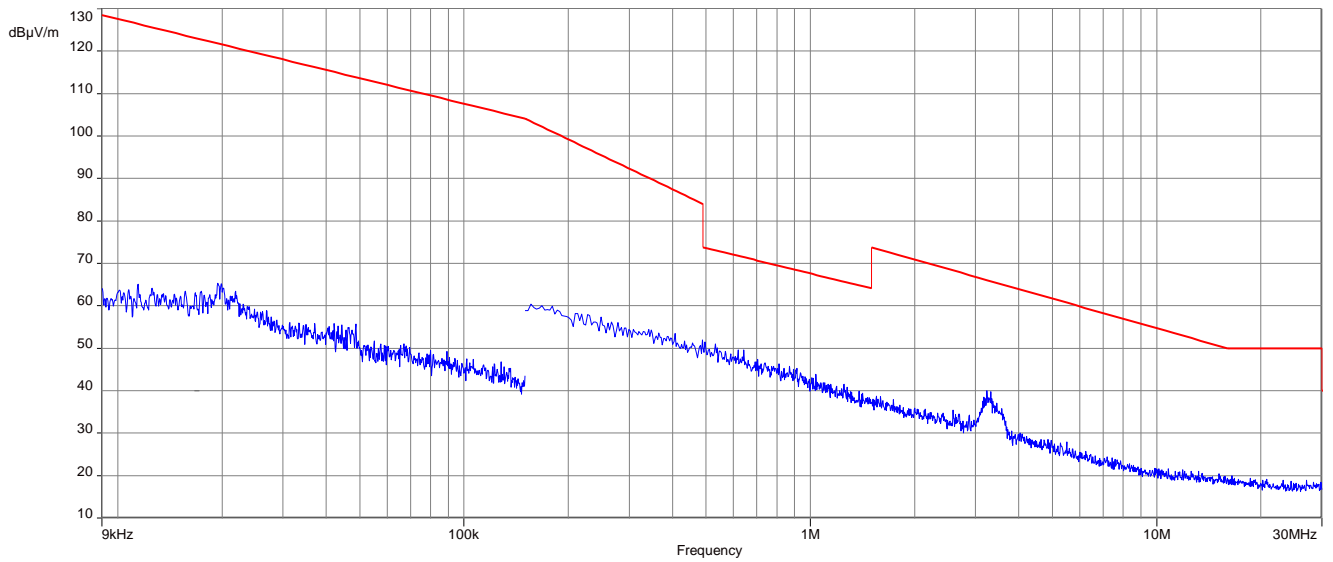
Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

### Results:

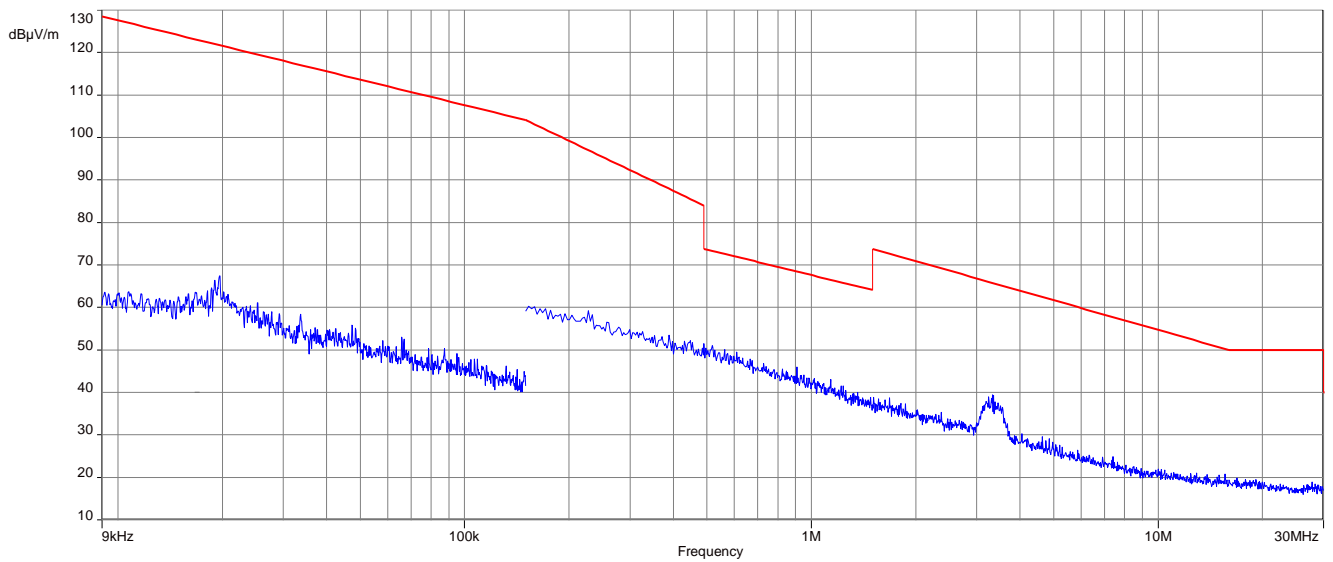
Spurious Emissions Radiated < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
All detected emissions are more than 20 dB below the limit.		

**Plots:** 20 MHz channel bandwidth

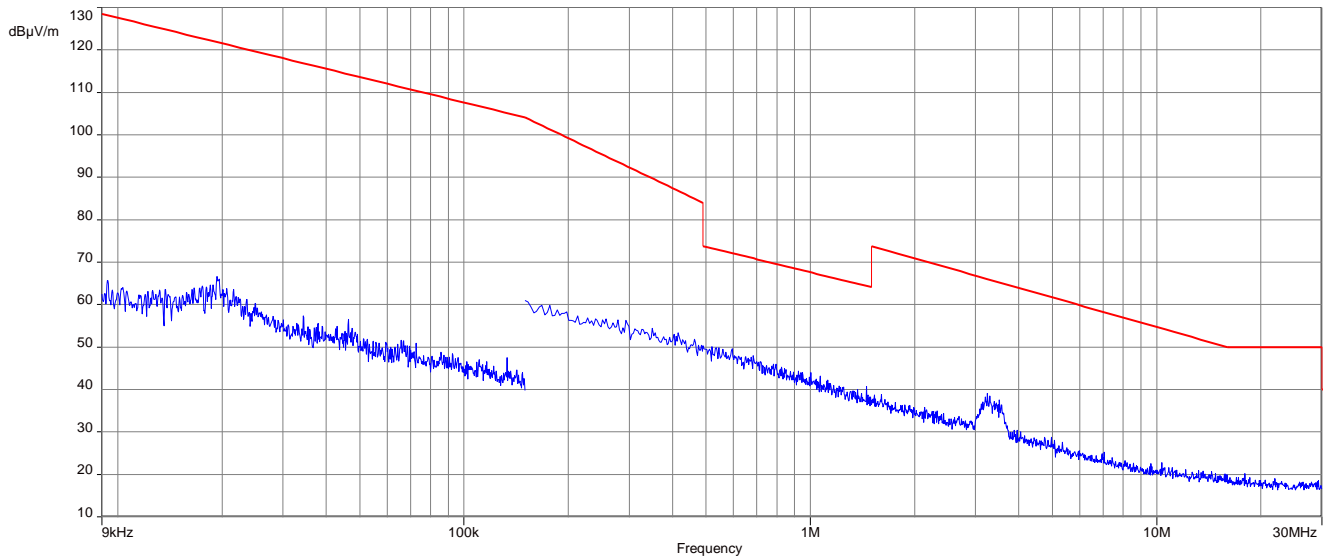
**Plot 1:** 9 kHz to 30 MHz, U-NII-1; lowest channel



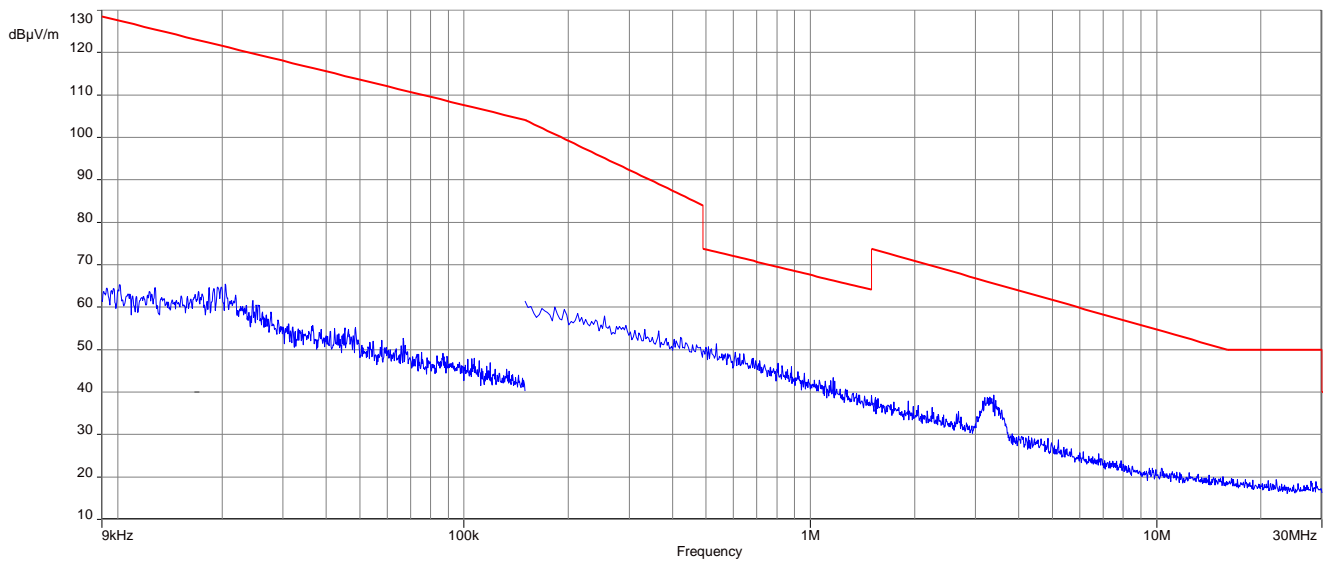
**Plot 2:** 9 kHz to 30 MHz, U-NII-1; middle channel



**Plot 3:** 9 kHz to 30 MHz, U-NII-1; highest channel

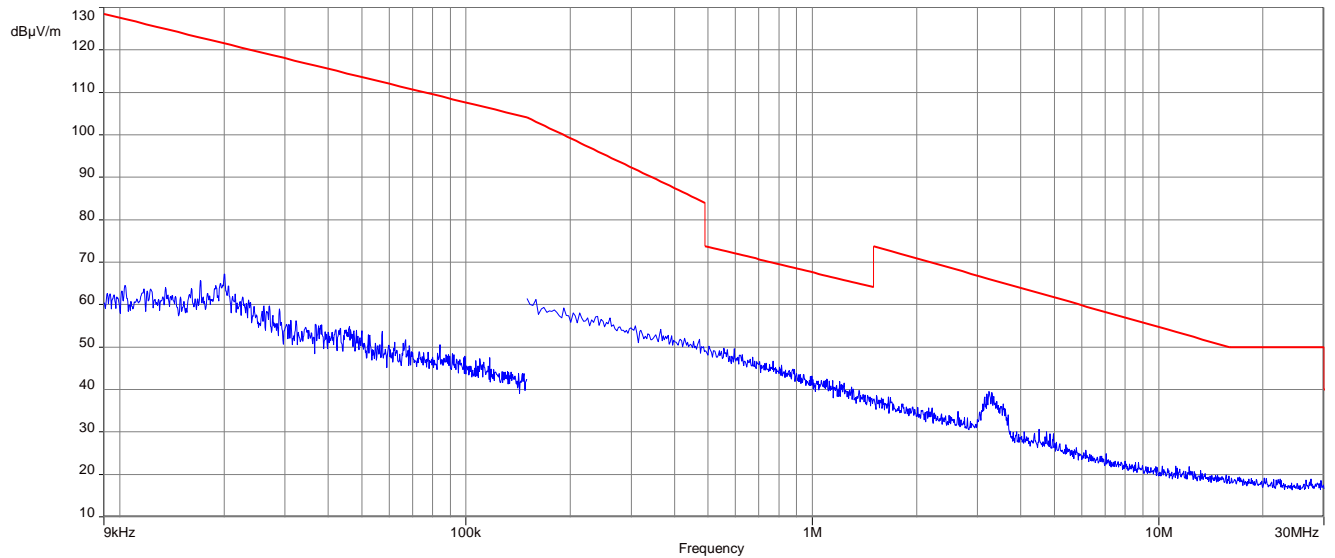


**Plot 4:** 9 kHz to 30 MHz, U-NII-3; lowest channel

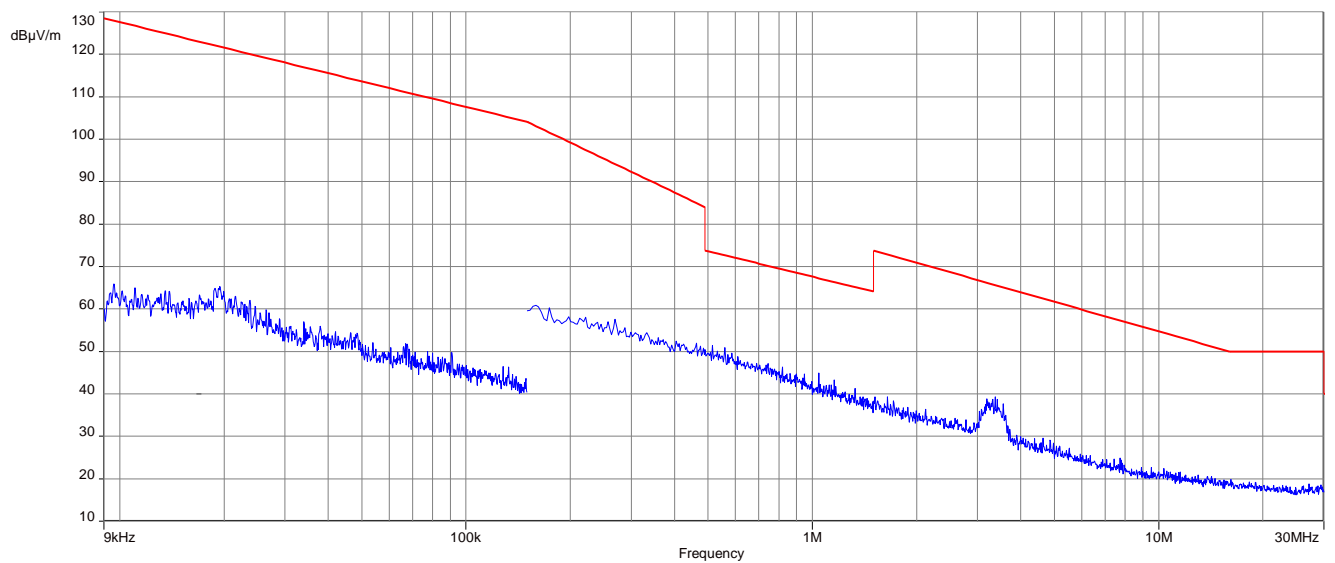




**Plot 5:** 9 kHz to 30 MHz, U-NII-3; middle channel

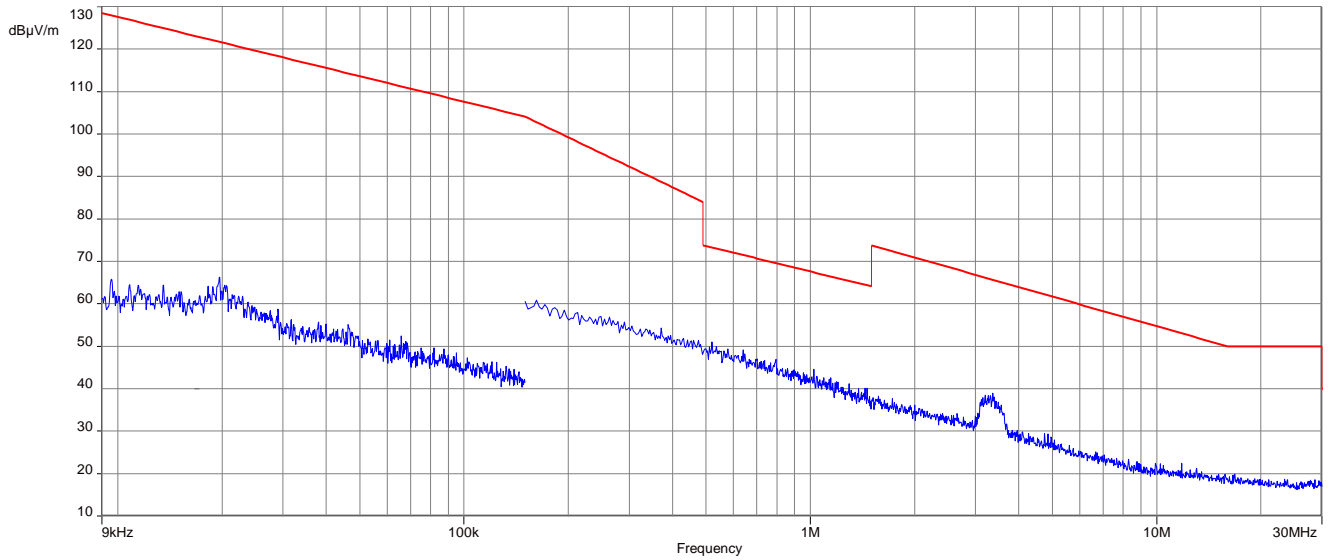


**Plot 6:** 9 kHz to 30 MHz, U-NII-3; highest channel

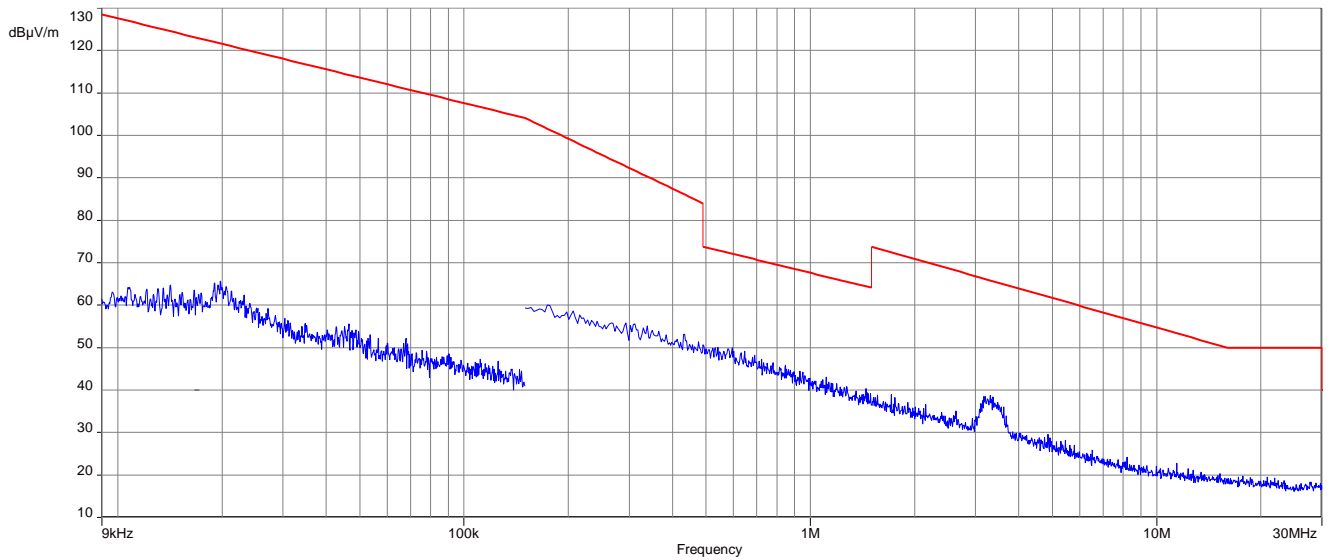


**Plots:** 40 MHz channel bandwidth

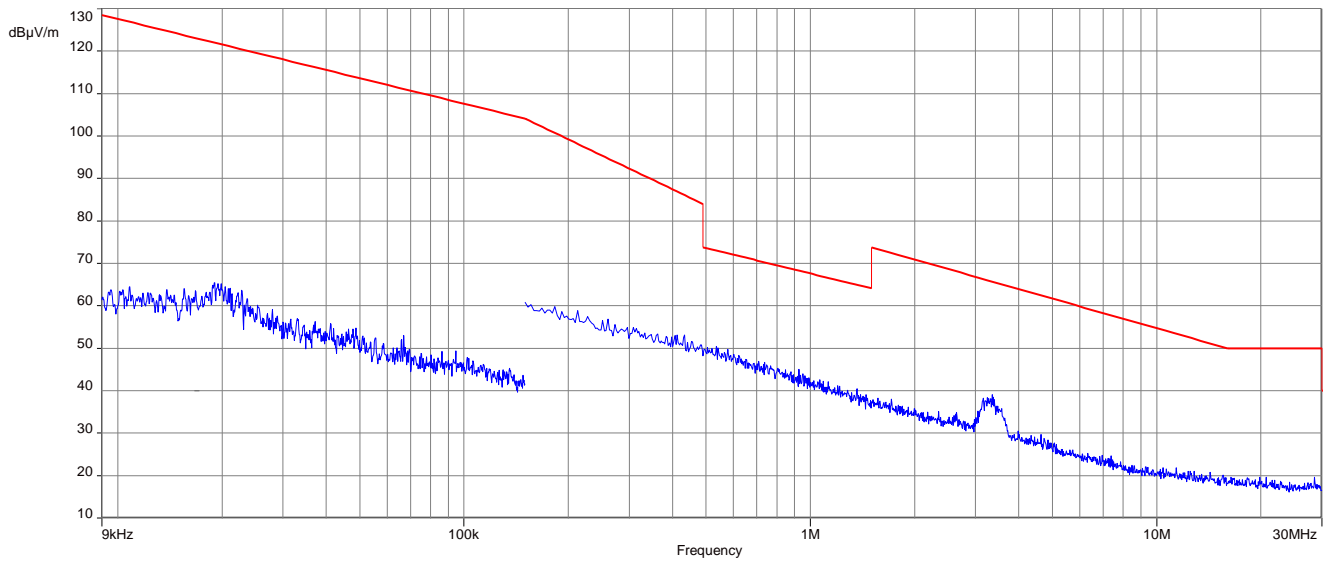
**Plot 1:** 9 kHz to 30 MHz, U-NII-1; lowest channel



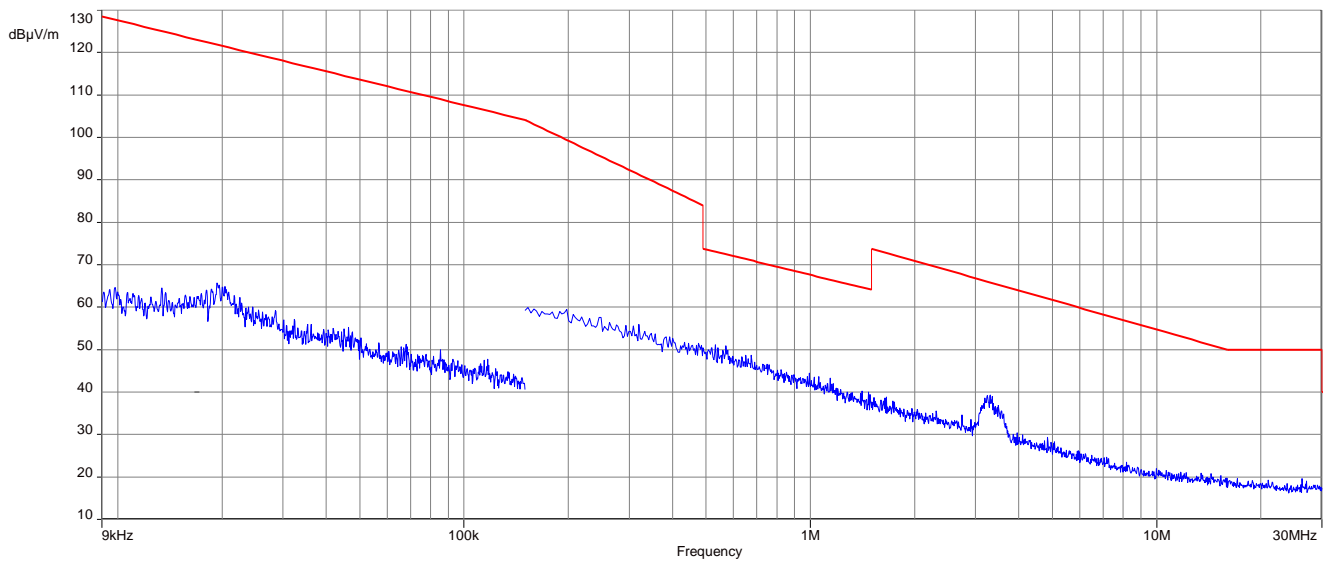
**Plot 2:** 9 kHz to 30 MHz, U-NII-1; highest channel



**Plot 3:** 9 kHz to 30 MHz, U-NII-3; lowest channel



**Plot 4:** 9 kHz to 30 MHz, U-NII-3; highest channel



## 12.11 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

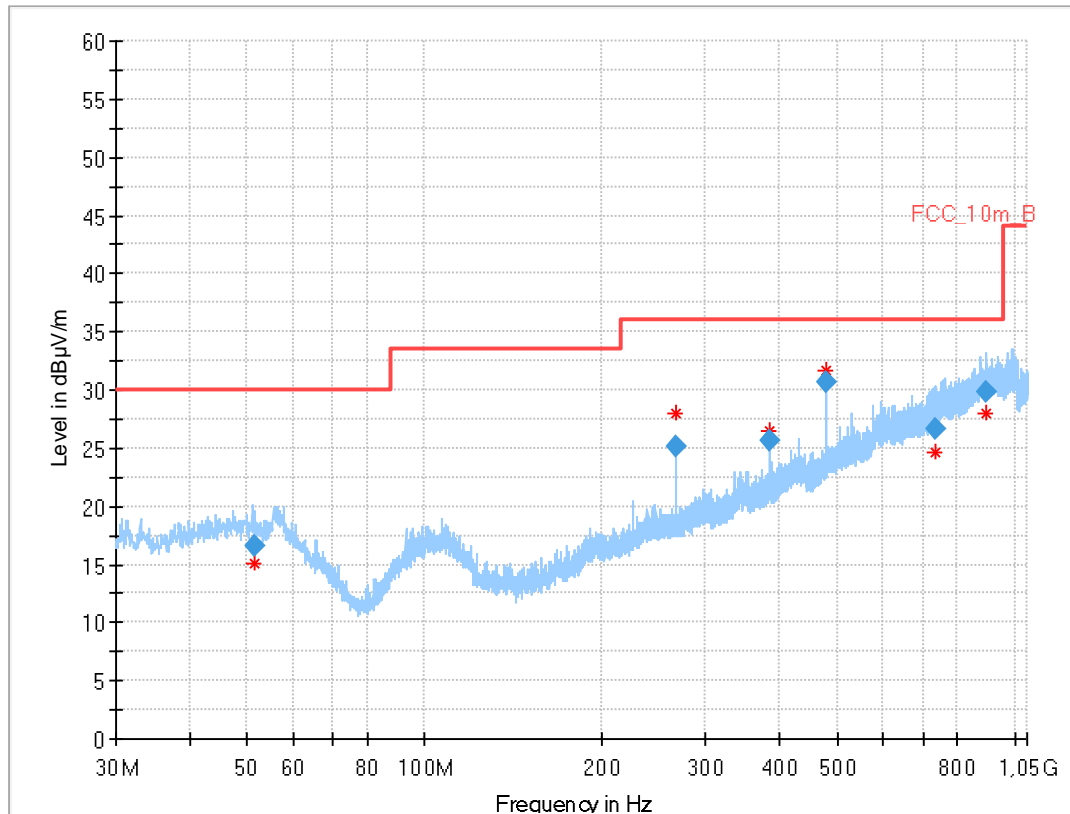
Measurement parameter	
Detector:	Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	120 kHz
Video bandwidth:	500 kHz
Span:	30 MHz to 1 GHz
Test setup:	See sub clause 7.1 – A
Measurement uncertainty:	See chapter 9

Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

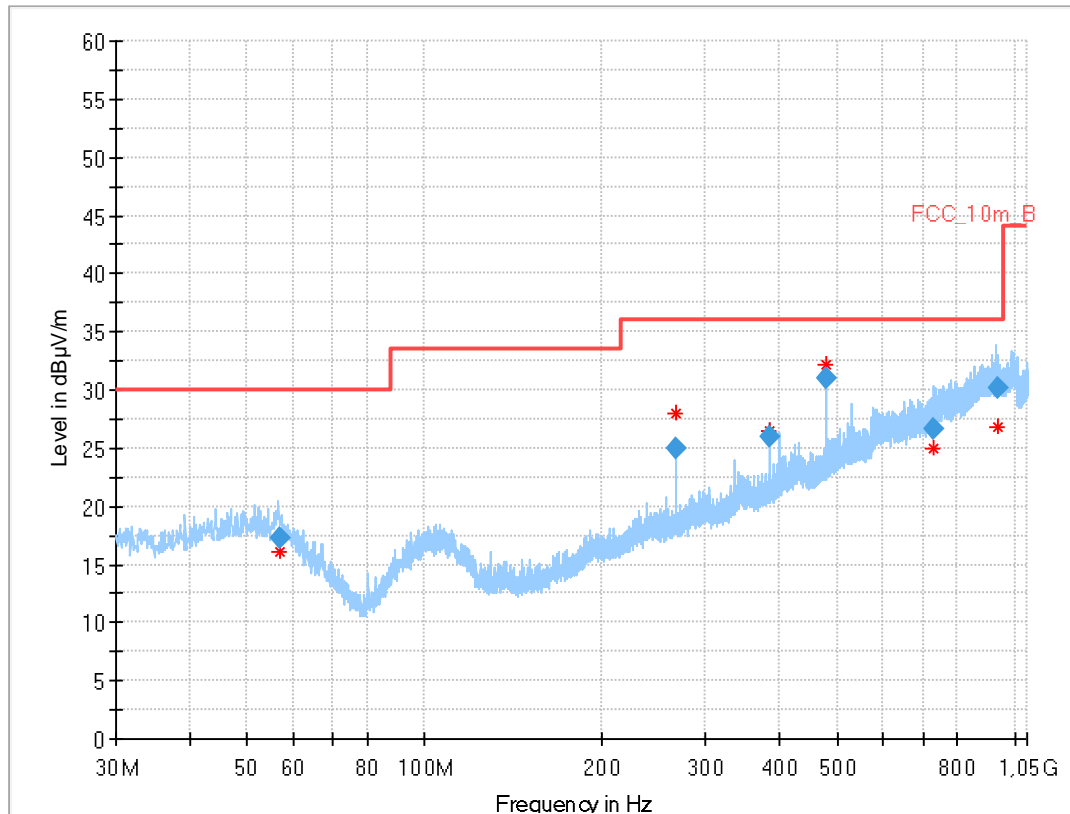
**Plots:** 20 MHz channel bandwidth

**Plot 1:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

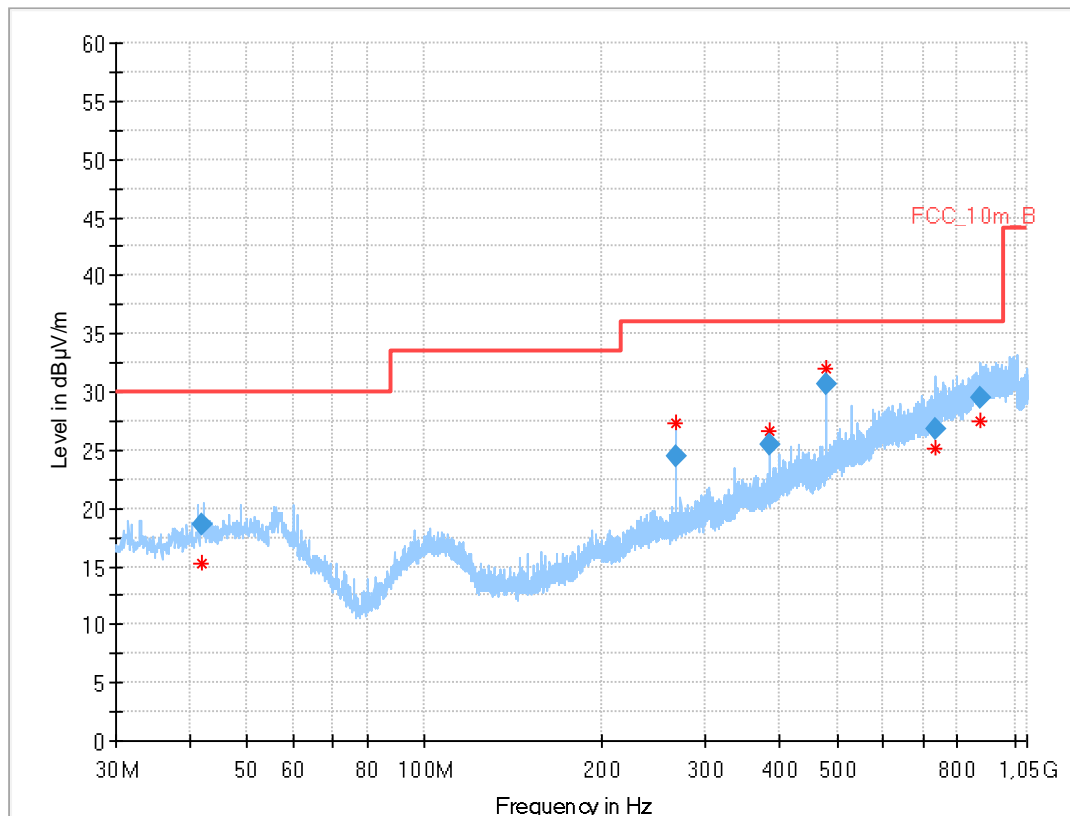


## Results:

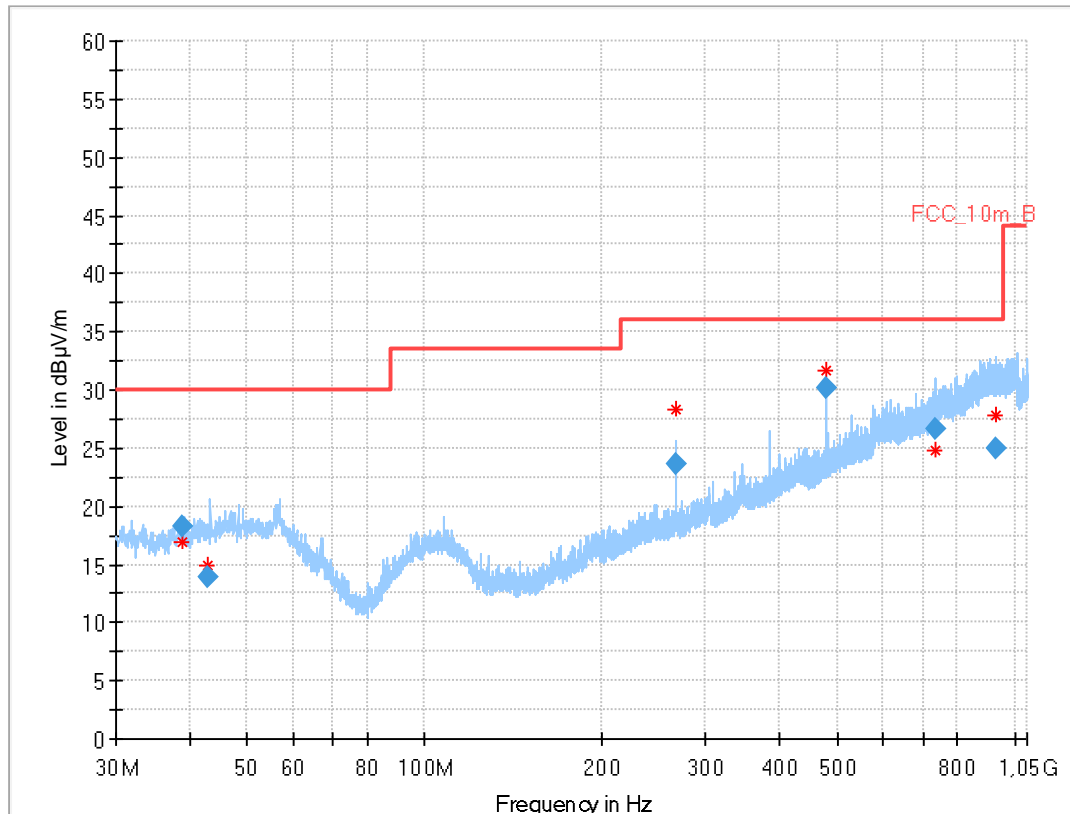
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
51.578	16.64	30.0	13.4	1000	120.0	131.0	V	112	15
265.997	25.16	36.0	10.8	1000	120.0	101.0	V	-3	14
384.003	25.60	36.0	10.4	1000	120.0	105.0	V	-22	17
480.005	30.59	36.0	5.4	1000	120.0	100.0	V	-22	19
734.840	26.71	36.0	9.3	1000	120.0	170.0	V	112	23
895.287	29.76	36.0	6.2	1000	120.0	170.0	V	10	25

**Plot 2:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; middle channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
56.738	17.33	30.0	12.7	1000	120.0	170.0	V	270	16
266.001	24.98	36.0	11.0	1000	120.0	102.0	V	22	14
383.990	25.99	36.0	10.0	1000	120.0	98.0	V	-22	17
479.997	30.98	36.0	5.0	1000	120.0	98.0	V	-22	19
730.673	26.64	36.0	9.4	1000	120.0	170.0	V	-22	23
933.278	30.11	36.0	5.9	1000	120.0	170.0	H	22	26

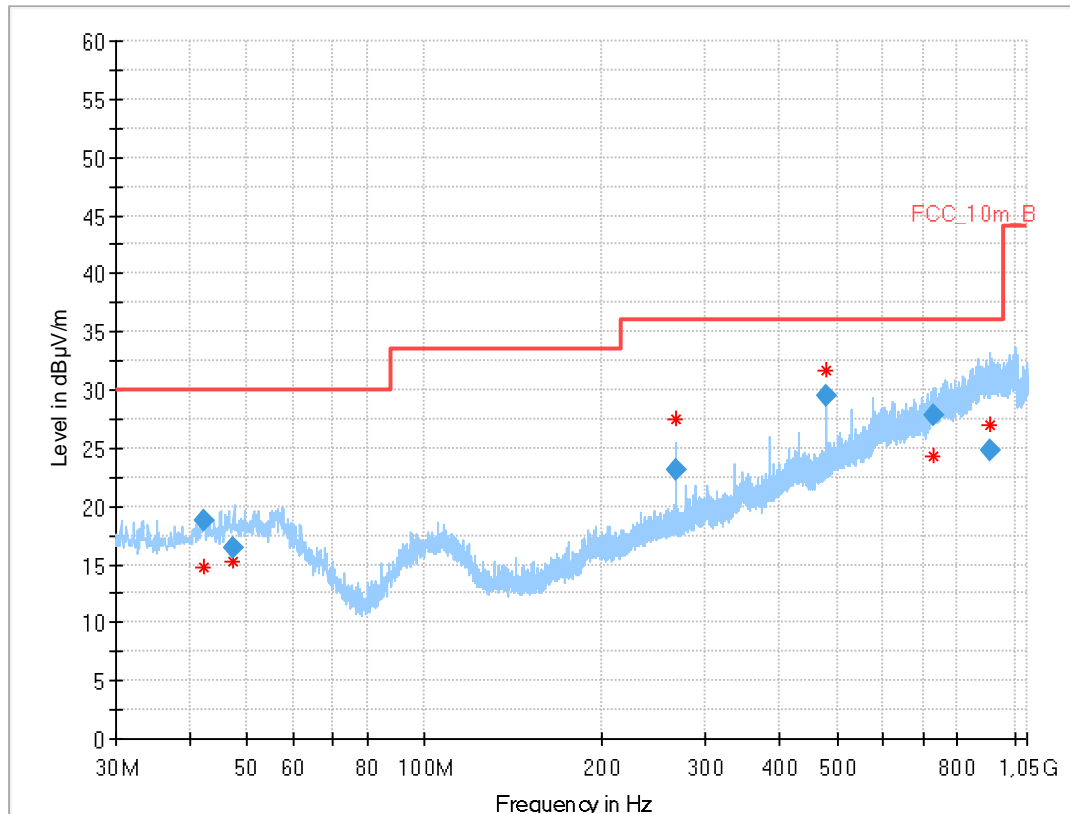
**Plot 3:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; highest channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
41.850	18.65	30.0	11.4	1000	120.0	113.0	H	-17	15
266.021	24.40	36.0	11.6	1000	120.0	114.0	V	8	14
384.007	25.49	36.0	10.5	1000	120.0	104.0	V	-22	17
479.991	30.74	36.0	5.3	1000	120.0	101.0	V	-22	19
734.480	26.77	36.0	9.2	1000	120.0	170.0	V	247	23
874.729	29.55	36.0	6.5	1000	120.0	170.0	H	248	25

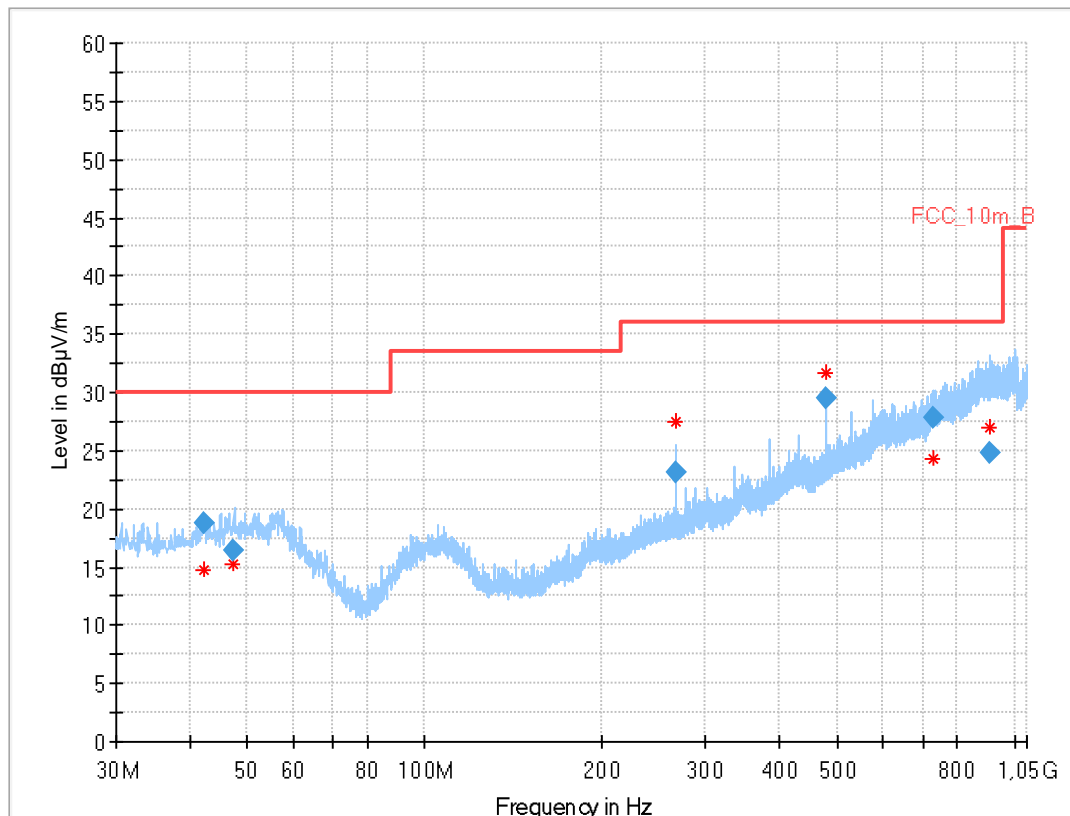
**Plot 4:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; lowest channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.723	18.27	30.0	11.7	1000	120.0	110.0	H	67	14
42.879	13.90	30.0	16.1	1000	120.0	114.0	V	67	15
266.003	23.66	36.0	12.3	1000	120.0	101.0	V	4	14
479.999	30.10	36.0	5.9	1000	120.0	98.0	V	-22	19
733.937	26.70	36.0	9.3	1000	120.0	101.0	V	-22	23
926.768	25.01	36.0	11.0	1000	120.0	170.0	V	105	26



**Plot 5:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; middle channel**Results:**

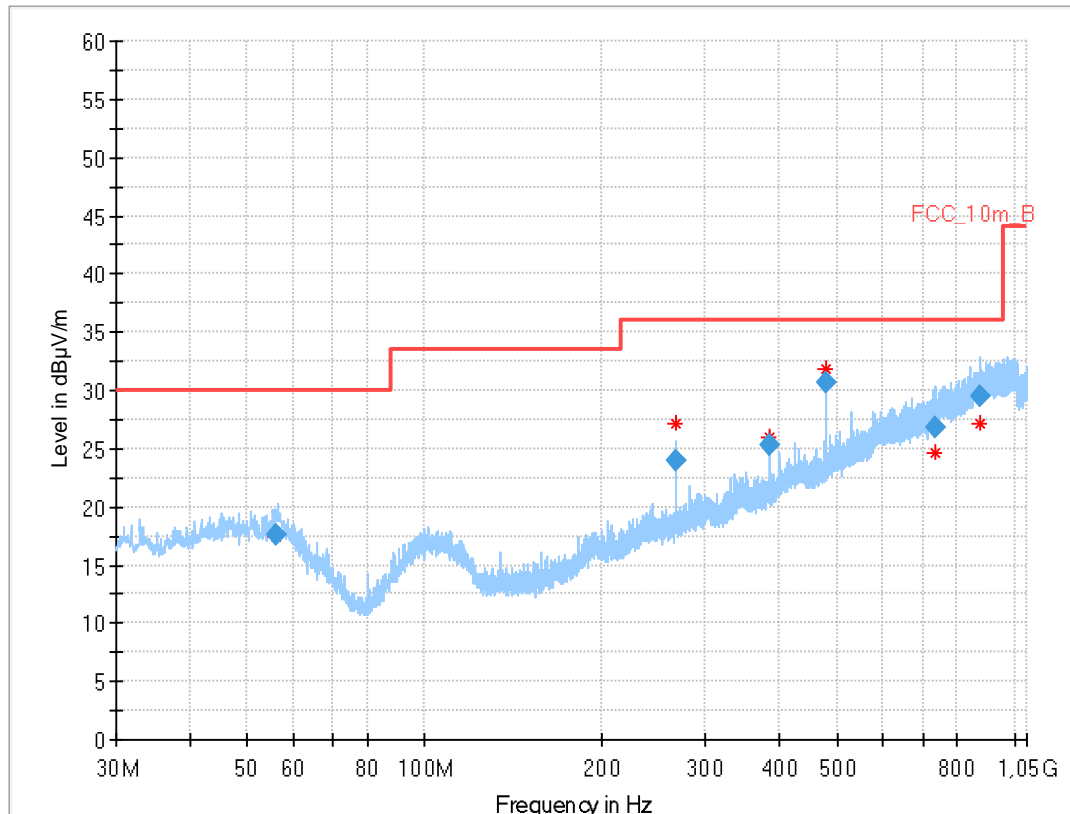
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.233	18.81	30.0	11.2	1000	120.0	170.0	H	292	15
47.300	16.45	30.0	13.6	1000	120.0	114.0	H	247	15
265.978	23.05	36.0	13.0	1000	120.0	118.0	V	16	14
479.984	29.58	36.0	6.4	1000	120.0	102.0	V	-22	19
727.128	27.78	36.0	8.2	1000	120.0	140.0	V	172	23
910.297	24.85	36.0	11.2	1000	120.0	170.0	H	191	26

**Plot 6:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; highest channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.233	18.81	30.0	11.2	1000	120.0	170.0	H	292	15
47.300	16.45	30.0	13.6	1000	120.0	114.0	H	247	15
265.978	23.05	36.0	13.0	1000	120.0	118.0	V	16	14
479.984	29.58	36.0	6.4	1000	120.0	102.0	V	-22	19
727.128	27.78	36.0	8.2	1000	120.0	140.0	V	172	23
910.297	24.85	36.0	11.2	1000	120.0	170.0	H	191	26

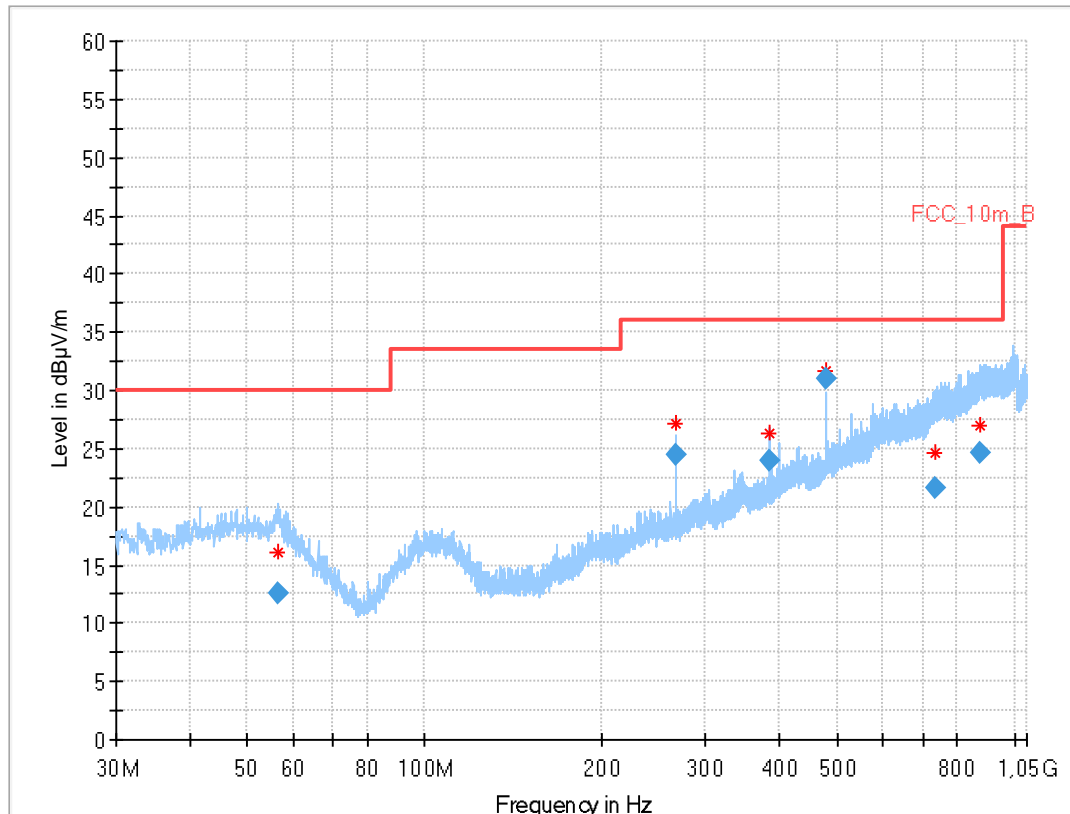
**Plots:** 40 MHz channel bandwidth

**Plot 1:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

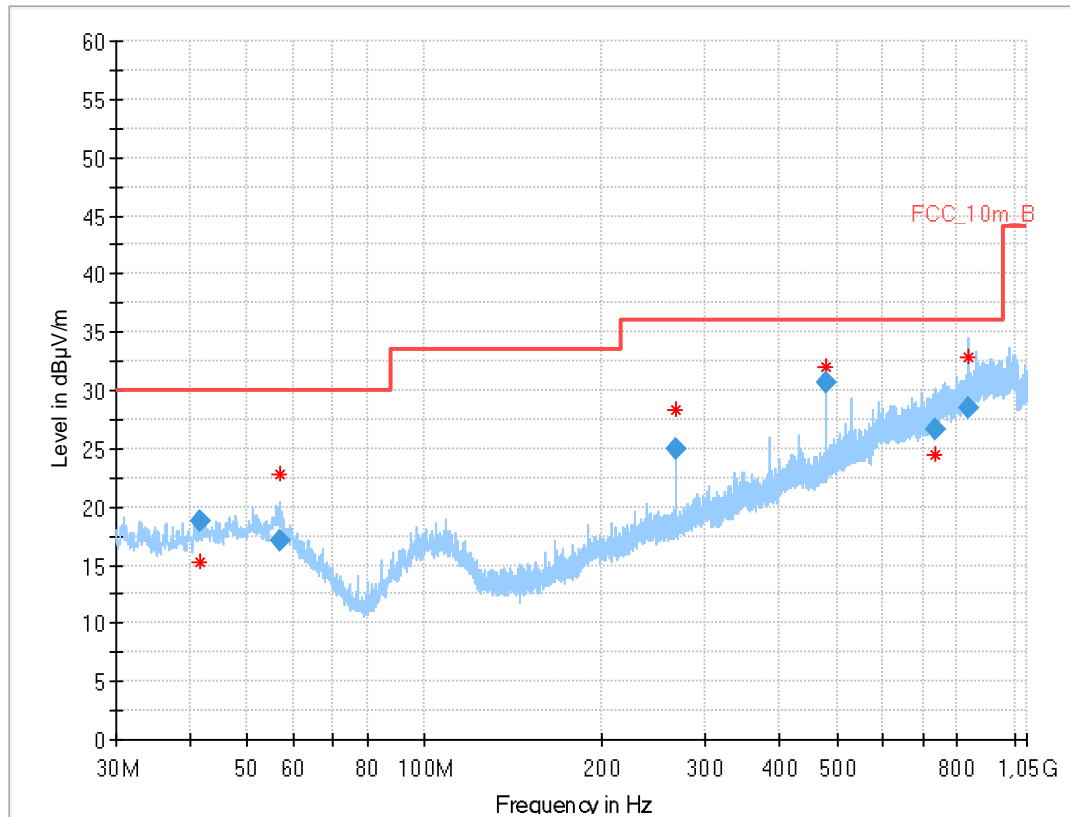


## Results:

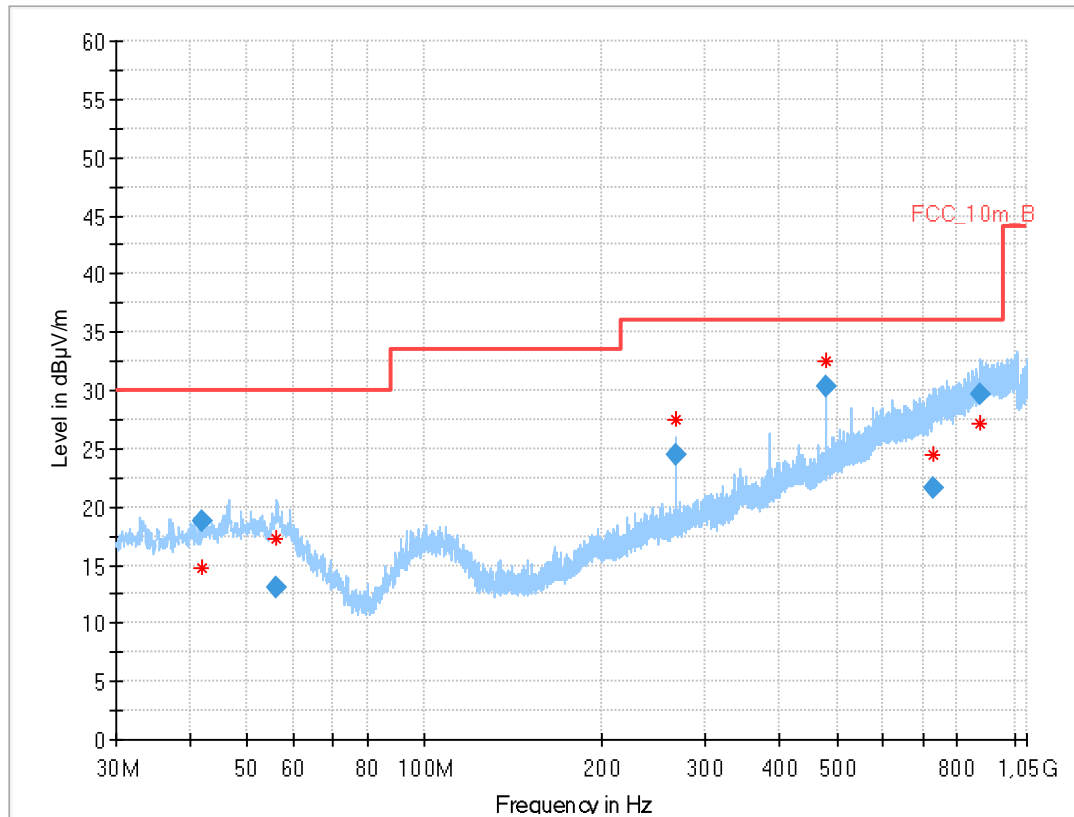
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
55.984	17.68	30.0	12.3	1000	120.0	113.0	V	247	16
265.961	23.97	36.0	12.0	1000	120.0	119.0	V	12	14
383.976	25.26	36.0	10.7	1000	120.0	102.0	V	-22	17
479.997	30.75	36.0	5.3	1000	120.0	101.0	V	-22	19
734.510	26.77	36.0	9.2	1000	120.0	170.0	V	247	23
874.202	29.51	36.0	6.5	1000	120.0	170.0	V	-22	25

**Plot 2:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-1; highest channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
56.442	12.49	30.0	17.5	1000	120.0	170.0	V	67	16
266.019	24.43	36.0	11.6	1000	120.0	110.0	V	-10	14
383.982	24.01	36.0	12.0	1000	120.0	100.0	V	-22	17
479.992	30.97	36.0	5.0	1000	120.0	98.0	V	-22	19
732.909	21.65	36.0	14.4	1000	120.0	170.0	H	247	23
874.989	24.69	36.0	11.3	1000	120.0	126.0	V	-2	25

**Plot 3:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; lowest channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
41.647	18.75	30.0	11.3	1000	120.0	163.0	H	247	15
56.891	17.10	30.0	12.9	1000	120.0	101.0	V	157	16
266.008	24.96	36.0	11.0	1000	120.0	102.0	V	-10	14
479.983	30.71	36.0	5.3	1000	120.0	101.0	V	-21	19
731.779	26.58	36.0	9.4	1000	120.0	170.0	H	67	23
834.520	28.52	36.0	7.5	1000	120.0	170.0	V	157	24

**Plot 4:** 30 MHz to 1 GHz; vertical & horizontal polarization; U-NII-3; highest channel**Results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
41.800	18.73	30.0	11.3	1000	120.0	139.0	H	157	15
56.027	13.15	30.0	16.9	1000	120.0	170.0	V	100	16
266.020	24.50	36.0	11.5	1000	120.0	105.0	V	-4	14
479.993	30.26	36.0	5.7	1000	120.0	98.0	V	-22	19
731.060	21.59	36.0	14.4	1000	120.0	170.0	V	67	23
873.990	29.65	36.0	6.4	1000	120.0	118.0	V	247	25

## 12.12 Spurious emissions radiated 1 GHz to 40 GHz

### Description:

Measurement of the radiated spurious emissions and cabinet radiations from 1 GHz to 40 GHz.

### Measurement:

Measurement parameter	
Detector:	Quasi Peak below 1 GHz (alternative Peak) Peak above 1 GHz / RMS
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	1 GHz to 40 GHz
Trace mode:	Max Hold / Average with 100 counts + 20 log (1 / X) for duty cycle lower than 100 %
Test setup:	See sub clause 7.2 – B See sub clause 7.3 – A
Measurement uncertainty:	See chapter 9

### Limits:

TX Spurious Emissions Radiated		
§15.209 / RSS-247		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
Above 960	54.0	3
§15.407		
Outside the restricted bands!	-27 dBm / MHz	

**Results:** 20 MHz channel bandwidth

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-1 (5150 MHz to 5250 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
All detected peak emissions are below the average limit			All detected peak emissions are below the average limit			All detected peak emissions are below the average limit		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

TX Spurious Emissions Radiated [dBµV/m] / dBm								
U-NII-3 (5725 MHz to 5850 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
All detected peak emissions are below the average limit			All detected peak emissions are below the average limit			All detected peak emissions are below the average limit		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		



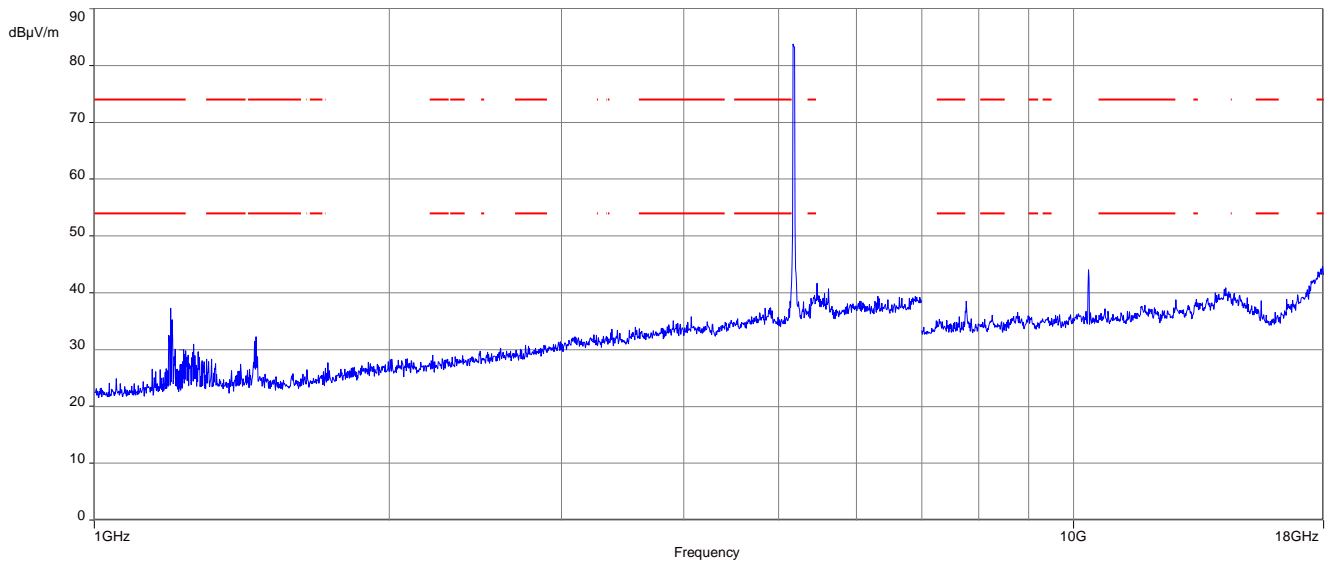
**Results:** 40 MHz channel bandwidth

TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
U-NII-1 (5150 MHz to 5250 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
All detected peak emissions are below the average limit			All detected peak emissions are below the average limit			All detected peak emissions are below the average limit		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

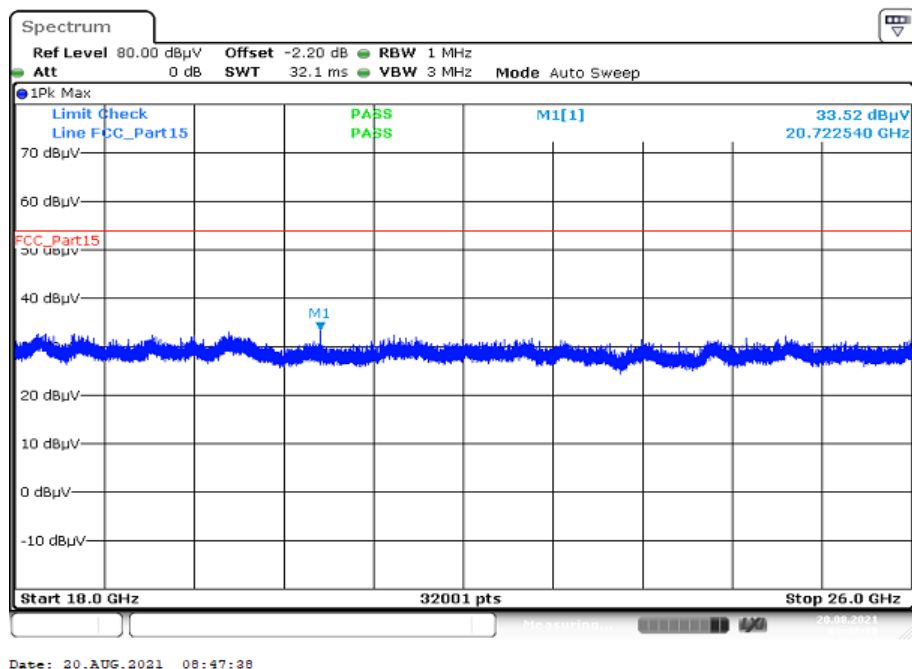
TX Spurious Emissions Radiated [dB $\mu$ V/m] / dBm								
U-NII-3 (5725 MHz to 5850 MHz)								
Lowest channel			Middle channel			Highest channel		
F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]	F [MHz]	Detector	Level [dB $\mu$ V/m]
All detected peak emissions are below the average limit			All detected peak emissions are below the average limit			All detected peak emissions are below the average limit		
For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.			For emissions above 18 GHz please take look at the plots.		

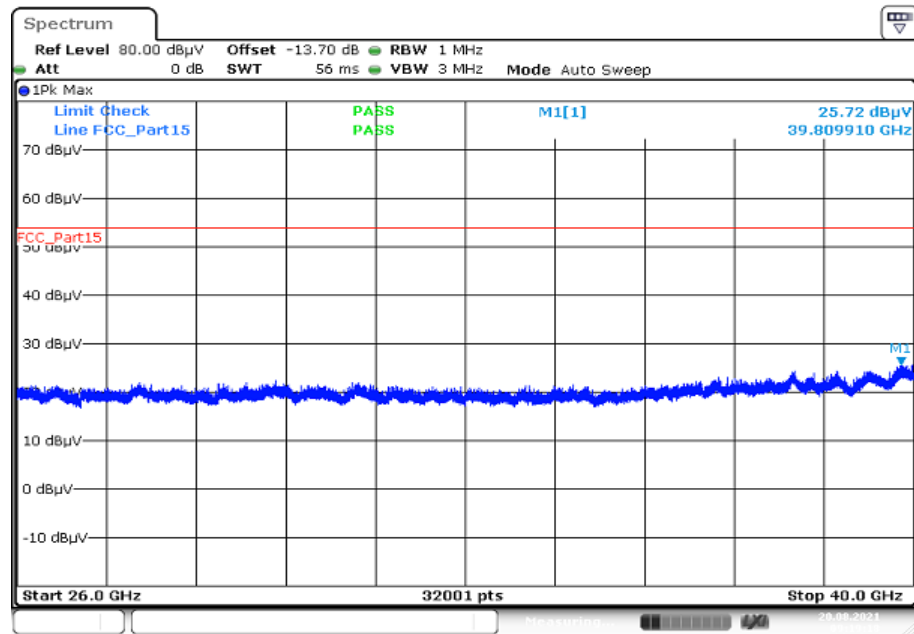
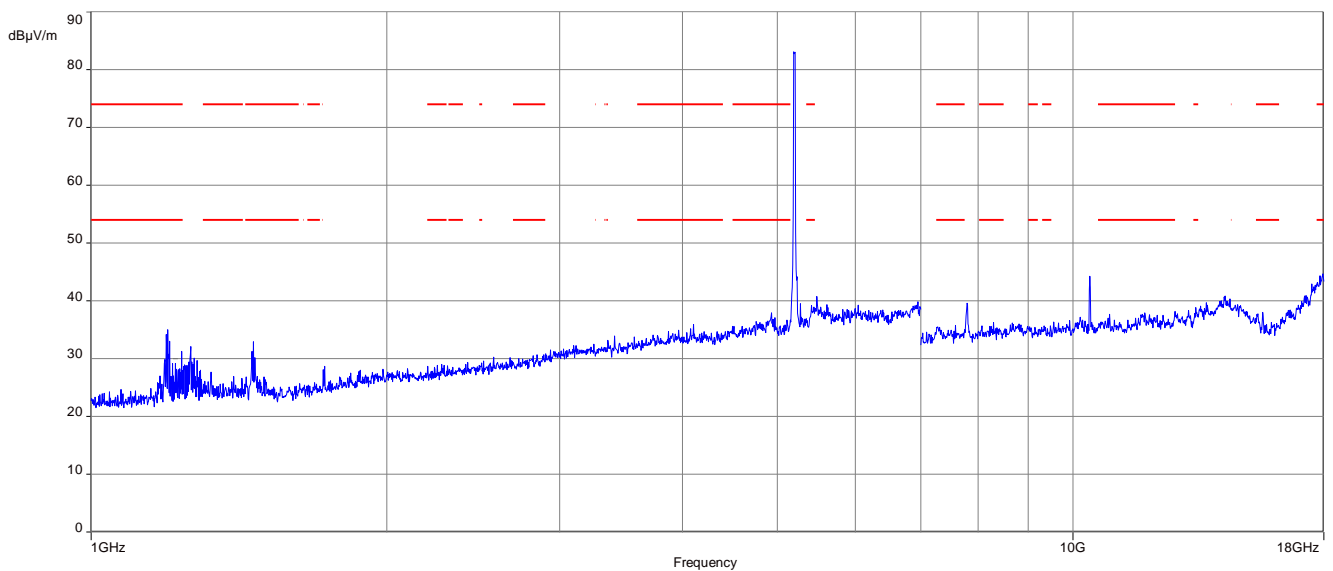
**Plots:** 20 MHz channel bandwidth

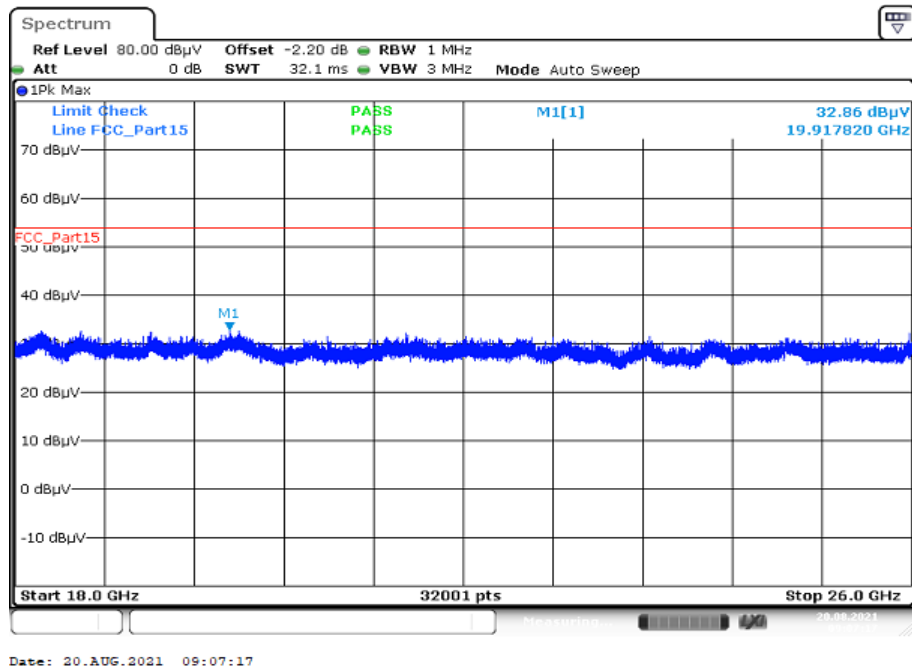
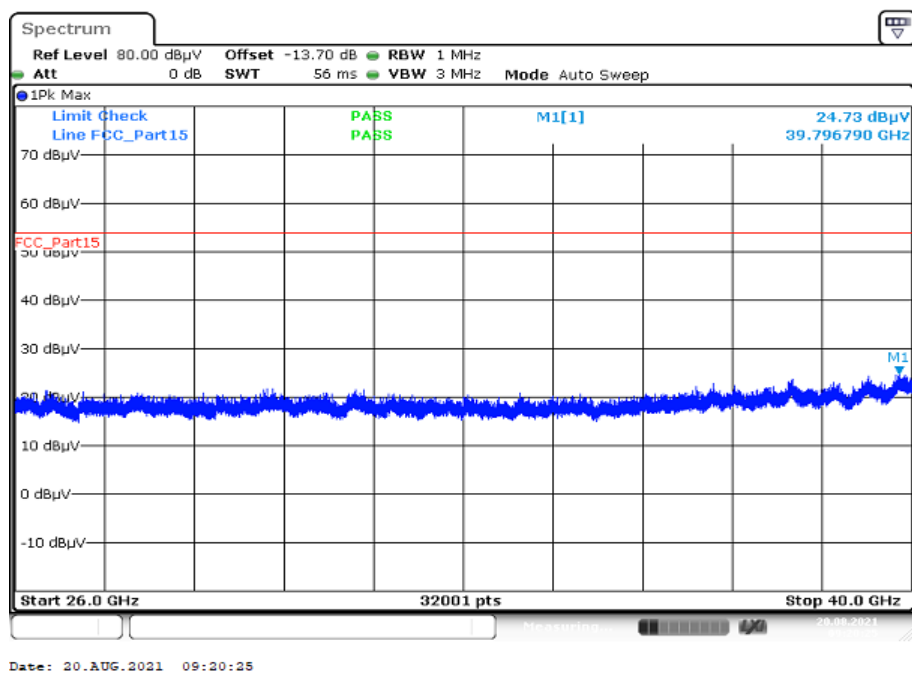
**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

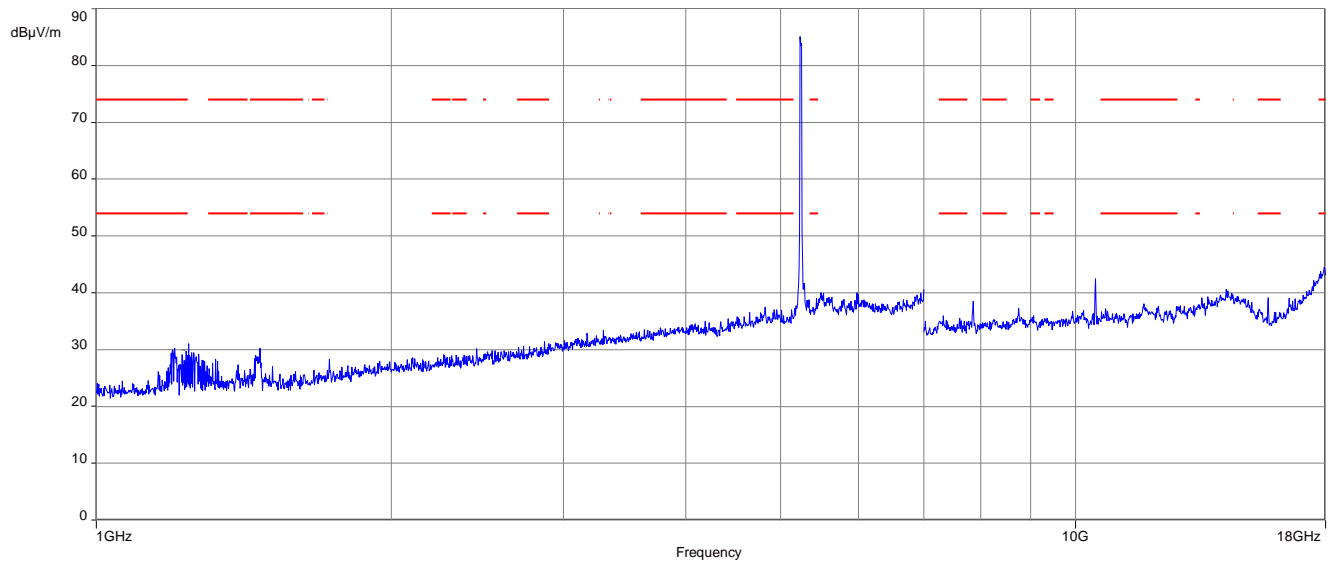
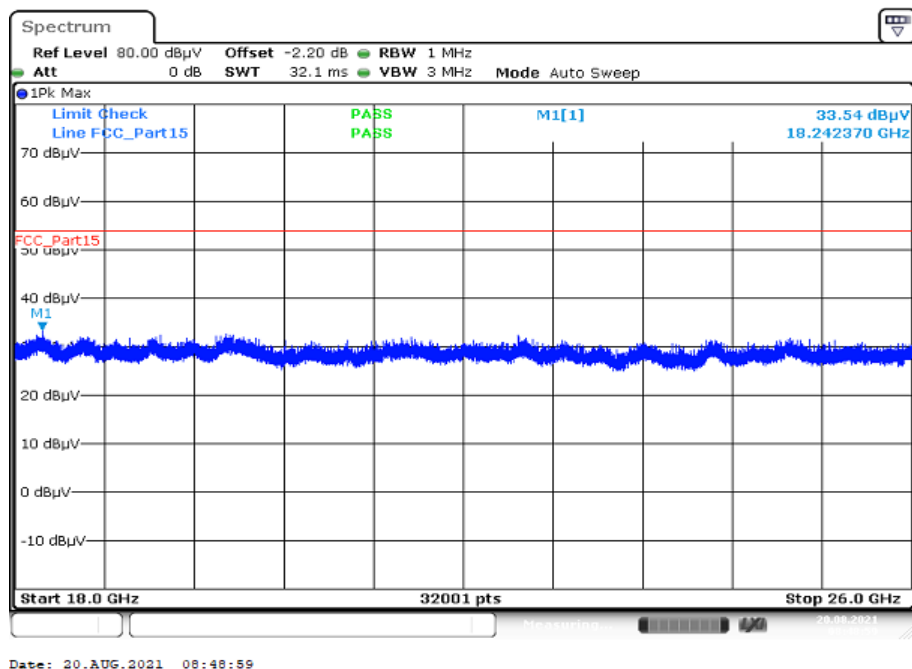


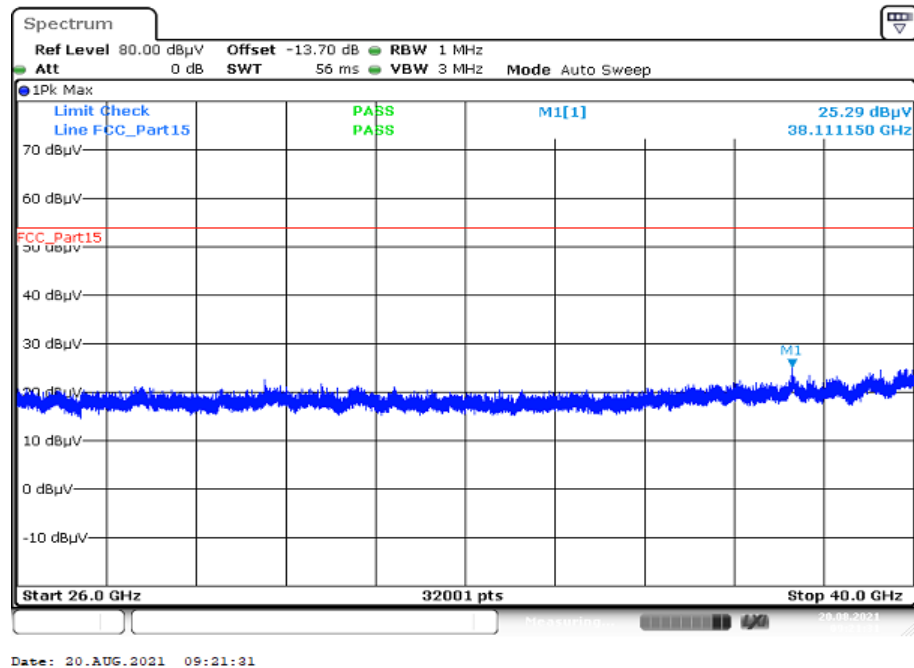
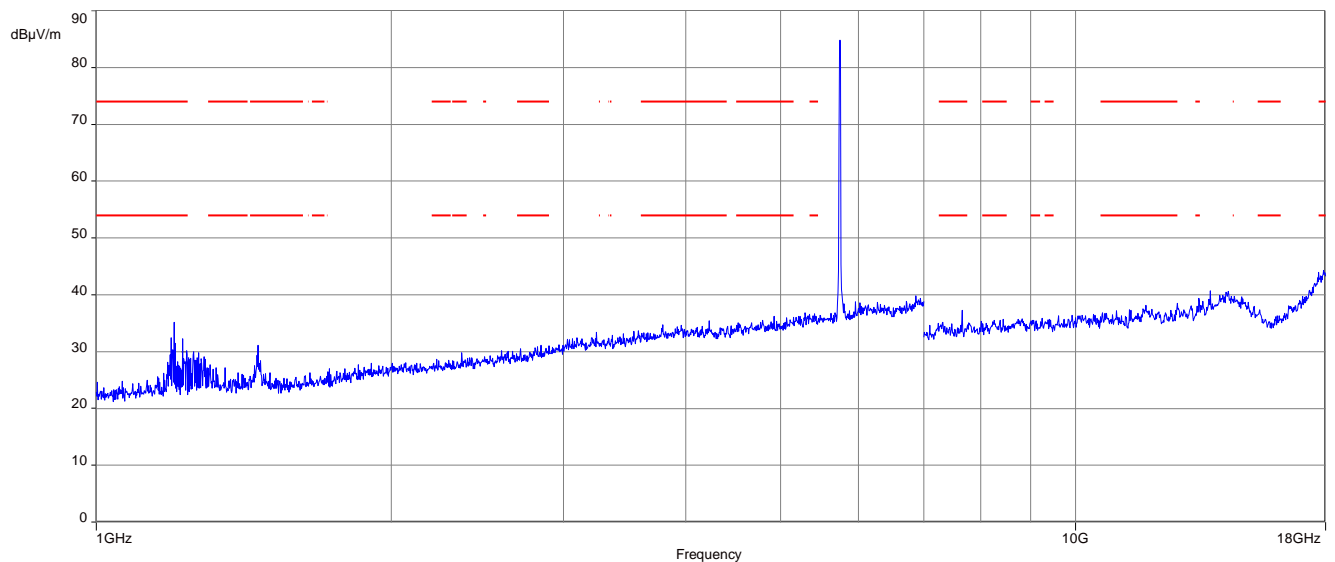
**Plot 2:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

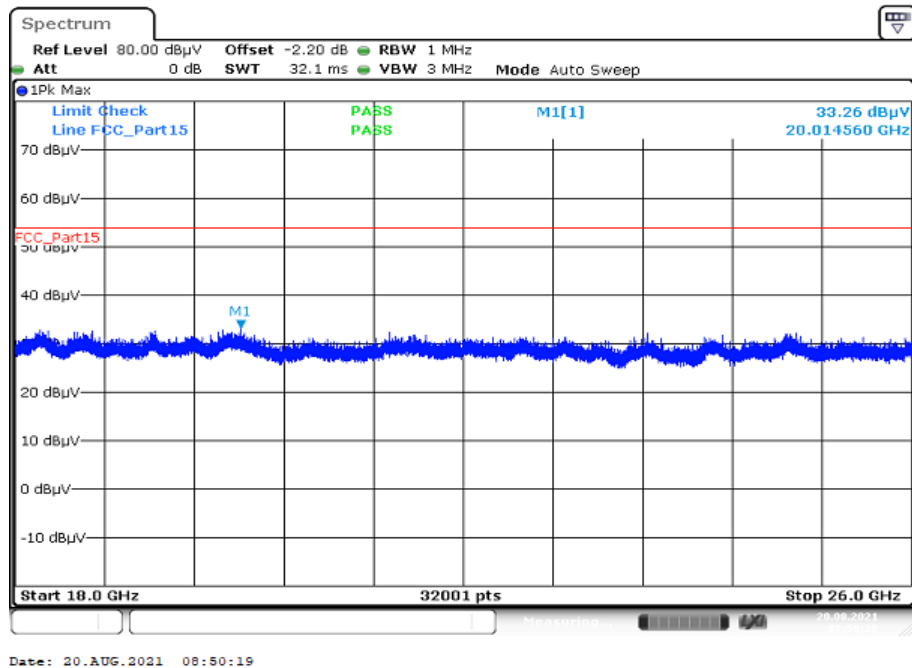
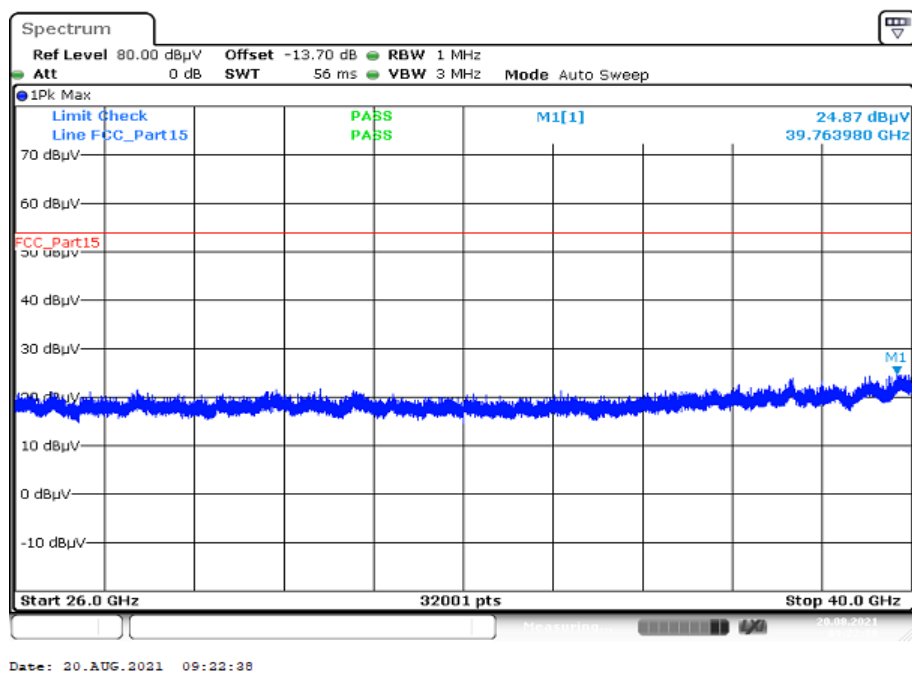


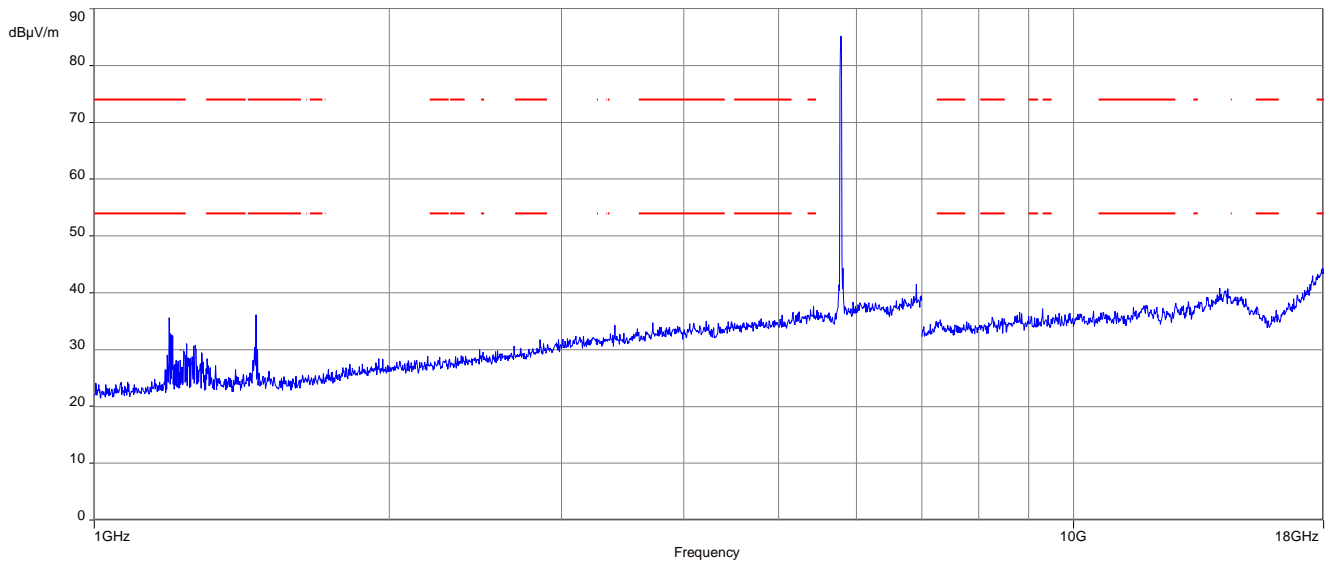
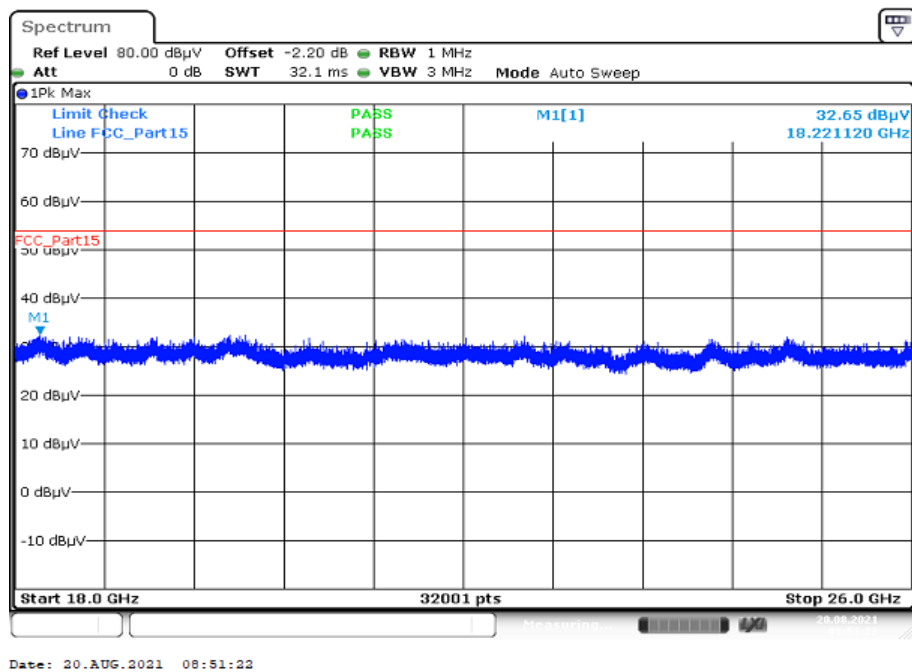
**Plot 3:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-1; lowest channel**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; middle channel

**Plot 5:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-1; middle channel**Plot 6:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-1; middle channel

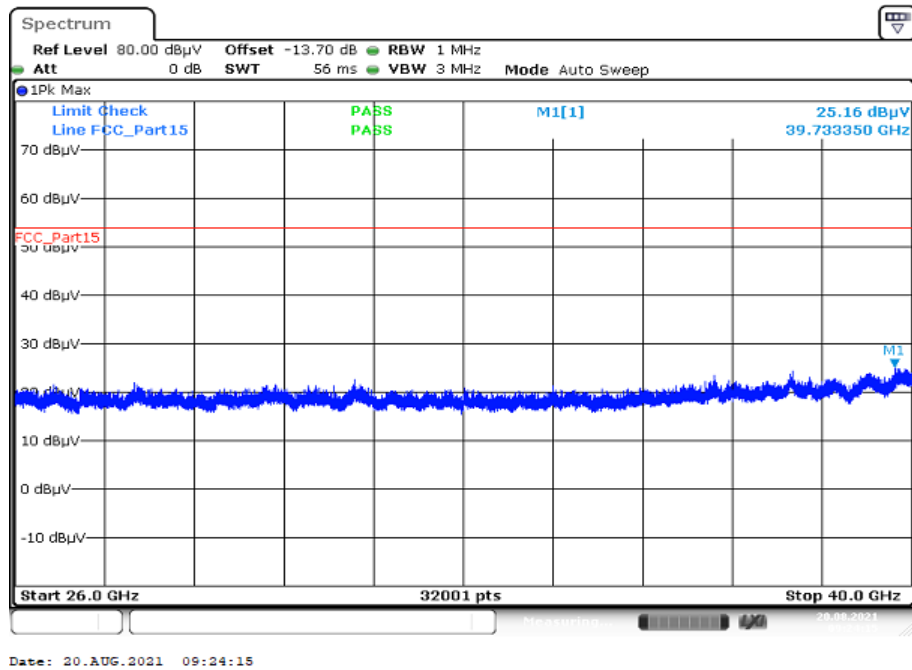
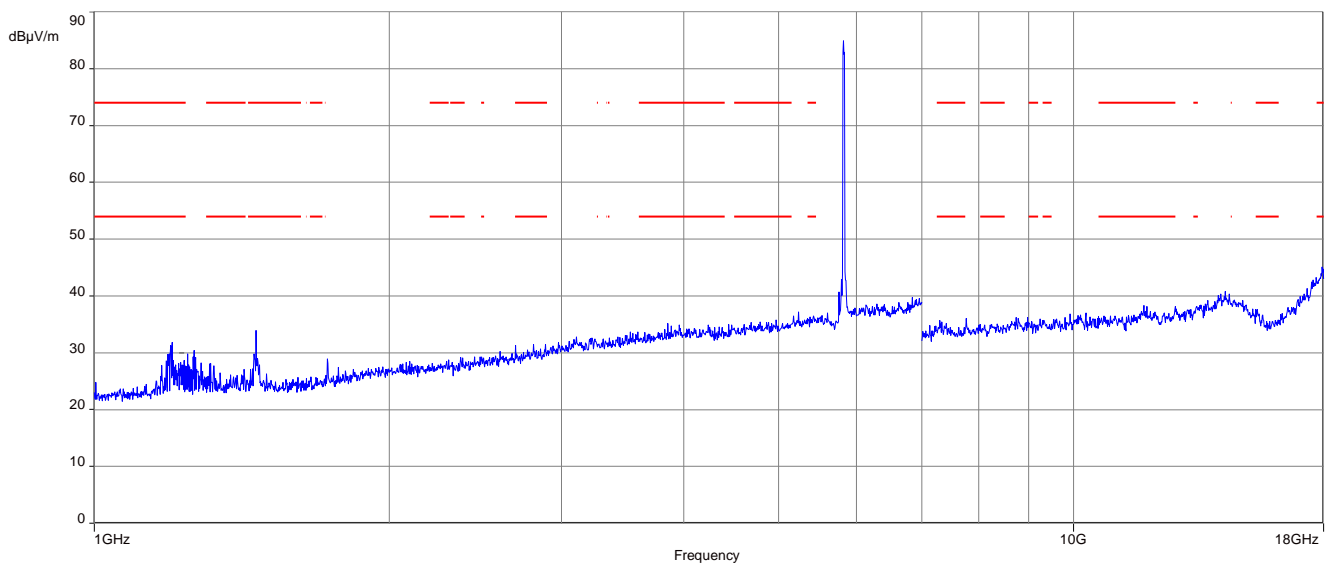
**Plot 7:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel**Plot 8:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-1; highest channel

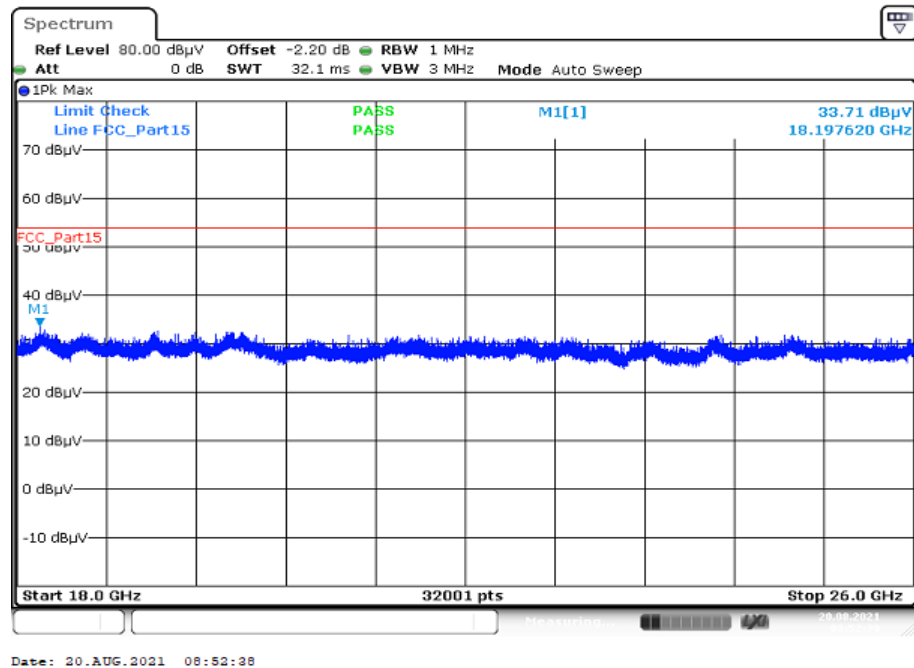
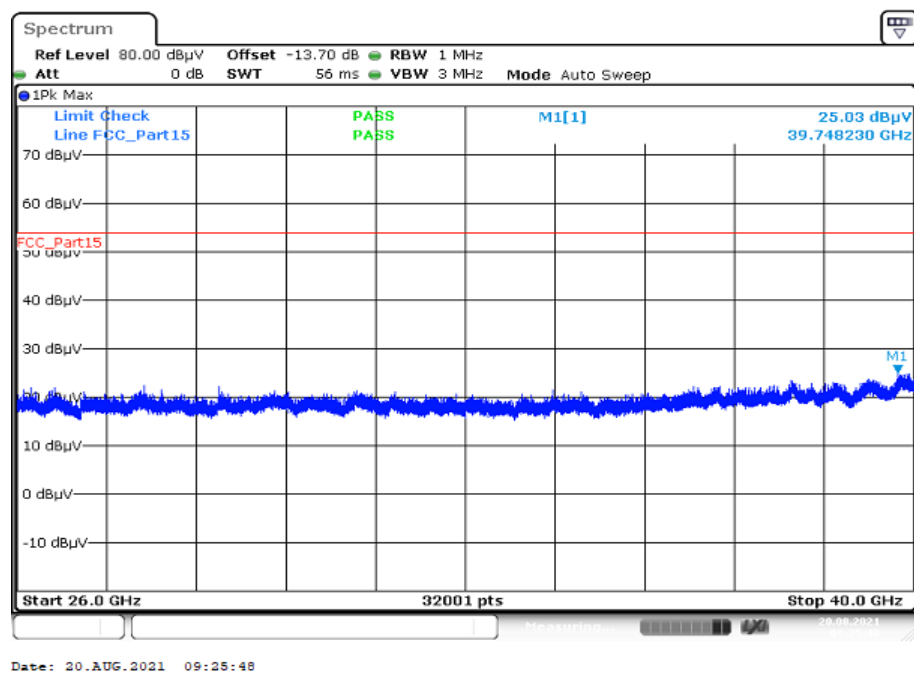
**Plot 9:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-1; highest channel**Plot 10:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

**Plot 11:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-3; lowest channel**Plot 12:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

**Plot 13:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; middle channel**Plot 14:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-3; middle channel

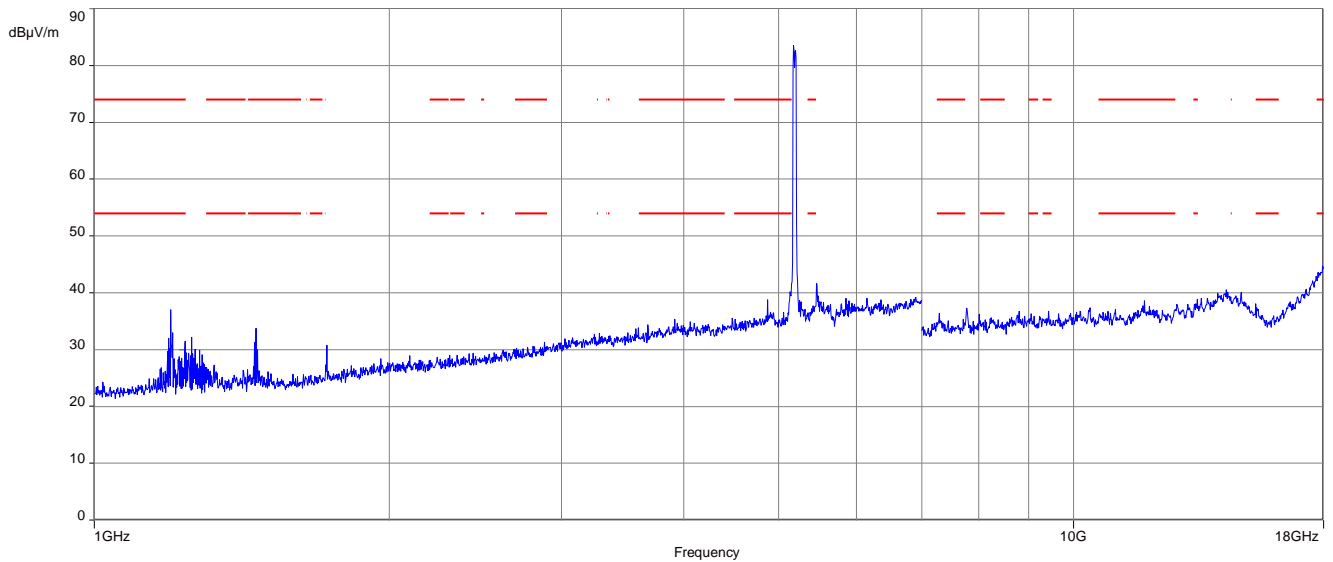


**Plot 15:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-3; middle channel**Plot 16:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

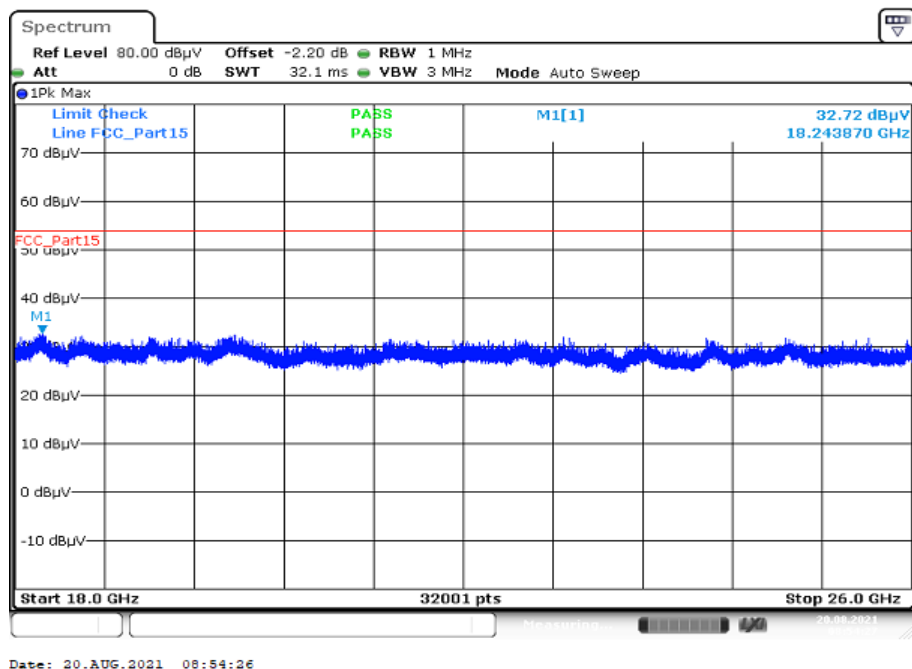
**Plot 17:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-3; highest channel**Plot 18:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-3; highest channel

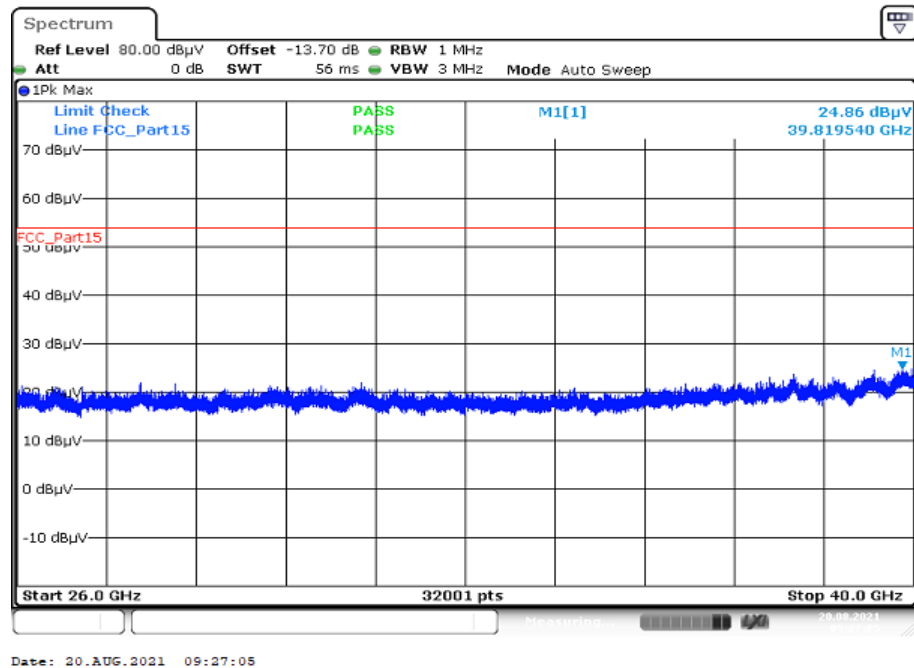
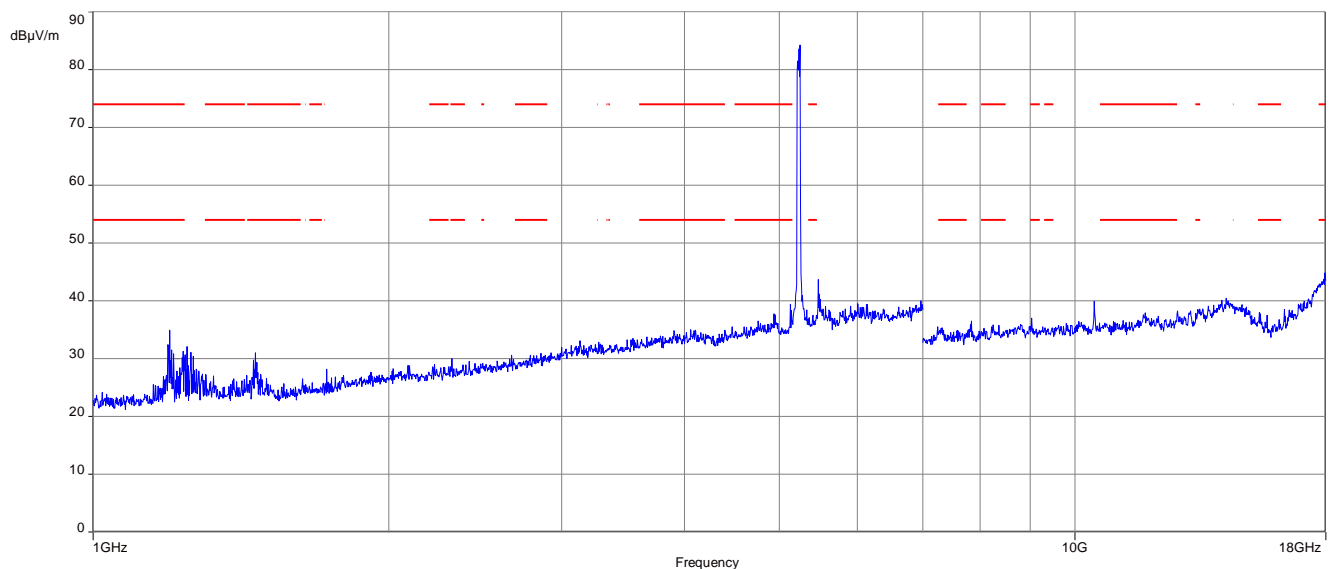
**Plots:** 40 MHz channel bandwidth

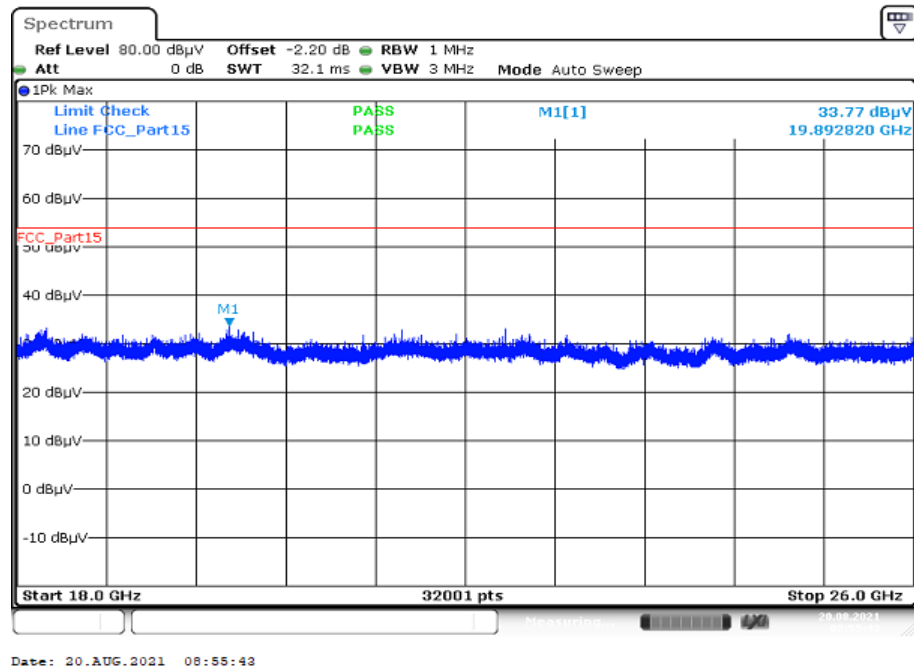
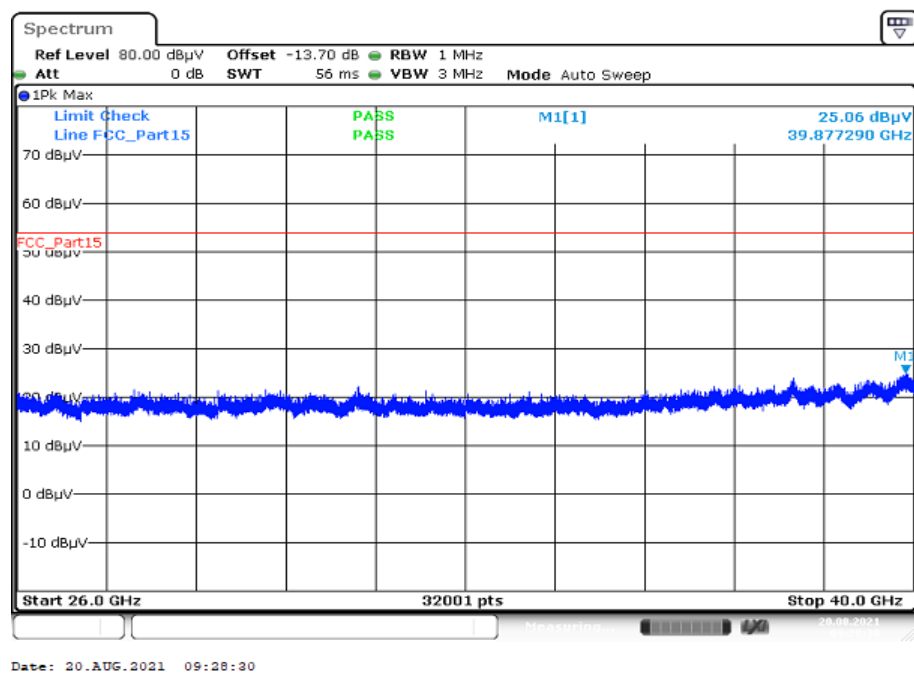
**Plot 1:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

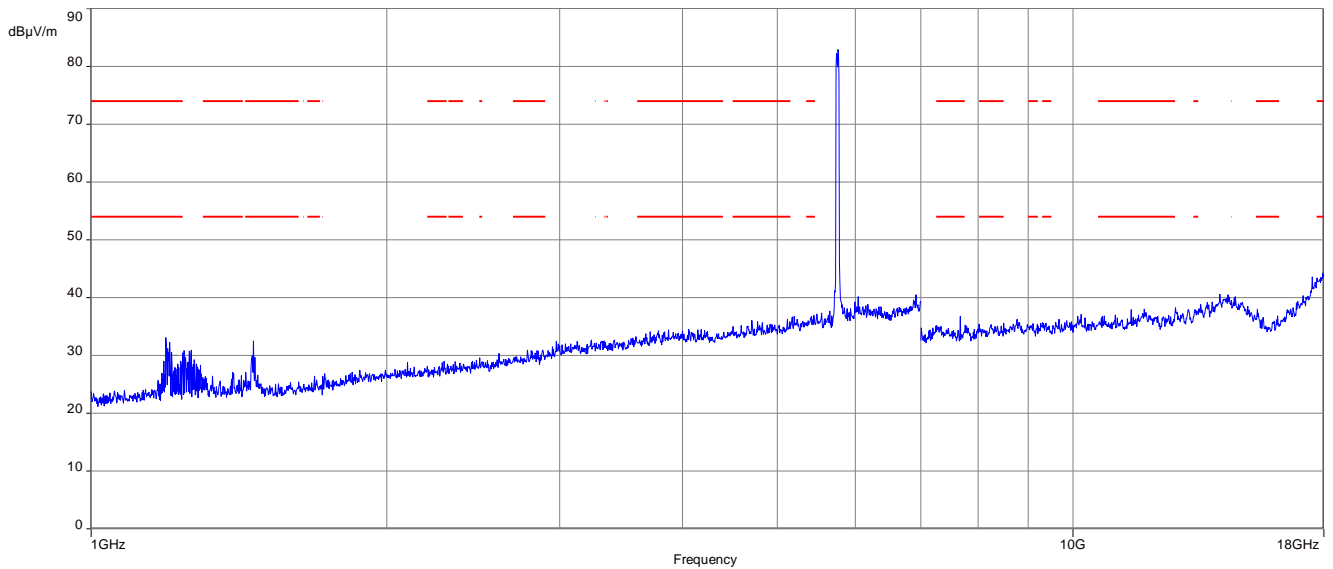
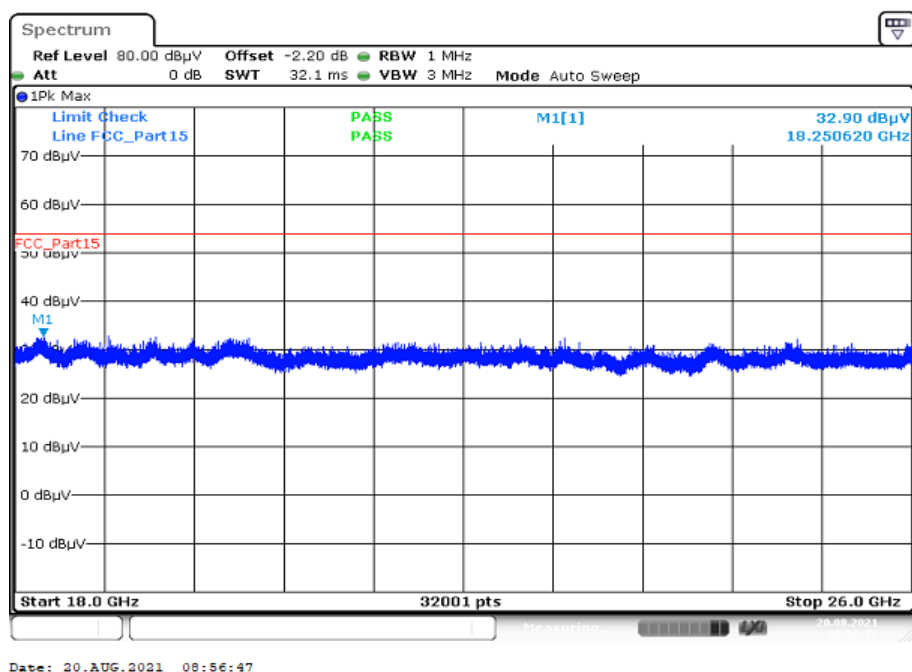


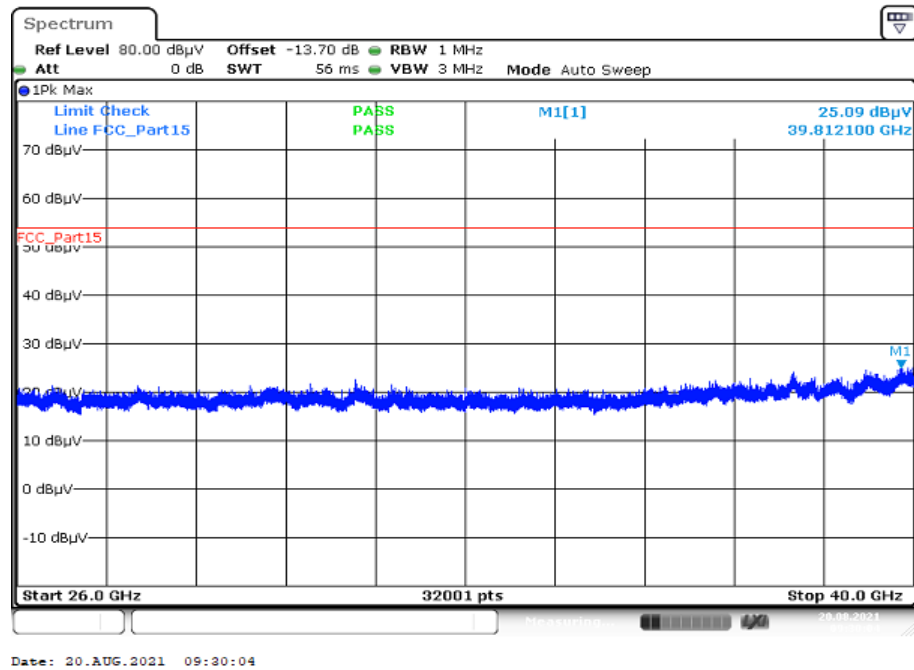
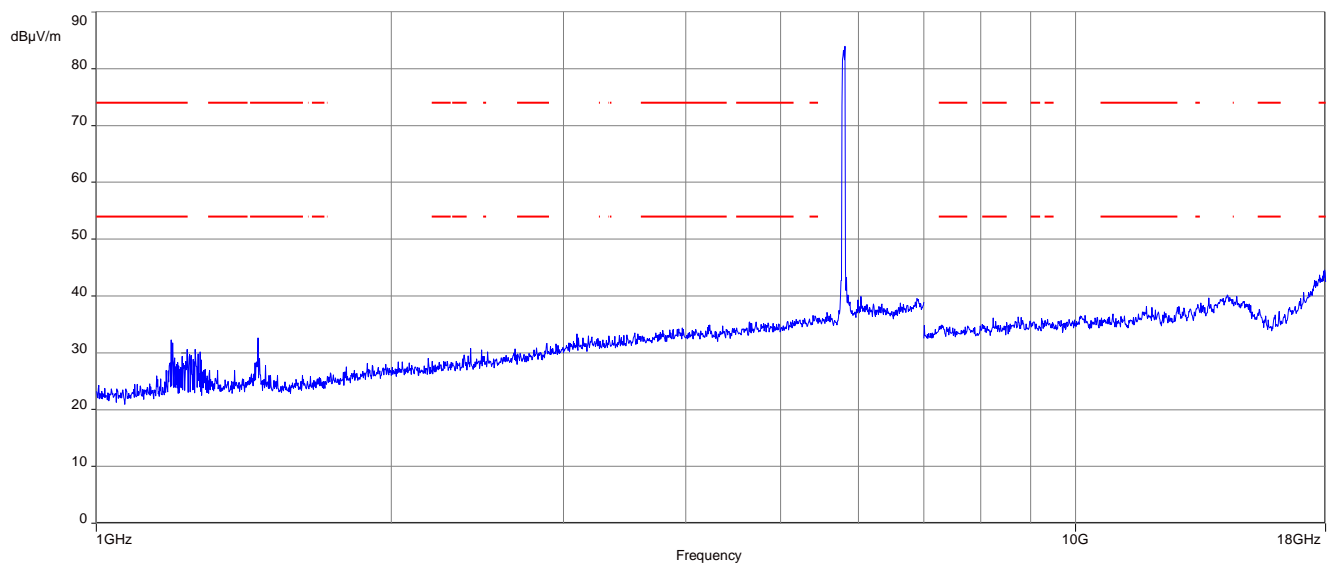
**Plot 2:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-1; lowest channel

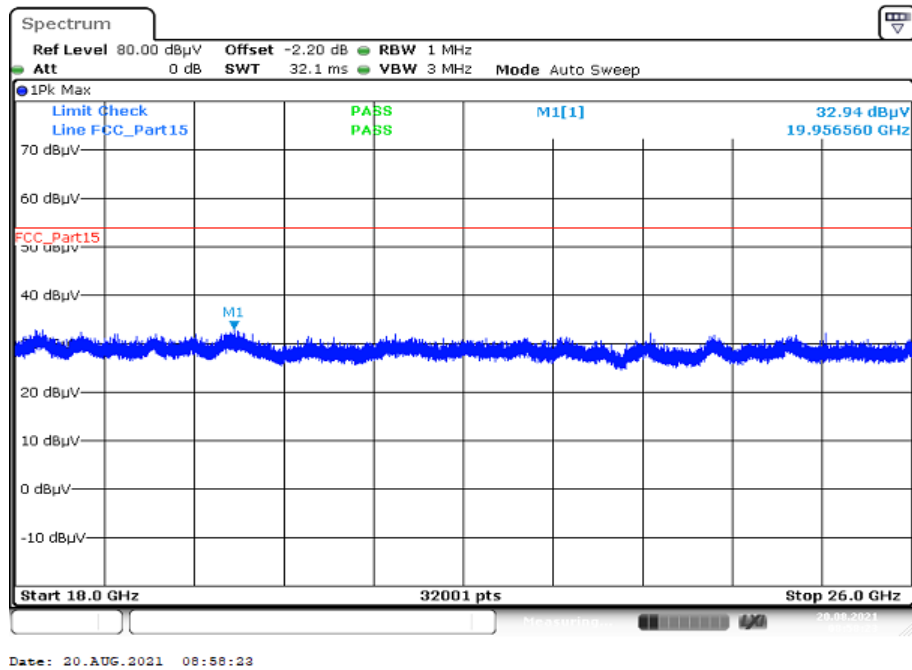
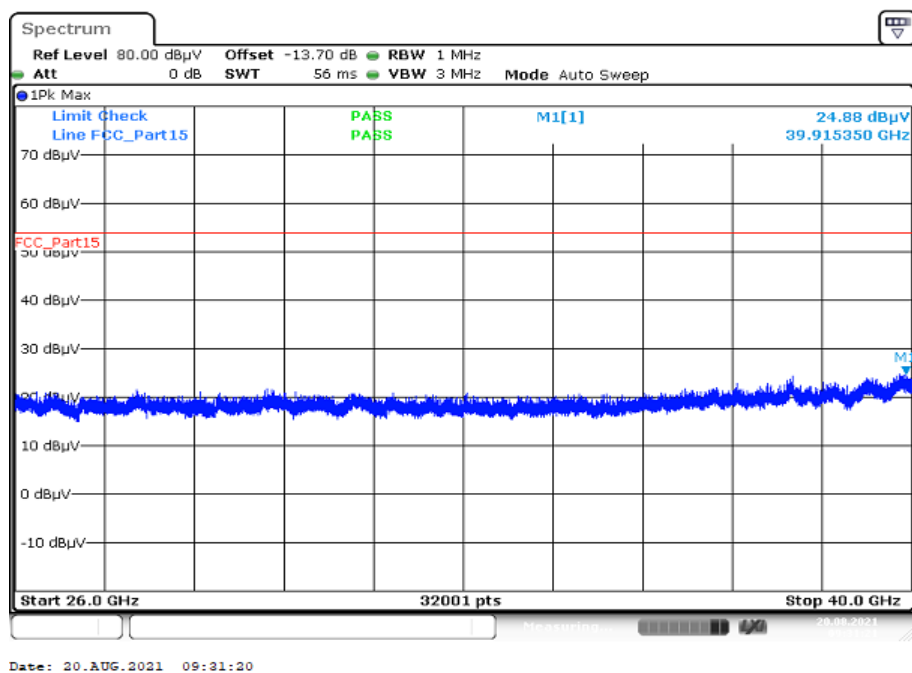


**Plot 3:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-1; lowest channel**Plot 4:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-1; highest channel

**Plot 5:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-1; highest channel**Plot 6:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-1; highest channel

**Plot 7:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; lowest channel**Plot 8:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-3; lowest channel

**Plot 9:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-3; lowest channel**Plot 10:** 1 GHz to 18 GHz; vertical & horizontal polarization; U-NII-3; highest channel

**Plot 11:** 18 GHz to 26 GHz; vertical & horizontal polarization; U-NII-3; highest channel**Plot 12:** 26 GHz to 40 GHz; vertical & horizontal polarization; U-NII-3; highest channel



## 13 Observations

No observations except those reported with the single test cases have been made.

## 14 Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>WLAN</b>	Wireless local area network
<b>RLAN</b>	Radio local area network
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>FHSS</b>	Frequency hopping spread spectrum

## 15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2022-01-21

## 16 Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: <b>Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 09.06.2020</p> <p>by order of  Dr. habil. E. Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> <small>(see notes covered)</small></small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAKKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAKKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAKKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>

**Note: The current certificate annex is published on the websites (link see below).**

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-04e.pdf>

or

[https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-04\\_Canada\\_TCEMC.pdf](https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-04_Canada_TCEMC.pdf)

**17 Accreditation Certificate – D-PL-12076-01-05**

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory  <b>CTC advanced GmbH</b>        Untertürkheimer Straße 6-10, 66117 Saarbrücken        is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:</p> <p>Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: <b>D-PL-12076-01-05</b></p> <p>Frankfurt am Main, 09.06.2020</p> <p>by order:         Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH.  <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a>        last status revised.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites:        EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a>        ILAC: <a href="http://www.ilac.org">www.ilac.org</a>        IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>

**Note: The current certificate annex is published on the websites (link see below).**

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf>

or

[https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05\\_TCB\\_USA.pdf](https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05_TCB_USA.pdf)

##### END OF TEST REPORT #####