

FCC PART 15.249
MEASUREMENT AND TEST REPORT
FOR

DongGuan City FLYSKY Remote Model Co., Ltd.
No 41 Road West, BanHu Village, HuangJiang Town, DongGuan City,
GuangDong Province, china.

FCC ID: VPOFLYSKY001

Report Concerns: Original Report	Equipment Type: 6 Channel model transmitter
Model: <u>FLYSKY001</u>	
Report No.: <u>STR07098107I</u>	
Test/Witness Engineer: <u>Lahm Peng</u>	
Test Date: <u>2007-10-04</u>	
Prepared By: Shenzhen SEM.Test Compliance Service Co., Ltd. Room 609-610, Baotong Building, Baomin 1 st Road, Baoan District, Shenzhen, Guangdong, P.R.C. (518133)	
Approved & Authorized By:  _____ Jandy So / PSQ Manager	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	3
1.3 RELATED SUBMITTAL(S)/GRANT(S)	3
1.4 TEST METHODOLOGY	4
1.5 TEST FACILITY	4
1.6 EUT EXERCISE SOFTWARE	4
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.8 EUT CABLE LIST AND DETAILS	4
2. SUMMARY OF TEST RESULTS	5
3. §15.203 - ANTENNA REQUIREMENT	6
3.1 STANDARD APPLICABLE.....	6
3.2 TEST RESULT.....	6
5. §15.205, §15.209, §15.249 (A)- RADIATED EMISSION.....	7
5.1 MEASUREMENT UNCERTAINTY	7
5.2 STANDARD APPLICABLE.....	7
5.3 TEST EQUIPMENT LIST AND DETAILS	8
5.4 TEST PROCEDURE.....	8
5.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	9
5.6 ENVIRONMENTAL CONDITIONS	9
5.7 SUMMARY OF TEST RESULTS/PLOTS	9
6. §15.249(B) OUT OF BAND EMISSIONS	13
6.1 STANDARD APPLICABLE.....	13
6.2 TEST EQUIPMENT LIST AND DETAILS	13
6.3 TEST PROCEDURE.....	13
6.4 ENVIRONMENTAL CONDITIONS	13
6.5 SUMMARY OF TEST RESULTS/PLOTS	13

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: DongGuan City FLYSKY Remote Model Co., Ltd.
Address of applicant: No 41 Road West, BanHu Village, HuangJiang Town,
DongGuan City, GuangDong Province, china.

Manufacturer: DongGuan City FLYSKY Remote Model Co., Ltd.
Address of applicant: No 41 Road West, BanHu Village, HuangJiang Town,
DongGuan City, GuangDong Province, china.

General Description of E.U.T

Items	Description
EUT Description:	6 Channel model transmitter
Trade Name:	/
Model No.:	FLYSKY001
Rated Voltage:	DC 12 V Battery
Output Power:	<0dBm
Frequency Range:	2402MHz
No. of Channel:	6 CH with different encode for identification
Antenna Type:	unique coupling antenna
Size:	19.0x6.0x29cm

For more information refer to the circuit diagram form and the user's manual.

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of DongGuan City FLYSKY Remote Model Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the Operating Instructions and let the EUT keep transmitting.

1.5 Test Facility

The Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files which the Registration No.: **759397**. Measurement required was performed at laboratory of Solid Industrial Co., Ltd. at 333 Bulong Highway Buji Longgang, Shenzhen, Guangdong, China.

1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission	Compliant
§15.249(a)	Field Strength	Compliant
§15.249(d)	Out of Band Emission	Compliant

3. §15.203 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a unique coupling antenna, fulfill the requirement of this section.

5. §15.205, §15.209, §15.249 (a)- RADIATED EMISSION

5.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 3.0 dB.

5.2 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of fundamental (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 20 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

Emissions that fall in the restricted bands (15.205) must be less than 54dB_{UV}/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

5.3 Test Equipment List and Details


Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Rohde & Schwarz	EMI Test Receiver	ESIB26	830245/009	2007-01-26	2008-01-25
ETS	Multi Controller	2090	57230	2007-01-26	2008-01-25
ETS	Receiver Antenna	2175	57337	2007-01-26	2008-01-25
ETS	50 ohm Coaxial Cable	SUCOFLEX 104	25498514	2007-01-26	2008-01-25
Schwarz beck	Horn Antenna	BBHX	BBHX9120-00 2	2007-01-26	2008-01-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

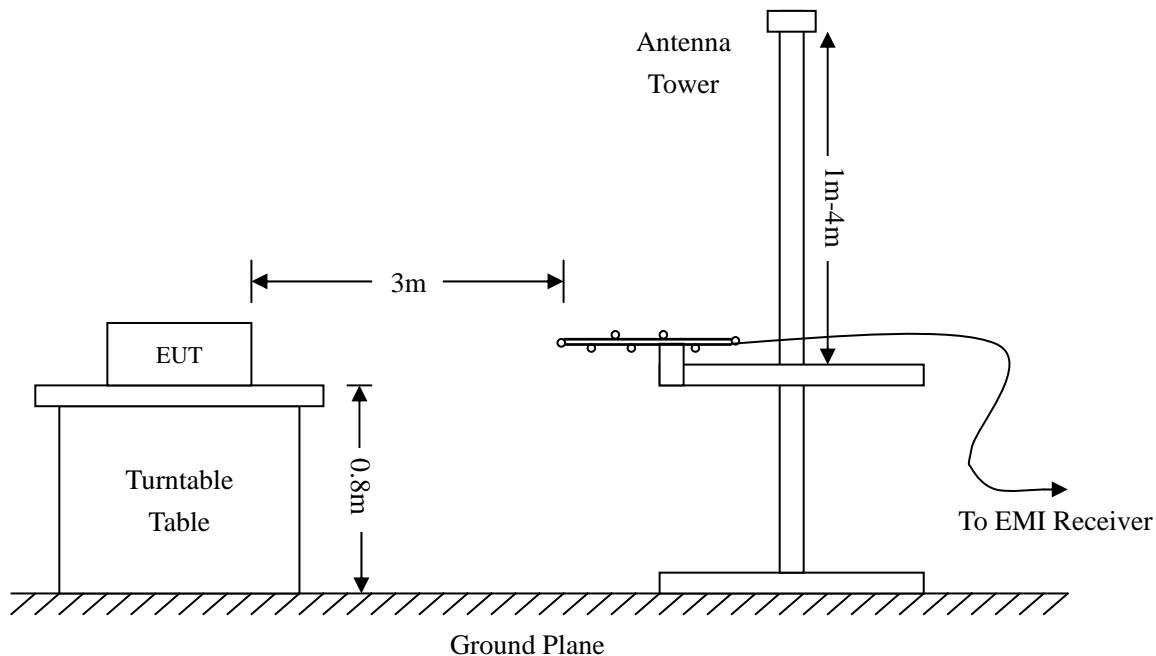

5.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

5.6 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

5.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:


-0.90 dB μ V at 398.90 MHz in the Vertical polarization, 30 MHz to 25 GHz, 3Meters

Frequency MHz	Meter Reading dBuV	Detector PK/ QP/AV	Direction Degree	Height Meter	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier Gain dB	Corr. Ampl. dBuV/m	FCC Part 15.249 & 15.209	
										Limit dBuV/m	Margin dB
Transmitting Low CH (2402MHz)											
4804	46.9	AV	45	1.0	V	34.1	5.2	33.0	53.2	54.0	-6.9
4804	42.0	AV	180	1.2	H	34.1	5.2	33.0	48.3	54.0	-8.4
7206	38.9	AV	45	1.0	V	37.4	6.1	33.5	48.9	54.0	-9.1
7206	35.5	AV	60	1.0	H	37.4	6.1	33.5	45.5	54.0	-9.5
4804	50.5	PK	45	1.0	V	34.1	5.2	33.0	56.8	74	-17.2
2402	66.6	AV(Fund.)	45	1.2	H	29.1	3.7	34.0	65.4	94.0	-28.9
2402	65.0	AV(Fund.)	180	1.2	V	29.1	3.7	34.0	63.8	94.0	-31.2
Transmitting from 30MHz to 1GHz											
398.90	52.54	QP	43	1	V	16.0	1.9	25.34	45.10	46	-0.9
253.70	56.26	QP	60	1.3	H	12.3	1.3	24.86	45.00	46	-1.0
163.08	53.93	QP	56	1.4	V	12.7	1.1	25.43	42.30	43.5	-1.2
199.50	53.45	QP	45	1	H	12.0	1.3	25.15	41.60	43.5	-1.9
271.80	52.54	QP	45	1.2	H	12.6	1.4	24.7	41.84	46	-4.2
163.08	50.08	QP	66	1	H	12.7	1.1	25.43	38.45	43.5	-5.1
181.20	49.02	QP	135	1.2	H	11.8	1.3	25.24	36.88	43.5	-6.6
253.70	50.46	QP	185	1.2	V	12.3	1.3	24.86	39.20	46	-6.8
271.80	48.80	QP	90	1.5	V	12.6	1.4	24.7	38.10	46	-7.9
199.50	45.85	QP	266	1	V	12.0	1.3	25.15	34.00	43.5	-9.5
181.20	43.88	QP	60	2	V	11.8	1.3	25.24	31.74	43.5	-11.8
398.90	40.22	QP	98	1.2	H	16.0	1.9	25.34	32.78	46	-13.2

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

Emissions 20dB lower than the limit are not reported.

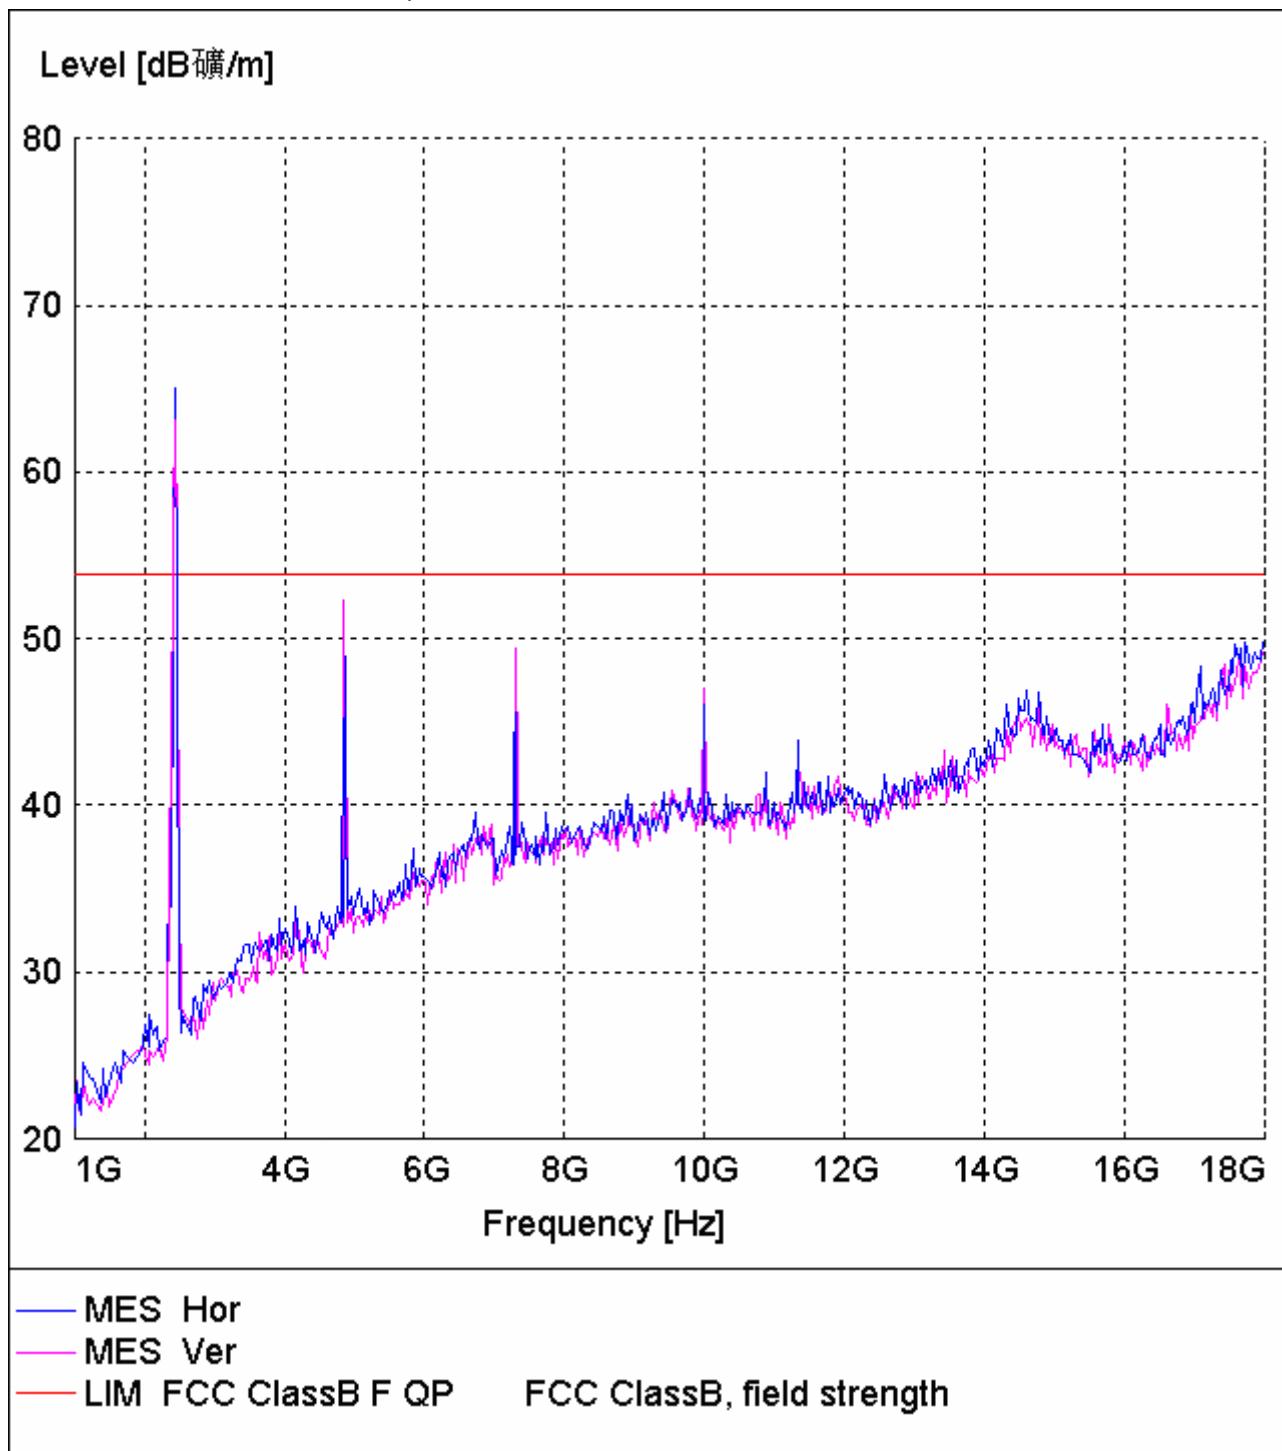Plot of Radiation Emissions Test*Radiated Disturbance**EUT: 6 Channel model transmitters**M/N: FLYSKY001**Operating Condition: Transmitting above 1GHz**Test Specification: Vertical & Horizontal**Comment: DC 12V/Battery*

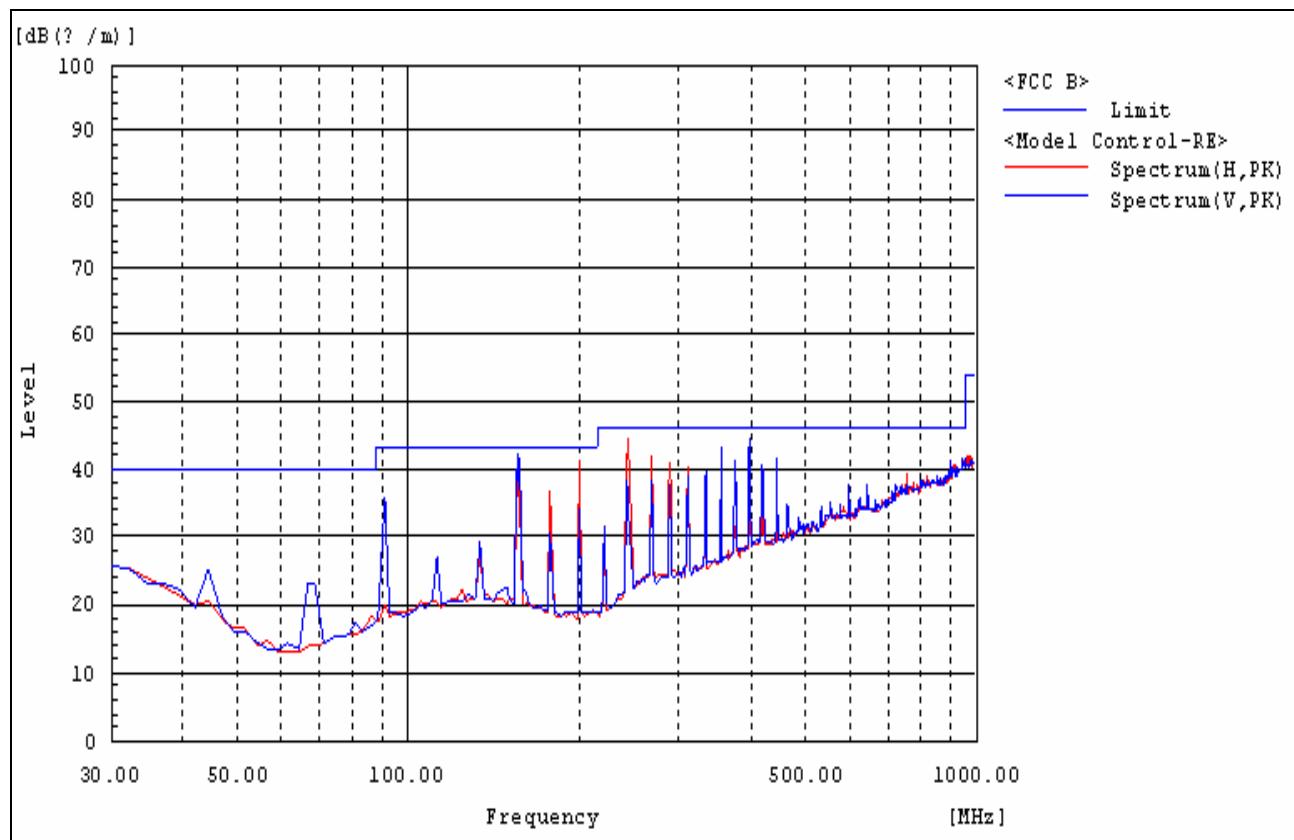*Radiated Disturbance**EUT: 6 Channel model transmitters**M/N: FLYSKY001**Operating Condition: Transmitting below 1GHz**Test Specification: Vertical & Horizontal**Comment: DC 12V/Battery*

6. §15.249(b) OUT OF BAND EMISSIONS

6.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

6.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Agilent	Spectrum Analyzer	E4402B	US41192821	2007-06-30	2008-06-29
ETS.LINDGR EN	Receiver Antenna	2175	57337	2007-01-26	2008-01-25
ETS.LINDGR EN	50 ohm Coaxial Cable	SUCOFLEX 104	25498514	2007-01-26	2008-01-25
Schwarz beck	Horn Antenna	BBHX	BBHX9120-00 2	2007-01-26	2008-01-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

6.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, than mark the higher-level emission for comparing with the FCC rules.

6.4 Environmental Conditions

Temperature:	22° C
Relative Humidity:	54%
ATM Pressure:	1012 mbar


6.5 Summary of Test Results/Plots

Frequency MHz	Emission dB μ V/m	Limit dB μ V/m
2400.0	50.30	54
2438.5	37.22	54

Test Result Pass

Refer to the attached plots.

Lower Bandedge

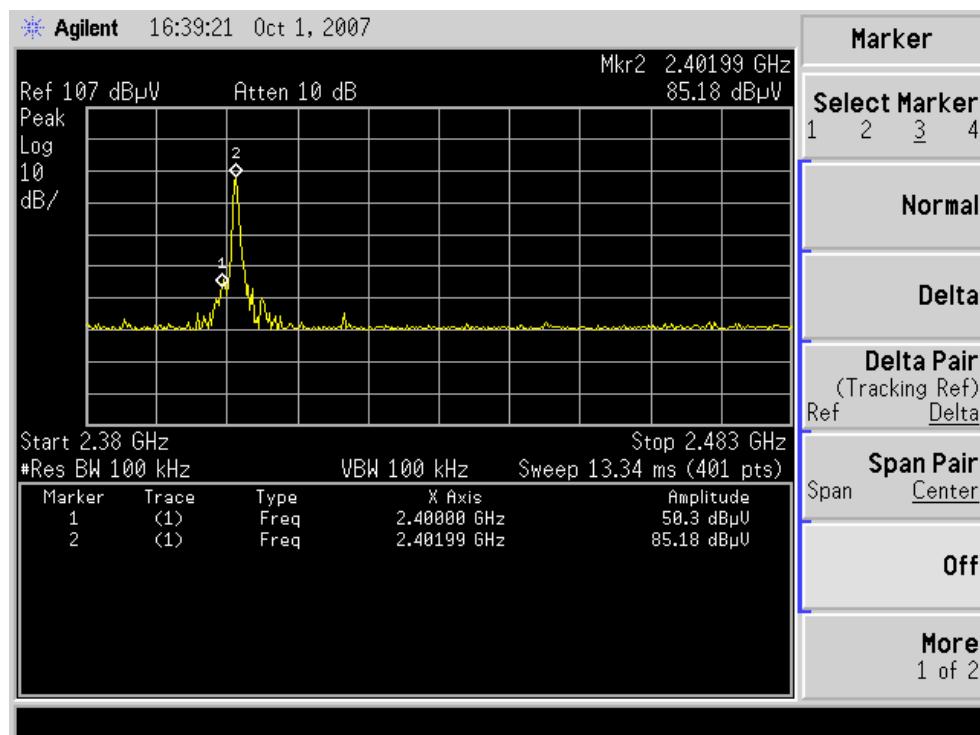

Upper Bandedge

