

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM150200085501

Email: ee.shenzhen@sgs.com Page: 1 of 26

FCC REPORT

Application No.: SZEM1502000855ET(SGS SZ No.:T51510170049EM)

Applicant: Guangdong Alpha Animation and Culture Co., Ltd.

Product Name: Fly 'Em Fast! Jett

Model No.(EUT): YW710710

Add Model No.: US710005, CA710005, US710710, CA710710

Product Description: Super Wings Remote Control Jett

FCC ID: VVAYW710710

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2015-02-25

Date of Test: 2015-03-05 to 2015-04-16

Date of Issue: 2015-11-16

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150200085501

Page: 2 of 26

2 Version

| Revision Record | | | | | | | |
|-----------------|---------|------------|----------|----------|--|--|--|
| Version | Chapter | Date | Modifier | Remark | | | |
| 00 | | 2015-11-16 | | Original | | | |
| | | | | | | | |
| | | | | | | | |

| Authorized for issue by: | | | | |
|--------------------------|-------------------------------|------------|--|--|
| Tested By | Brir Chen | 2015-04-16 | | |
| | (Bill Chen) /Project Engineer | Date | | |
| Prepared By | Vivi Zhou | 2015-11-16 | | |
| | (Vivi Zhou) /Clerk | Date | | |
| Checked By | Eric Fu | 2015-11-16 | | |
| | (Eric Fu) /Reviewer | Date | | |



Report No.: SZEM150200085501

Page: 3 of 26

2 Test Summary

| Test Item | Test Requirement | Test method | Result |
|---------------------|---|--------------------|--------|
| Antenna Requirement | 47 CFR Part 15, Subpart C Section 15.203 | ANSI C63.10 (2009) | PASS |
| Radiated Emission | 47 CFR Part 15, Subpart C Section 15.227 | ANSI C63.10 (2009) | PASS |
| Occupied Bandwidth | 47 CFR Part 15, Subpart C Section 15.215 | ANSI C63.10 (2009) | PASS |

Remark:

Model No.: YW710710, US710005, CA710005, US710710, CA710710

Only the model YW710710 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being model name.



Report No.: SZEM150200085501

Page: 4 of 26

3 Contents

| | | | Page |
|---|-------------|---|-------|
| 1 | С | OVER PAGE | 1 |
| 2 | V | ERSION | |
| 2 | Т | EST SUMMARY | 1 |
| | | | |
| 3 | С | ONTENTS | 4 |
| 4 | G | ENERAL INFORMATION | 5 |
| 4 | 4.1 | CLIENT INFORMATION | 5 |
| 4 | 4.2 | GENERAL DESCRIPTION OF EUT | 5 |
| 4 | 4.3 | TEST ENVIRONMENT AND MODE | 5 |
| 4 | 4.4 | DESCRIPTION OF SUPPORT UNITS | |
| | 4.5 | TEST LOCATION | |
| | 4.6 | TEST FACILITY | |
| | 4.7 | DEVIATION FROM STANDARDS | |
| | 4.8 | ABNORMALITIES FROM STANDARD CONDITIONS | |
| | 4.9 4.10 | OTHER INFORMATION REQUESTED BY THE CUSTOMER | |
| 5 | TI | EST RESULT & MEASUREMENT DATA | 9 |
| | 5.1 | Antenna Requirment | 9 |
| | 5.2 | RADIATED EMISSIONS | |
| | 5.3 | OCCUPIED BANDWIDTH | 20 |
| 6 | P | HOTOGRAPHS - EUT TEST SETUP | 22 |
| (| 5.1 | RADIATED EMISSION | 22 |
| 7 | P | HOTOGRAPHS - EUT CONSTRUCTION DETAILS | 24-26 |



Report No.: SZEM150200085501

Page: 5 of 26

4 General Information

4.1 Client Information

| Applicant: | Guangdong Alpha Animation and Culture Co., Ltd. | | | | | | |
|-----------------------|---|-----------------------|-------|---------|-----|-----------|----------|
| Address of Applicant: | , | Industrial ong, China | Area, | Wenguan | Rd, | Chenghai, | Shantou, |

4.2 General Description of EUT

| Product Name: | Fly 'Em Fast! Jett |
|-------------------------|---------------------------------|
| Model No.: | YW710710 |
| Product Description: | Super Wings Remote Control Jett |
| Operation Frequency: | 27.145MHz |
| Modulation Type: | AM |
| Channel Number: | 1 |
| Antenna Type: | Integral |
| Country of Origin: | China |
| Country of Destination: | EU AND US |
| Request Age Grading | 3+ |
| Power Supply: | Tx: DC 2*1.5V(AAA)=3.0V |

4.3 Test Environment and Mode

| Operating Environment: | Operating Environment: | | |
|------------------------|-----------------------------------|--|--|
| Temperature: | 26.0 °C | | |
| Humidity: | 56 % RH | | |
| Atmospheric Pressure: | 1020 mbar | | |
| Test mode: | | | |
| Transmitting mode: | Keep the EUT in transmitting mode | | |



Report No.: SZEM150200085501

Page: 6 of 26

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM150200085501

Page: 7 of 26

4.10Equipment List

| | RE in Chamber | | | | | | |
|------|---------------------------------------|--|-----------|------------------|------------------------|---------------------------|--|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date (yyyy-mm-dd) | Cal.Due date (yyyy-mm-dd) | |
| 1 | 3m Semi- Anechoic Chamber | ETS-LINDGREN | N/A | SEL0017 | 2014-05-13 | 2015-05-13 | |
| 2 | EMI Test Receiver | Agilent Technologies | N9038A | SEL0312 | 2014-09-16 | 2015-09-16 | |
| 3 | EMI Test software | AUDIX | E3 | SEL0050 | N/A | N/A | |
| 4 | BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEL0015 | 2014-11-15 | 2017-11-15 | |
| 5 | Double-ridged horn (1-18GHz) | ETS-LINDGREN | 3117 | SEL0006 | 2014-10-17 | 2015-10-17 | |
| 6 | Horn Antenna (18-26GHz) | ETS-LINDGREN | 3160 | SEL0076 | 2014-11-24 | 2017-11-24 | |
| 7 | Pre-amplifier (0.1-1300MHz) | Agilent Technologies | 8447D | SEL0053 | 2014-05-13 | 2015-05-13 | |
| 8 | Pre-Amplifier (0.1-26.5GHz) | Compliance Directions Systems Inc. | PAP-0126 | SEL0168 | 2014-10-17 | 2015-10-17 | |
| 9 | Coaxial cable | SGS | N/A | SEL0027 | 2014-05-13 | 2015-05-13 | |
| 10 | Coaxial cable | SGS | N/A | SEL0189 | 2014-05-13 | 2015-05-13 | |
| 11 | Coaxial cable | SGS | N/A | SEL0121 | 2014-05-13 | 2015-05-13 | |
| 12 | Coaxial cable | SGS | N/A | SEL0178 | 2014-05-13 | 2015-05-13 | |
| 13 | Band filter | Amindeon | 82346 | SEL0094 | 2014-05-13 | 2015-05-13 | |
| 14 | Barometer | Chang Chun | DYM3 | SEL0088 | 2014-05-13 | 2015-05-13 | |
| 15 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2014-10-09 | 2015-10-09 | |
| 16 | Humidity/ Temperature Indicator | Shanhai Qixiang | ZJ1-2B | SEL0103 | 2014-10-24 | 2015-10-24 | |
| 17 | Signal Generator (10M-27GHz) | Rohde & Schwarz | SMR27 | SEL0067 | 2014-05-13 | 2015-05-13 | |
| 18 | Loop Antenna | Beijing Daze | ZN30401 | SEL0203 | 2014-05-13 | 2015-05-13 | |



Report No.: SZEM150200085501

Page: 8 of 26

| | RF connected test | | | | | | | |
|------|---------------------------------------|-------------------------|-----------|---------------|------------------------|---------------------------------|--|--|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date (yyyy-mm-dd) | Cal.Due date (yyyy-mm-dd) | | |
| 1 | DC Power Supply | Zhao Xin | RXN-305D | SEL0117 | 2014-10-09 | 2015-10-09 | | |
| 2 | Humidity/ Temperature Indicator | HYGRO | ZJ1-2B | SEL0033 | 2014-10-24 | 2015-10-24 | | |
| 3 | Spectrum Analyzer | Rohde & Schwarz | FSP | SEL0154 | 2014-10-17 | 2015-10-17 | | |
| 4 | Coaxial cable | SGS | N/A | SEL0178 | 2014-05-13 | 2015-05-13 | | |
| 5 | Coaxial cable | SGS | N/A | SEL0179 | 2014-05-13 | 2015-05-13 | | |
| 6 | Barometer | ChangChun | DYM3 | SEL0088 | 2014-05-13 | 2015-05-13 | | |
| 7 | Signal Generator | Rohde & Schwarz | SML03 | SEL0068 | 2014-04-25 | 2015-04-25 | | |
| 8 | POWER METER | R & S | NRVS | SEL0144 | 2014-10-09 | 2015-10-09 | | |
| 9 | Attenuator | Beijin feihang taida | TST-2-6dB | SEL0205 | 2014-04-25 | 2015-04-25 | | |



Report No.: SZEM150200085501

Page: 9 of 26

5 Test Result & Measurement Data


5.1 Antenna Requirment

Standard 47 CFR Part 15C Section 15.203
Requirement:

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


EUT Antenna:

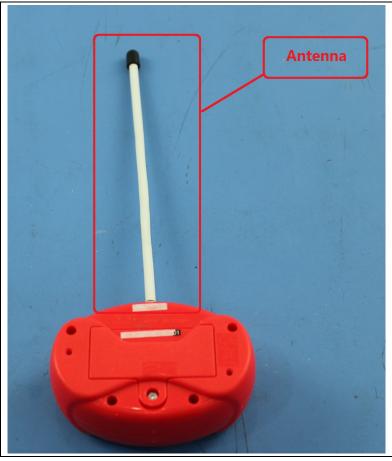




Report No.: SZEM150200085501

Page: 10 of 26

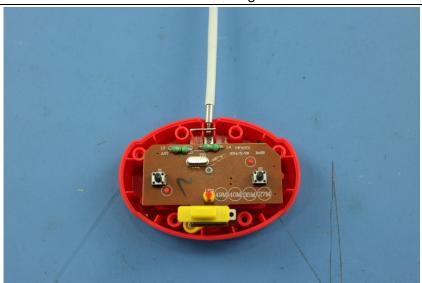

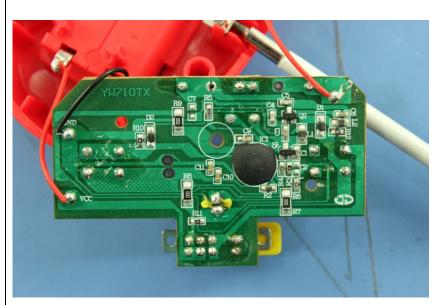

The antenna is soldered on the main PCB and it can be replaced by the user if it is broken.



Report No.: SZEM150200085501

Page: 11 of 26

5.2 Radiated Emissions

| Test Requirement: | 47 CFR Part 15C Section 15.227 | | | | | | | |
|-------------------|---|-------|------------------|---------------|--------------|------|-------------|----|
| Test Method: | ANSI C63.10: 2009 | | | | | | | |
| Test Site: | 3m (Semi-Anechoic Chamber) | | | | | | | |
| ERP Limit: | Carrier Power will not exceed 80dBuV/m at 3m (Average). | | | | | | | |
| Receiver Setup: | Frequency Detector RBW VBW Remark | | | | | | 1 | |
| · | 0.009MHz-0.090MHz | | Peak | 10kHz | 30kHz | | Peak | |
| | 0.009MHz-0.090MH | | Average | 10kHz | 30kHz | | Average | 1 |
| | 0.090MHz-0.110MH | | Quasi-peak | 10kHz | 30kHz | | Quasi-peak | • |
| | 0.110MHz-0.490MH | Ηz | Peak | 10kHz | 30kHz | | Peak | 1 |
| | 0.110MHz-0.490MH | Ηz | Average | 10kHz | 30kHz | | Average | |
| | 0.490MHz -30MHz | Z | Quasi-peak | 10kHz | 30kHz | C | Quasi-peak | |
| | 30MHz-1GHz | | Quasi-peak | 100 kHz | 300kHz | C | Quasi-peak | |
| | Above 1011- | | Peak | 1MHz | 3MHz | | Peak | |
| | Above 1GHz | | Peak | 1MHz | 10Hz | | Average | |
| Limit: | Frequency | | ield strength | Limit | Remark | · | Measurem | |
| | | | icrovolt/meter) | (dBuV/m) | Homan | ` | distance (ı | m) |
| | 0.009MHz-0.490MHz | | 400/F(kHz) | - | - | | 300 | |
| | 0.490MHz705MHz | 24 | 1000/F(kHz) | - | - | | 30 | |
| | 1.705MHz-30MHz | | 30 | - | - | | 30 | |
| | 30MHz-88MHz | | 100 | 40.0 | Quasi-peak | | 3 | |
| | 88MHz-216MHz | | 150 | 43.5 | Quasi-pe | | 3 | |
| | 216MHz-960MHz | | 200 | 46.0 | Quasi-pe | | 3 | |
| | 960MHz-1GHz | | 500 | 54.0 | Quasi-pe | ak | 3 | |
| | Above 1GHz | | 500 | 54.0 | Average | 9 | 3 | |
| | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. | | | | | | | |
| Test Procedure: | a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | | | | |
| | b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | | | | | |
| | c. The antenna heigh determine the max polarizations of the | kimur | m value of the f | ield strength | n. Both hori | zoni | | |




Report No.: SZEM150200085501

Page: 12 of 26

| | <u> </u> |
|----|--|
| d. | For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. |
| e. | The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. |
| f. | If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| g. | The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is |

Test Setup:

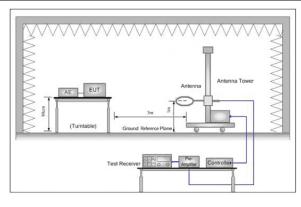

recorded in the report.

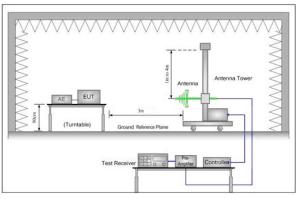


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

| Test Mode: | Transmitting mode | | | |
|---|-------------------|--|--|--|
| Instruments Used: Refer to section 4.10 for details | | | | |
| Test Result: | Pass | | | |



Report No.: SZEM150200085501

Page: 13 of 26

27.145MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Test Result:

Intentional emission

| Test Frequency | Peak (d | dBμV/m) | Limits | Margin (dB) | | |
|----------------|----------|------------|----------|-------------|------------|--|
| (MHz) | Vertical | Horizontal | (dBµV/m) | Vertical | Horizontal | |
| 27.145 | 80.77 | 72.61 | 100.00 | 19.23 | 27.39 | |


| Test Frequency | Average (dBμV/m) | | Limits | Margin (dB) | | |
|----------------|------------------|------------|----------|-------------|------------|--|
| (MHz) | Vertical | Horizontal | (dBµV/m) | Vertical | Horizontal | |
| 27.145 | 63.77 | 58.61 | 80.00 | 16.23 | 21.39 | |



Report No.: SZEM150200085501

Page: 14 of 26

Out of Band Emissions 30MHz-1000MHz Vertical

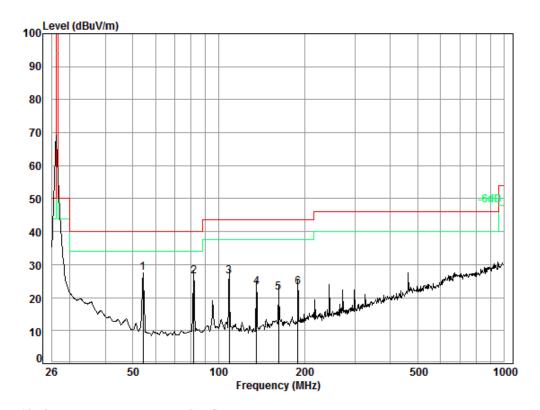

Condition: 3m 3142C Vertical

Job No. : 0855ET Test Mode: TX mode


| | Freq | | | Preamp Factor | | | | Over Limit |
|---|--------|------|-------|------------------|-------|--------|--------|---------------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 54.25 | 0.80 | 8.14 | 25.95 | 44.46 | 27.45 | 40.00 | -12.55 |
| 2 | 81.70 | 1.10 | 7.98 | 25.92 | 43.28 | 26.44 | 40.00 | -13.56 |
| 3 | 108.93 | 1.23 | 8.74 | 25.88 | 42.46 | 26.55 | 43.50 | -16.95 |
| 4 | 135.92 | 1.29 | 8.20 | 25.84 | 39.47 | 23.12 | 43.50 | -20.38 |
| 5 | 162.25 | 1.34 | 9.65 | 25.81 | 36.41 | 21.59 | 43.50 | -21.91 |
| 6 | 189.44 | 1.39 | 10.09 | 25.78 | 37.58 | 23.28 | 43.50 | -20.22 |



Report No.: SZEM150200085501

Page: 15 of 26

Horizontal

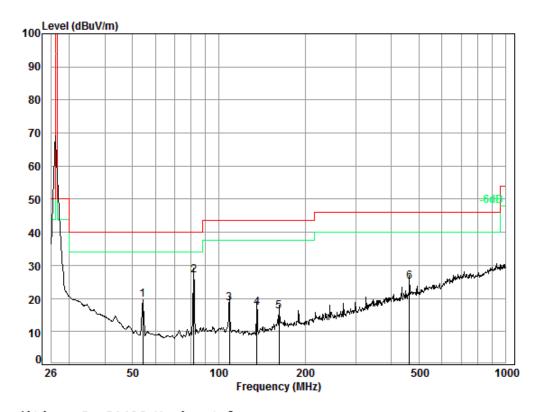

Condition: 3m 3142C Horizontal

Job No. : 0855ET Test Mode: TX mode

| | | Cable | Ant | Preamp | Read | | Limit | 0ver |
|---|--------|-------|--------|--------|-------|--------|--------|--------|
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| | | | | | | | | |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| | 54.05 | 0.00 | | 25.25 | 26.70 | 40.60 | 40.00 | 00.74 |
| 1 | 54.25 | 0.80 | 8.14 | 25.95 | 36.70 | 19.69 | 40.00 | -20.31 |
| 2 | 81.70 | 1.10 | 7.98 | 25.92 | 43.94 | 27.10 | 40.00 | -12.90 |
| 3 | 108.93 | 1.23 | 8.74 | 25.88 | 34.33 | 18.42 | 43.50 | -25.08 |
| 4 | 135.92 | 1.29 | 8.20 | 25.84 | 33.48 | 17.13 | 43.50 | -26.37 |
| 5 | 162.25 | 1.34 | 9.65 | 25.81 | 30.86 | 16.04 | 43.50 | -27.46 |
| 6 | 462.56 | 2.46 | 17.31 | 25.64 | 30.96 | 25.09 | 46.00 | -20.91 |




Report No.: SZEM150200085501

Page: 16 of 26

26MHz-30MHz

RBW: 10kHz, VBW: 30kHz.

Vertical

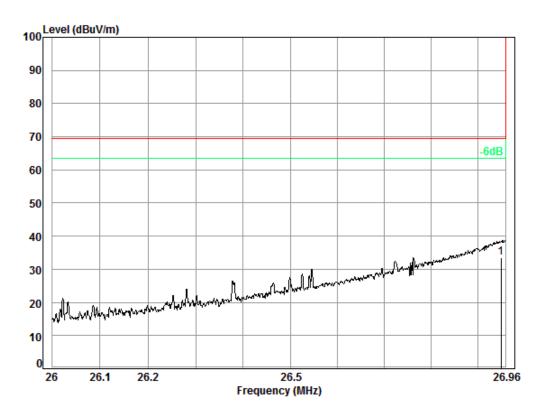

Condition: 3m 3142C Vertical


Job No. : 0855ET Test Mode: TX mode

> Cable Ant Preamp Read Limit 0ver Loss Factor Factor Level Level Line dBuV dBuV/m dBuV/m MHz dB dB/m dΒ 1 26.95 0.60 20.87 26.01 38.00 33.46 69.50 -36.04



Report No.: SZEM150200085501

Page: 17 of 26

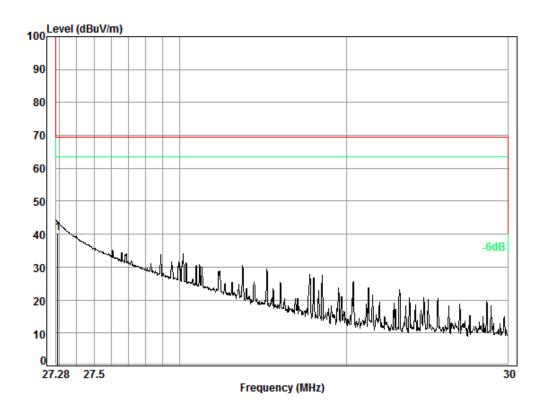

Condition: 3m 3142C Vertical

Job No. : 0855ET Test Mode: TX mode

Cable Ant Preamp Read Limit Over Freq Loss Factor Factor Level Level Line Limit

MHz dB dB/m dB dBuV dBuV/m dBuV/m dB


27.29 0.60 20.65 26.01 45.00 40.24 69.50 -29.26



Report No.: SZEM150200085501

Page: 18 of 26

Horizontal

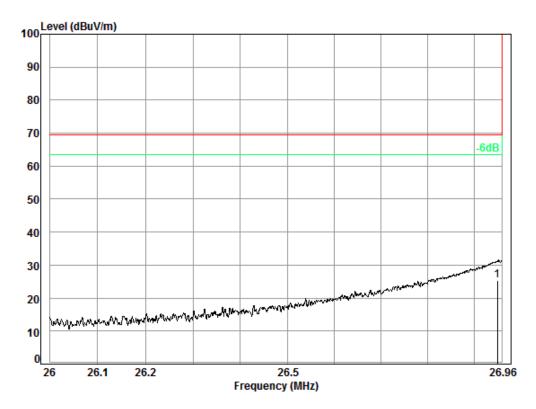

Condition: 3m 3142C Horizontal


Job No. : 0855ET Test Mode: TX mode

Ant Preamp Cable Read Limit 0ver Loss Factor Factor Freq Level Level Line Limit dB dBuV dBuV/m dBuV/m MHz dB/m dB 1 26.95 0.60 20.87 26.01 30.00 25.46 69.50 -44.04



Report No.: SZEM150200085501

Page: 19 of 26

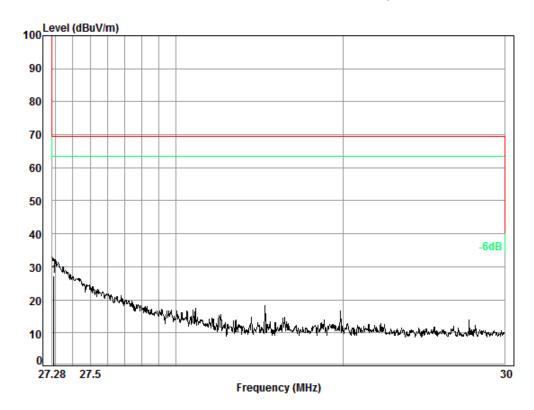

Condition: 3m 3142C Horizontal

Job No. : 0855ET Test Mode: TX mode

Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Line Limit Level Level dB dB/m dBuV dBuV/m dBuV/m MHz 1 27.29 0.60 20.65 26.01 32.00 27.24 69.50 -42.26

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance below 26MHz was at least 30dB margin, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Report No.: SZEM150200085501

Page: 20 of 26

5.3 Occupied Bandwidth


| Test Requirement: | 47 CFR Part 15C Section 15.215 (C) | | | |
|-------------------|--|--|--|--|
| Test Method: | ANSI C63.10: 2009 | | | |
| Limit: | Operation within the band 26.960 – 27.280 MHz | | | |
| Requirement : | Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's | | | |
| | antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be deomonstrated by measuring the radiated emissions. | | | |
| Test Setup: | Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane | | | |
| Test Mode: | Transmitter mode | | | |
| Instruments Used: | Refer to section 4.10 for details | | | |
| Test Result: | Pass | | | |



Report No.: SZEM150200085501

Page: 21 of 26

Test Result:

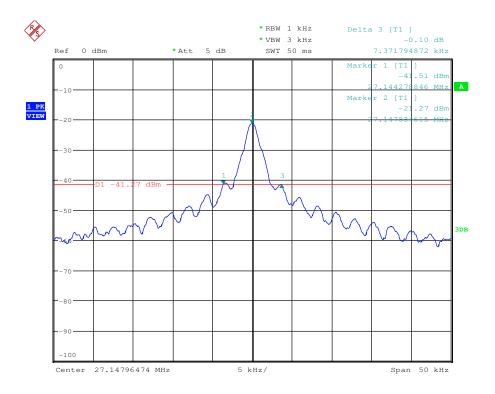





Report No.: SZEM150200085501

Page: 22 of 26

6 Photographs - EUT Test Setup

6.1 Radiated Emission







Report No.: SZEM150200085501

Page: 23 of 26





Report No.: SZEM150200085501

Page: 24 of 26

Photographs - EUT Construction Details

Test model No.: YW710710









Report No.: SZEM150200085501

Page: 25 of 26

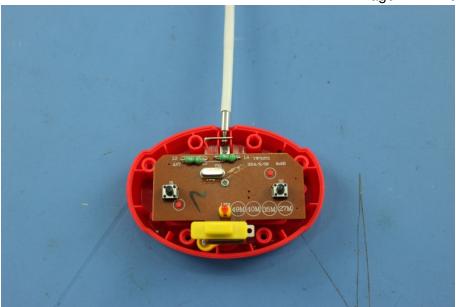

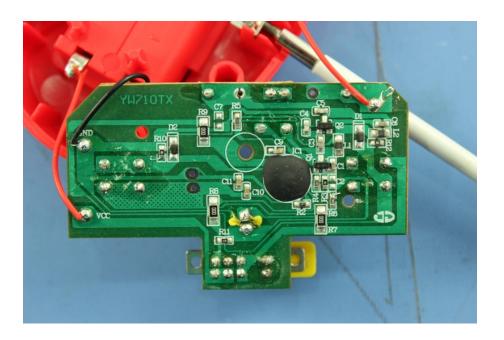



Report No.: SZEM150200085501

Page: 26 of 26

