

APPLICATION CERTIFICATION  
On Behalf of  
Shenzhen San Fu Da Electronics Co., Ltd.

REMOTE COOKING THERMOMETER  
Model No.: BB-22

FCC ID: VVG22TX

Prepared for : Shenzhen San Fu Da Electronics Co., Ltd.  
Address : 6/F., Block B, Huali Industrial Building, District 28,  
Baoan, Shenzhen, China  
Prepared by : ACCURATE TECHNOLOGY CO., LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20122714  
Date of Test : Nov 28-Dec 12, 2012  
Date of Report : Dec 12, 2012

## TABLE OF CONTENTS

Description	Page
<b>Test Report Certification</b>	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty.....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. 20DB OCCUPIED BANDWIDTH .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c) .....	13
5.3. EUT Configuration on Measurement .....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	14
5.6. Measurement Result .....	15
<b>6. RELEASE TIME MEASUREMENT.....</b>	<b>16</b>
6.1. Block Diagram of Test Setup.....	16
6.2. Release Time Measurement According To FCC Part 15 Section 15.231(e) .....	16
6.3. EUT Configuration on Measurement .....	17
6.4. Operating Condition of EUT .....	17
6.5. Test Procedure .....	17
6.6. Measurement Result .....	18
<b>7. ANTENNA REQUIREMENT.....</b>	<b>20</b>
7.1. The Requirement .....	20
7.2. Antenna Construction .....	20

APPENDIX I ( TEST CURVES) (10 pages)

## Test Report Certification

### Measurement Procedure Used:

## **FCC Rules and Regulations Part 15 Subpart C Section 15.231 ANSI 63.10: 2009**

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : Nov 28-Dec 12, 2012

Prepared by :

Terry. Yang

(Engineer)

Approved & Authorized Signer :

George

(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : REMOTE COOKING THERMOMETER  
Model Number : BB-22  
Trade Name : n.a  
  
Power Supply : DC 3V ("AAA battery" 2×)  
  
Operation Frequency : 433.92MHz  
  
Applicant : Shenzhen San Fu Da Electronics Co., Ltd.  
Address : 6/F., Block B, Huali Industrial Building, District 28,  
Baoan, Shenzhen, China  
Manufacturer : Shenzhen San Fu Da Electronics Co., Ltd.  
Address : 6/F., Block B, Huali Industrial Building, District 28,  
Baoan, Shenzhen, China  
Date of sample received : Nov 28, 2012  
  
Date of Test : Nov 28-Dec 12, 2012

## 1.2.Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen
	Listed by FCC The Registration Number is 752051
	Listed by Industry Canada The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO., LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

## 1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2  
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2  
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2  
(Above 1GHz)

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(e)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(e)	Release Time Measurement	Compliant
Section 15.203	Antenna Requirement	Compliant

The product is a automatically operated transmitter.

Section 15.231 (a) (2), (3), (4) and (5) are not applicable.

All normal using modes of the normal function were tested but only the worst test data of the worst mode is recorded by this report.

## 4. THE FIELD STRENGTH OF RADIATION EMISSION

### 4.1. Block Diagram of Test Setup


#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE COOKING THERMOMETER)

#### 4.1.2. Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

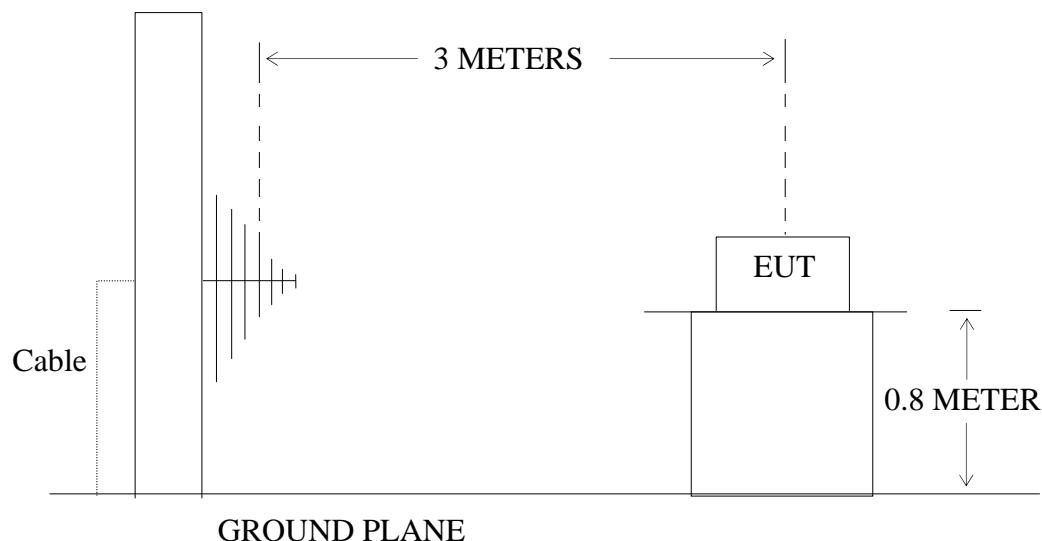

GROUND PLANE

(EUT: REMOTE COOKING THERMOMETER)

## 4.2.The Field Strength of Radiation Emission Measurement Limits

### 4.2.1.Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(e)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [μV/m]	Field Strength of Spurious Emission [μV/m]
40.66-40.70	1000	100
70-130	500	50
130-174	500 to 5000	50 to 150
174-260	1500	150
260-470	1500-5000	150-500
Above 470	5000	500

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu$ V/m at 3 meters; for the band 260-470 MHz,  $\mu$ V/m at 3 meters. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

### 4.2.2.Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

## 4.3.Configuration of EUT on Measurement

The following equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. REMOTE COOKING THERMOMETER (EUT)

Model Number : BB-22  
 Serial Number : N/A  
 Manufacturer : Shenzhen San Fu Da Electronics Co., Ltd.

## 4.4.Operating Condition of EUT

### 4.4.1.Setup the EUT and simulator as shown as Section 4.1.

### 4.4.2.Turn on the power of all equipment.

### 4.4.3.Let the EUT work in TX mode measure it.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.10 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120 kHz in 30-1000 MHz, and 1 MHz in 1000-5000 MHz.

The frequency range from 30 MHz to 5000 MHz is checked.

**4.6.The Field Strength of Radiation Emission Measurement Results  
PASS.**

The frequency range 30MHz to 5000MHz is investigated.

Date of Test:	Dec 4, 2012	Temperature:	25°C
EUT:	REMOTE COOKING		
Model No.:	THERMOMETER	Humidity:	50%
Test Mode:	BB-22	Power Supply:	DC 3V
	TX	Test Engineer:	Ricky

**For 30MHz-1000MHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor Corr. (dB)	Result	Limit	Margin	Polarization
			QP	QP	QP	
433.9200	44.13	22.95	67.08	72.90	-5.82	Vertical
867.8400	16.06	28.64	44.70	52.90	-8.20	Vertical
433.9200	45.54	22.99	68.53	72.90	-4.37	Horizontal
867.8400	17.21	28.64	45.82	52.90	-7.054	Horizontal

**For 1GHz-5GHz**

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

AV =PK + duty cycle factor

Frequency (MHz)	Duty cycle factor	Reading (dB $\mu$ V/ m)	Factor Corr. (dB)	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarizati on
				PEAK	AV	PEAK	AV	PEAK	AV	
1301.760	-15.21	50.69	-12.22	23.26	38.47	52.90	72.90	-29.64	-34.43	Vertical
1735.680	-15.21	54.08	-10.32	28.55	43.76	52.90	72.90	-24.35	-29.14	Vertical
2169.600	-15.21	61.27	-8.51	37.55	52.76	52.90	72.90	-15.35	-20.14	Vertical
1301.760	-15.21	51.78	-12.22	24.35	39.56	52.90	72.90	-28.55	-33.34	Horizontal
1735.680	-15.21	52.79	-10.32	27.26	42.47	52.90	72.90	-25.64	-30.43	Horizontal
2169.600	-15.21	55.96	-8.51	32.24	47.45	52.90	72.90	-20.66	-25.45	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. \*: Denotes restricted band of operation.

Measurements were made using a peak detector, the AV value computed by duty cycle factor. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. The field strength is calculated by adding the antenna factor, high pass filter loss (if used) and cable loss, and subtracting the amplifier gain (if any) from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

FCC Limit for Fundamental Measurement =72.9 dB $\mu$ V/m

FCC Limit for Spurious Measurement =52.9dB $\mu$ V/m

Pulse Width (PW) =0.51ms\*1= 0.51ms

1/PW=1/0.51ms=1.9608kHz

RBW(100 kHz) >1/PW (1.9608kHz)

Therefore PDCF is not needed.

Duty cycle = (Ton/ (Toff+Ton)) \*100% = (0.51/2.94)\*100%=17.35%

Duty cycle factor=20log (Duty cycle) = 20log (0.1735) = -15.21

## 5. 20DB OCCUPIED BANDWIDTH

### 5.1. Block Diagram of Test Setup


#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE COOKING THERMOMETER)

#### 5.1.2. Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

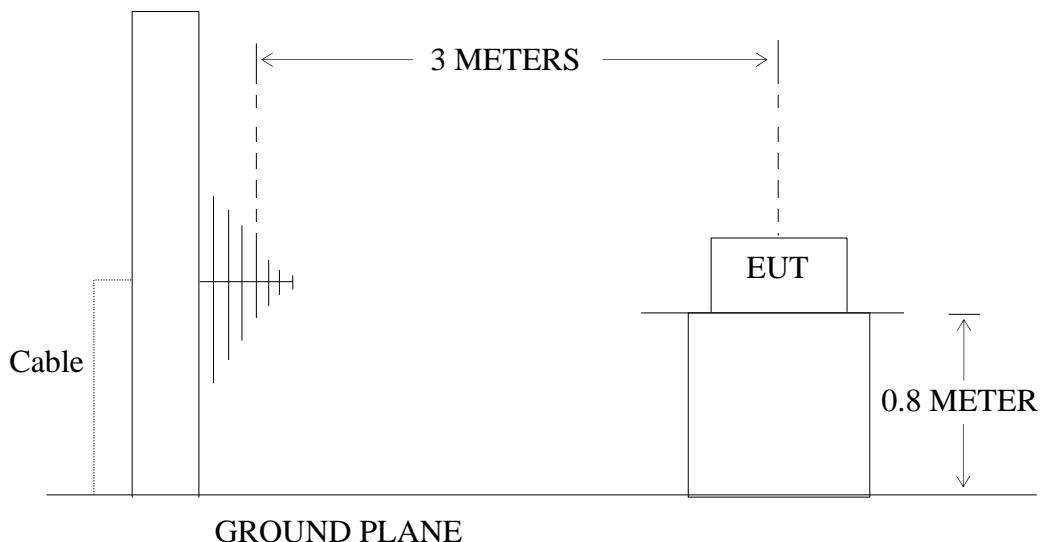

### 5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $433.92 \text{ MHz} \times 0.25\% = 1.0848 \text{ MHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1.REMOTE COOKING THERMOMETER (EUT)

Model Number : BB-22  
Serial Number : N/A  
Manufacturer : Shenzhen San Fu Da Electronics Co., Ltd.

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in TX mode measure it.

### 5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10 kHz, VBW = 30 kHz, Span = 500 kHz.

5.5.2.Set SPA Max hold, Mark peak, -20 dB.

## 5.6.Measurement Result

**The EUT does meet the FCC requirement.**

-20 dB bandwidth = 27 kHz.

$(27 \text{ kHz}/433.92\text{MHz}) * 100\% = 0.0062\% < 0.25\%$

The spectral diagrams in appendix I.

## 6. RELEASE TIME MEASUREMENT

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block diagram of connection between the EUT and simulators



(EUT: REMOTE COOKING THERMOMETER)

#### 6.1.2. Semi-Anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

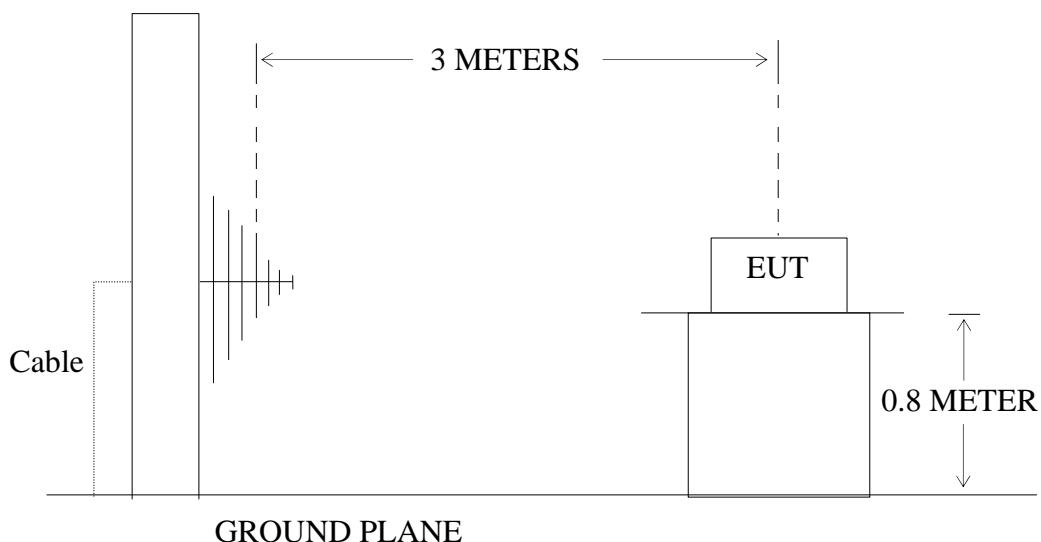

(EUT: REMOTE COOKING THERMOMETER)

### 6.2. Release Time Measurement According To FCC Part 15 Section 15.231(e)

Section 15.231(e) Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds

### 6.3.EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1. REMOTE COOKING THERMOMETER (EUT)

Model Number : BB-22  
Serial Number : N/A  
Manufacturer : Shenzhen San Fu Da Electronics Co., Ltd.

### 6.4.Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX mode measure it.

### 6.5.Test Procedure

6.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 100 kHz, VBW = 300 kHz, Span = 0 Hz. Sweep time = 1s.

6.5.2. Set EUT as normal operation and press Transmitter button.

6.5.3. Set SPA View. Delta Mark time.


## 6.6. Measurement Result

Release Time = 0.488s


Silent Time= 31.2s

The space of transmitting time=31.2>0.488s\*30 =14.64s>10s

The spectral diagrams in appendix I.

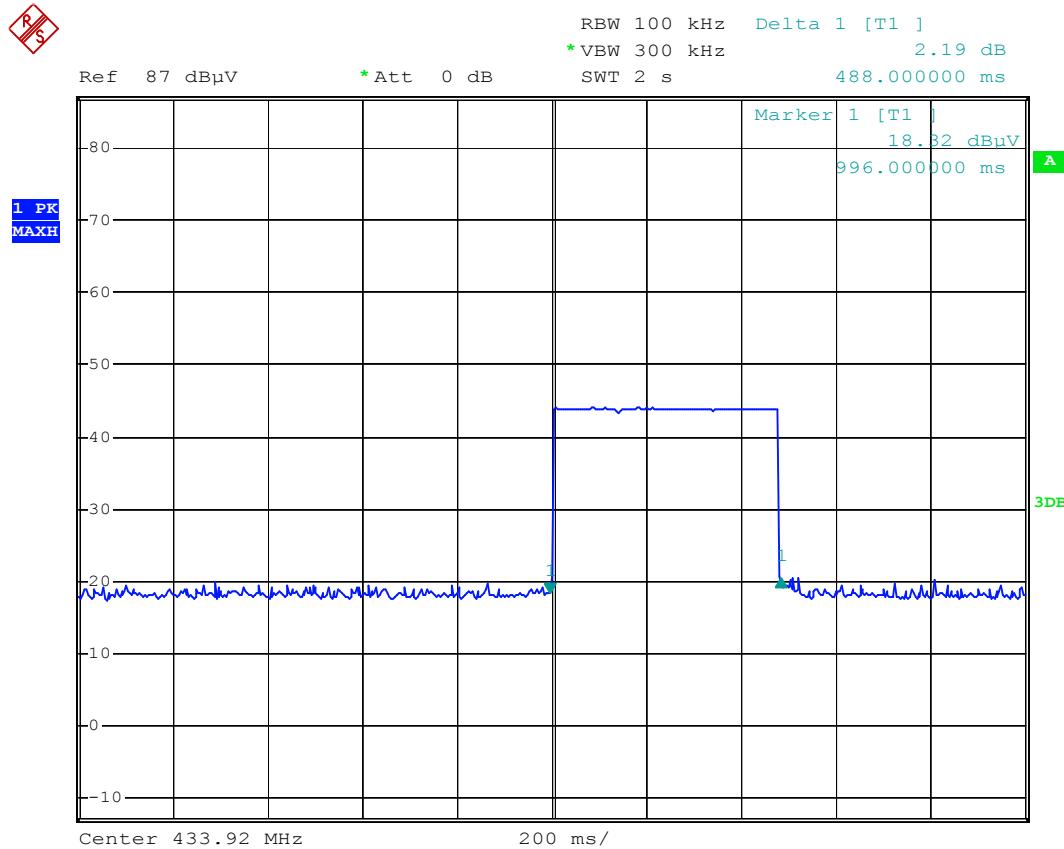

Date: 8.DEC.2012 09:21:18

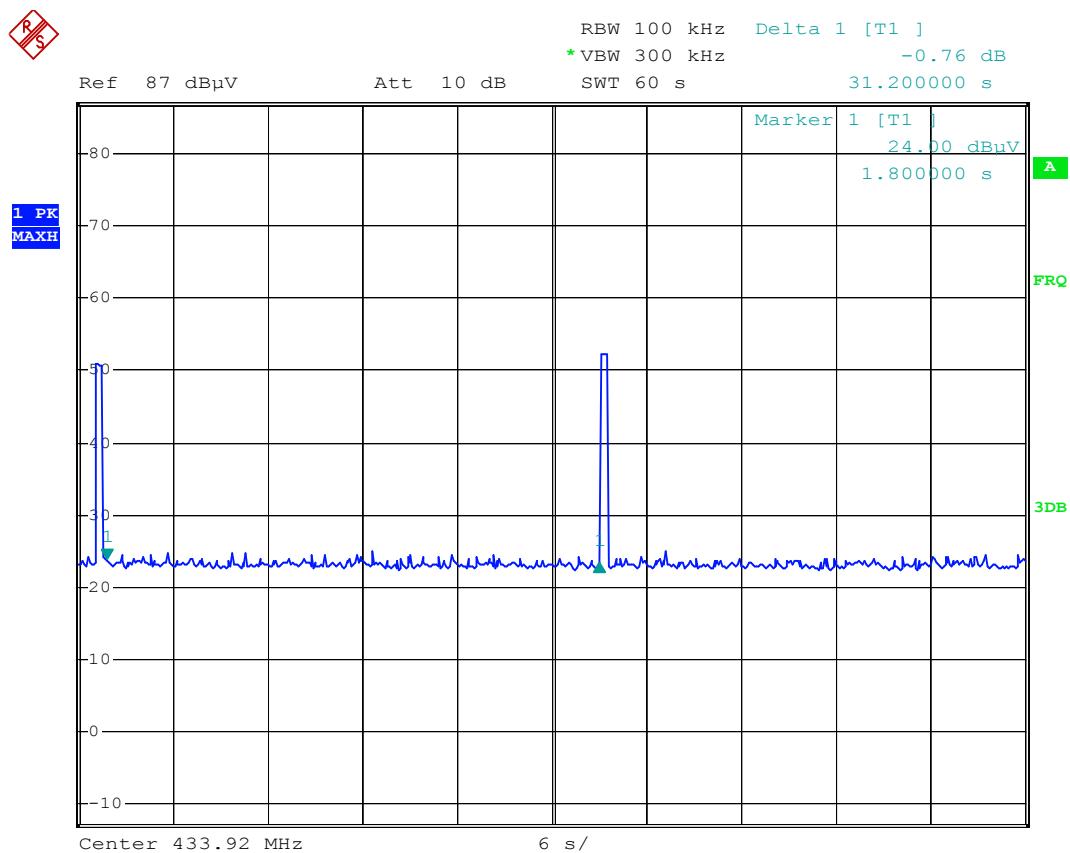

Date: 8.DEC.2012 09:57:02


## 7. ANTENNA REQUIREMENT

### 7.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

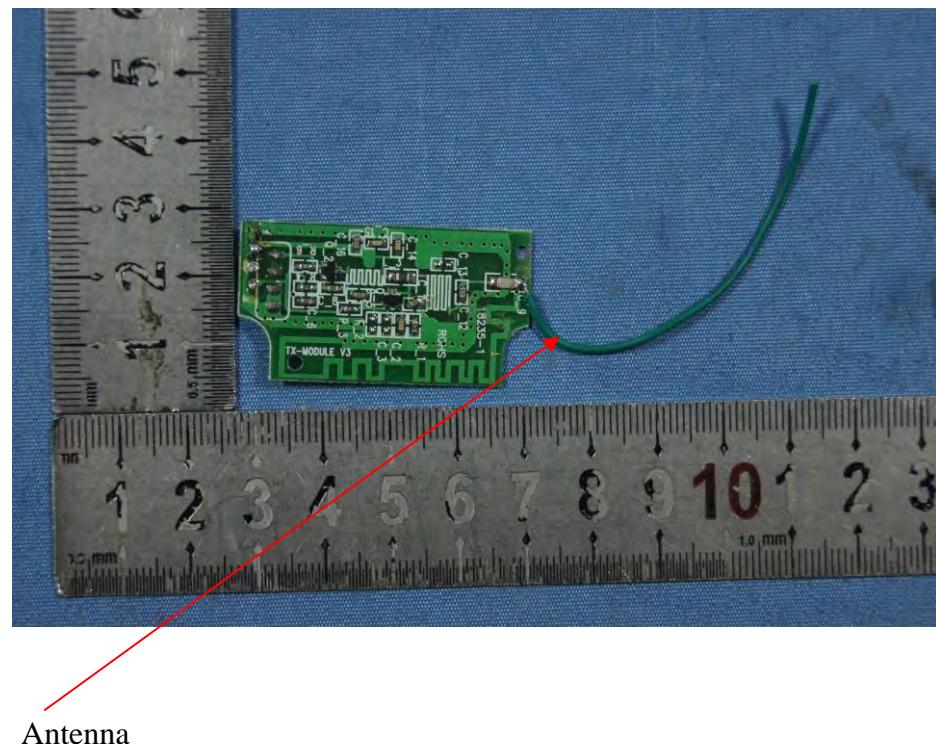

## APPENDIX I (Test Curves)


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 署 龟 嘴

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY #368

Polarization: Horizontal

Standard: 433M AUTO

Power Source: DC 3V

Test item: Radiation Test

Date: 12/12/04/

Temp. ( C)/Hum.(%) 25 C / 51 %

Time: 8/53/06

EUT: REMOTE COOKING THERMOMETER

Engineer Signature: Ricky

Mode: TX


Distance: 3m

Model: BB-22

Manufacturer: Shenzhen San Fu Da Electronics Co., Ltd

Note:

100.0 dBuV/m

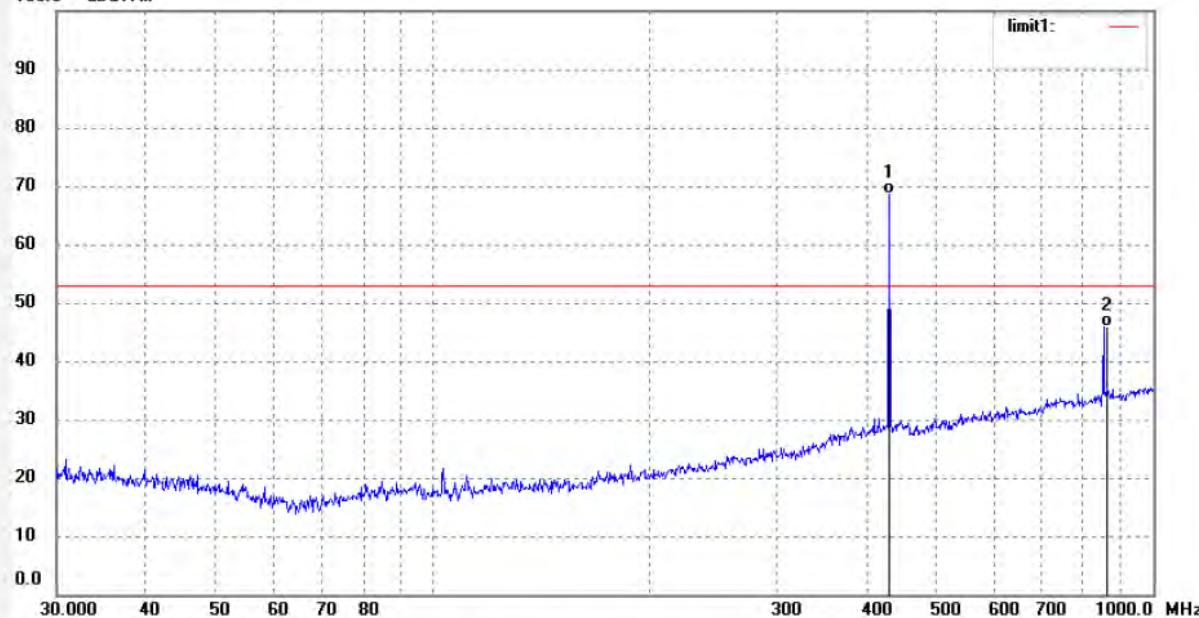


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	45.54	22.99	68.53	72.90	-4.37	QP			
2	867.8400	17.21	28.64	45.85	52.90	-7.05	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 略  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.:	RUCKY #369	Polarization:	Vertical
Standard:	433M AUTO	Power Source:	DC 3V
Test item:	Radiation Test	Date:	12/12/04/
Temp.( C)/Hum.(%)	25 C / 51 %	Time:	8/59/56
EUT:	REMOTE COOKING THERMOMETER	Engineer Signature:	alen
Mode:	TX	Distance:	3m
Model:	BB-22		
Manufacturer:	Shenzhen San Fu Da Electronics Co., Ltd		
Note:			

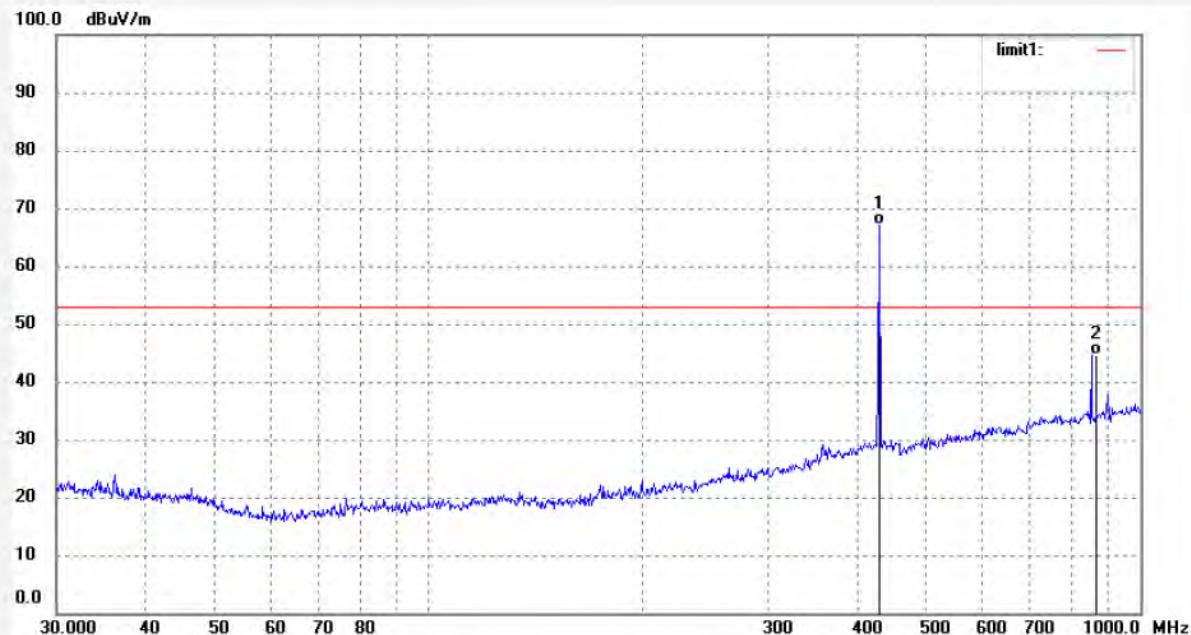

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9200	44.13	22.95	67.08	72.90	-5.82	QP			
2	867.8400	16.06	28.64	44.70	52.90	-8.20	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 龟嘴

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: RUCKY #367

Polarization: Vertical

Standard: 433M AUTO ABOVE1G

Power Source: DC 3V

Test item: Radiation Test

Date: 12/12/04/

Temp. (C)/Hum.(%) 25 C / 51 %

Time: 9/06/17

EUT: REMOTE COOKING THERMOMETER

Engineer Signature: alen


Mode: TX

Distance: 3m

Model: BB-22

Manufacturer: Shenzhen San Fu Da Electronics Co., Ltd

Note:

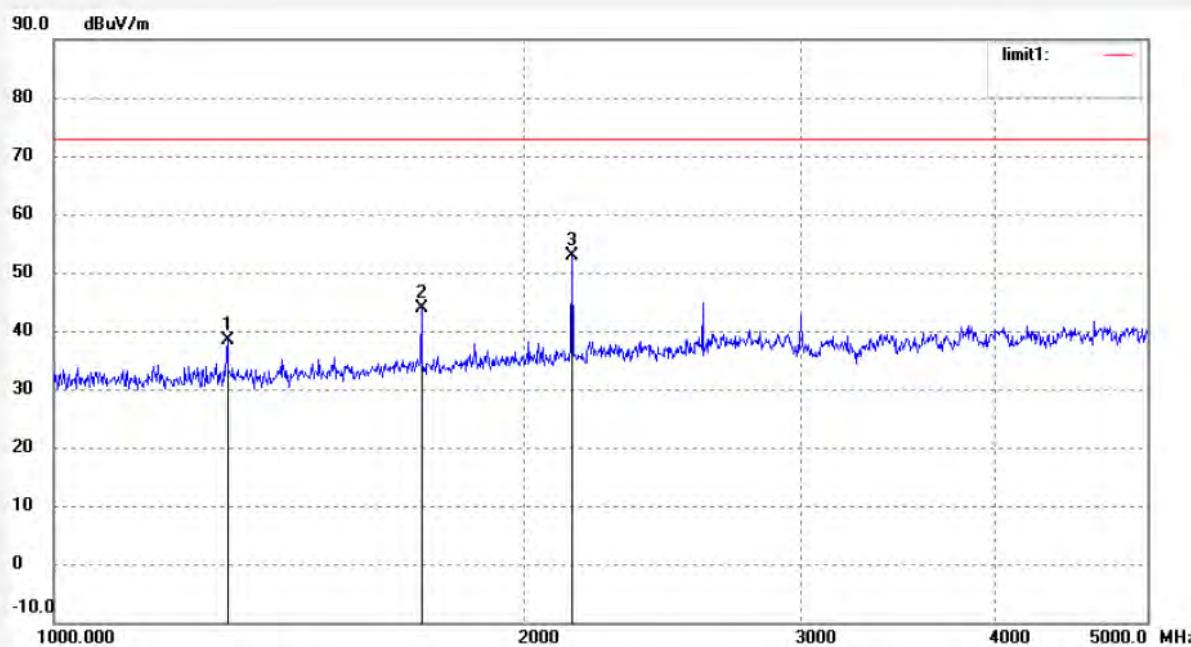

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	50.69	-12.22	38.47	72.90	-34.43	peak			
2	1735.680	54.08	-10.32	43.76	72.90	-29.14	peak			
3	2169.600	61.27	-8.51	52.76	72.90	-20.14	peak			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 署 龟 喷


Tel:+86-0755-26503290

Fax:+86-0755-26503396


Job No.: RUCKY #366  
 Standard: 433M AUTO ABOVE1G  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 25 C / 51 %  
 EUT: REMOTE COOKING THERMOMETER  
 Mode: TX  
 Model: BB-22  
 Manufacturer: Shenzhen San Fu Da Electronics Co., Ltd

Polarization: Horizontal  
 Power Source: DC 3V  
 Date: 12/12/04/  
 Time: 9/04/44  
 Engineer Signature: alen  
 Distance: 3m


Note:

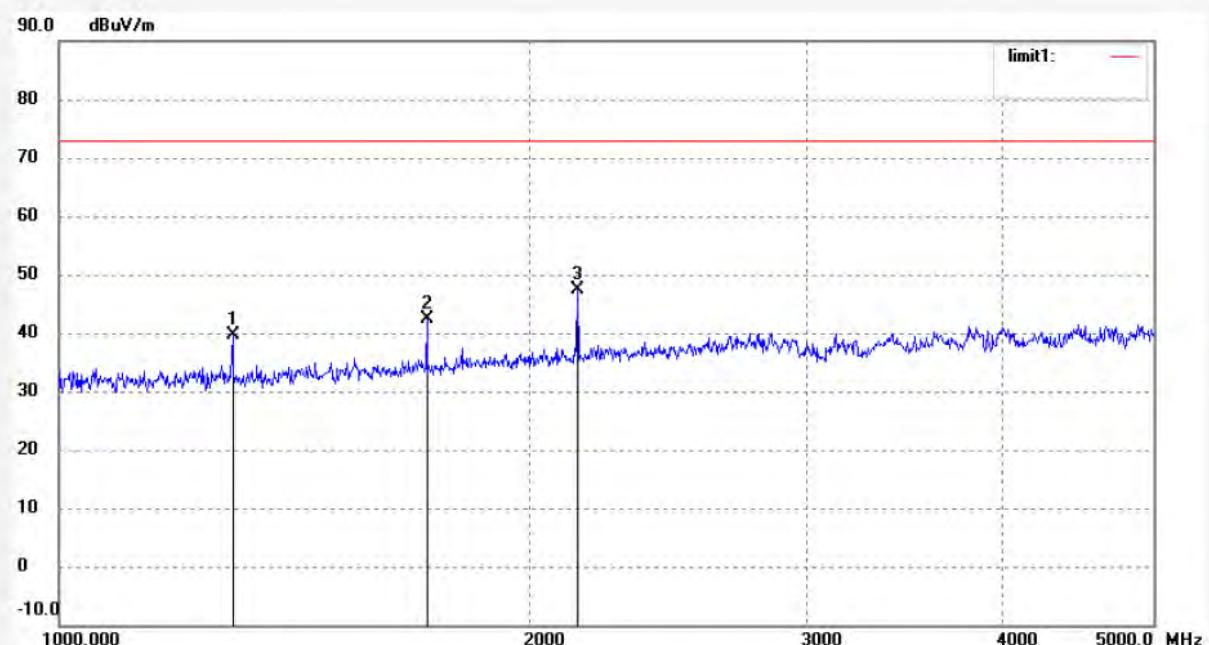


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.760	51.78	-12.22	39.56	72.90	-33.34	peak			
2	1735.680	52.79	-10.32	42.47	72.90	-30.43	peak			
3	2169.600	55.96	-8.51	47.45	72.90	-25.45	peak			

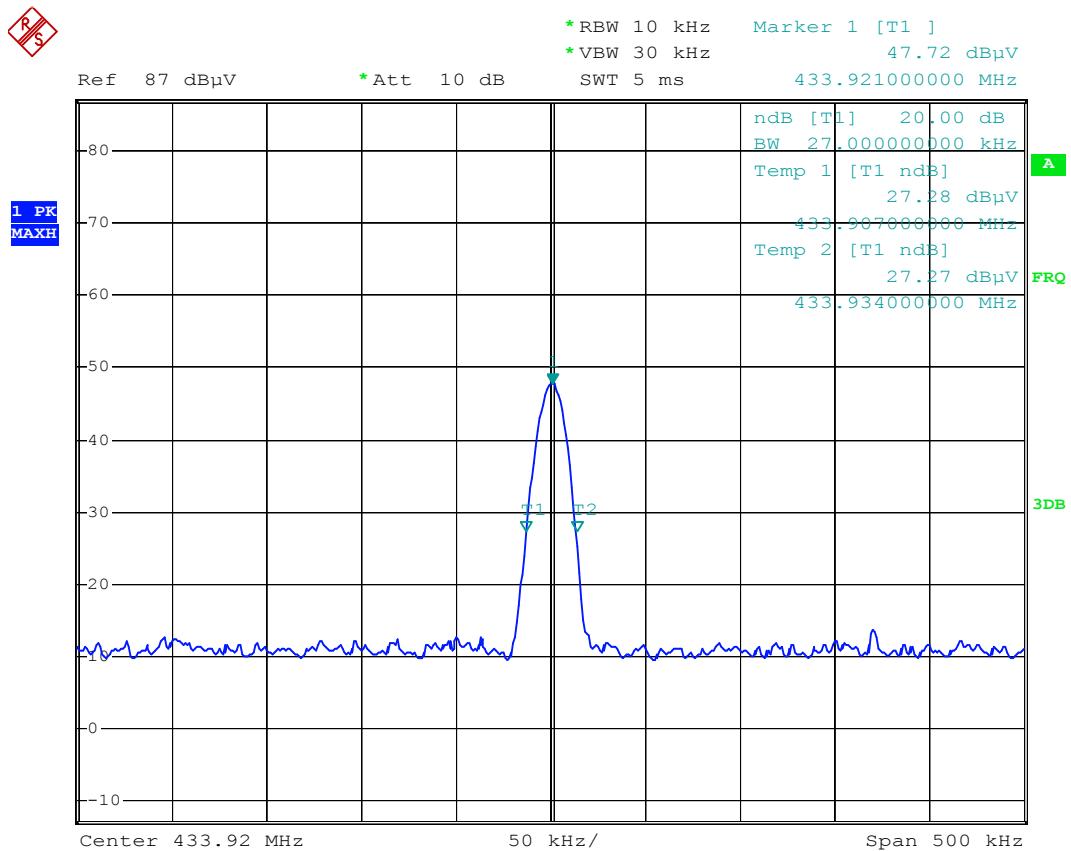


Date: 11.DEC.2012 17:16:29

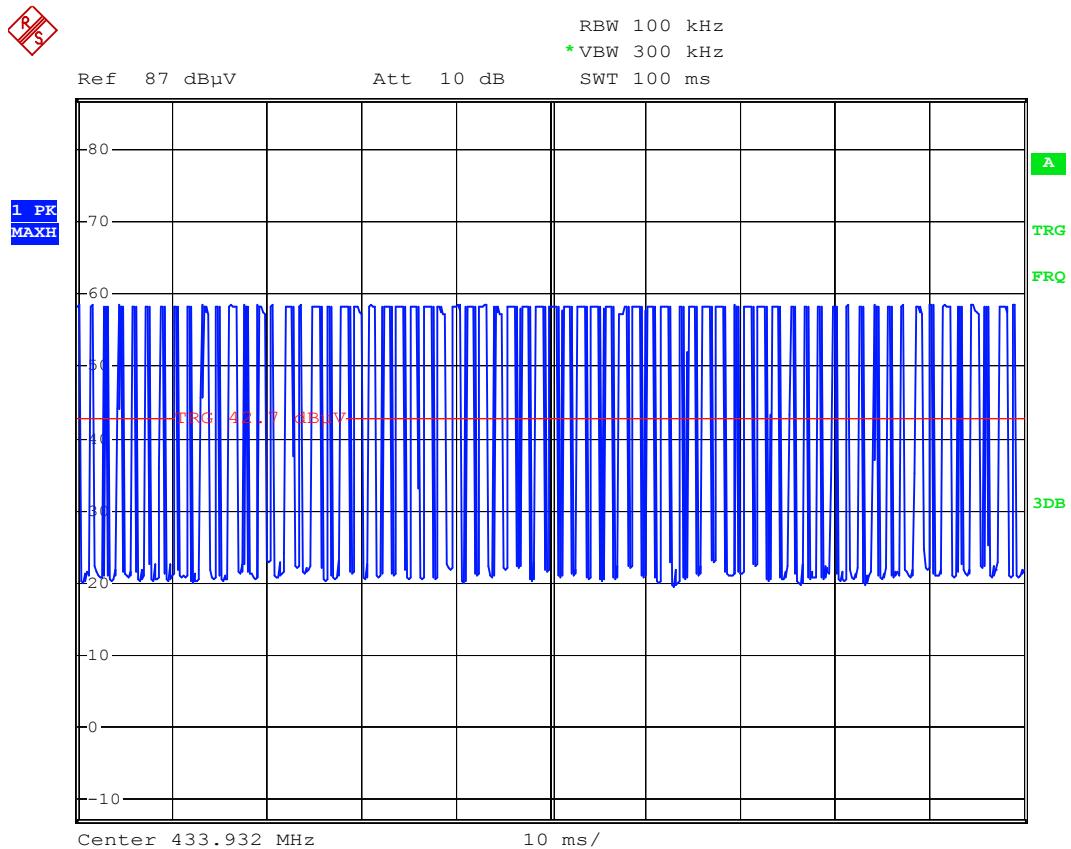

Date: 8.DEC.2012 09:49:52

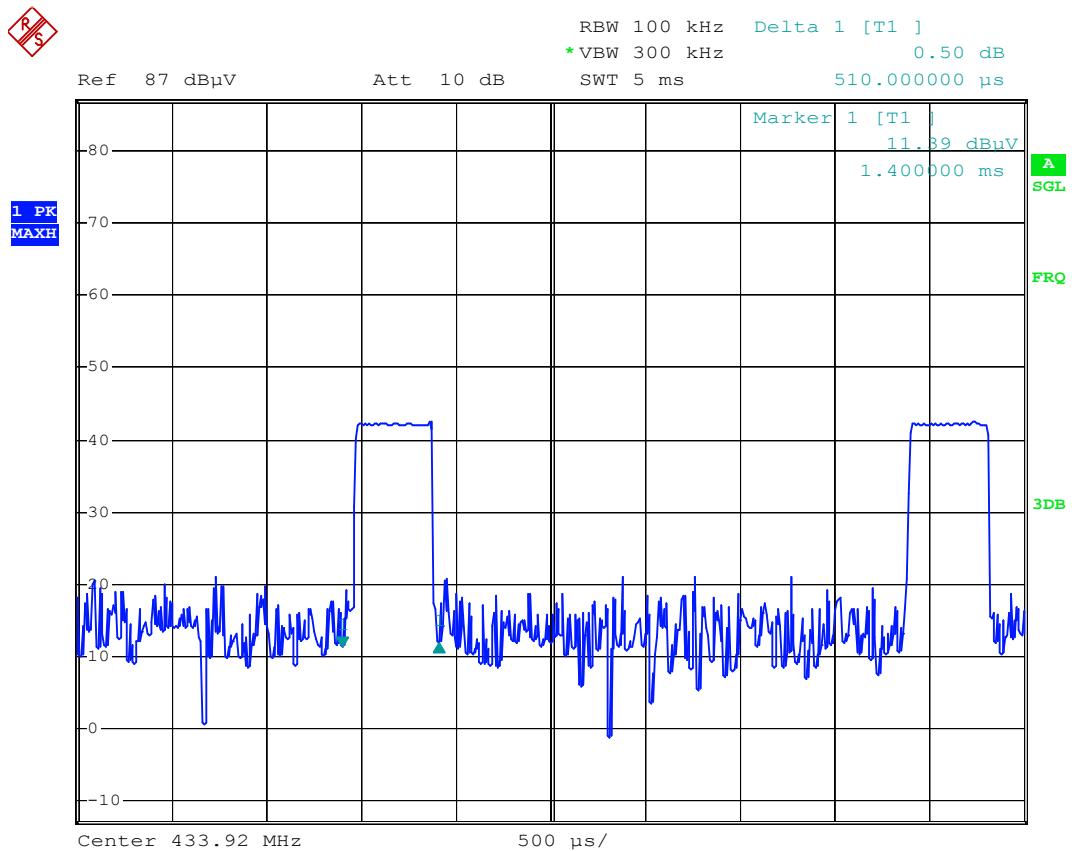

Date: 8.DEC.2012 09:52:44

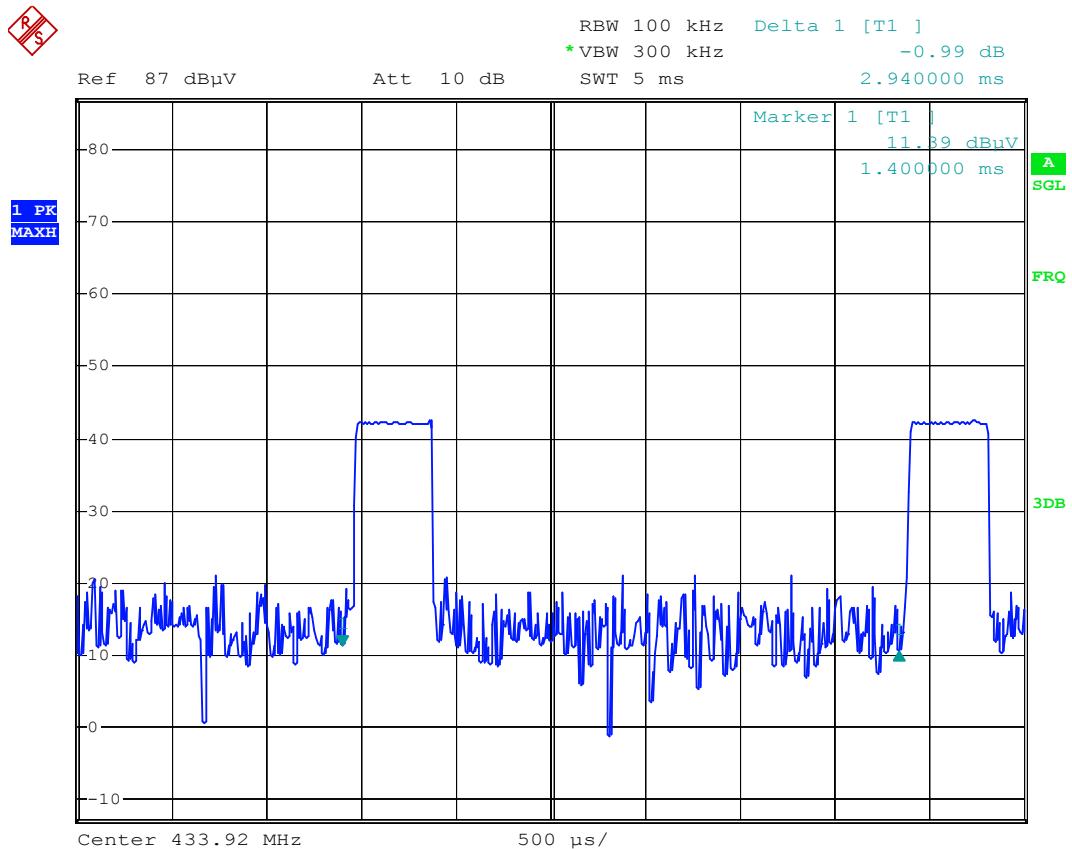

Date: 8.DEC.2012 09:53:00