

**CTC** || advanced  
member of RWTÜV group



Bundesnetzagentur

BNetzA-CAB-02/21-102

## TEST REPORT

Test report no.: 1-3977/22-02-08

### Testing laboratory

**CTC advanced GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <https://www.ctcadvanced.com>  
e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)  
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**SAGEMCOM BROADBAND SAS**  
250, route de l' Empereur  
92848 Rueil-Malmaison Cedex / FRANCE  
Phone: -/-  
Contact: Ludovic Bomba  
e-mail: [ludovic.bomba-ext@sagemcom.com](mailto:ludovic.bomba-ext@sagemcom.com)

### Manufacturer

**SAGEMCOM BROADBAND SAS**  
250, route de l' Empereur  
92848 Rueil-Malmaison Cedex / FRANCE

### Test standard/s

FCC - Title 47 CFR Part 27   FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 27 -  
Miscellaneous wireless communications services

For further applied test standards please refer to section 3 of this test report.

### Test Item

Kind of test item:	Gateway
Model name:	F5688W
FCC ID:	VW3FAST5688W
Frequency:	Band 41
Technology tested:	LTE, 5G NR
Antenna:	4 integrated antennas
Power supply:	120 V AC by power supply unit
Temperature range:	0°C to +50°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Michael Dorongovski  
Lab Manager  
Radio Communications

### Test performed:

Andreas Luckenbill  
Head of Department  
Radio Communications

## 1 Table of contents

<b>1</b>	<b>Table of contents</b>	<b>2</b>
<b>2</b>	<b>General information</b>	<b>4</b>
2.1	Notes and disclaimer	4
2.2	Application details	4
2.3	Test laboratories sub-contracted	4
<b>3</b>	<b>Test standard/s, references and accreditations</b>	<b>5</b>
<b>4</b>	<b>Reporting statements of conformity – decision rule</b>	<b>6</b>
<b>5</b>	<b>Test environment</b>	<b>7</b>
<b>6</b>	<b>Test item</b>	<b>7</b>
6.1	General description	7
6.2	Additional information	7
<b>7</b>	<b>Sequence of testing</b>	<b>8</b>
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	8
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	9
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	10
7.4	Sequence of testing radiated spurious above 18 GHz	11
<b>8</b>	<b>Description of the test setup</b>	<b>12</b>
8.1	Shielded semi anechoic chamber	13
8.2	Shielded fully anechoic chamber	14
8.3	Radiated measurements > 18 GHz	15
8.4	Conducted measurements normal and extreme conditions	16
<b>9</b>	<b>Measurement uncertainty</b>	<b>17</b>
<b>10</b>	<b>Additional information and comments</b>	<b>18</b>
<b>11</b>	<b>Summary of measurement results</b>	<b>19</b>
11.1	Part 27: LTE band 41	19
<b>12</b>	<b>RF measurements</b>	<b>20</b>
12.1	Description of test setup	20
12.2	Results LTE band 41	20
12.2.1	RF output power	20
12.2.2	Frequency stability	26
12.2.3	Spurious emissions radiated	28
12.2.4	Spurious emissions conducted	36
12.2.5	Block edge compliance	56
12.2.6	Occupied bandwidth	69
<b>13</b>	<b>Summary of measurement results</b>	<b>108</b>
13.1	Part 27: 5G NR band 41	108
<b>14</b>	<b>RF measurements</b>	<b>109</b>
14.1	Description of test setup	109
14.2	Results 5G NR band 41	109

14.2.1	RF output power .....	109
14.2.2	Frequency stability .....	117
14.2.3	Spurious emissions radiated.....	119
14.2.4	Spurious emissions conducted.....	130
14.2.5	Block edge compliance.....	133
14.2.6	Occupied bandwidth.....	134
<b>15</b>	<b>Glossary .....</b>	<b>142</b>
<b>16</b>	<b>Document history .....</b>	<b>143</b>
<b>17</b>	<b>Accreditation Certificate – D-PL-12076-01-05 .....</b>	<b>143</b>

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order: 2022-03-11

Date of receipt of test item: 2022-02-16

Start of test: 2022-02-21

End of test: 2022-05-30

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 27		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 27 - Miscellaneous wireless communications services
Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.26-2015	-/-	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
Power Meas License Systems: KDB 971168 D01	v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters
Accreditation	Description	
D-PL-12076-01-05	Telecommunication FCC requirements <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>	

FCC designation number: DE0002

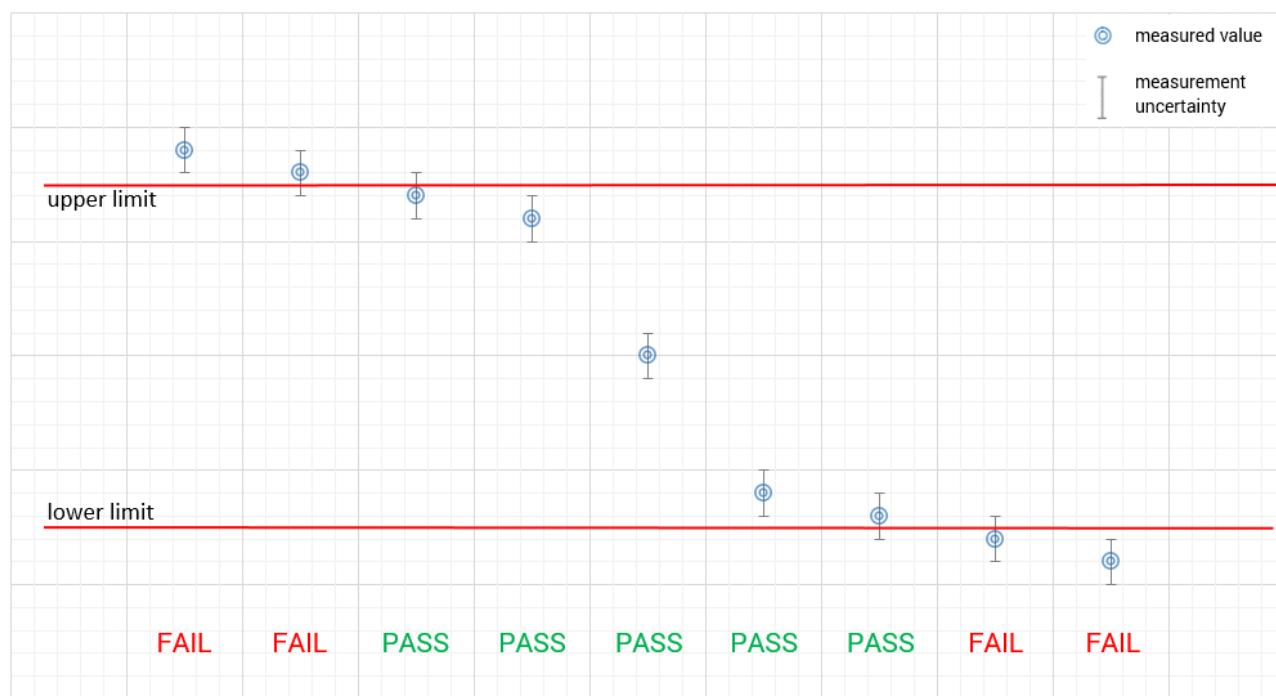


## 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

### measured value, measurement uncertainty, verdict



## 5 Test environment

Temperature :	$T_{\text{nom}}$	+22 °C during room temperature tests
	$T_{\text{max}}$	+50 °C during high temperature tests
	$T_{\text{min}}$	-30 °C during low temperature tests
Relative humidity content :		55 %
Barometric pressure :		1021 hpa
Power supply :	$V_{\text{nom}}$	120 V AC by power supply unit.
	$V_{\text{max}}$	138 V AC by external power supply.
	$V_{\text{min}}$	102 V AC by external power supply.

## 6 Test item

### 6.1 General description

Kind of test item :	Gateway
Model name :	F5688W
S/N serial number :	Radiated unit: DM2205259000020 (IMEI: 359509840011321) Conducted units: DM2201959000030 (IMEI: 359509840005463) DM2205259000045 (IMEI: 359509840012014)
Hardware status :	V1.0
Software status :	SGJi10000C/SG520TMDAR01A02M4G_01.001.01.001_V03
Firmware status :	SGJi10000C/SG520TMDAR01A02M4G_01.001.01.001_V03
Frequency band :	Band 41
Type of radio transmission :	
Use of frequency spectrum :	Modulated carrier
Type of modulation :	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Antenna :	4 integrated antennas
Power supply :	120 V AC by power supply unit
Temperature range :	0°C to +50°C

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-3977/22-02-01\_AnnexA  
 1-3977/22-02-01\_AnnexB  
 1-3977/22-02-01\_AnnexC

## 7 Sequence of testing

### 7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premereasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*)Note: The sequence will be repeated three times with different EUT orientations.

## 7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 7.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 8 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

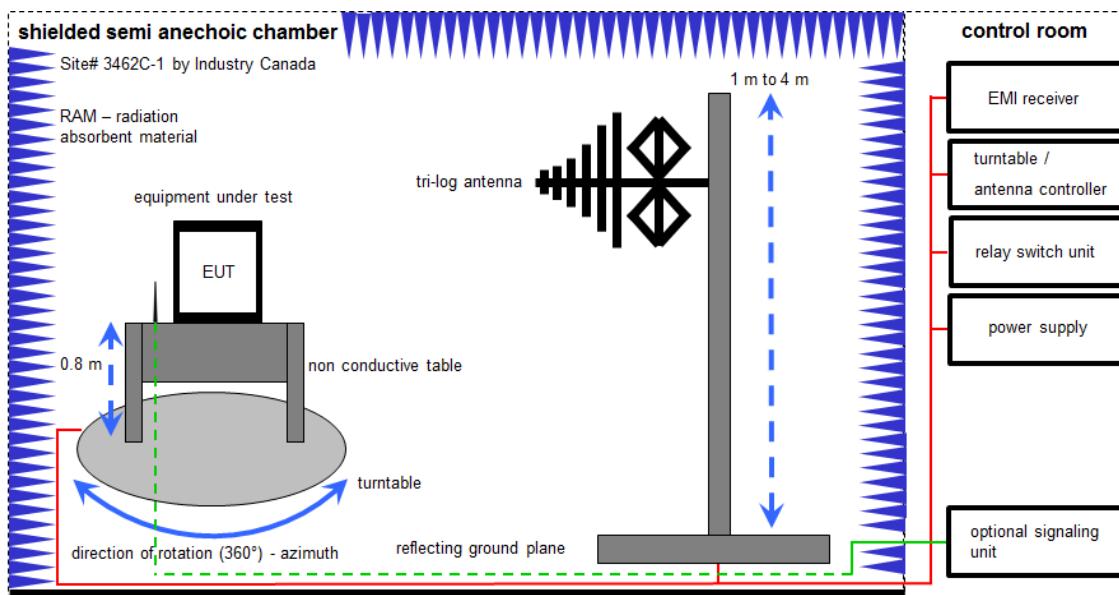
Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

### Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval	*	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

## 8.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter; EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

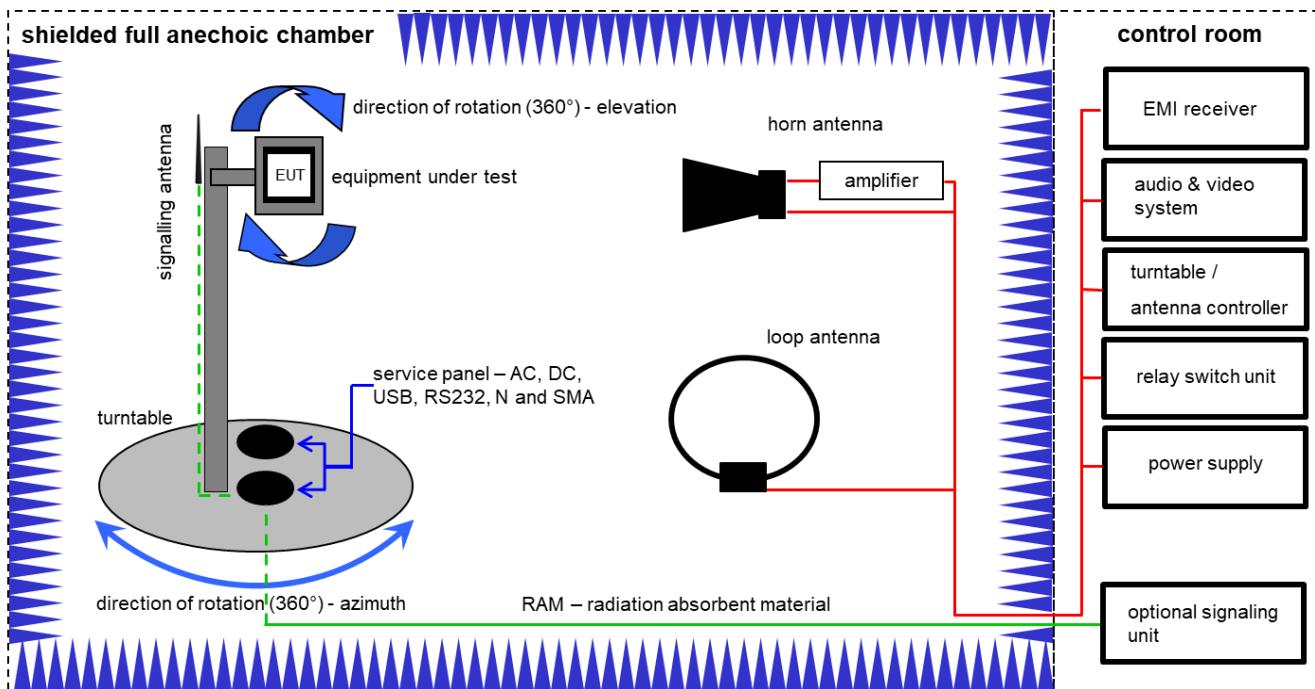
Example calculation:

FS [dB $\mu$ V/m] = 12.35 [dB $\mu$ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB $\mu$ V/m] (35.69  $\mu$ V/m)

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	Batch no. 699714	300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vIKI!	21.04.2021	20.04.2023
7	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	10.12.2020	09.06.2022
8	A	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

## 8.2 Shielded fully anechoic chamber



Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

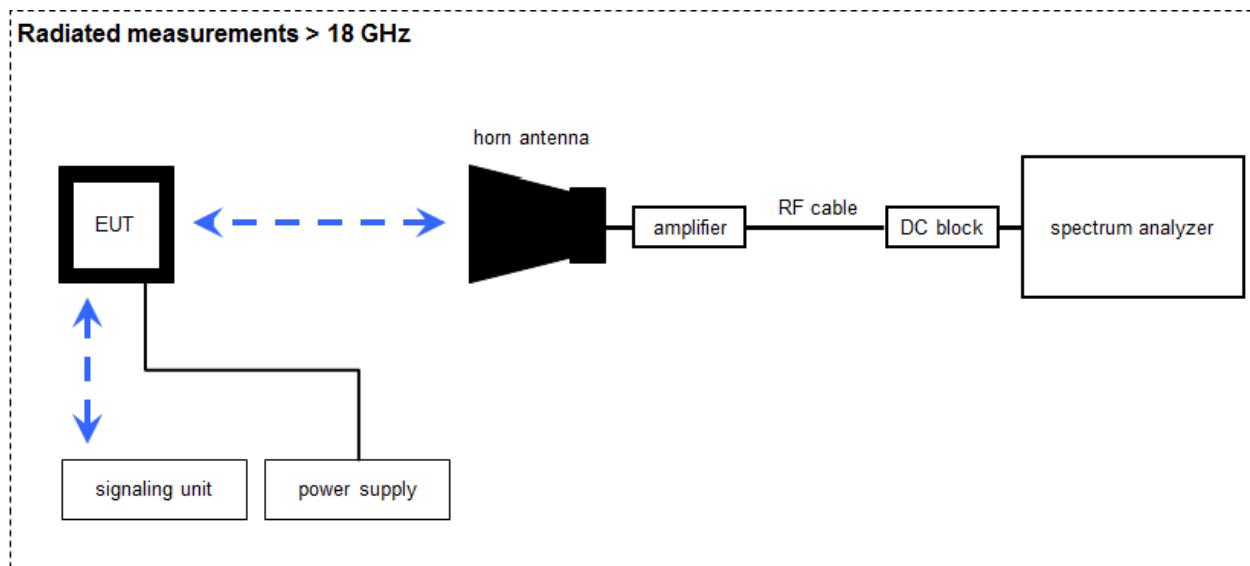
### Example calculation:

$$OP [dBm] = -39.0 [dBm] + 57.0 [dB] - 12.0 [dBi] + (-36.0) [dB] = -30 [dBm] (1 \mu W)$$

### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	B	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vIKI!	01.07.2021	31.07.2023
2	A, B	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3089	300000307	vIKI!	11.02.2022	29.02.2024
4	A, B	EMI Test Receiver 20Hz-26,5GHz	ESU26	R&S	100037	300003555	k	09.12.2021	31.12.2022
5	A, B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
6	A, B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
7	A	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
8	A, B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
9	A, B	NEXIO EMV-Software	BAT EMC V3.21.0.27	EMCO		300004682	ne	-/-	-/-
10	A	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-
11	A, B	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

### 8.3 Radiated measurements > 18 GHz



Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

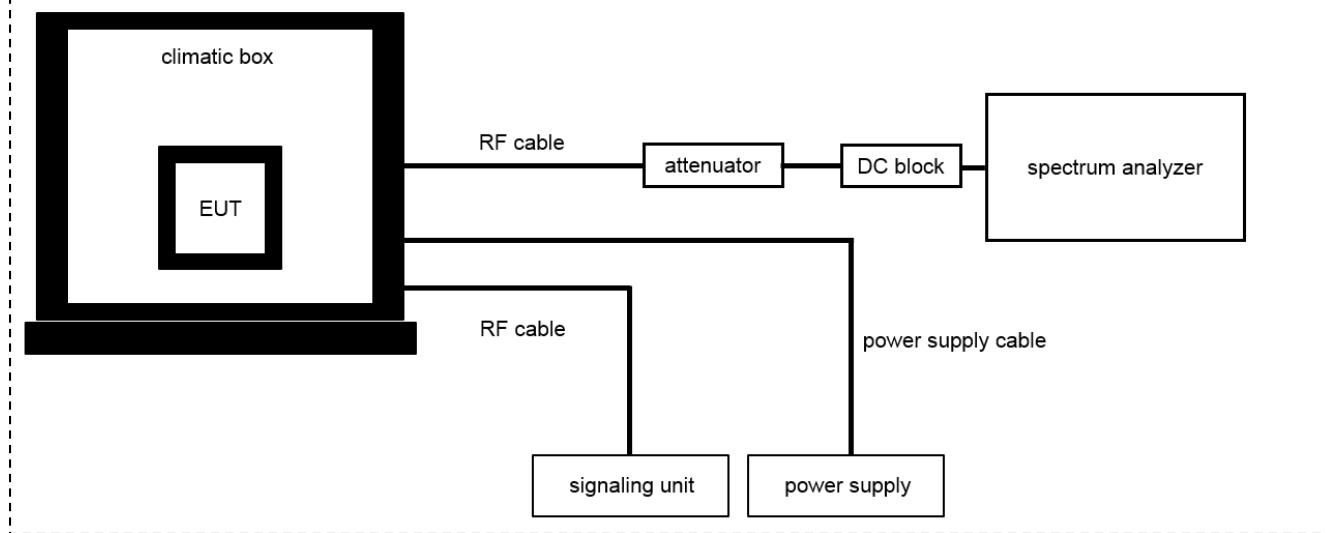
$$FS [\text{dB}\mu\text{V}/\text{m}] = 40.0 [\text{dB}\mu\text{V}/\text{m}] + (-60.1) [\text{dB}] + 36.74 [\text{dB}/\text{m}] = 16.64 [\text{dB}\mu\text{V}/\text{m}] (6.79 \mu\text{V}/\text{m})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vlKI!	17.01.2022	31.01.2024
3	A	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	82-16	300000510	vlKI!	17.01.2022	31.01.2024
4	A	Broadband Low Noise Amplifier 18-50 GHz	CBL18503070-XX	CERNEX	19338	300004273	ev	-/-	-/-
5	A	RF-Cable	ST18/SMAM/SMAM /48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
6	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	25.01.2022	31.01.2023
7	A	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

## 8.4 Conducted measurements normal and extreme conditions

### Conducted measurements normal & extreme conditions



OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

$$OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 \text{ mW})$$

#### Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	25.01.2022	31.01.2023
2	A	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH		300004590	ne	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm /72	Huber & Suhner	Batch no. 699714	400001184	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-
5	A	RF-Cable	ST18/SMAm/SMAm /36	Huber & Suhner	Batch no. 601494	400001309	ev	-/-	-/-
6	A	Temperature Test Chamber	T-40/50	CTS GmbH	064023	300003540	ev	08.05.2020	07.05.2022
7	A	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	170616	300006251	k	16.09.2021	30.09.2023

## 9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
99 % bandwidth	± RBW	
-26 dB bandwidth	± RBW	
Frequency stability	10 <sup>-6</sup>	
Maximum output power conducted	± 1.56 dB	
Block edge compliance	± 1.56 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	

## 10 Additional information and comments

Reference documents: Customer Questionnaire\_F5688W\_Sagemcom\_v3.docx  
F5866WTMO\_ANTENNA MAPPING\_v2.xlsx  
1-3977\_22-02-08\_Annex\_MR\_A1 (5G NR plots)

Special test descriptions: Although the device has 4 integrated antennas, only antenna 1 (5GNR\_P) is used for TX mode for LTE. For 5G NR band 41 only 2 antennas are used for TX mode (LTE\_M and 5GNR\_P).  
Supported bandwidths for 5G NR band 41: 20 MHz  
CP-OFDM and DFT-s-OFDM were investigated for SISO and DFT-s-OFDM was found to be the worst case for SISO.  
CP-OFDM is used for MIMO.  
For 5G NR tests the MT8000A from Anritsu with the serial number SN6262186399 was used.

Configuration descriptions: ANT1 = LTE\_M  
ANT2 = 5GNR\_P

EUT selection:  Only one device available  
 Devices selected by the customer  
 Devices selected by the laboratory (Randomly)

## 11 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC: CFR Part 2 & Part 27	See table!	2022-06-01	-/-

### 11.1 Part 27: LTE band 41

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

#### Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
---	-----------	----	---------------	----	----------------	----	---------------

## 12 RF measurements

### 12.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

### 12.2 Results LTE band 41

The EUT was set to transmit the maximum power.

#### 12.2.1 RF output power

**Description:**

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

**Measurement:**

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Sample
AQT:	See plot
Resolution bandwidth:	40 MHz
Used equipment:	See chapter 8.2 setup A & 8.4 setup A
Measurement uncertainty:	See chapter 9
Measurement procedure:	FCC: § 2.1046

**Limits:**

FCC
§27.50(h)(2)
<i>Mobile and other user stations.</i> Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.
Power: 33 dBm EIRP PAPR: Reporting only

**Results:**

Output Power (conducted)						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
5	39675 / 2498.5	1 RB low	25.0	24.7	23.2	-/-
		1 RB mid	25.2	24.7	23.3	-/-
		1 RB high	25.2	24.6	23.3	-/-
		50% RB low	24.2	23.2	22.2	-/-
		50% RB mid	24.2	23.2	22.2	-/-
		50% RB high	24.2	23.2	22.2	-/-
		100% RB	24.2	23.2	22.2	-/-
	40620 / 2593.0	1 RB low	25.6	25.1	23.8	-/-
		1 RB mid	25.7	25.1	23.9	-/-
		1 RB high	25.7	25.1	23.9	-/-
		50% RB low	24.6	23.8	22.7	-/-
		50% RB mid	24.8	23.9	22.8	-/-
		50% RB high	24.7	23.7	22.8	-/-
		100% RB	24.7	23.8	22.7	-/-
10	39700 / 2501.0	1 RB low	25.0	24.6	23.4	-/-
		1 RB mid	25.1	24.7	23.3	-/-
		1 RB high	25.0	24.6	23.2	-/-
		50% RB low	24.1	23.1	22.0	-/-
		50% RB mid	24.2	23.2	22.2	-/-
		50% RB high	24.1	23.2	22.1	-/-
		100% RB	24.1	23.2	22.1	-/-
	40620 / 2593.0	1 RB low	25.0	24.4	23.3	-/-
		1 RB mid	25.1	24.5	23.3	-/-
		1 RB high	25.2	24.6	23.4	-/-
		50% RB low	24.2	23.2	22.2	-/-
		50% RB mid	24.2	23.3	22.3	-/-
		50% RB high	24.2	23.3	22.3	-/-
		100% RB	24.2	23.2	22.2	-/-
	41540 / 2685.0	1 RB low	25.7	25.0	23.9	-/-
		1 RB mid	25.7	25.1	24.0	-/-
		1 RB high	25.6	25.0	23.9	-/-
		50% RB low	24.7	23.7	22.7	-/-

Output Power (conducted)						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
15		50% RB mid	24.2	23.2	22.2	-/-
		50% RB high	24.1	23.1	22.1	-/-
		100% RB	24.1	23.1	22.1	-/-
	39725 / 2503.5	1 RB low	24.9	24.2	23.2	-/-
		1 RB mid	25.0	24.4	23.1	-/-
		1 RB high	24.9	24.3	23.2	-/-
		50% RB low	23.9	23.0	22.0	-/-
		50% RB mid	24.1	23.1	22.1	-/-
		50% RB high	24.1	23.1	22.0	-/-
		100% RB	24.0	23.1	22.0	-/-
	40620 / 2593.0	1 RB low	25.7	24.9	23.8	-/-
		1 RB mid	25.5	24.9	23.8	-/-
		1 RB high	25.5	24.9	23.9	-/-
		50% RB low	24.6	23.6	22.6	-/-
		50% RB mid	24.6	23.7	22.6	-/-
		50% RB high	24.6	23.7	22.6	-/-
		100% RB	24.6	23.7	22.7	-/-
	41515 / 2682.5	1 RB low	25.0	24.2	23.1	-/-
		1 RB mid	25.1	24.4	23.3	-/-
		1 RB high	25.0	24.3	23.2	-/-
		50% RB low	24.0	23.0	21.9	-/-
		50% RB mid	24.1	23.1	22.1	-/-
		50% RB high	24.1	23.1	22.1	-/-
		100% RB	24.1	23.1	22.1	-/-
20	39750 / 2506.0	1 RB low	24.9	24.4	23.2	-/-
		1 RB mid	25.0	24.4	23.4	-/-
		1 RB high	24.8	24.5	23.2	-/-
		50% RB low	24.0	23.0	22.0	-/-
		50% RB mid	24.1	23.1	22.1	-/-
		50% RB high	24.1	23.1	22.0	-/-
		100% RB	24.1	23.1	22.1	-/-
	40620 / 2593.0	1 RB low	25.6	25.3	23.9	-/-
		1 RB mid	25.6	25.1	23.9	-/-
		1 RB high	25.6	25.0	23.8	-/-
		50% RB low	24.6	23.6	22.6	-/-
		50% RB mid	24.6	23.6	22.7	-/-
		50% RB high	24.6	23.6	22.7	-/-
		100% RB	24.6	23.6	22.6	-/-
	41490 / 2680.0	1 RB low	24.8	24.1	23.1	-/-
		1 RB mid	25.1	24.3	23.2	-/-
		1 RB high	25.0	24.2	23.1	-/-
		50% RB low	23.9	23.0	22.0	-/-

Output Power (conducted)						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
		50% RB mid	24.0	23.0	22.1	-/-
		50% RB high	24.0	23.1	22.1	-/-
		100% RB	24.0	23.0	22.0	-/-

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (EIRP)					
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
5	2498.5	28.6	28.1	26.7	-/-
	2593.0	28.2	27.6	26.4	-/-
	2687.5	25.6	25.2	23.9	-/-
10	2501.0	28.6	28	26.8	-/-
	2593.0	28.2	27.6	26.5	-/-
	2685.0	25.7	24.9	23.8	-/-
15	2503.5	28.4	27.8	26.6	-/-
	2593.0	28.2	27.4	26.4	-/-
	2682.5	25.6	24.9	23.8	-/-
20	2506.0	28.4	27.9	26.8	-/-
	2593.0	28.1	27.8	26.4	-/-
	2680.0	25.6	24.8	23.7	-/-

Peak to Average ratio						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM
5	39675 / 2498.5	1 RB low	6.4	6.0	7.7	-/-
		1 RB mid	6.5	5.9	7.6	-/-
		1 RB high	6.7	6.1	7.7	-/-
		50% RB low	8.0	7.1	9.0	-/-
		50% RB mid	8.0	7.1	8.7	-/-
		50% RB high	8.2	7.2	8.9	-/-
		100% RB	8.6	7.4	9.1	-/-
	40620 / 2593.0	1 RB low	6.8	6.2	7.7	-/-
		1 RB mid	6.7	6.1	7.7	-/-
		1 RB high	6.8	6.2	7.7	-/-
		50% RB low	8.3	7.3	9.2	-/-
		50% RB mid	8.1	7.2	9.1	-/-
		50% RB high	8.3	7.3	8.8	-/-
		100% RB	8.6	7.6	9.3	-/-
10	39700 / 2501.0	1 RB low	6.0	6.7	7.6	-/-
		1 RB mid	6.0	6.7	7.6	-/-
		1 RB high	6.1	6.7	7.6	-/-
		50% RB low	7.1	8.2	9.0	-/-
		50% RB mid	7.1	8.0	9.0	-/-
		50% RB high	7.3	8.3	9.1	-/-
		100% RB	7.7	8.7	9.3	-/-
	40620 / 2593.0	1 RB low	6.0	6.8	7.6	-/-
		1 RB mid	6.0	6.7	7.6	-/-
		1 RB high	6.1	6.8	7.8	-/-
		50% RB low	7.3	8.2	9.1	-/-
		50% RB mid	7.2	8.2	9.1	-/-
		50% RB high	7.3	8.2	9.1	-/-
		100% RB	7.7	8.7	9.4	-/-
20	41540 / 2685.0	1 RB low	5.7	6.6	7.6	-/-
		1 RB mid	5.5	6.3	7.2	-/-
		1 RB high	5.5	6.5	7.2	-/-
		50% RB low	6.8	7.8	8.6	-/-
		50% RB mid	6.6	7.6	8.5	-/-
		50% RB high	6.7	7.7	8.5	-/-
		100% RB	7.4	8.3	9.0	-/-

Peak to Average ratio						
Bandwidth (MHz)	Channel No. / Frequency (MHz)	Resource block allocation	Peak to Average ratio (dB) QPSK	Peak to Average ratio (dB) 16-QAM	Peak to Average ratio (dB) 64-QAM	Peak to Average ratio (dB) 256-QAM
15	39725 / 2503.5	1 RB low	6.6	6.0	7.6	-/-
		1 RB mid	6.7	6.1	7.8	-/-
		1 RB high	6.7	6.1	7.7	-/-
		50% RB low	8.2	7.2	9.1	-/-
		50% RB mid	8.2	7.2	9.1	-/-
		50% RB high	8.2	7.2	9.1	-/-
		100% RB	8.7	7.8	9.4	-/-
	40620 / 2593.0	1 RB low	6.7	6.1	7.8	-/-
		1 RB mid	6.9	6.1	7.6	-/-
		1 RB high	6.9	6.2	7.6	-/-
		50% RB low	8.3	7.3	9.2	-/-
		50% RB mid	8.2	7.3	9.2	-/-
		50% RB high	8.3	7.3	9.2	-/-
		100% RB	8.9	7.9	9.5	-/-
20	39750 / 2506.0	1 RB low	6.5	5.8	7.4	-/-
		1 RB mid	6.4	5.6	7.3	-/-
		1 RB high	6.1	5.5	7.1	-/-
		50% RB low	8.0	7.0	8.9	-/-
		50% RB mid	7.7	6.8	8.7	-/-
		50% RB high	7.7	6.8	8.6	-/-
		100% RB	8.4	7.5	9.1	-/-
	40620 / 2593.0	1 RB low	6.0	6.7	7.7	-/-
		1 RB mid	6.0	6.9	7.8	-/-
		1 RB high	6.2	6.7	7.6	-/-
		50% RB low	7.2	8.3	9.2	-/-
		50% RB mid	7.1	8.0	9.0	-/-
		50% RB high	7.3	8.3	9.2	-/-
		100% RB	7.7	8.6	9.4	-/-
	41490 / 2680.0	1 RB low	6.2	6.7	7.8	-/-
		1 RB mid	6.1	6.7	7.7	-/-
		1 RB high	6.2	6.8	7.8	-/-
		50% RB low	7.3	8.3	9.2	-/-
		50% RB mid	7.3	8.2	9.2	-/-
		50% RB high	7.3	8.3	9.2	-/-
		100% RB	7.8	8.8	9.5	-/-
		1 RB low	5.9	6.5	7.4	-/-
		1 RB mid	5.7	6.5	7.6	-/-
		1 RB high	5.5	6.2	7.1	-/-
		50% RB low	7.0	7.9	8.9	-/-
		50% RB mid	6.9	7.8	8.8	-/-
		50% RB high	6.8	7.8	8.7	-/-
		100% RB	7.5	8.5	9.2	-/-

## 12.2.2 Frequency stability

### Description:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMW500 DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with  $V_{\text{nom}}$ , connected to the CMW500 and in a simulated call on channel 18900 (center channel), measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with  $V_{\text{nom}}$ . Vary supply voltage from  $V_{\text{min}}$  to  $V_{\text{max}}$ , in 0.1 Volt steps re-measuring carrier frequency at each voltage. Pause at  $V_{\text{nom}}$  for 1.5 hours unpowered, to allow any self heating to stabilize, before continuing.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### Measurement:

Measurement parameters	
Detector:	
Sweep time:	
Video bandwidth:	
Resolution bandwidth:	Measured with CMW500
Span:	
Trace mode:	
Used equipment:	See chapter 8.4 setup A
Measurement uncertainty:	See chapter 9
Measurement procedure:	FCC: § 2.1055

### Limits:

FCC
§27.54
The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

**Results:****AFC FREQ ERROR versus VOLTAGE**

<b>Voltage (V)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>
102	17	0.0067
120	13	0.0051
138	13	0.0051

**AFC FREQ ERROR versus TEMPERATURE**

<b>Temperature (°C)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>
-30	-8	-0.0031
-20	-11	-0.0043
-10	-4	-0.0016
± 0	-9	-0.0035
10	-13	-0.0051
20	13	0.0051
30	-9	-0.0035
40	-7	-0.0027
50	-7	-0.0027

### 12.2.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, middle and highest channels of the LTE band 41.

#### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Span:	100 MHz Steps
Trace mode:	Max Hold
Used equipment:	See chapter 8.1 setup A & 8.2 setup A+B & setup 8.3 A
Measurement uncertainty:	See chapter 9
Measurement procedure	FCC: § 2.1053

#### Limits:

FCC
§ 27.53 (m) (4)
For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.
-25 dBm

**Results:****QPSK:**

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

**16-QAM:**

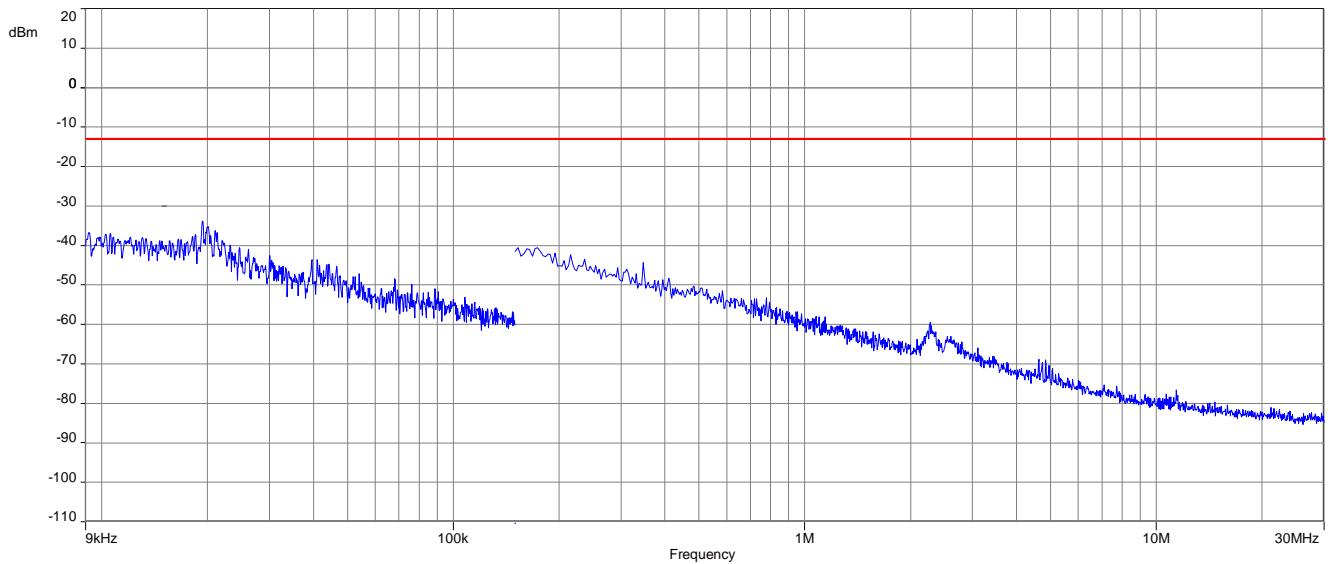
Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

**64-QAM:**

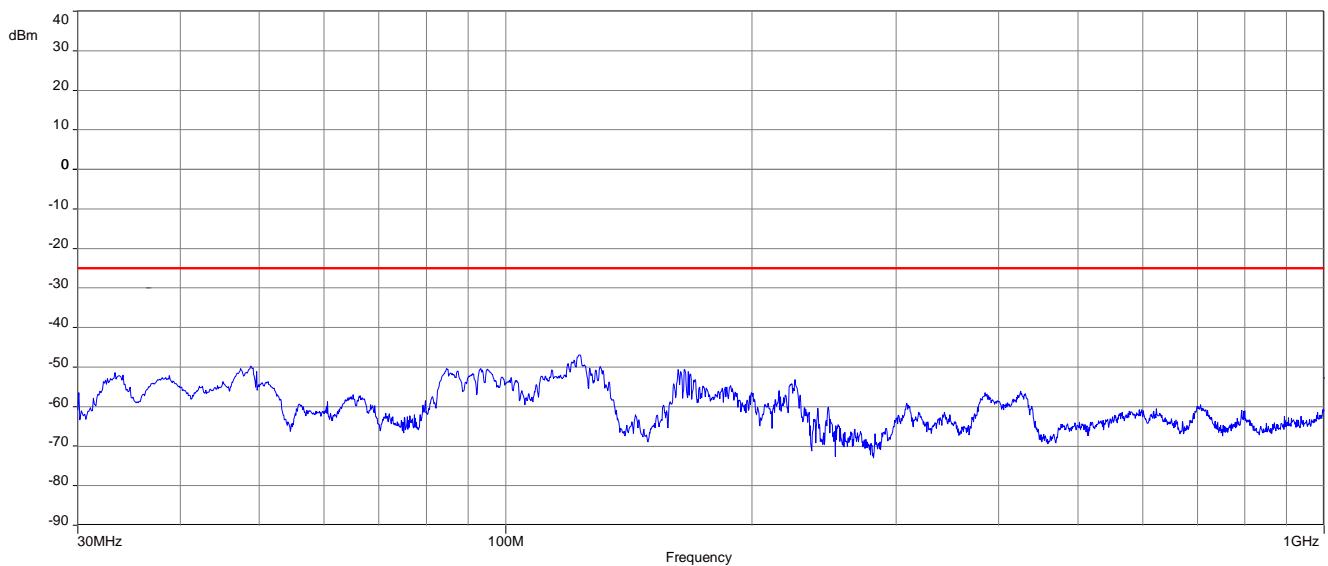
Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

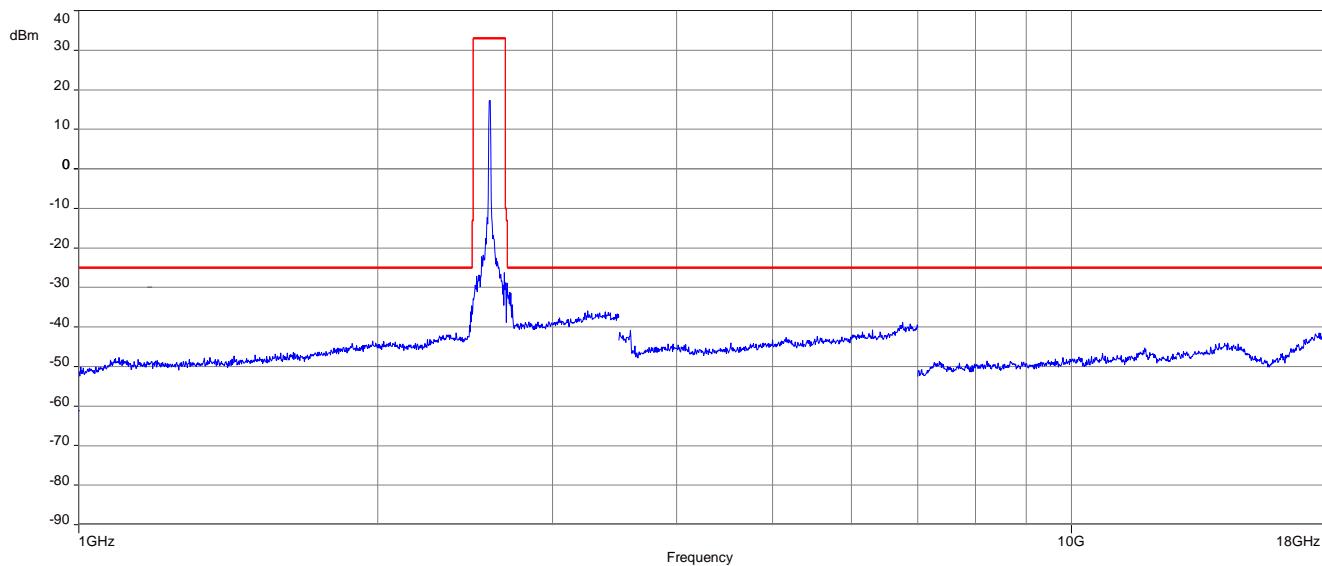
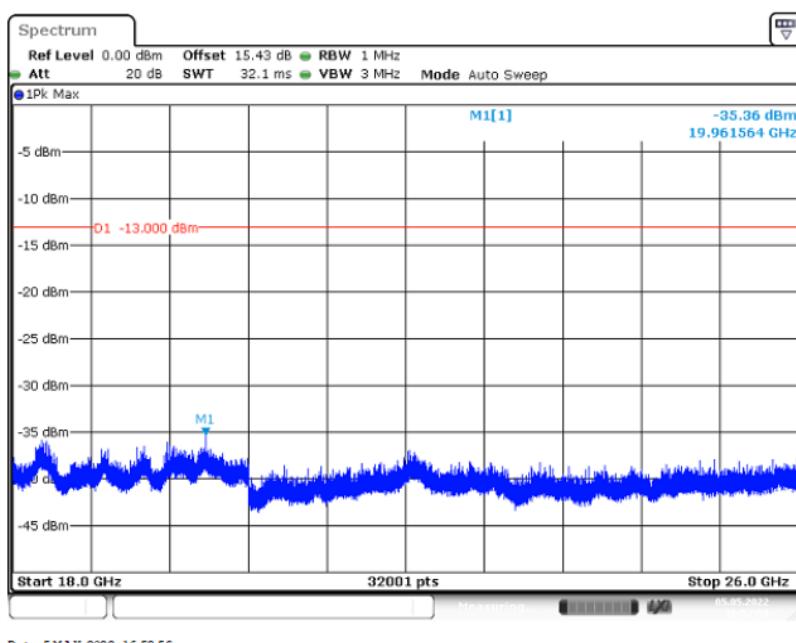
**Plots:**

**Plot 1:** QPSK - Middle channel (9 kHz - 30 MHz)



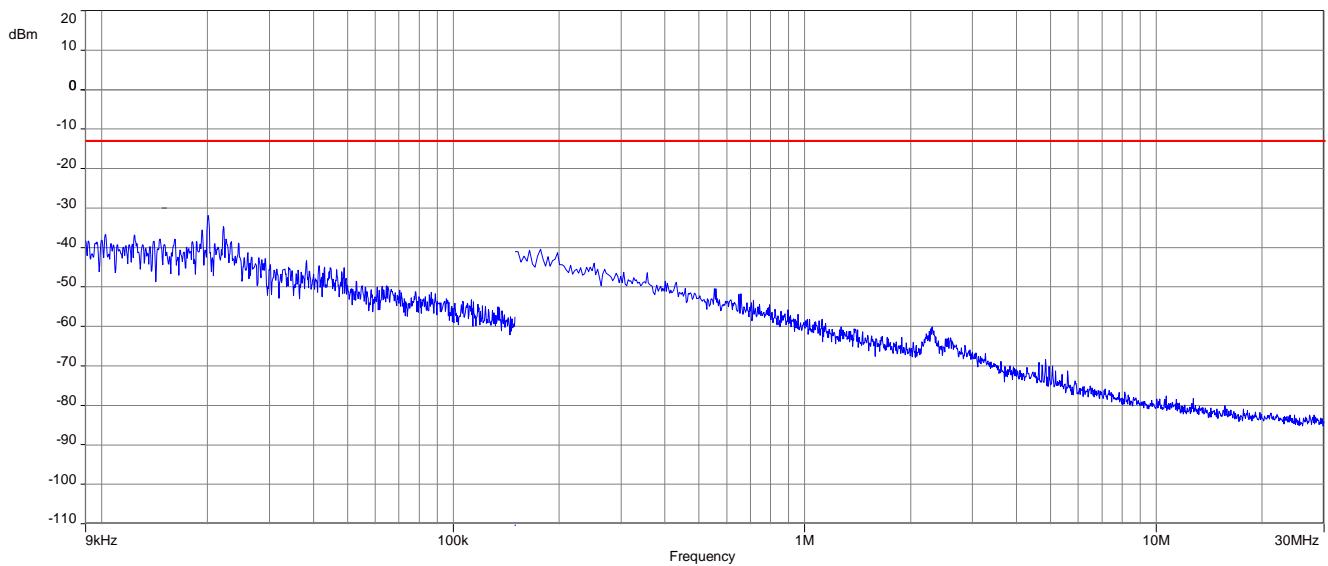
**Plot 2:** QPSK - Middle channel (30 MHz – 1 GHz)



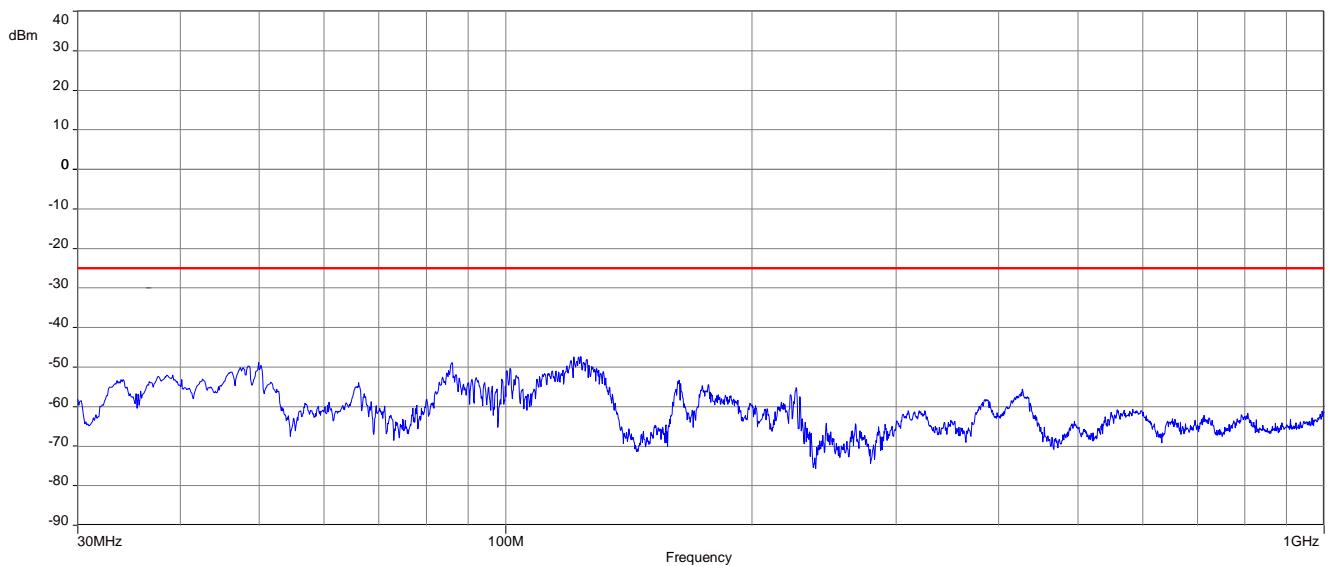
**Plot 3:** QPSK - Middle channel (1 GHz – 18 GHz)**Plot 4:** QPSK - Middle channel (18 GHz – 26 GHz)

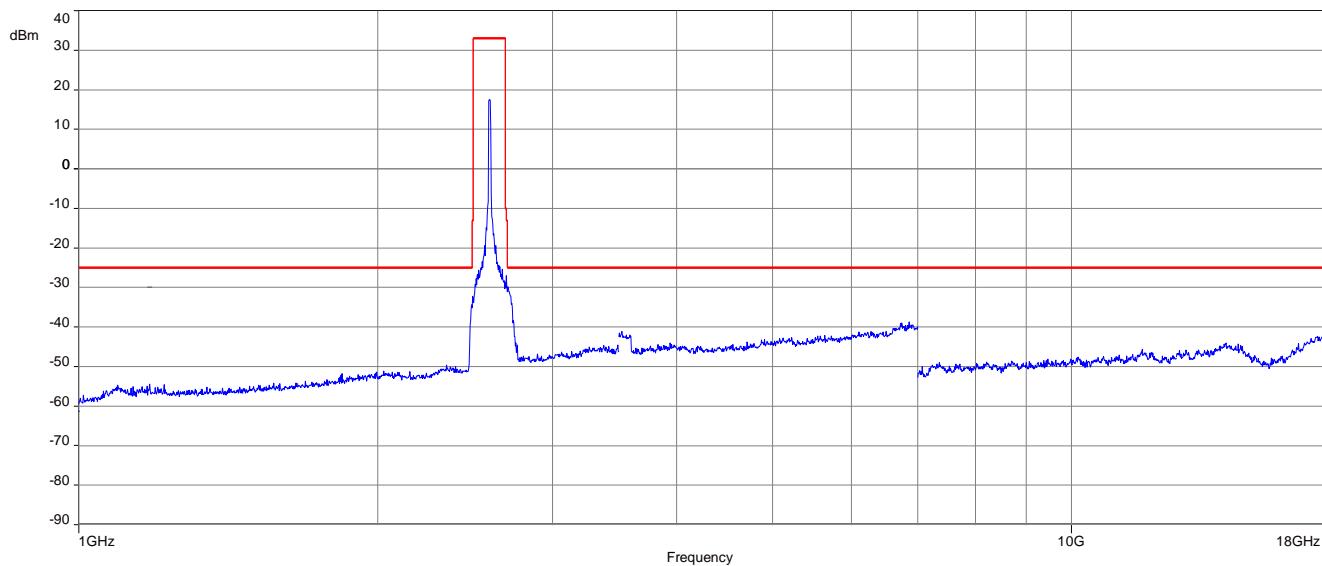
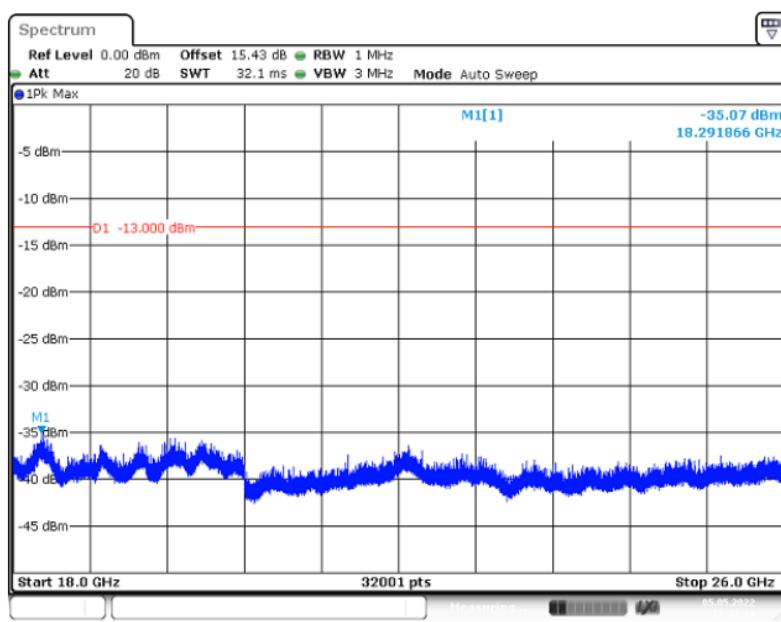
This plot is valid for LTE band 41 and 5G NR band 41.

**Plot 5:** 16-QAM - Middle channel (9 kHz - 30 MHz)



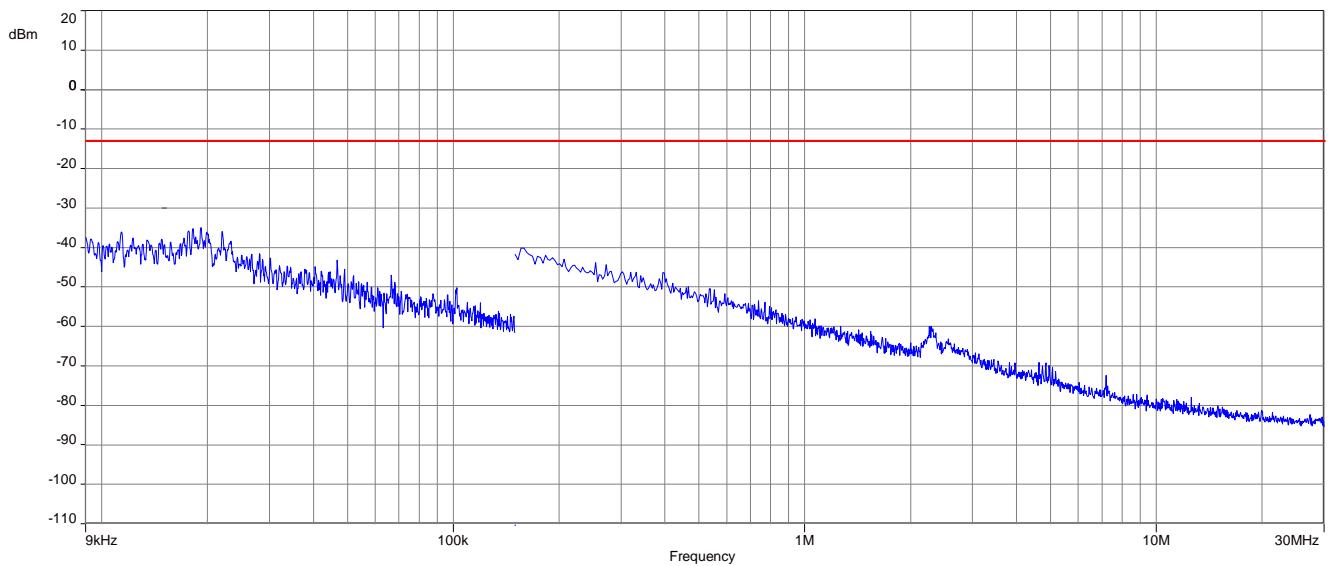
**Plot 6:** 16-QAM - Middle channel (30 MHz – 1 GHz)



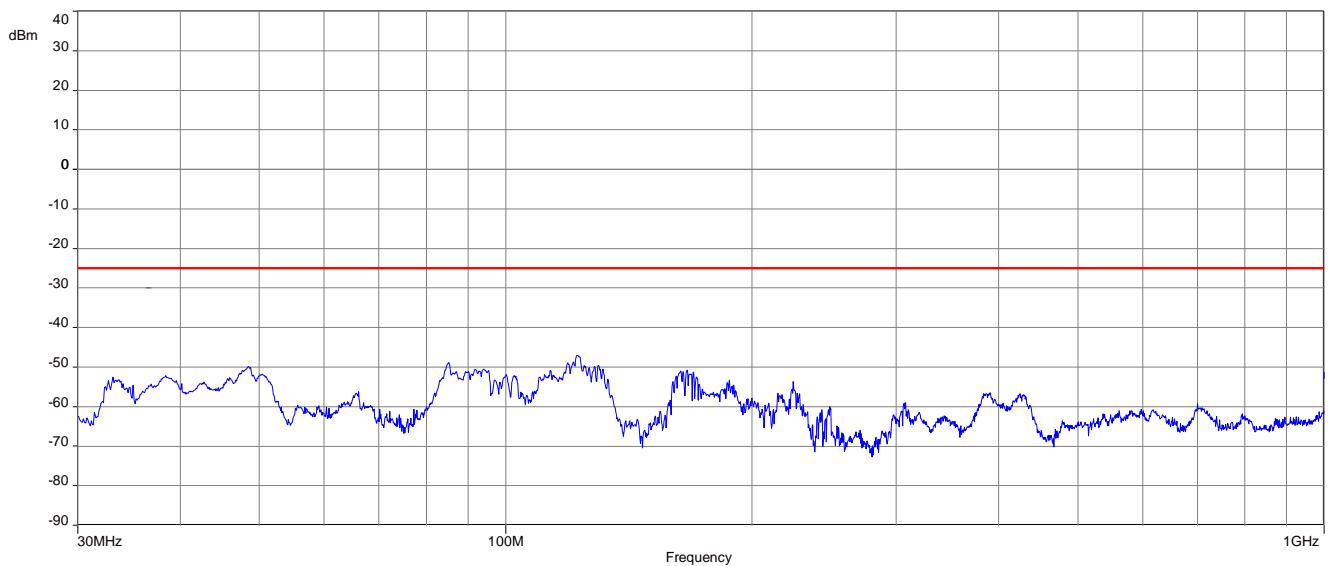
**Plot 7:** 16-QAM - Middle channel (1 GHz – 18 GHz)**Plot 8:** 16-QAM - Middle channel (18 GHz – 26 GHz)

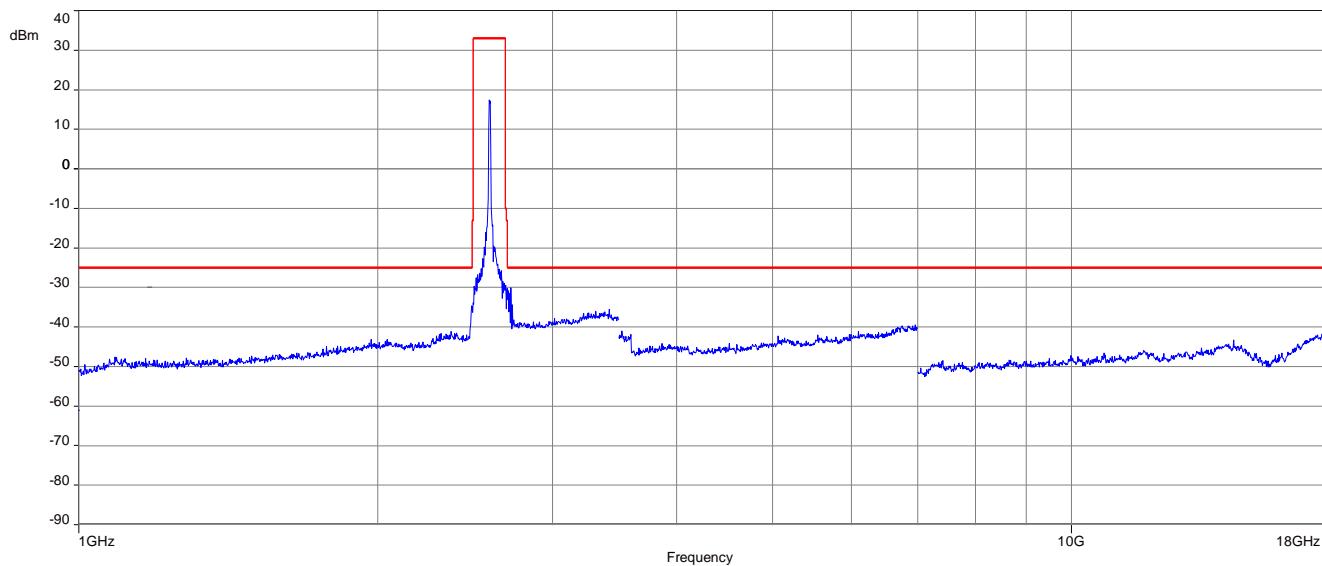
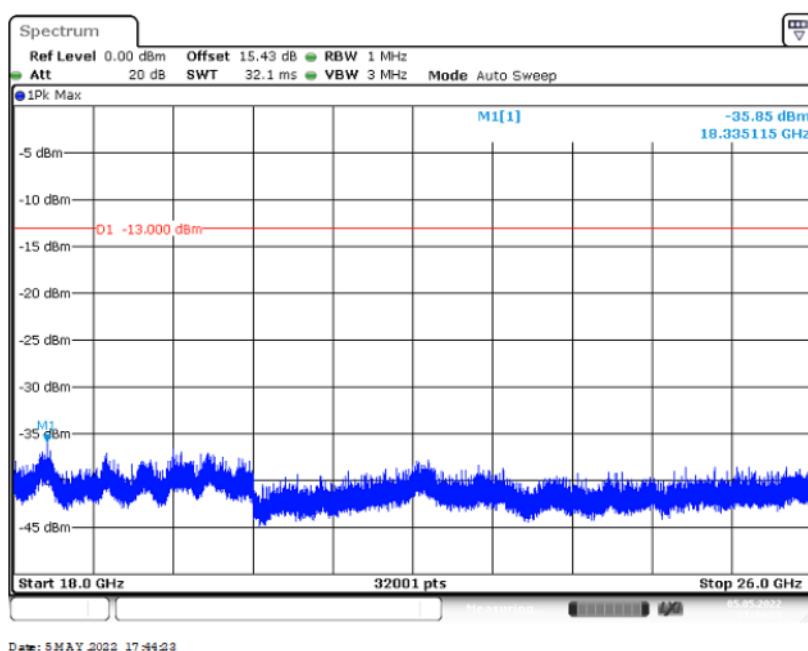
This plot is valid for LTE band 41 and 5G NR band 41.

**Plot 9:** 64-QAM - Middle channel (9 kHz - 30 MHz)



**Plot 10:** 64-QAM - Middle channel (30 MHz – 1 GHz)



**Plot 11:** 64-QAM - Middle channel (1 GHz – 18 GHz)**Plot 12:** 64-QAM - Middle channel (18 GHz – 26 GHz)

This plot is valid for LTE band 41 and 5G NR band 41.

## 12.2.4 Spurious emissions conducted

### Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From § 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	1 MHz
Span:	30 MHz – 26 GHz
Trace mode:	Max Hold
Used equipment:	See chapter 8.4 setup A
Measurement uncertainty:	see chapter 9
Measurement procedure	FCC: § 2.1051

### Limits:

FCC
§ 27.53 (m) (4)
For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.
<b>-25 dBm</b>

**Results:****QPSK:**

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

**16-QAM:**

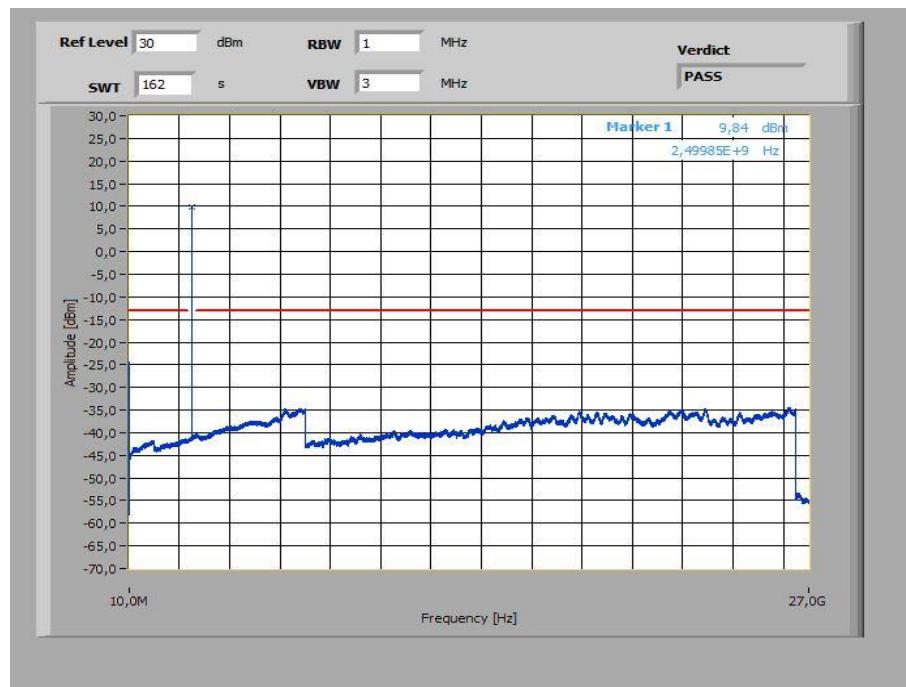
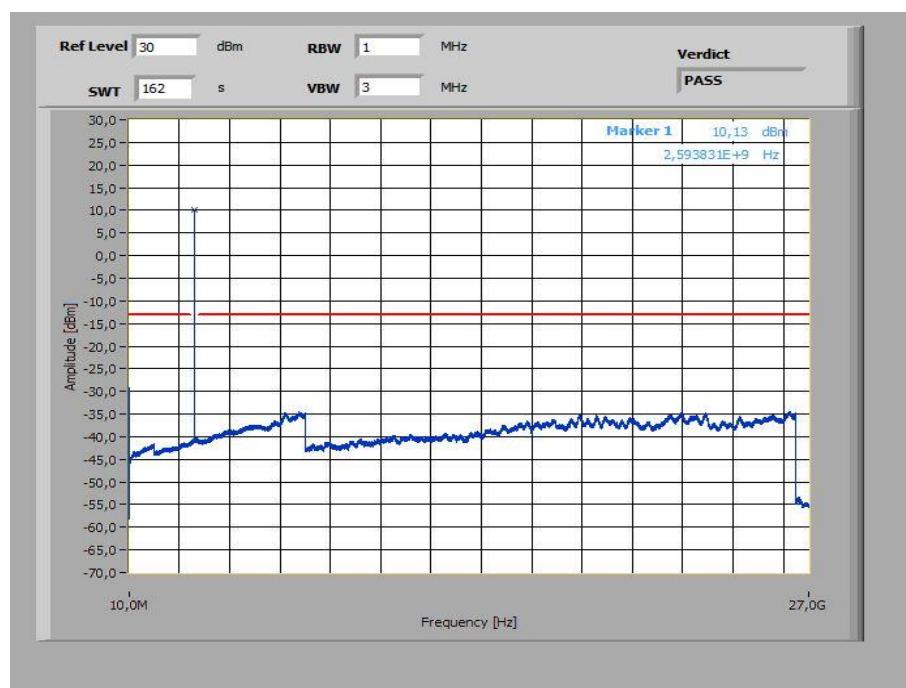
Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

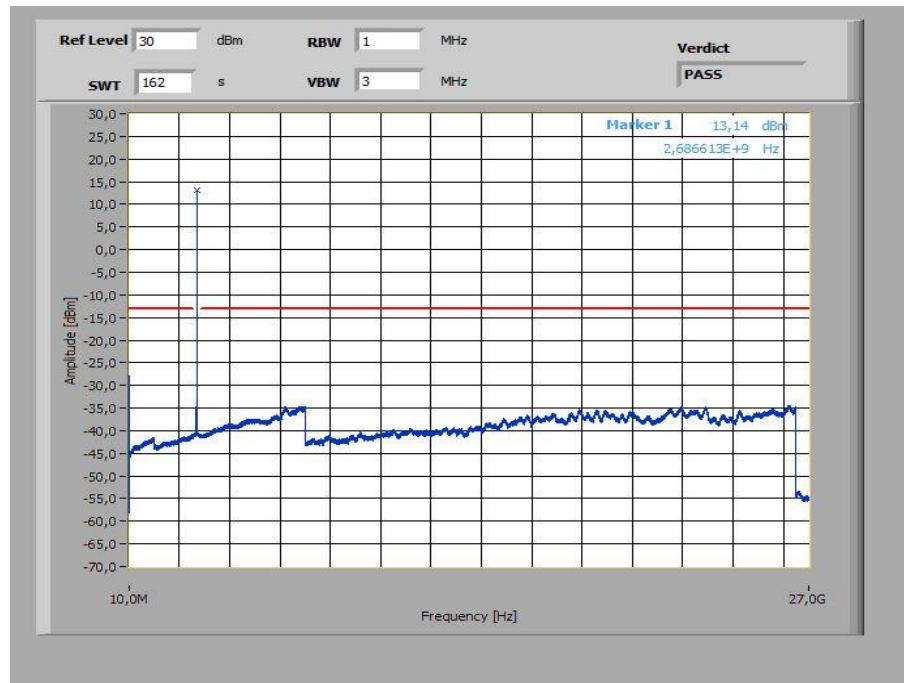
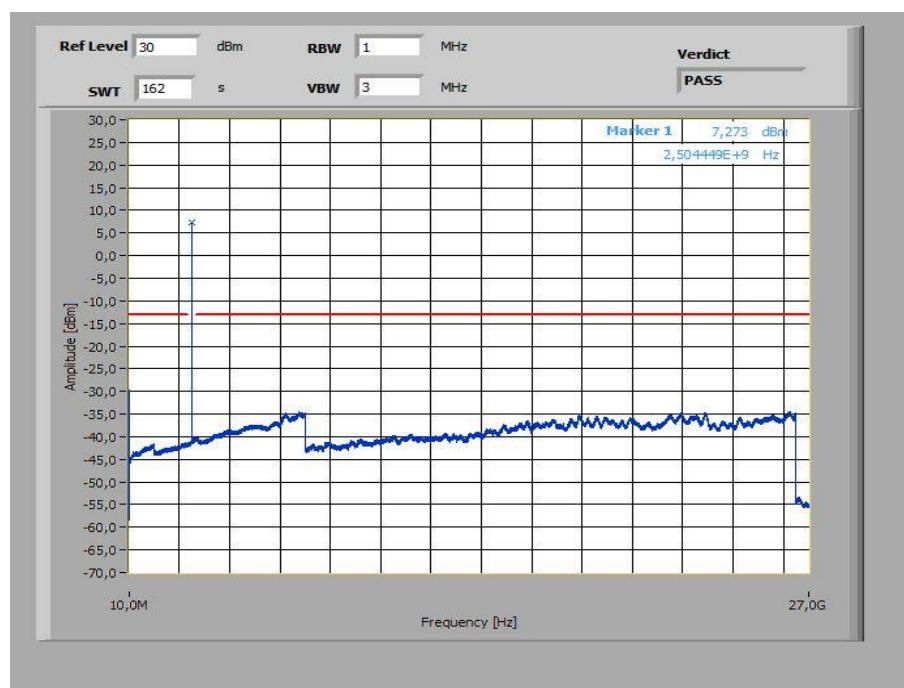
NOTE: The limit of -25 dBm is fulfilled.

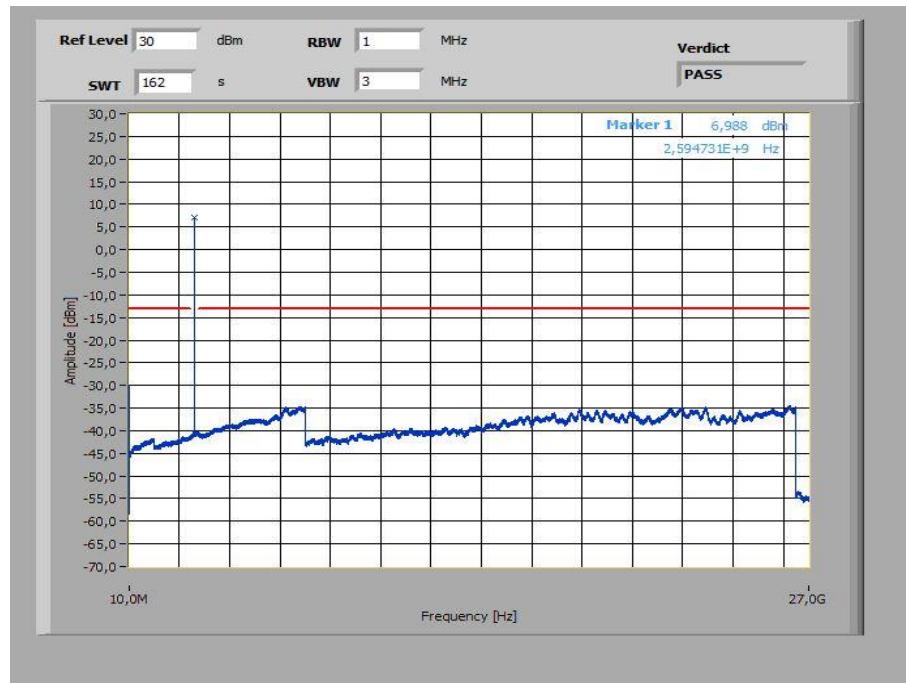
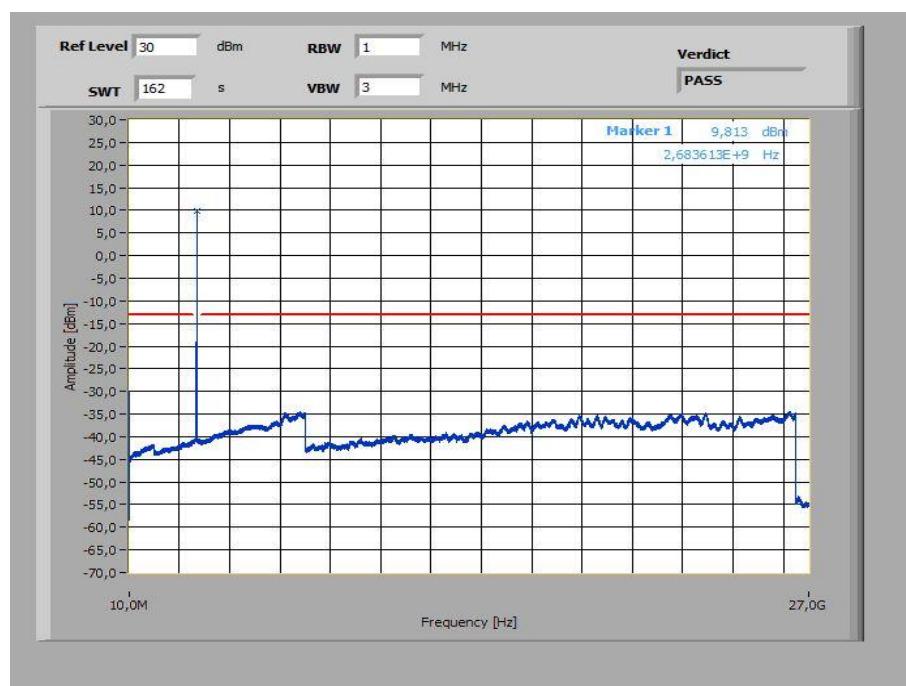
**64-QAM:**

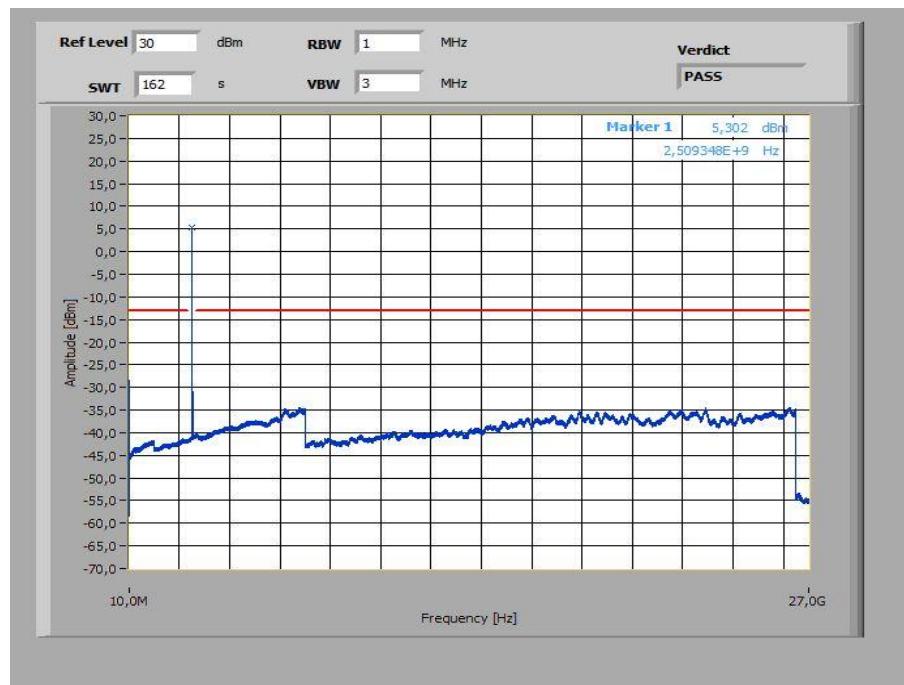
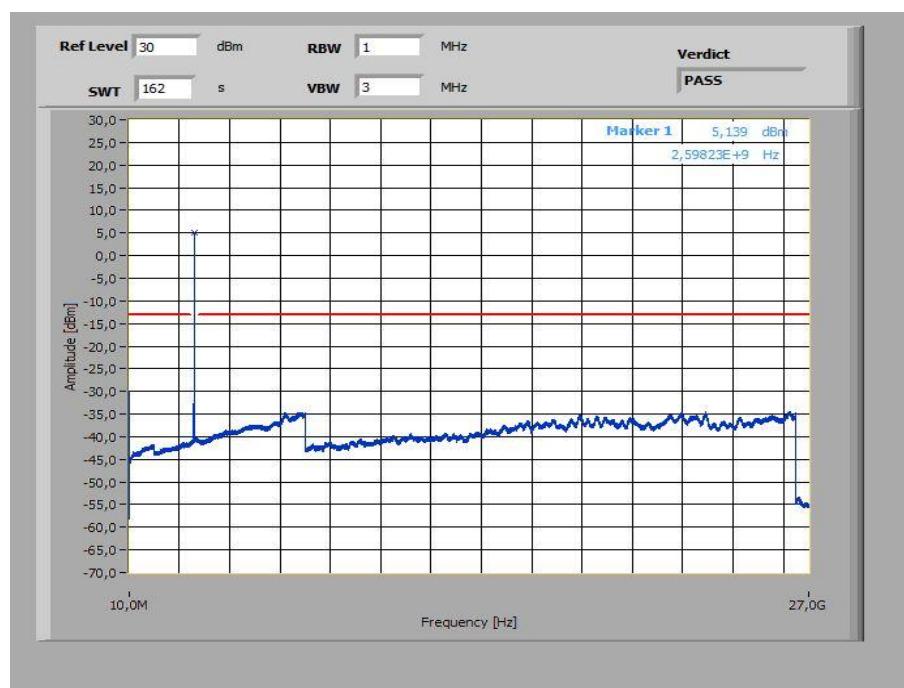
Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

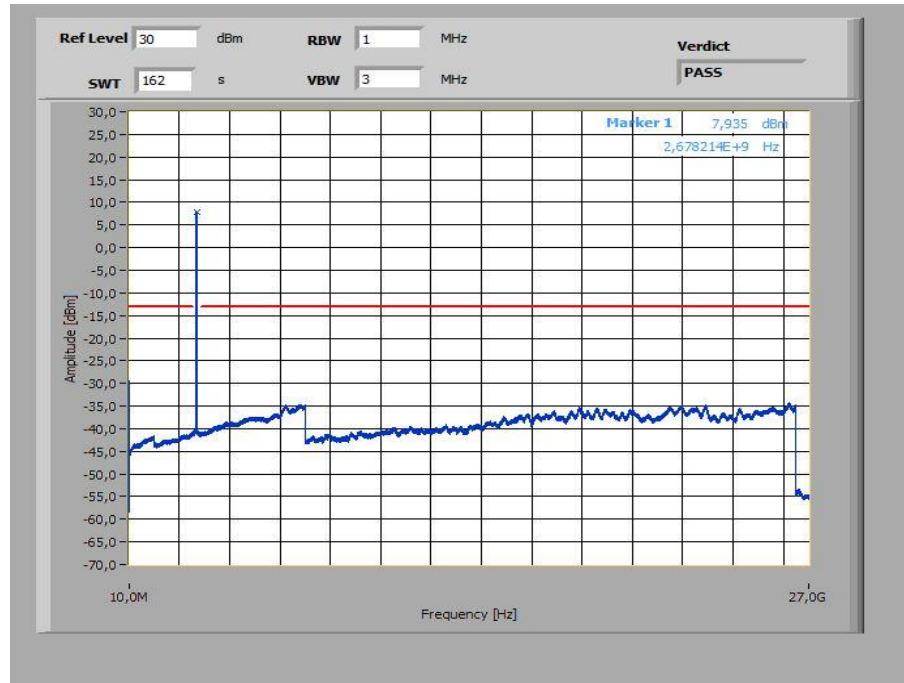
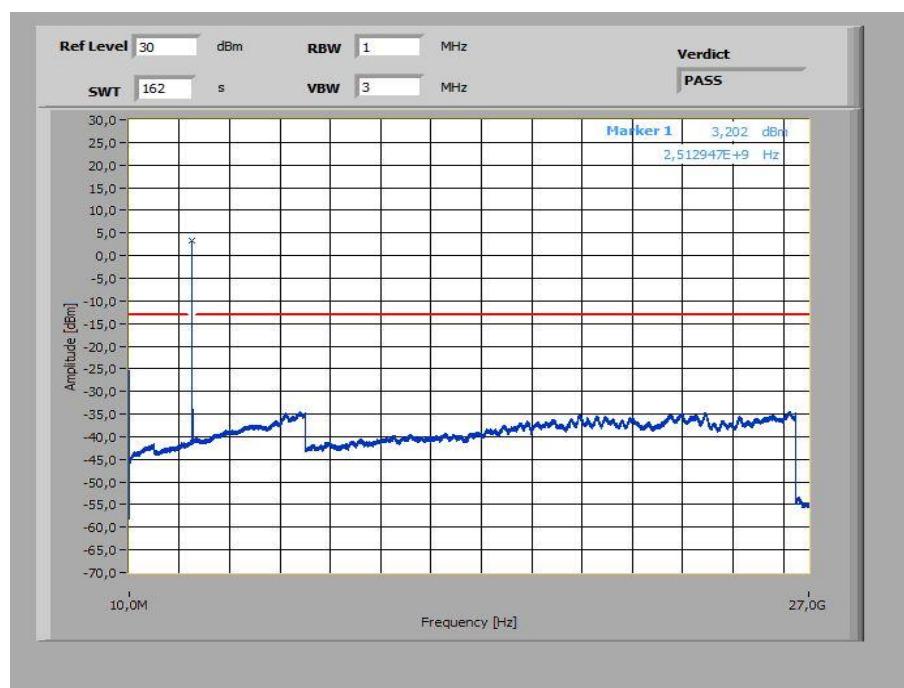
NOTE: The limit of -25 dBm is fulfilled.

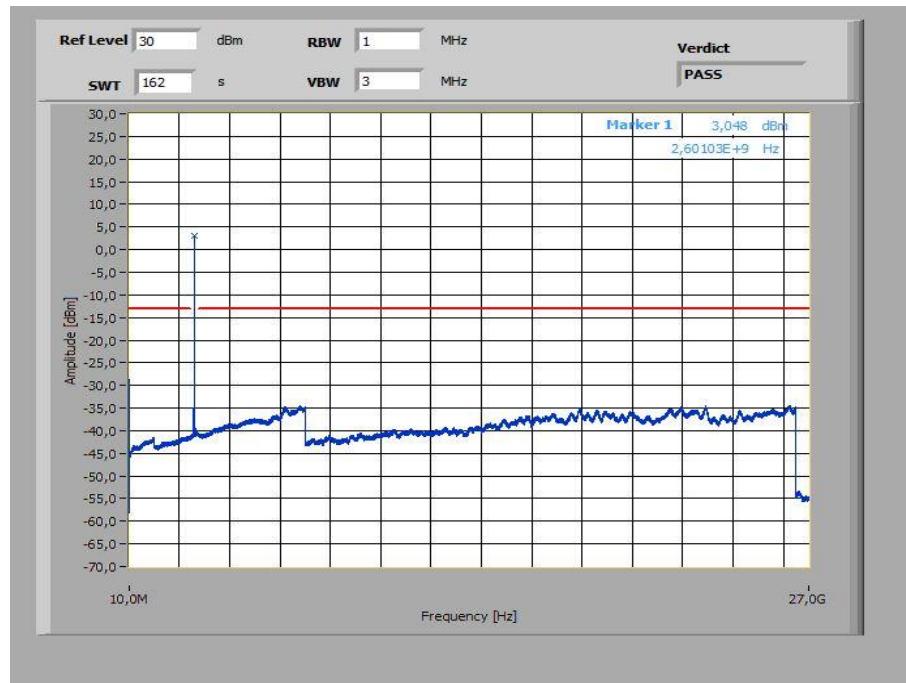
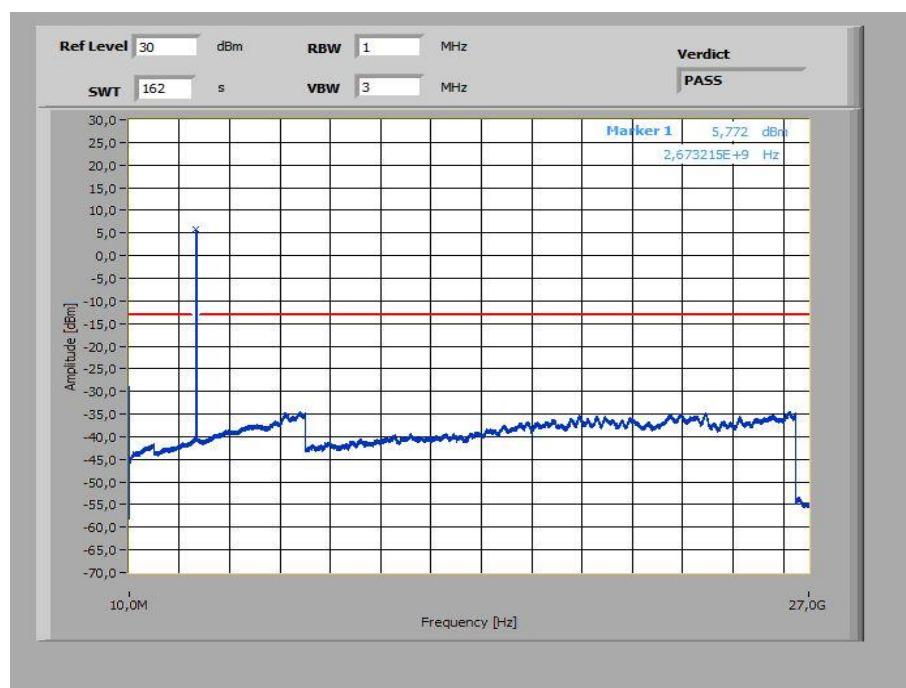
**Plots:****Plot 1:** 5 MHz – QPSK - Lowest Channel (10 MHz – 26 GHz)**Plot 2:** 5 MHz – QPSK - Middle Channel (10 MHz – 26 GHz)

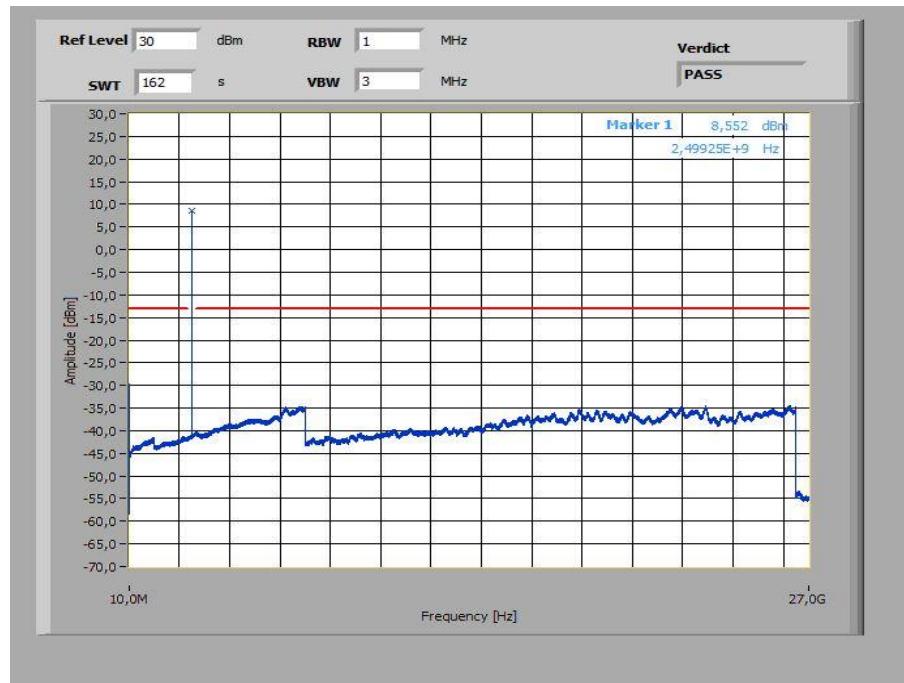
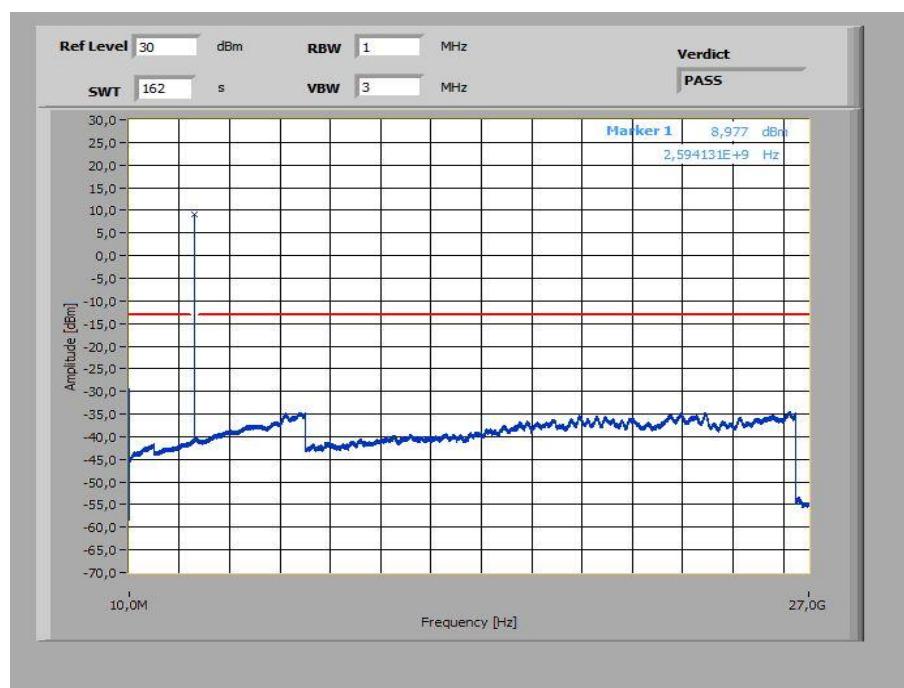
**Plot 3:** 5 MHz – QPSK - Highest Channel (10 MHz – 26 GHz)**Plot 4:** 10 MHz – QPSK - Lowest Channel (10 MHz – 26 GHz)

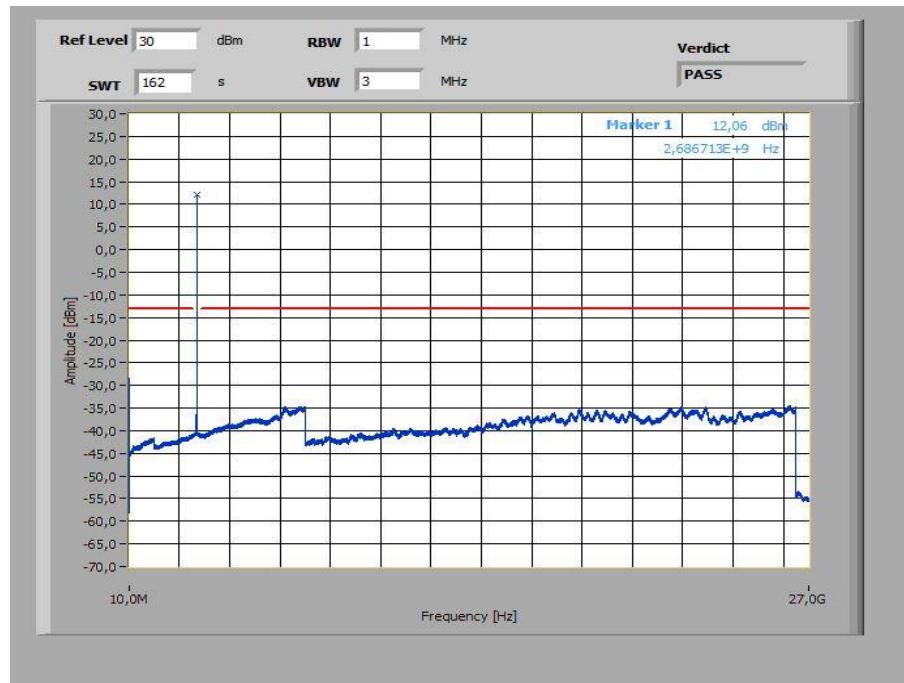
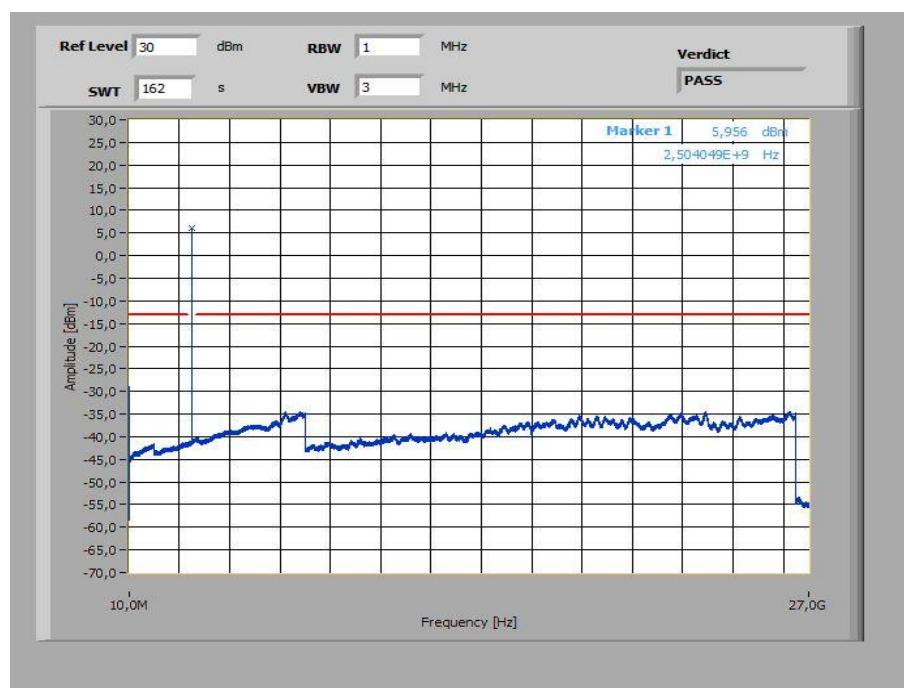
**Plot 5:** 10 MHz – QPSK - Middle Channel (10 MHz – 26 GHz)**Plot 6:** 10 MHz – QPSK - Highest Channel (10 MHz – 26 GHz)

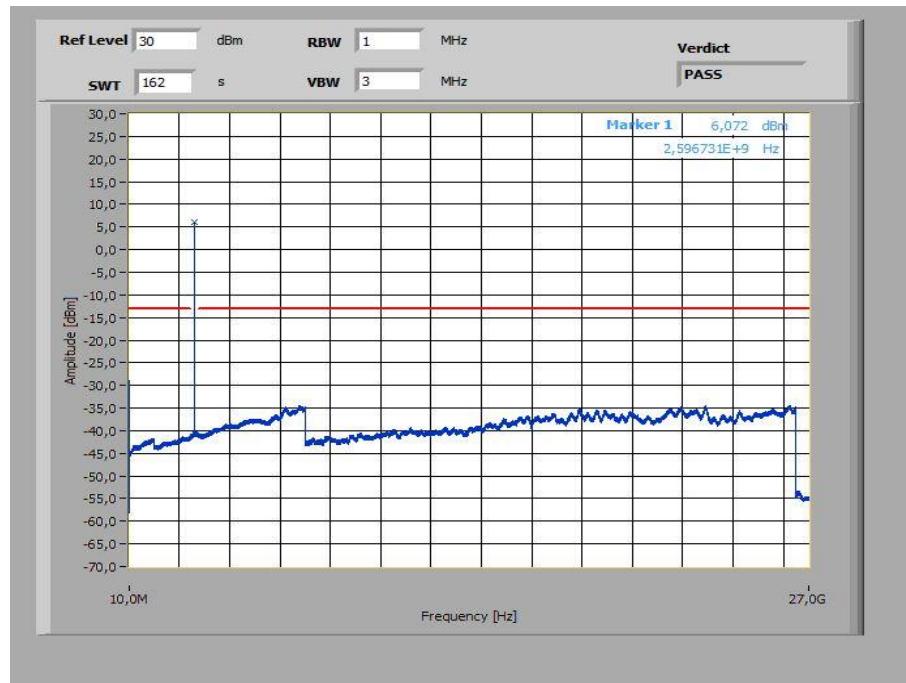
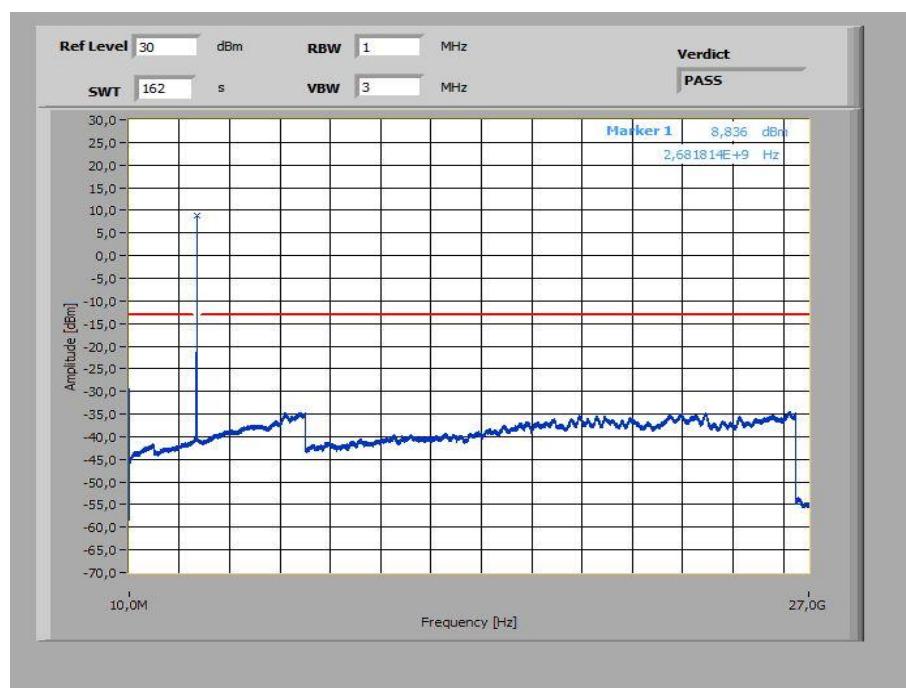
**Plot 7:** 15 MHz – QPSK - Lowest Channel (10 MHz – 26 GHz)**Plot 8:** 15 MHz – QPSK - Middle Channel (10 MHz – 26 GHz)

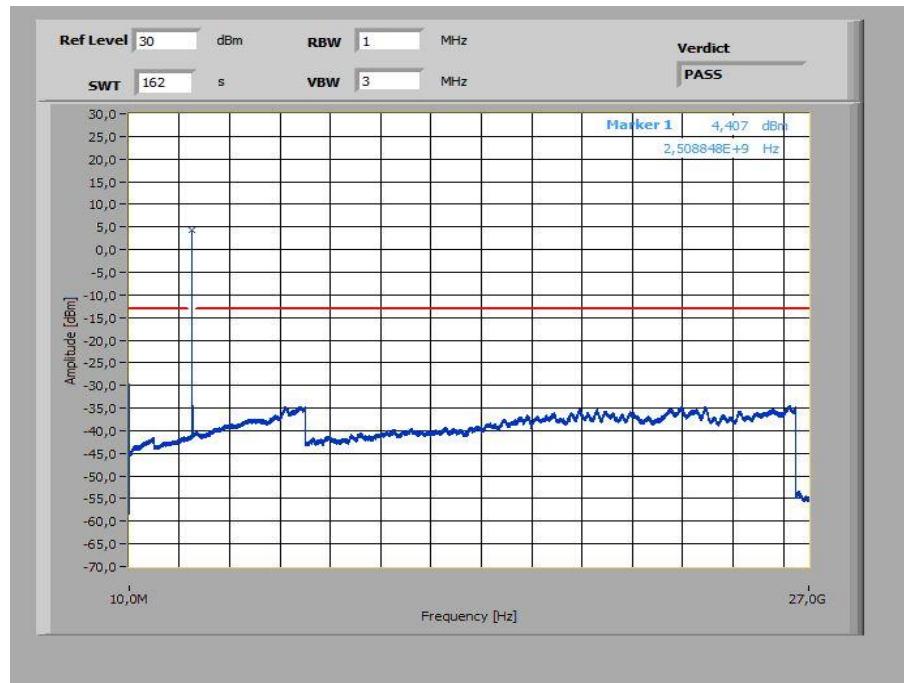
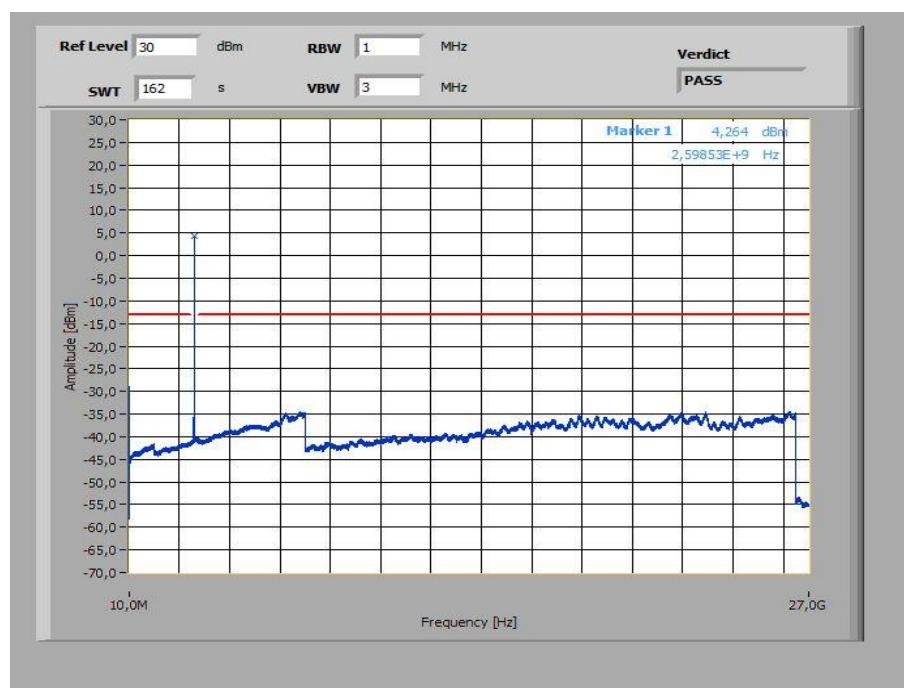
**Plot 9:** 15 MHz – QPSK - Highest Channel (10 MHz – 26 GHz)**Plot 10:** 20 MHz – QPSK - Lowest Channel (10 MHz – 26 GHz)

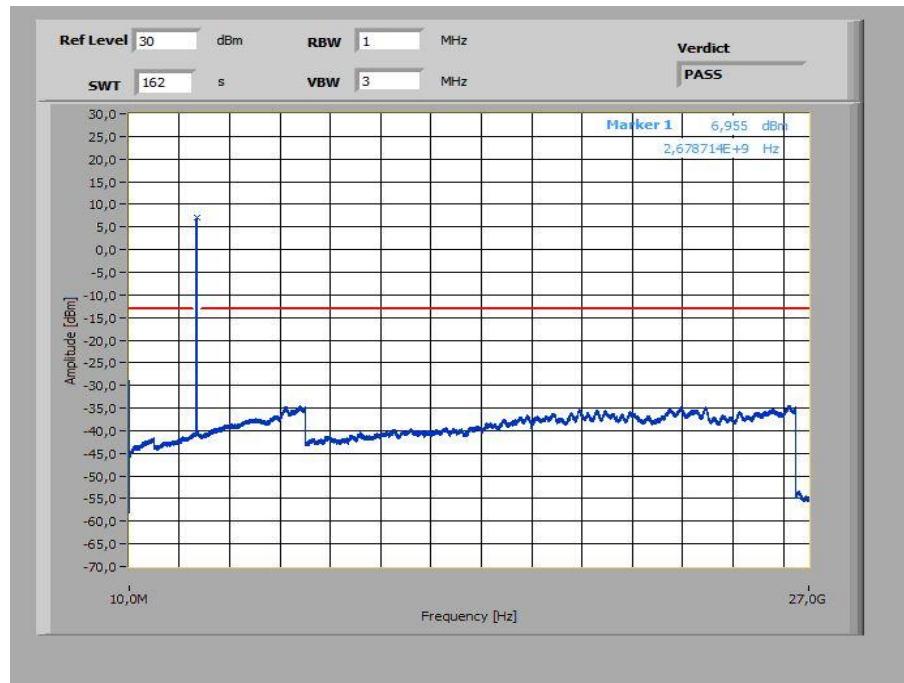
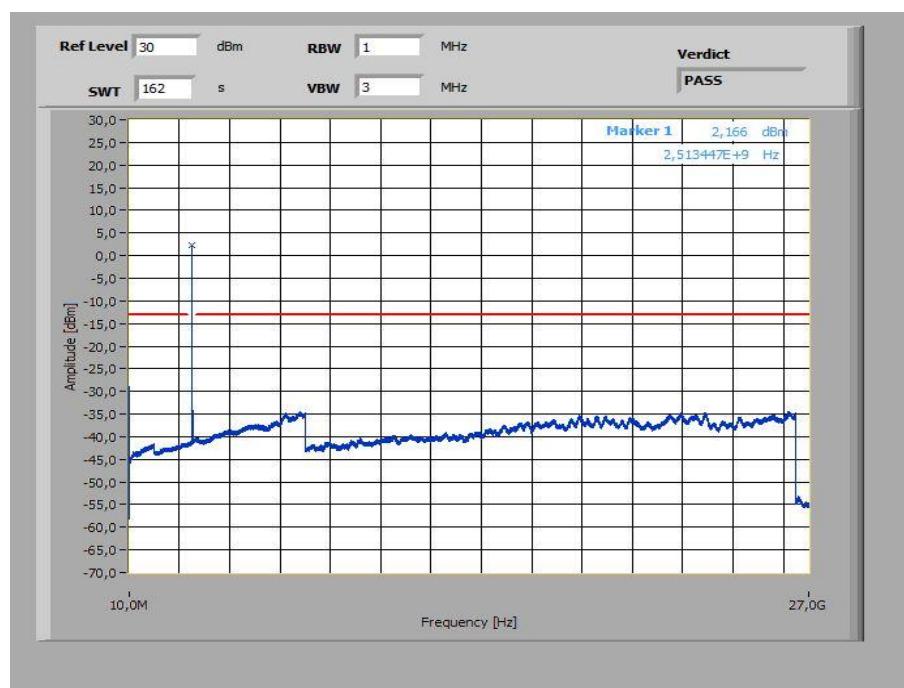
**Plot 11:** 20 MHz – QPSK - Middle Channel (10 MHz – 26 GHz)**Plot 12:** 20 MHz – QPSK - Highest Channel (10 MHz – 26 GHz)

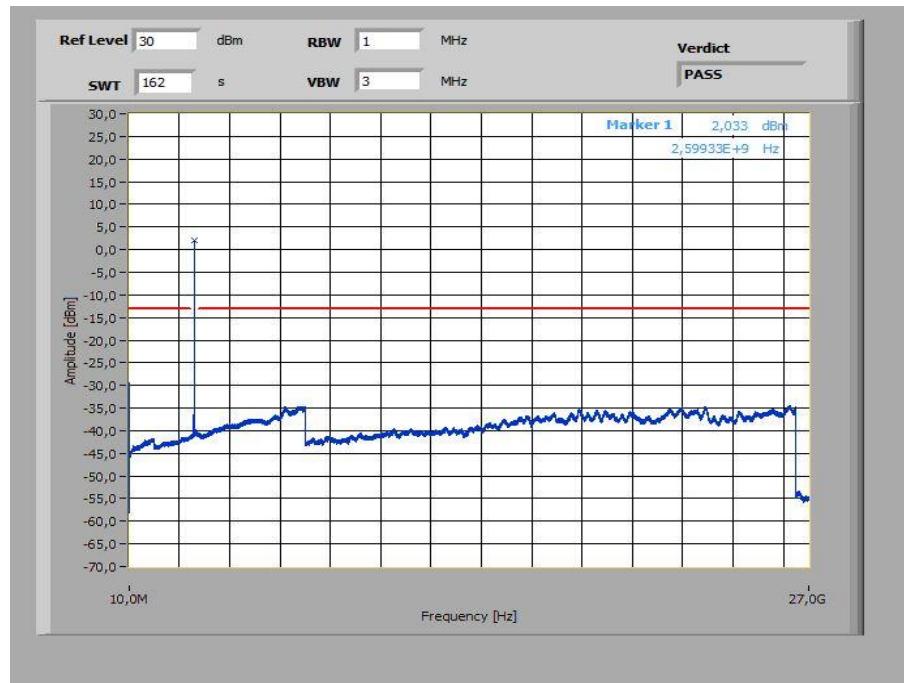
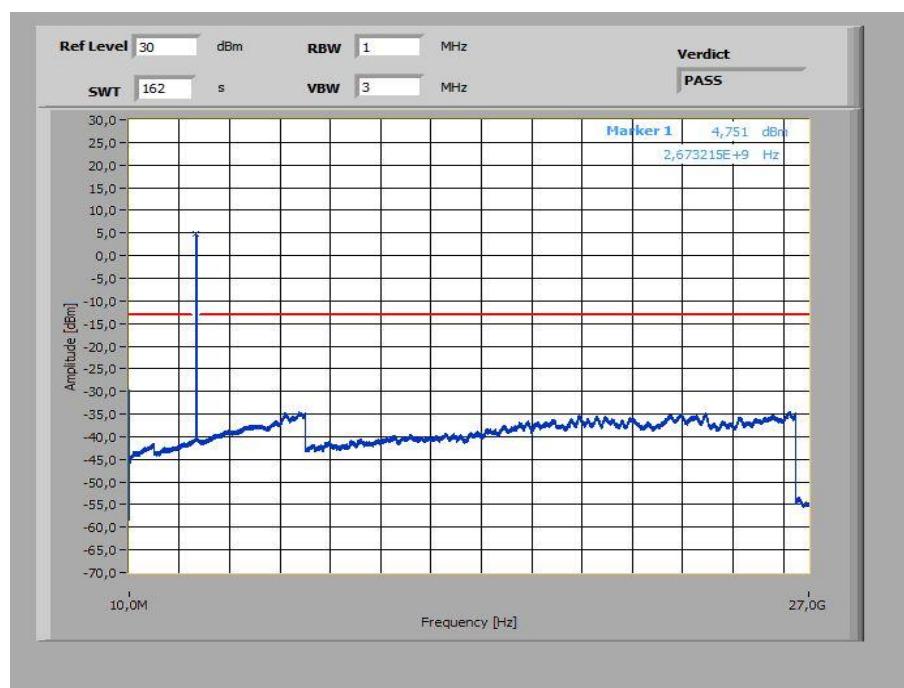
**Plot 13:** 5 MHz – 16-QAM - Lowest Channel (10 MHz – 26 GHz)**Plot 14:** 5 MHz – 16-QAM - Middle Channel (10 MHz – 26 GHz)

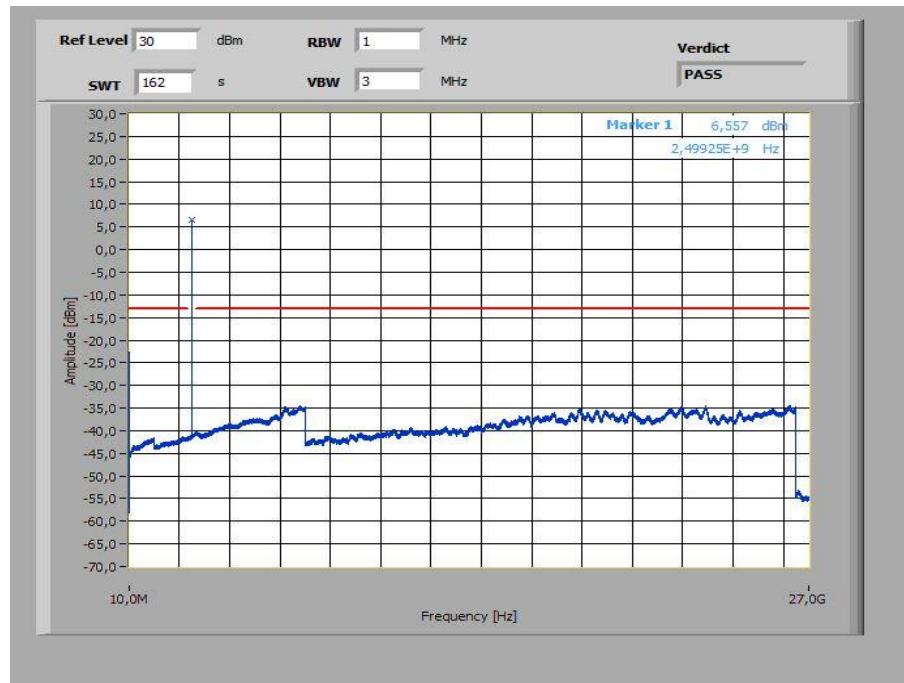
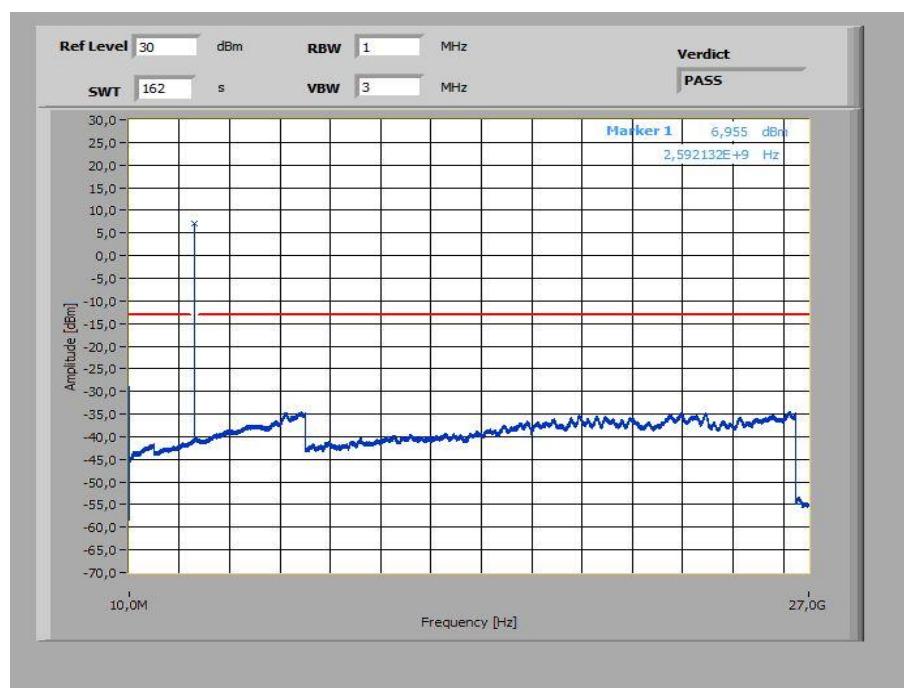
**Plot 15:** 5 MHz – 16-QAM - Highest Channel (10 MHz – 26 GHz)**Plot 16:** 10 MHz – 16-QAM - Lowest Channel (10 MHz – 26 GHz)

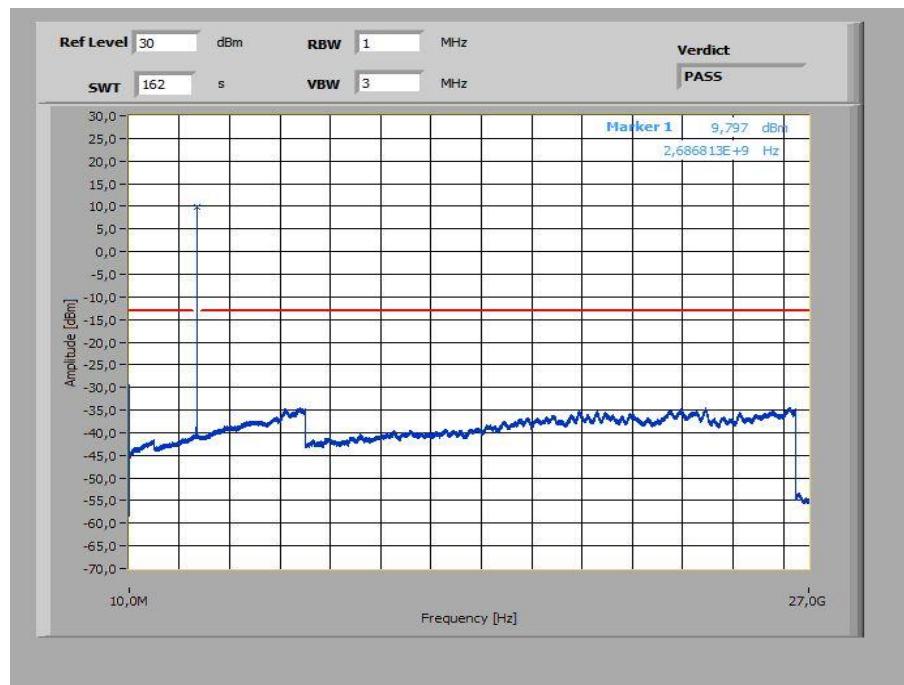
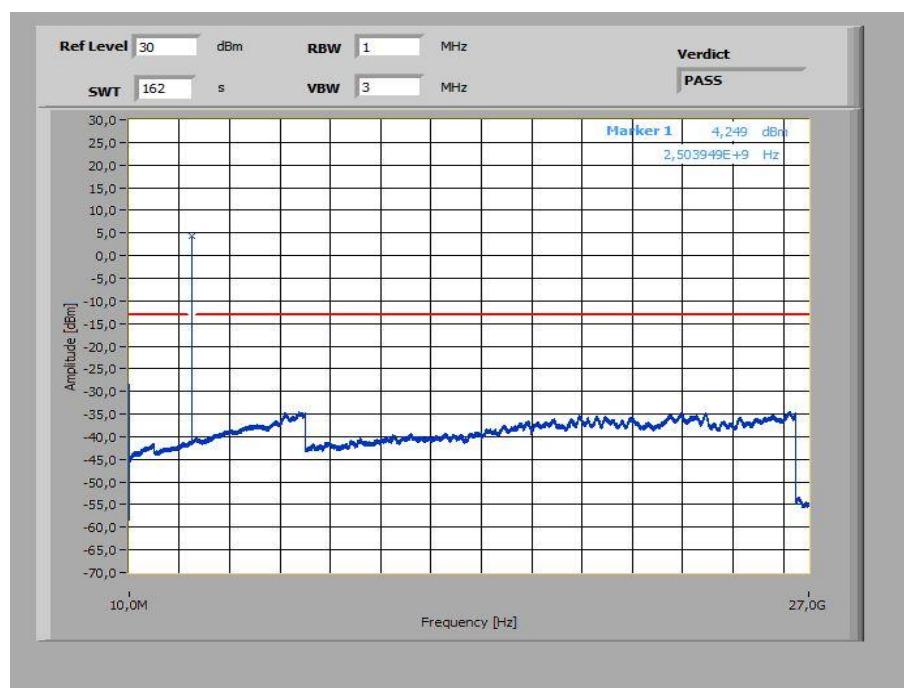
**Plot 17:** 10 MHz – 16-QAM - Middle Channel (10 MHz – 26 GHz)**Plot 18:** 10 MHz – 16-QAM - Highest Channel (10 MHz – 26 GHz)

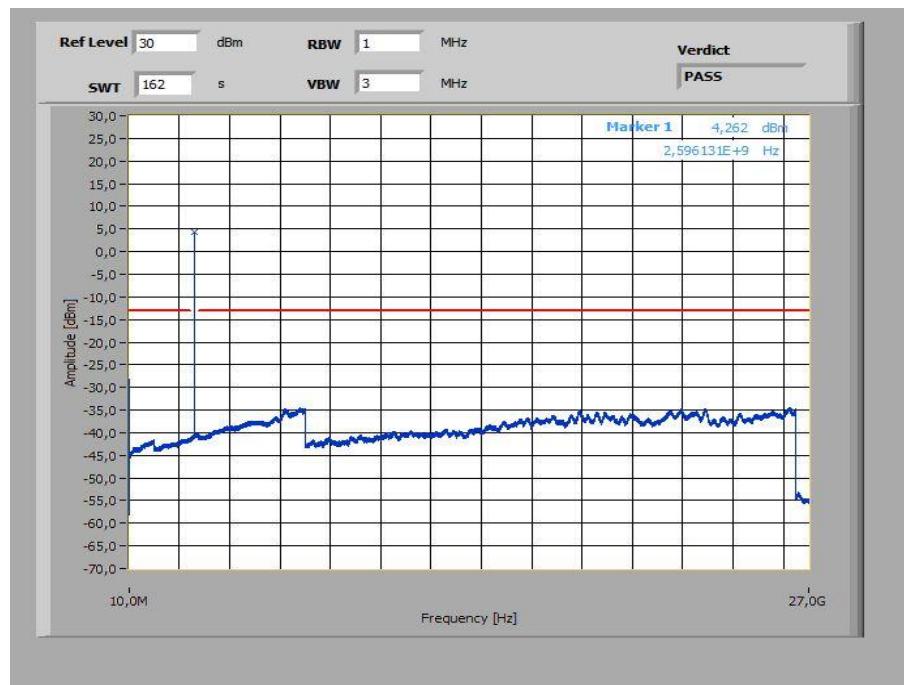
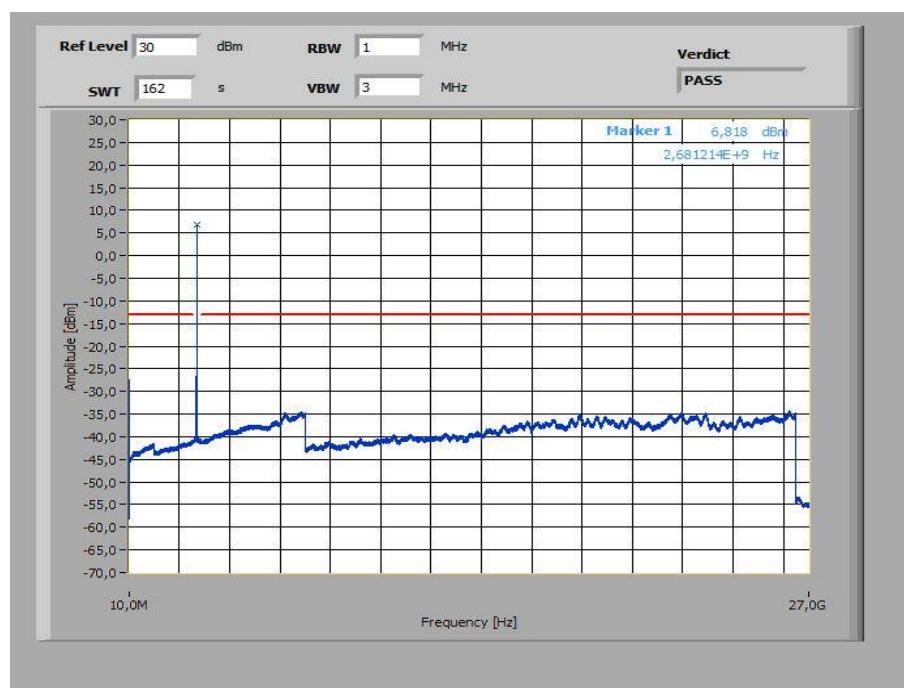
**Plot 19:** 15 MHz – 16-QAM - Lowest Channel (10 MHz – 26 GHz)**Plot 20:** 15 MHz – 16-QAM - Middle Channel (10 MHz – 26 GHz)

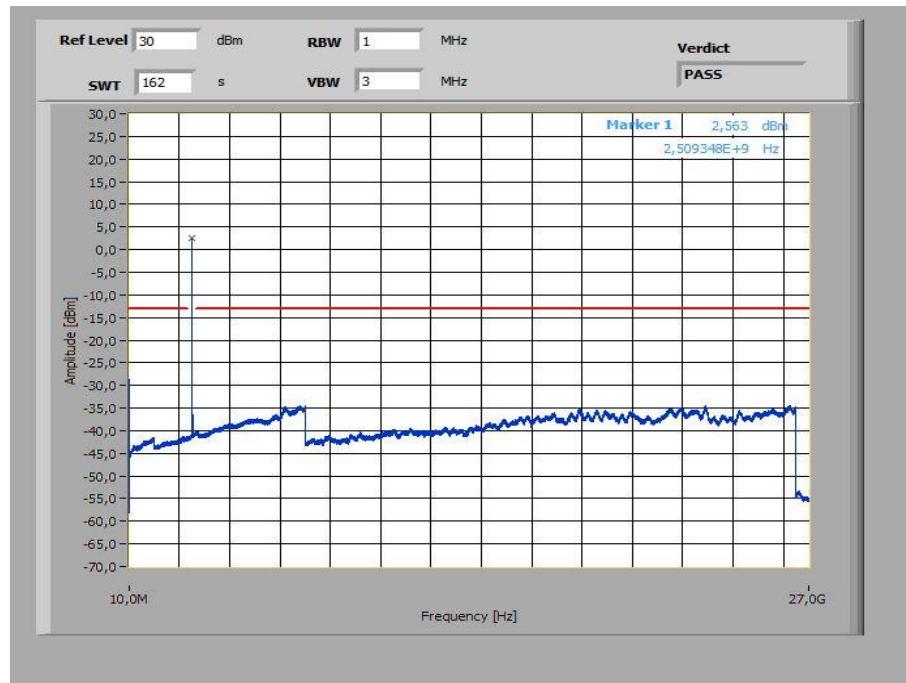
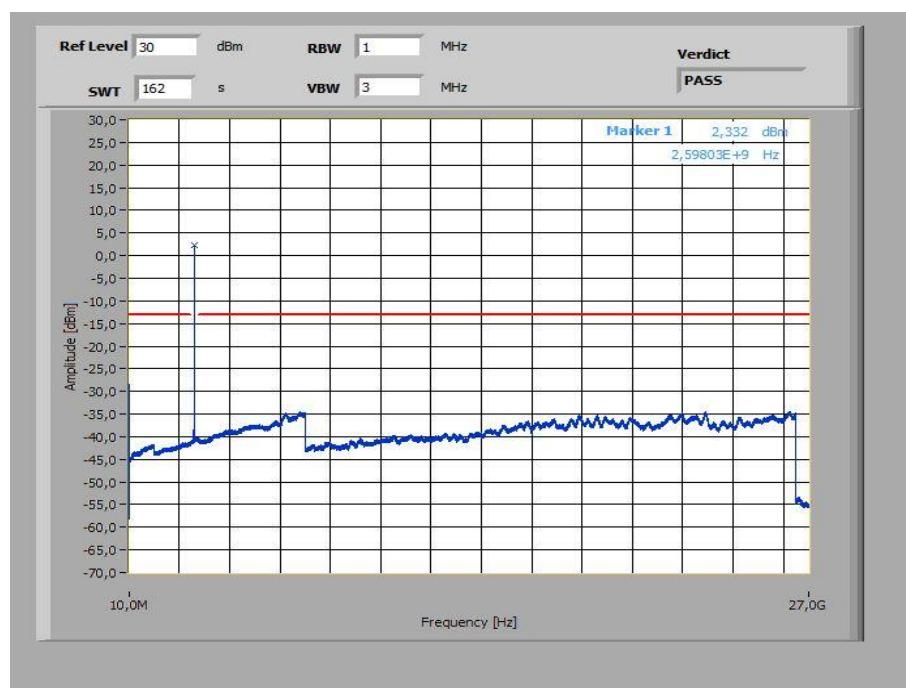
**Plot 21:** 15 MHz – 16-QAM - Highest Channel (10 MHz – 26 GHz)**Plot 22:** 20 MHz – 16-QAM - Lowest Channel (10 MHz – 26 GHz)

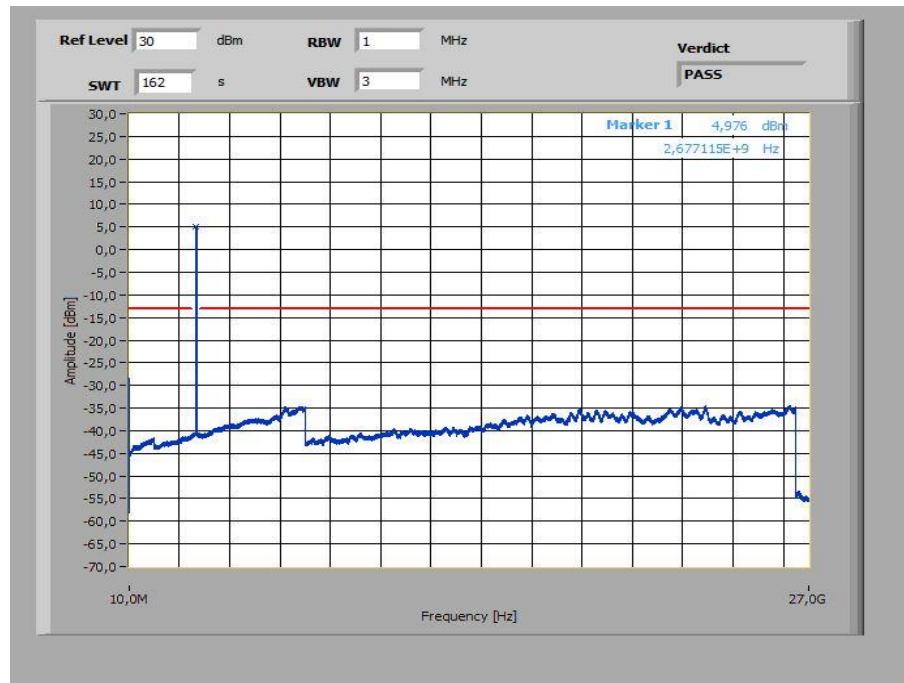
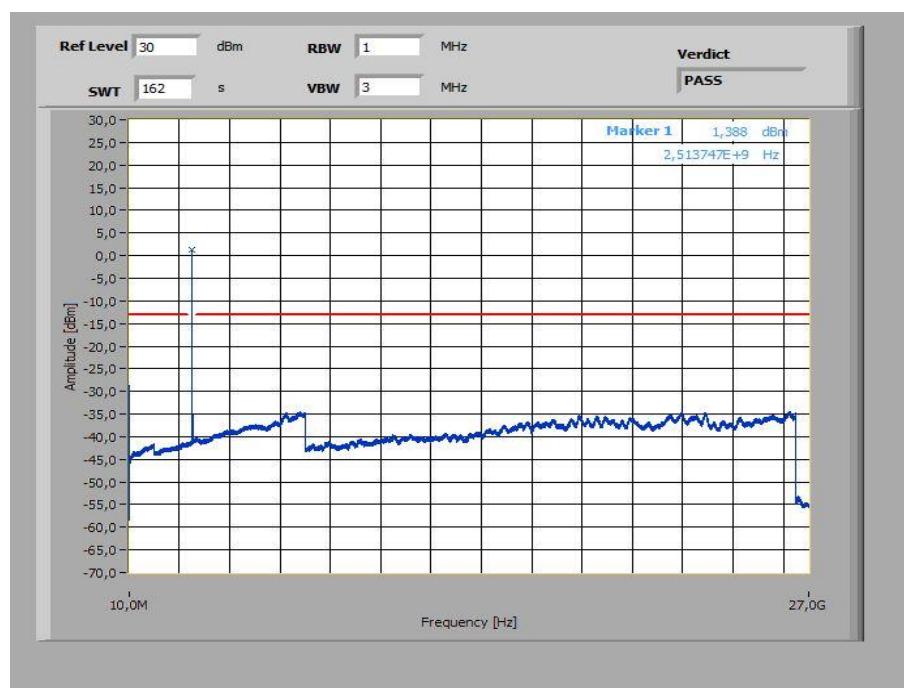
**Plot 23:** 20 MHz – 16-QAM - Middle Channel (10 MHz – 26 GHz)**Plot 24:** 20 MHz – 16-QAM - Highest Channel (10 MHz – 26 GHz)

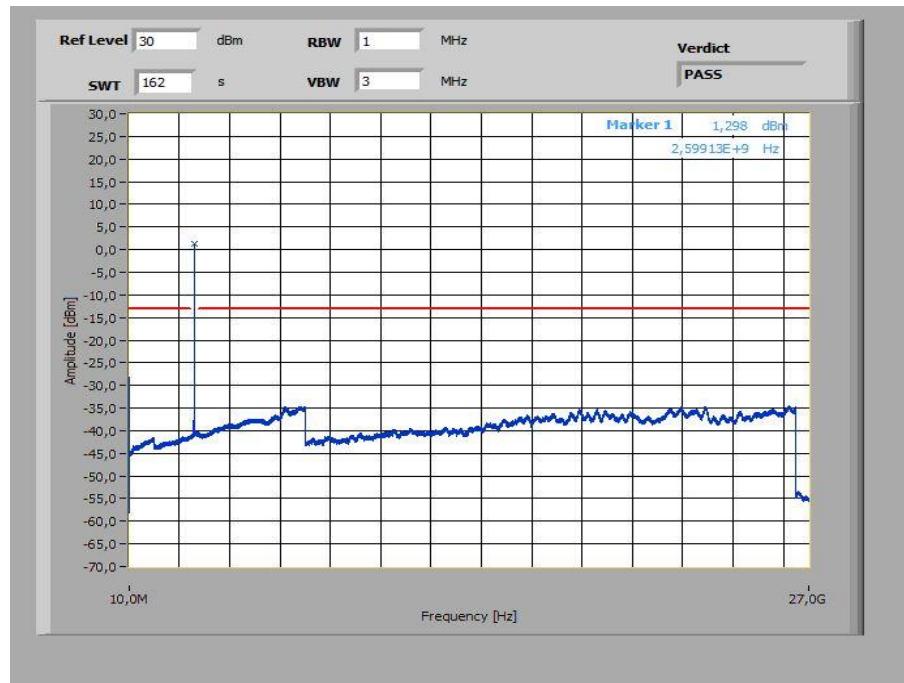
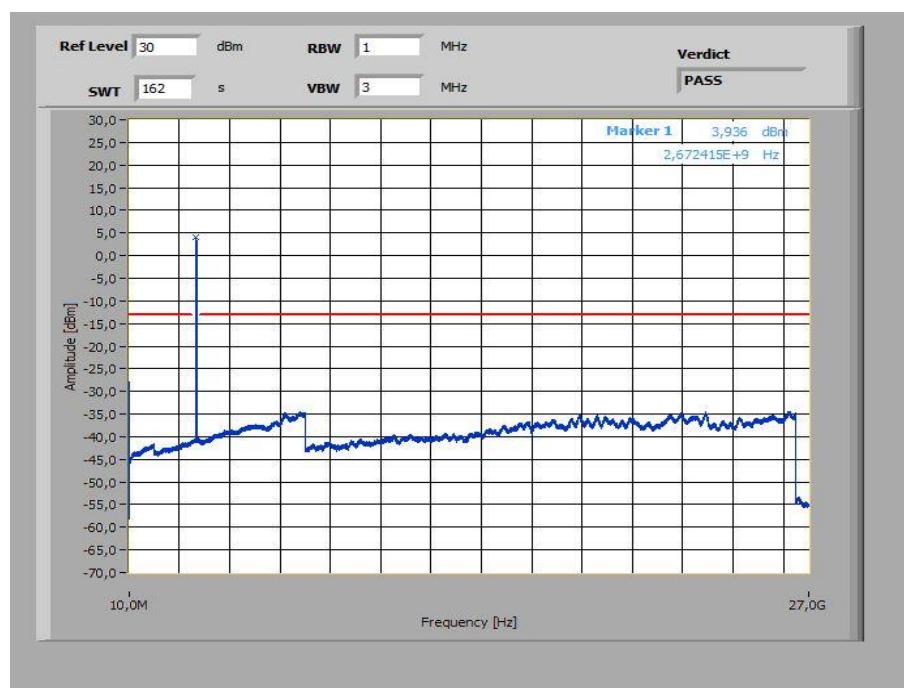
**Plot 25:** 5 MHz – 64-QAM - Lowest Channel (10 MHz – 26 GHz)**Plot 26:** 5 MHz – 64-QAM - Middle Channel (10 MHz – 26 GHz)

**Plot 27:** 5 MHz – 64-QAM - Highest Channel (10 MHz – 26 GHz)**Plot 28:** 10 MHz – 64-QAM - Lowest Channel (10 MHz – 26 GHz)

**Plot 29:** 10 MHz – 64-QAM - Middle Channel (10 MHz – 26 GHz)**Plot 30:** 10 MHz – 64-QAM - Highest Channel (10 MHz – 26 GHz)

**Plot 31:** 15 MHz – 64-QAM - Lowest Channel (10 MHz – 26 GHz)**Plot 32:** 15 MHz – 64-QAM - Middle Channel (10 MHz – 26 GHz)

**Plot 33:** 15 MHz – 64-QAM - Highest Channel (10 MHz – 26 GHz)**Plot 34:** 20 MHz – 64-QAM - Lowest Channel (10 MHz – 26 GHz)

**Plot 35:** 20 MHz – 64-QAM - Middle Channel (10 MHz – 26 GHz)**Plot 36:** 20 MHz – 64-QAM - Highest Channel (10 MHz – 26 GHz)

## 12.2.5 Block edge compliance

### Description:

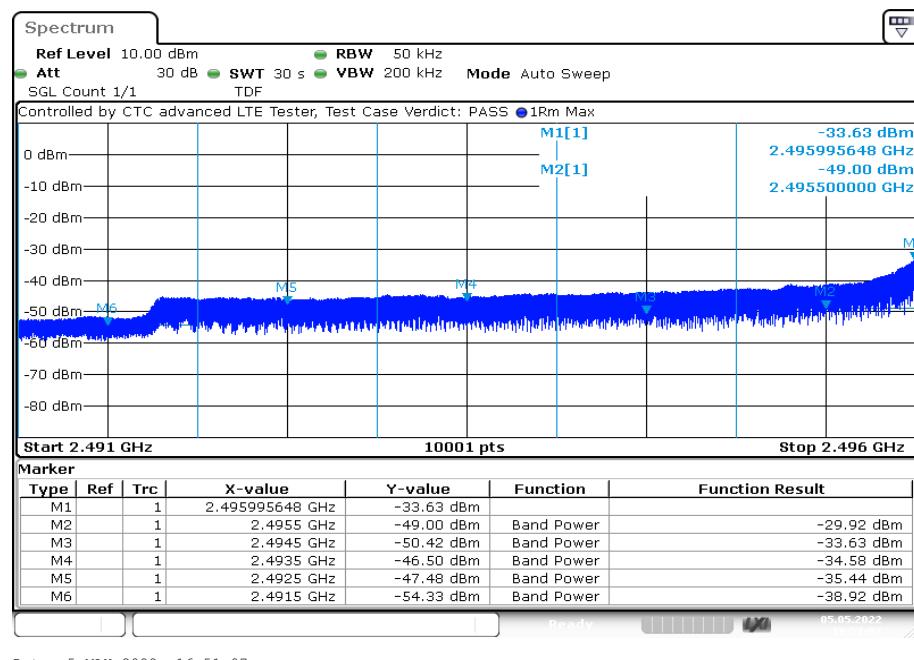
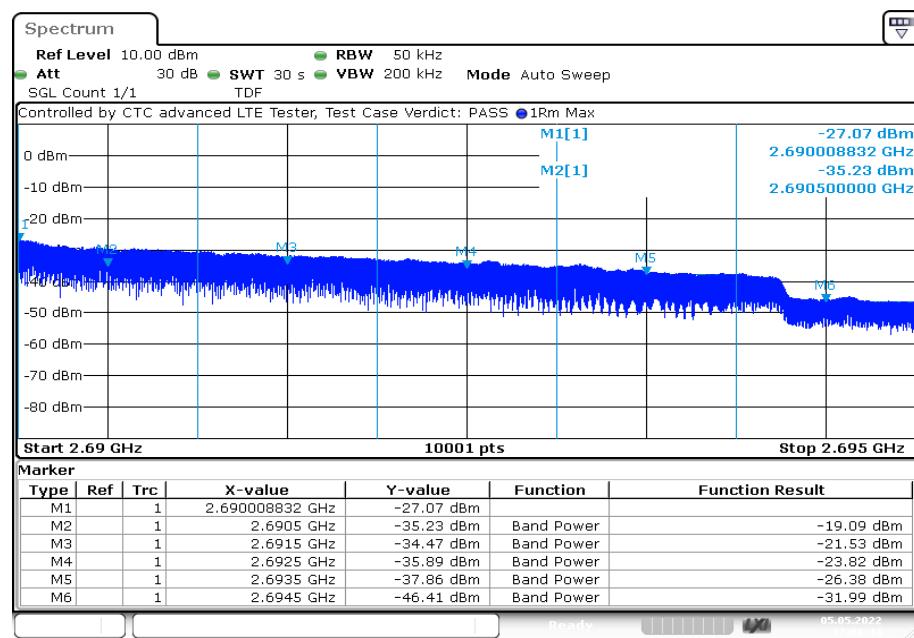
The spectrum at the band edges must comply with the spurious emissions limits.

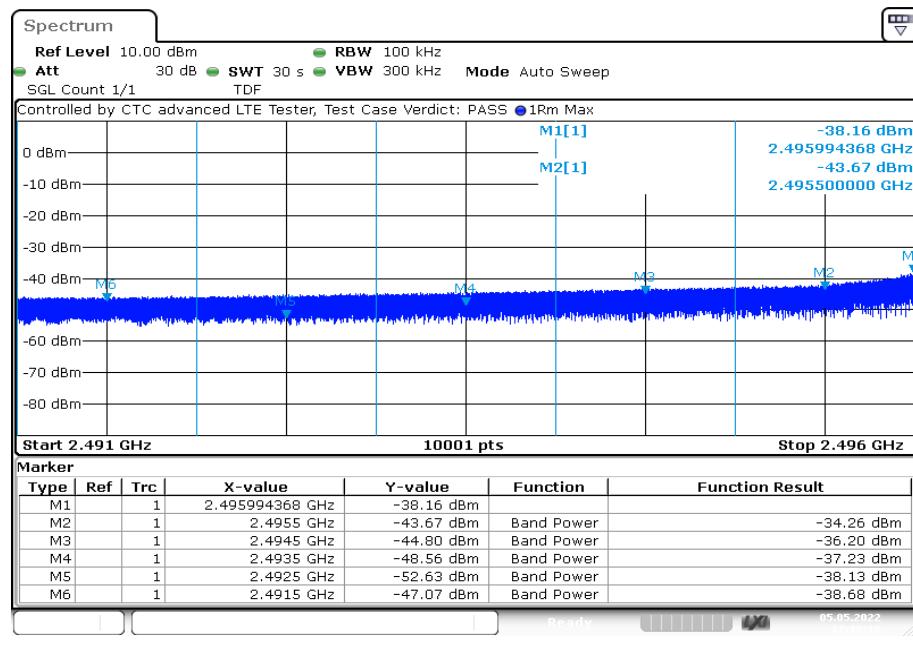
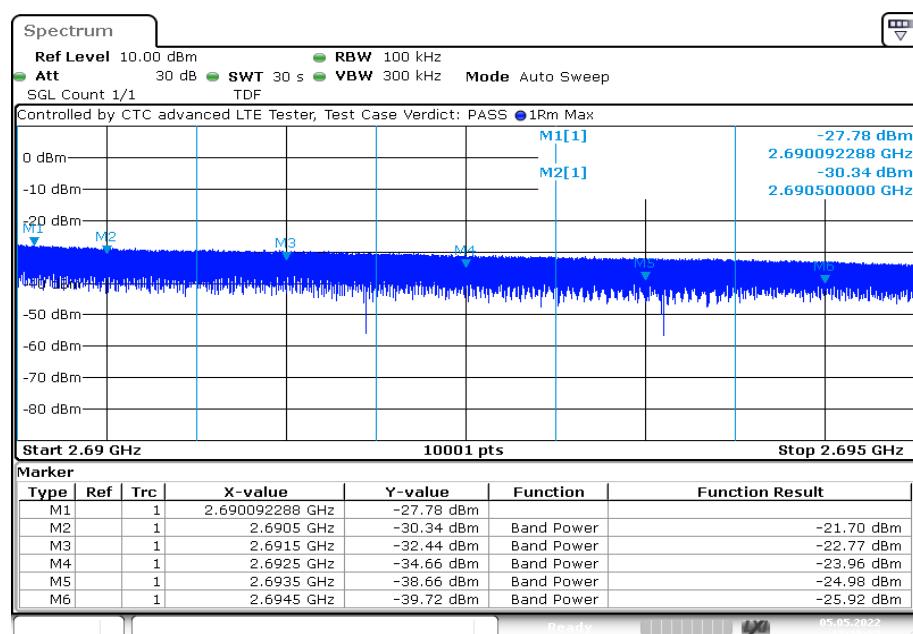
### Measurement:

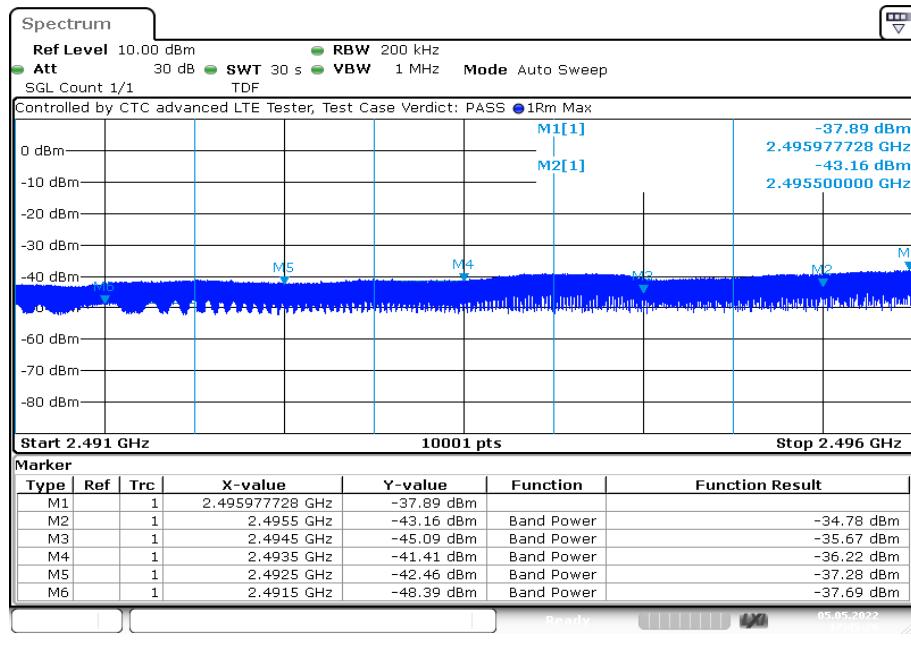
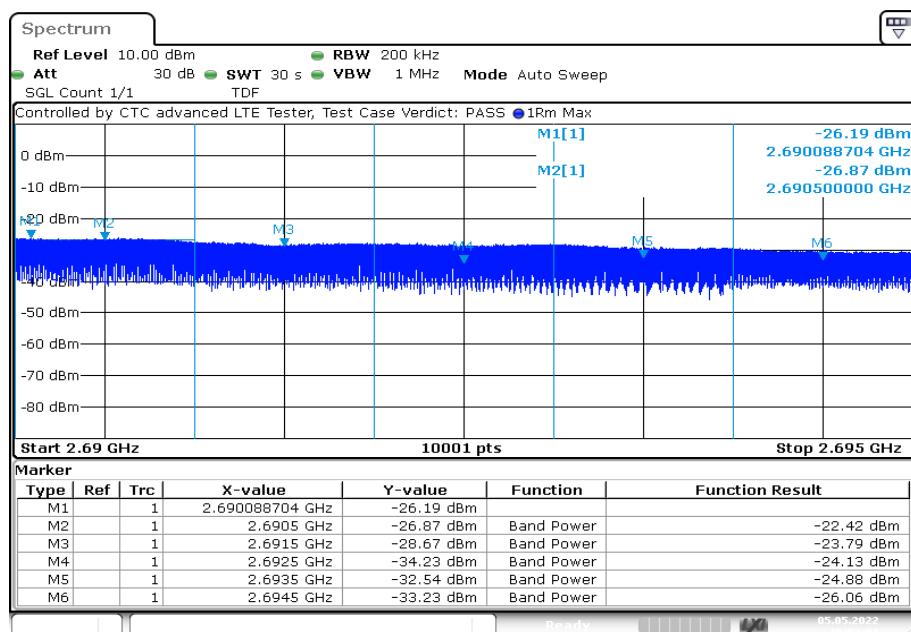
Measurement parameters	
Detector:	RMS
Sweep time:	See plots
Video bandwidth:	See plots
Resolution bandwidth:	See plots
Span:	1 MHz steps
Trace mode:	Max Hold
Used equipment:	See chapter 8.4 setup A
Measurement uncertainty:	See chapter 9
Measurement procedure	FCC: § 2.1051

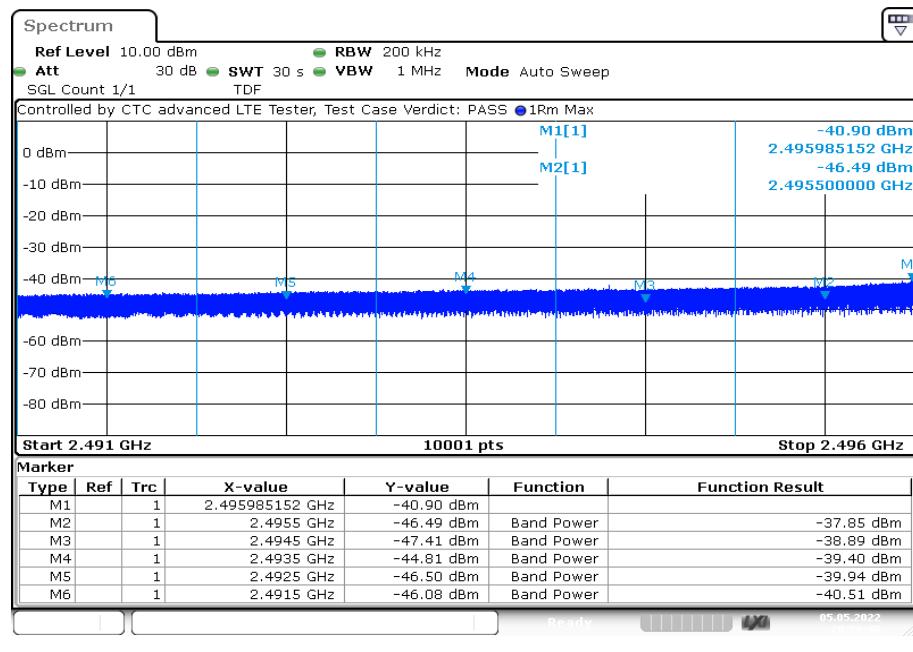
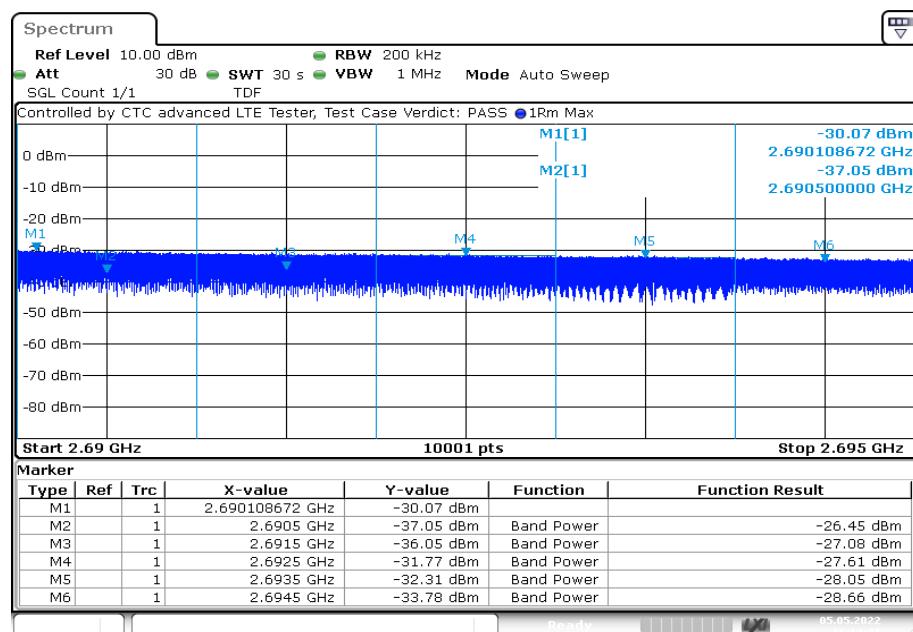
### Limits:

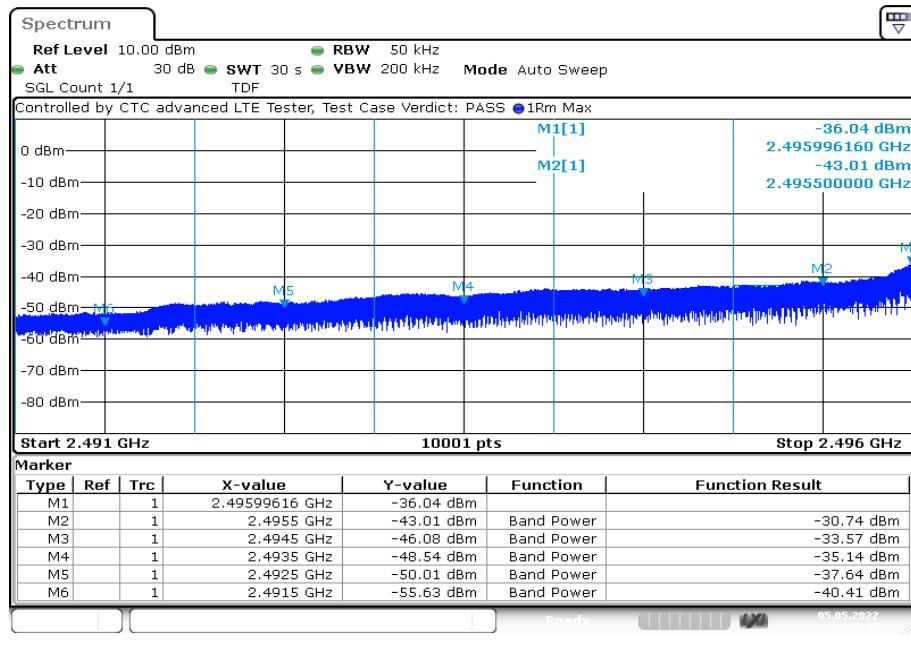
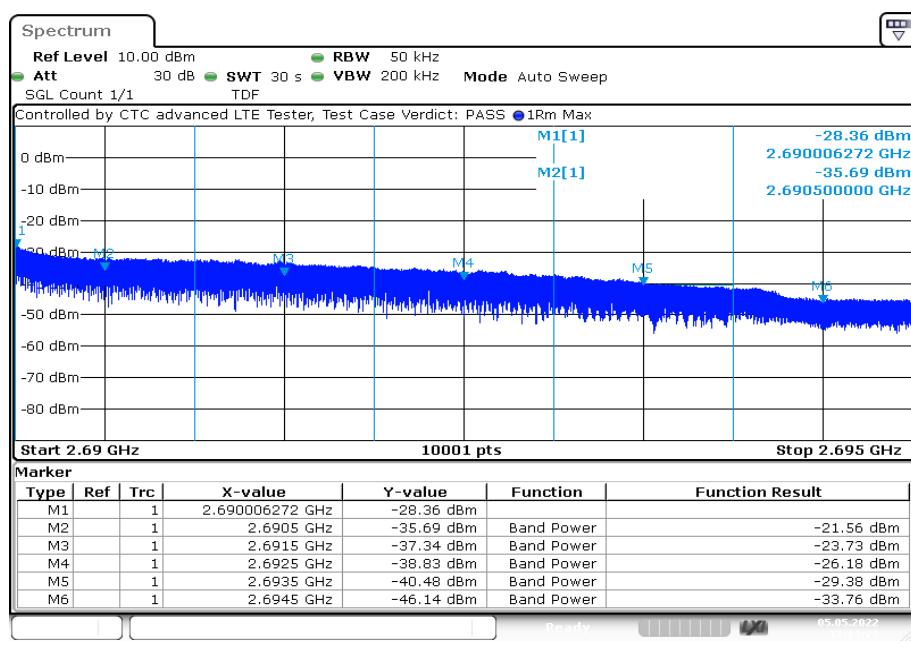
FCC
§ 27.53 (m) (4)
For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.
<b>-10 dBm / -13 dBm</b>

**Results:****Plot 1: 5 MHz – QPSK - Lowest channel****Plot 2: 5 MHz – QPSK - Highest channel**

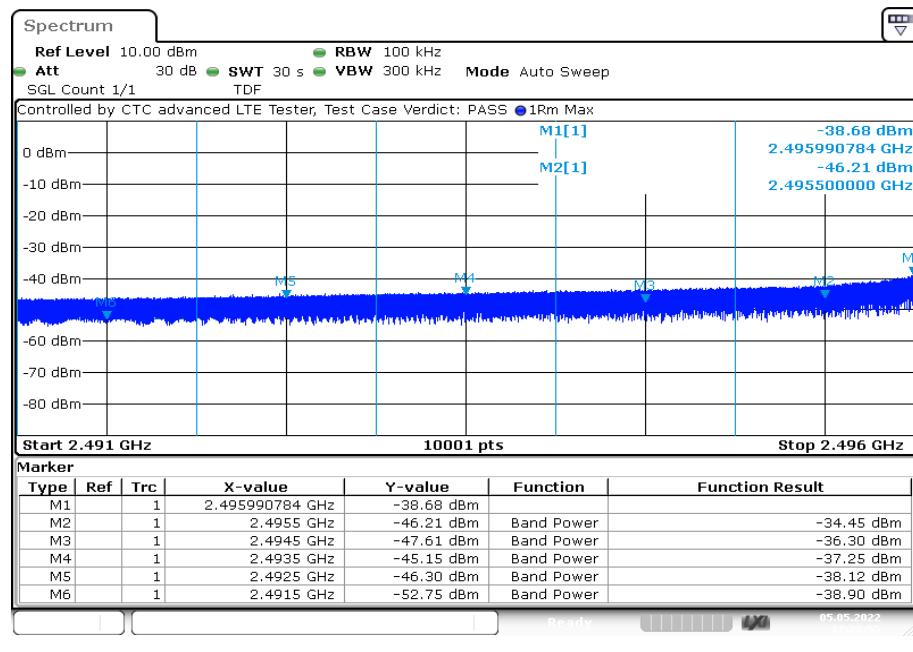
**Plot 3:** 10 MHz – QPSK - Lowest channel**Plot 4:** 10 MHz – QPSK - Highest channel

**Plot 5:** 15 MHz – QPSK - Lowest channel**Plot 6:** 15 MHz – QPSK - Highest channel

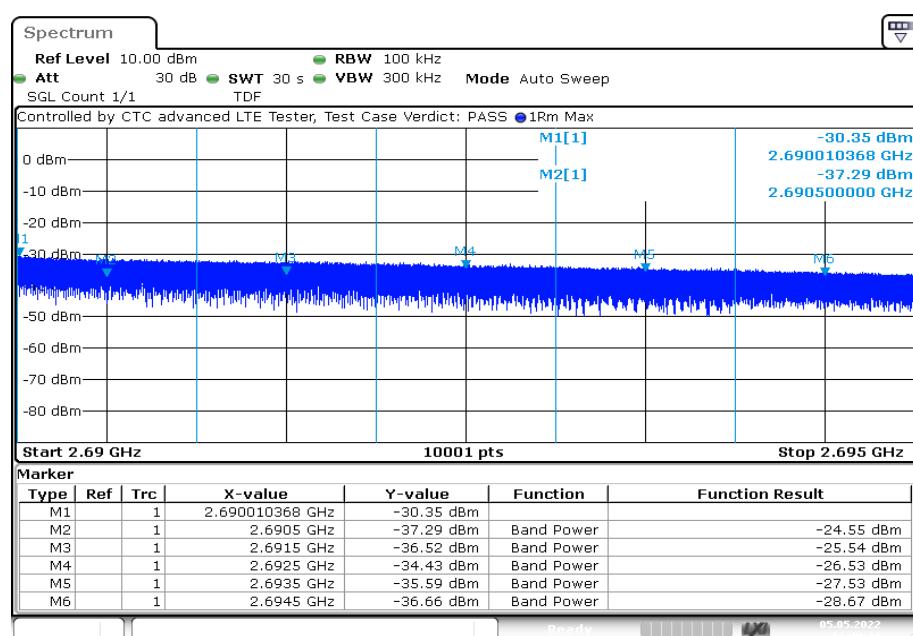
**Plot 7:** 20 MHz – QPSK - Lowest channel**Plot 8:** 20 MHz – QPSK - Highest channel

**Plot 9:** 5 MHz – 16-QAM - Lowest channel**Plot 10:** 5 MHz – 16-QAM - Highest channel

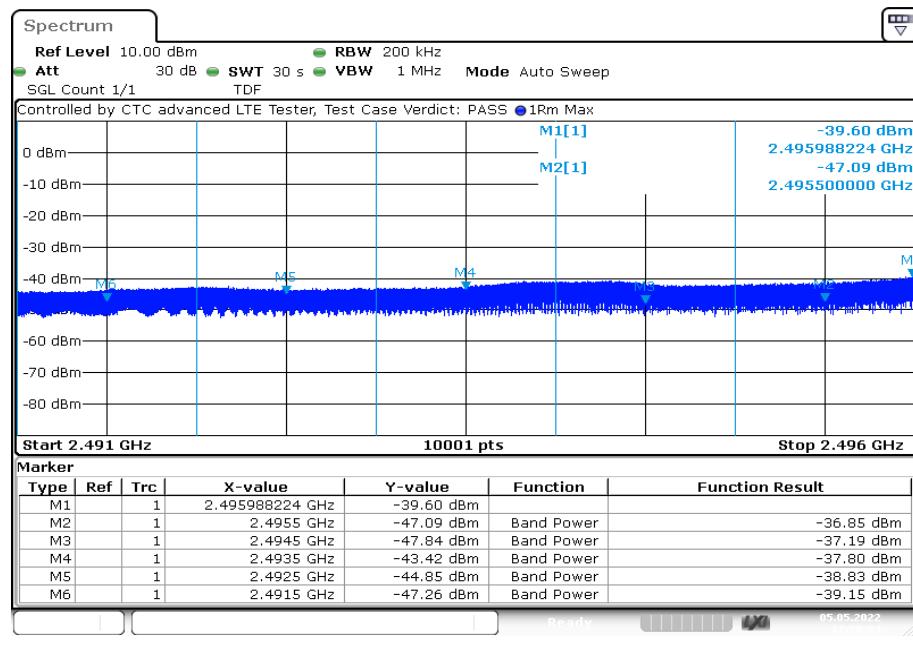
Plot 11: 10 MHz – 16-QAM - Lowest channel



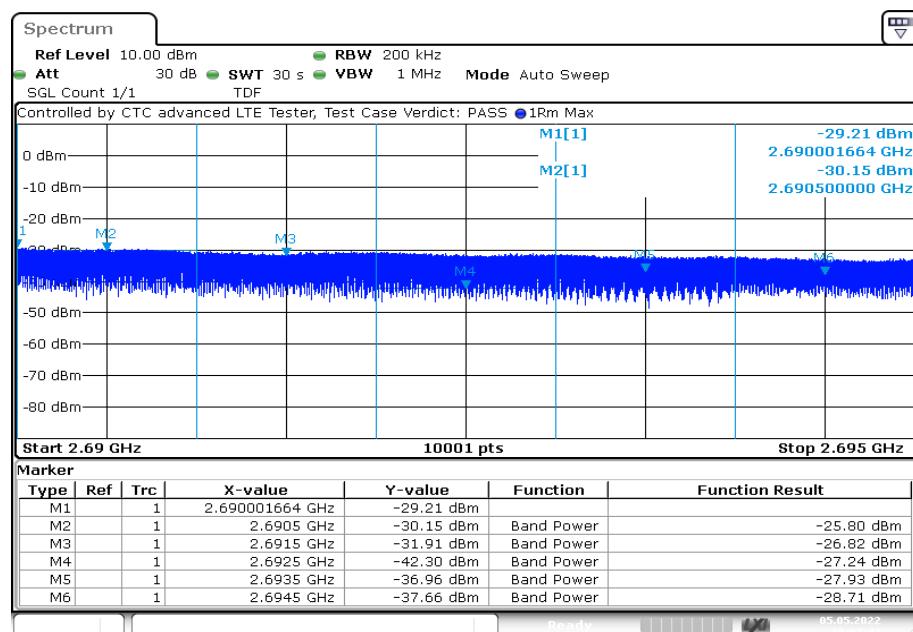
Plot 12: 10 MHz – 16-QAM - Highest channel



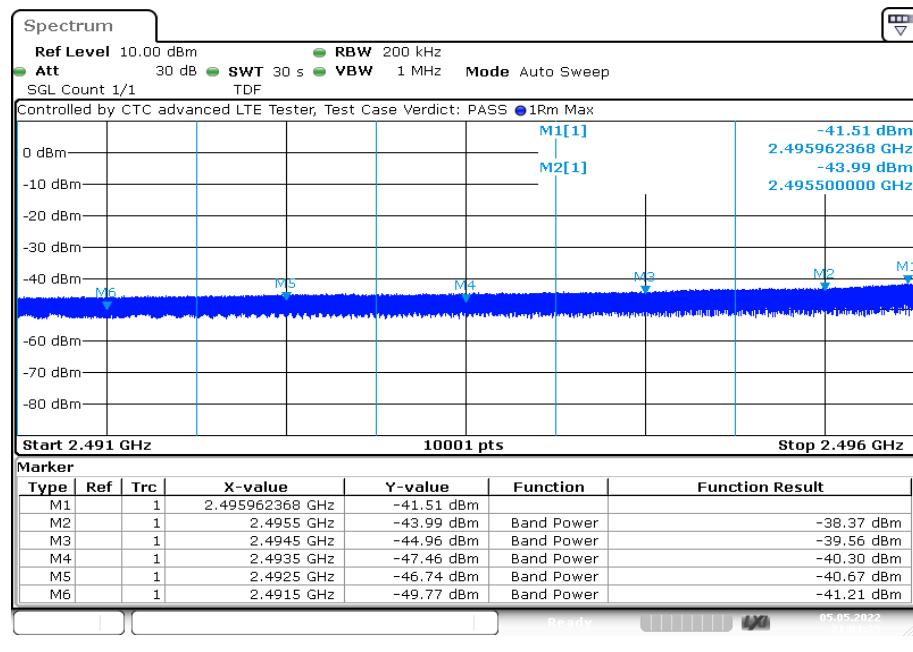
Plot 13: 15 MHz – 16-QAM - Lowest channel



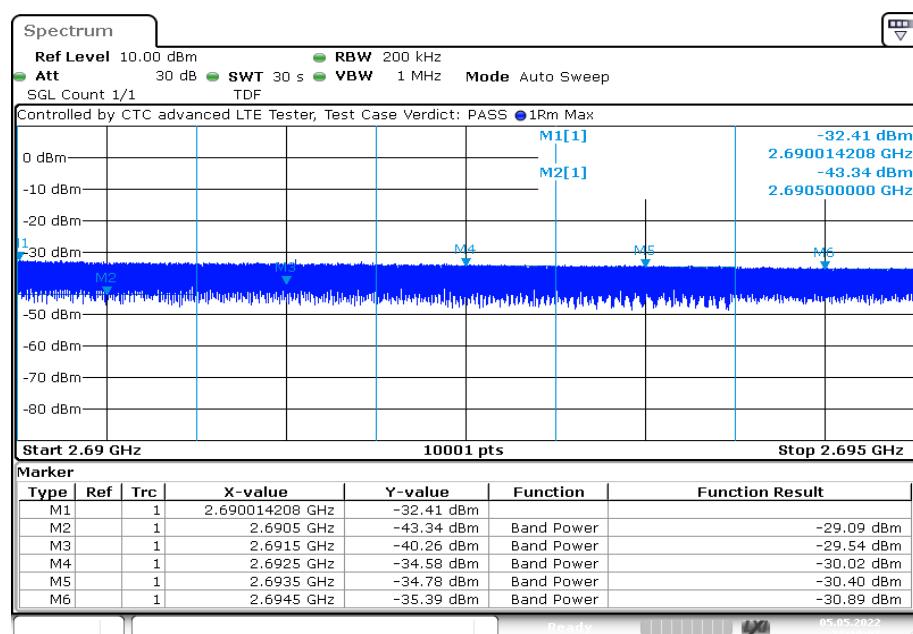
Plot 14: 15 MHz – 16-QAM - Highest channel



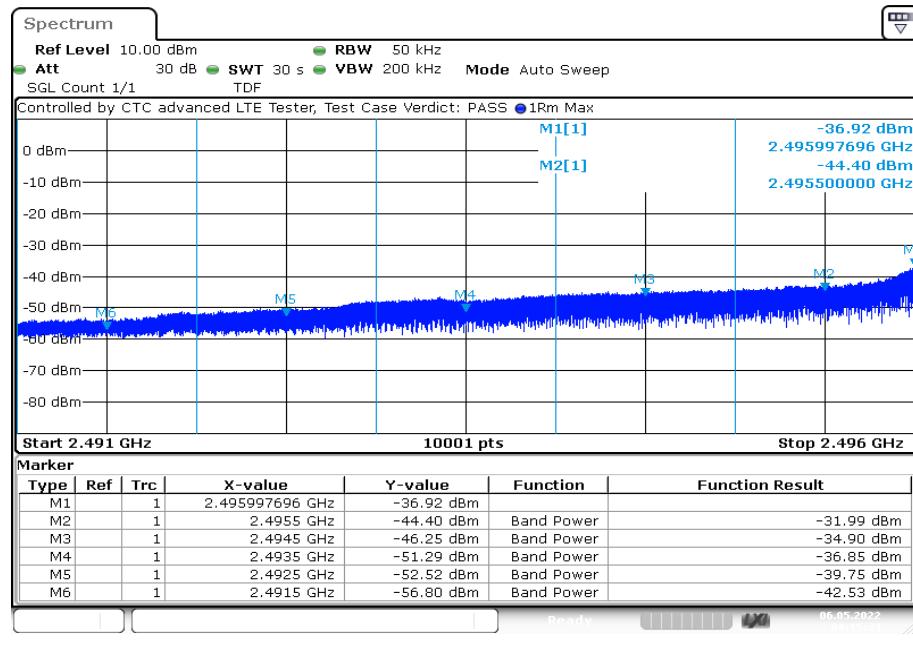
Plot 15: 20 MHz – 16-QAM - Lowest channel



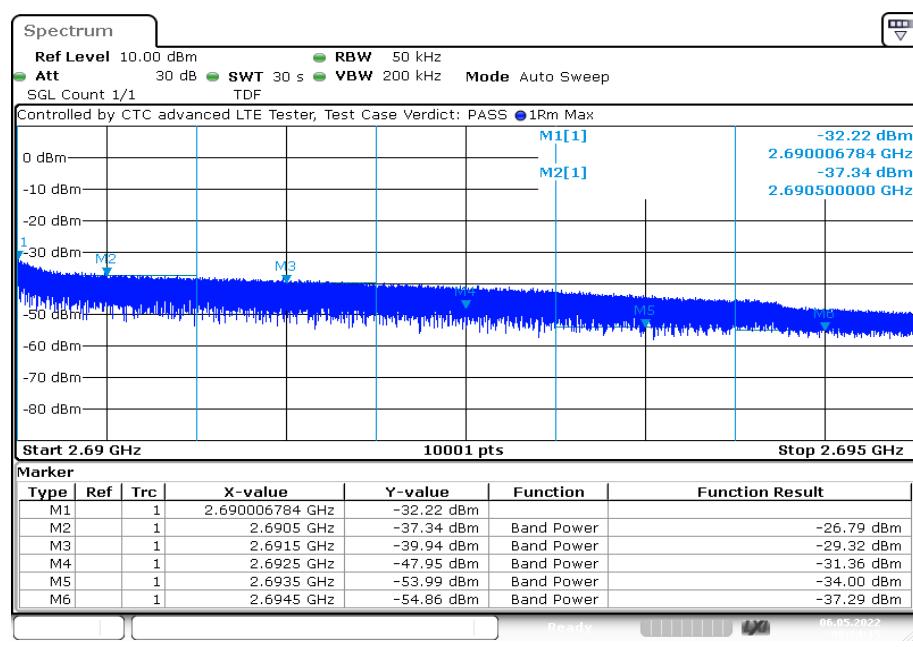
Plot 16: 20 MHz – 16-QAM - Highest channel



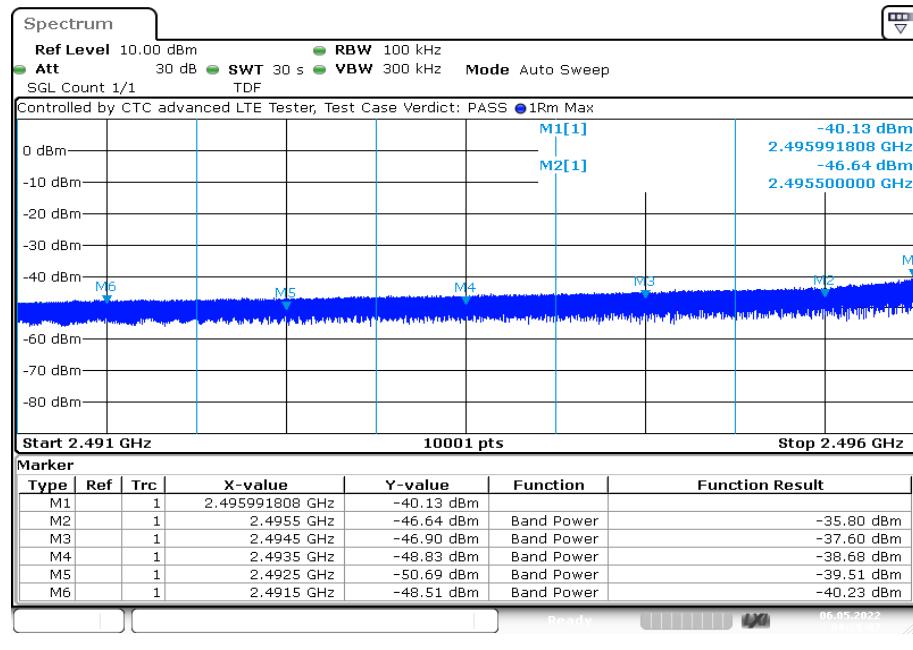
Plot 17: 5 MHz – 64-QAM - Lowest channel



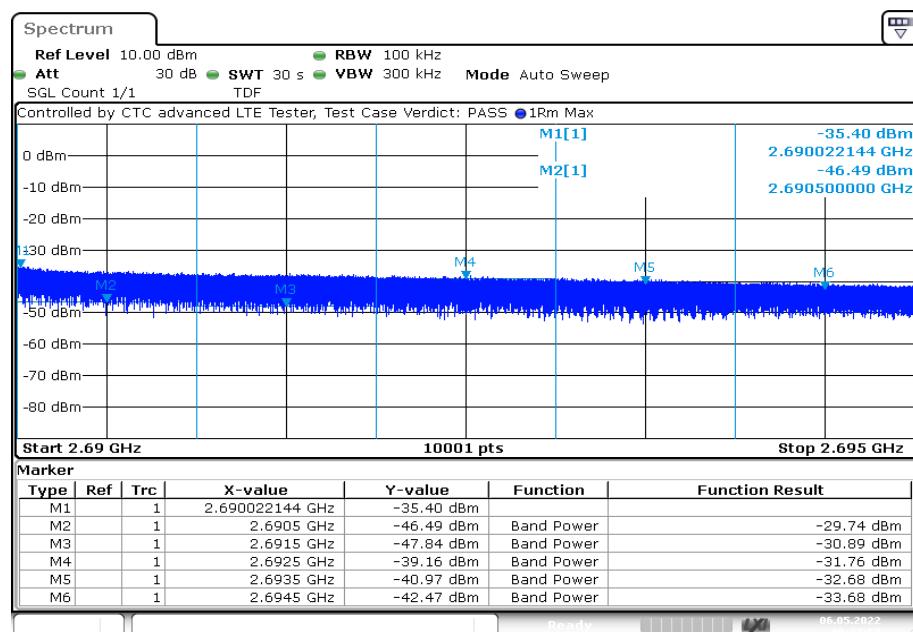
Plot 18: 5 MHz – 64-QAM - Highest channel



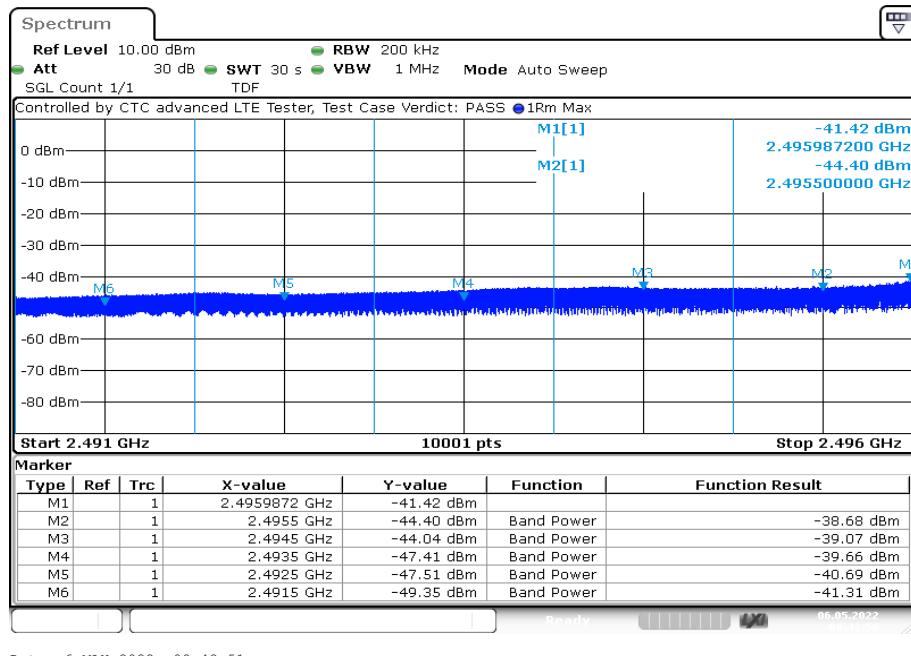
Plot 19: 10 MHz – 64-QAM - Lowest channel



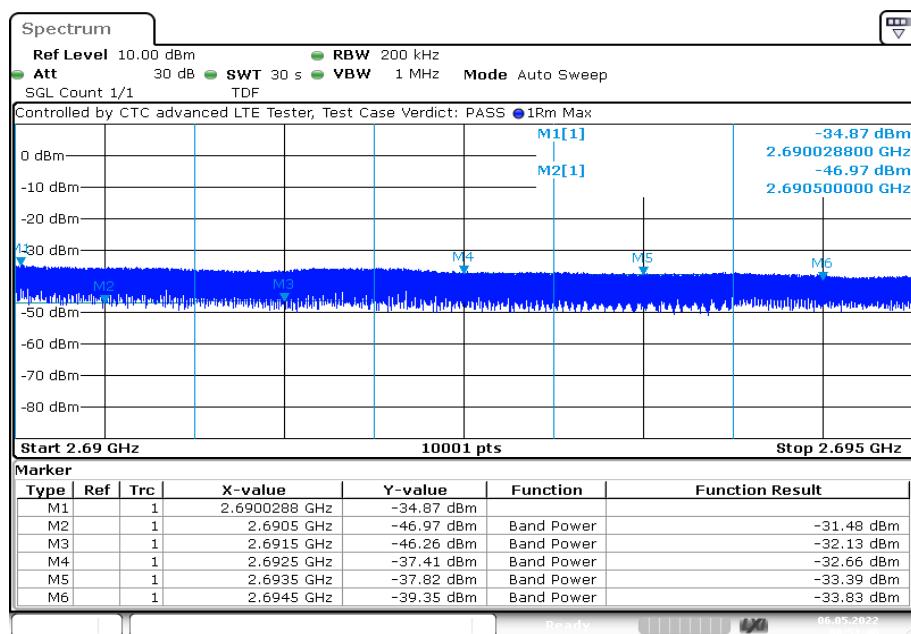
Plot 20: 10 MHz – 64-QAM - Highest channel



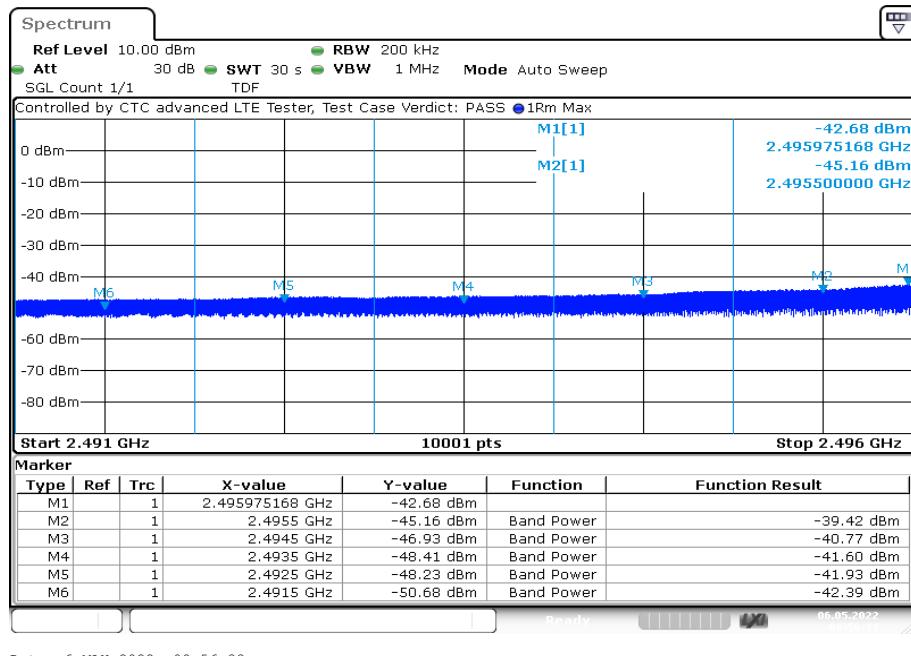
Plot 21: 15 MHz – 64-QAM - Lowest channel



Plot 22: 15 MHz – 64-QAM - Highest channel



Plot 23: 20 MHz – 64-QAM - Lowest channel



Plot 24: 20 MHz – 64-QAM - Highest channel

