



FCC PART 15 SUBPART B

Test Report

Applicant: Shenyang Torch-Bigtide Digital Technology Co.,Ltd.

Address: No.18-6B,Yaoyang Road,Huishan Economic Development Area,Shenbei New District,Shenyang,China

Product Name: 19" LCD Monitor

Model Name: HL1916AMT-R, HL1916AMT-L

Brand Name: N/A

FCC ID: W65HL1916AMT

Date of Issue: Sep.30, 2011

Issued by: Most Technology Service Co., Ltd.

Address: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

Tel: 86-755-86170306

Fax: 86-755-86170310

The report consists 16 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1.VERIFICATION OF CONFORMITY	3
2.GENERAL INFORMATION	4
2.1 PRODUCT INFORMATION	4
2.2. OBJECTIVE	4
2.3 TEST STANDARDS AND RESULTS	4
2.4 MEASUREMENT UNCERTAINTY	4
2.5 ENVIRONMENTAL CONDITIONS	4
3.TEST FACILITY	5
3.1 TEST FACILITY	5
3.2 GENERAL TEST PROCEDURES	5
4.SETUP OF EQUIPMENT UNDER TEST	6
4.1 SUPPORT EQUIPMENT	6
4.2 TEST EQUIPMENT LIST	6
5.TEST REQUIREMENTS	7
5.1 LIMITS OF LINE CONDUCTED EMISSION TEST	7
5.2 BLOCK DIAGRAM OF TEST SETUP	7
5.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	7
5.4 TEST RESULT OF LINE CONDUCTED EMISSION TEST	8
6.TEST RADIATED EMISSION REQUIREMENT	11
6.1 LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B	11
6.2: BLOCK OF RADIATION INTERFERENCE	11
6.3 PRELIMINARY RADIATED EMISSION TEST	12
6.4 TEST RESULT OF RADIATION EMISSION TEST	16

1. VERIFICATION OF CONFORMITY

Equipment under test: 19" LCD Monitor

Brand Name: N/A

Model Number: HL1916AMT-R, HL1916AMT-L

FCC ID: W65HL1916AMT

Applicant: Shenyang Torch-Bigtide Digital Technology Co.,Ltd.
No.18-6B,Yaoyang Road,Huishan Economic Development
Area,Shenbei New District,Shenyang,China

Manufacturer: Shenyang Torch-Bigtide Digital Technology Co.,Ltd.
No.18-6B,Yaoyang Road,Huishan Economic Development
Area,Shenbei New District,Shenyang,China

Technical Standards: FCC Part 15 Subpart B

File Number: MOST MTPKEYE11090262

Date of test: Sep. 23, 2011-Sep.24, 2011

Deviation: None

Condition of Test Normal

Sample:

Test Result: PASS

The above equipment was tested by Most for compliance with the requirements set forth in FCC Rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample of HL1916AMT-R identified in the report.

Test by:  (Candy Zhang)

Reviewed by:  (Key Wang)

Approved by:  (Yvette Zhou)

2. GENERAL INFORMATION

2.1 Product Information

Motherboard BP011AX2140

Chip GM5621

NOTE: Please refer to the photographs of the EUT. For more detailed features description about the EUT, please refer to User's Manual.

2.2. Objective

The objective of the report is to perform tests according to FCC Part 15 Subpart B for the EUT FCC ID Certification:

NO.	Identity	Document Title
1	FCC PART15 Subpart B	Class B personal computers and peripherals.....

2.3 Test standards And Results

Test items and the results are as bellow:

NO.	Section	Description	Result	Date of test
1	15.107	Conducted	Pass	2011-09-23
2	15.109	Radiated emission	Pass	2011-09-23

2.4 Measurement Uncertainty

No.	Item	Uncertainty
1.	Uncertainty for Conducted Disturbance Test	2.75dB
2.	Uncertainty for Radiated Disturbance Test	3.15dB

2.5 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35 °C
- Humidity: 30-60%
- Atmospheric pressure: 86-106kPa

3. TEST FACILITY

3.1 Test Facility

Test Site: Most Technology Service Co., Ltd

Location: No.5, Nangshan 2nd Rd., North Hi-tech Industrial Park, Shenzhen, Guangdong, China.

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test sites and the line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4-2003 and CISPR 16 requirements. The FCC Registration Number is 490827

Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4 and CISPR 16 requirements that Meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted emission, One in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

3.2 General Test Procedures

Test mode: The following data show only with the worst case setup

Conducted Emissions: The EUT is placed on the test table, which is 0.8 m above ground plane. According to the requirements Section 13.1.4.1 of ANSI C63.4. Conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which Varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by Changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum Emissions, exploratory radiated emission measurements were made according to the requirements in section 13.1.4.1 of ANSI C63.4.

Setting :	9KHZ~150KHZ	RBW 200HZ	VBW1KHZ
	150KHZ~30MHZ	RBW 9KHZ	VBW 30KHZ
	30MHZ~1GHZ	RBW 120KHZ	VBW 300KHZ
	Above 1GHZ	RBW 1MHZ	VBW 3MHZ

4. SETUP OF EQUIPMENT UNDER TEST

4.1 Support Equipment

Description	Manufacturer	Model	Serial number
Computer	Dell DOC	DCSM	5P3842X
Mouse	Dell DOC	D PPID	MS111-L
Keyboard	Dell DOC	L100	U01C
USB flash drive	Kingston DOC	DT101 G2	5276930
VGA cable	Lenovo	shield	140cm
DVI cable	Lenovo	shield	140cm

4.2 Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100492	Mar. 06, 2011	1 Year
LISN	ROHDE&SCHWARZ	ENV216	100093	Mar. 06, 2011	1 Year
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	101202	Mar. 06, 2011	1 Year
Spectrum Analyzer	ANRITSU	MS2651B	6200238316	Mar. 06, 2011	1 Year
50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar. 06, 2011	1 Year
Bilog Antenna	Sunol	JB3	A121206	Mar. 06, 2011	1 Year
Horn Antenna	EMCO	3115	640201028-06	Mar. 06, 2011	1 Year
50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Mar. 06, 2011	1 Year
Cable	Resenberger	N/A	NO.1	Mar. 06, 2011	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Mar. 06, 2011	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Mar. 06, 2011	1 Year
DC Power Filter	Duoji	DL2X30B	N/A	Mar. 06, 2011	1 Year
Single phase power Line filter	Duoji	FNF 202B30	N/A	Mar. 06, 2011	1 Year
3 phase power line filter	Duoji	FNF 402B30	N/A	Mar. 06, 2011	1 Year
Impedance matching Pad	Rohde&schwarz	SCA-Comp	N/A	Mar. 06, 2011	1 Year
Coaxial switch	Anritsu Corp	MP59B	6200283933	Mar. 06, 2011	1 Year
AC power soure	KIKUSUI	AC40MA	LM003232	Mar. 06, 2011	1 Year
AMN	Rohde&schwarz	ESH3-Z5	100229	Mar. 06, 2011	1 Year
Spectrum analyzer	Agilent	E4408B	MY414404-60	Mar. 06, 2011	1 Year
ATV generator	Philips	PM5418 TNS	609114	Mar. 13.2011	1 Year
DTV generator	Teleview	DTA110T	4110576337	Mar. 13.2011	1 Year


5. TEST REQUIREMENTS

5.1 Limits Of Line Conducted Emission Test

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* the limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz. The lower limit shall apply at the transition frequency

5.2 Block Diagram Of Test Setup

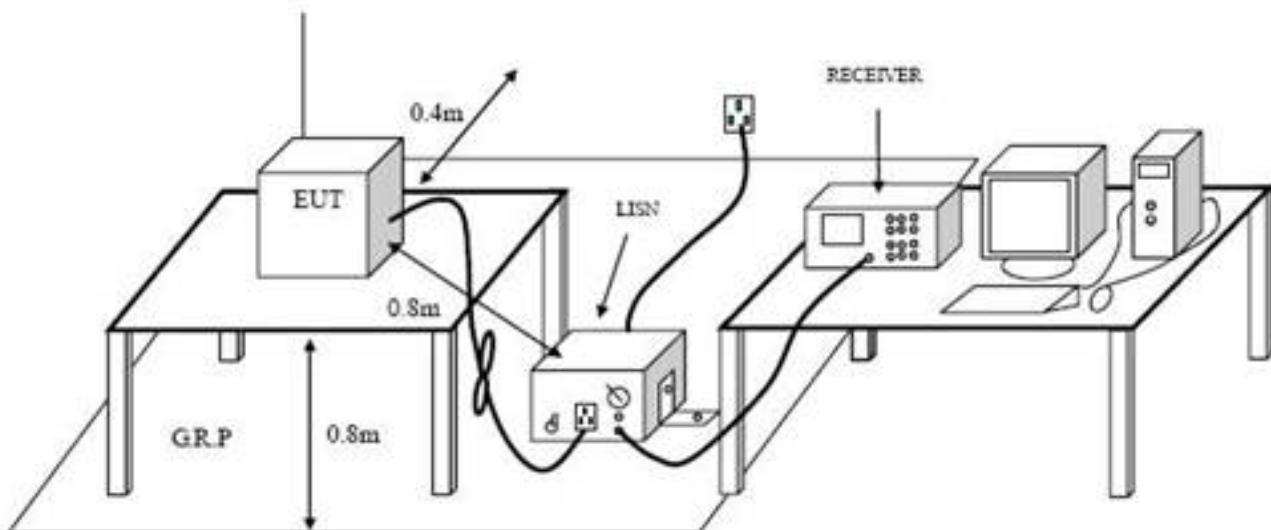

5.3 Preliminary Procedure Of Line Conducted Emission Test

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height 0.8 meters is used and is placed on the ground plane as per FCC 15 (see Test Facility for the dimensions of the ground plane non-conductive covering to insulate the EUT from the ground plane).
- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O Cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT Test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer /Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer/Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer/Receiver.
- 7) Analyzer /Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing

5.4 Test Result Of Line Conducted Emission Test



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Conducted Emission Measurement

File : HL1916AMT-R

Data : #14

Date: 2011-09-23

Time: 10:14:42

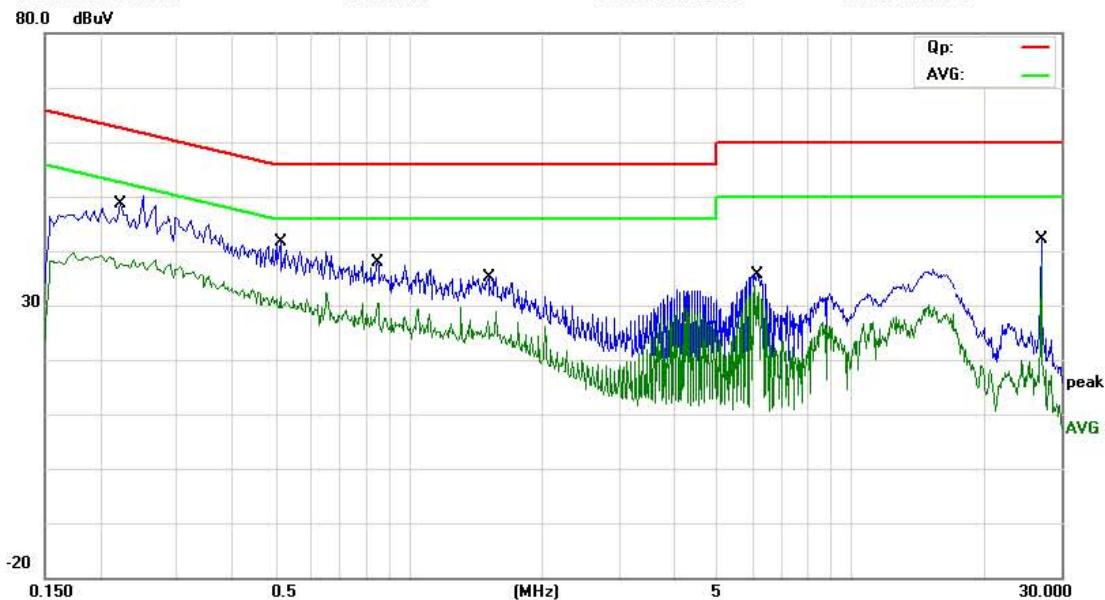

Site site #1

Phase: **N**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: 120V/60Hz

Humidity: 60 %

EUT: 19''LCD Monitor

M/N: HL1916AMT-R

Mode: Running "H" Pattern

Note: DVI:1280*1024 60Hz

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2220	36.83	11.85	48.68	62.74	-14.06	QP	
2		0.2220	25.68	11.85	37.53	52.74	-15.21	AVG	
3		0.5100	30.40	10.00	40.40	56.00	-15.60	QP	
4		0.5100	19.75	10.00	29.75	46.00	-16.25	AVG	
5		0.8460	27.44	10.00	37.44	56.00	-18.56	QP	
6		0.8460	18.56	10.00	28.56	46.00	-17.44	AVG	
7		1.5060	25.08	9.49	34.57	56.00	-21.43	QP	
8		1.5060	17.63	9.49	27.12	46.00	-18.88	AVG	
9		6.1540	23.95	11.31	35.26	60.00	-24.74	QP	
10		6.1540	16.23	11.31	27.54	50.00	-22.46	AVG	
11		26.9980	33.02	9.00	42.02	60.00	-17.98	QP	
12	*	26.9980	28.93	9.00	37.93	50.00	-12.07	AVG	

*:Maximum data x:Over limit !:over margin

Engineer Signature: Rex



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310


Conducted Emission Measurement

File : HL1916AMT-R

Data : #15

Date: 2011-09-23

Time: 10:16:57

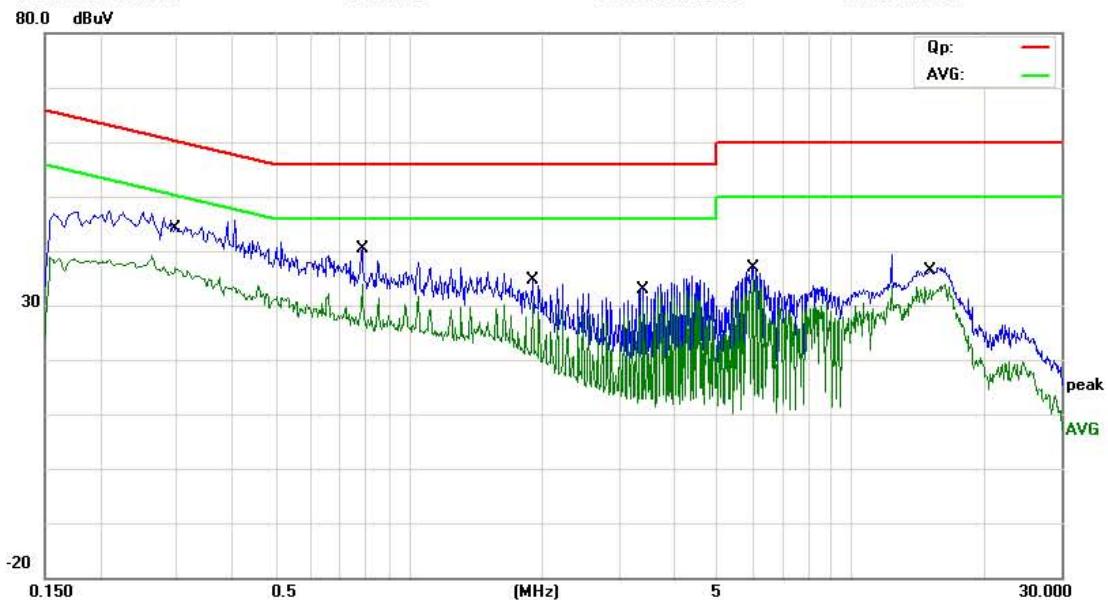

Site: site #1

Phase: **L1**

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: 120V/60Hz

Humidity: 60 %

EUT: 19''LCD Monitor

M/N: HL1916AMT-R

Mode: Running "H" Pattern

Note: DVI:1280*1024 60Hz

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2987	32.79	11.34	44.13	60.28	-16.15	QP	
2	*	0.2987	25.38	11.34	36.72	50.28	-13.56	AVG	
3		0.7820	29.86	10.00	39.86	56.00	-16.14	QP	
4		0.7820	19.65	10.00	29.65	46.00	-16.35	AVG	
5		1.9020	25.44	9.10	34.54	56.00	-21.46	QP	
6		1.9020	21.19	9.10	30.29	46.00	-15.71	AVG	
7		3.4100	22.52	10.41	32.93	56.00	-23.07	QP	
8		3.4100	20.27	10.41	30.68	46.00	-15.32	AVG	
9		6.0340	25.39	11.38	36.77	60.00	-23.23	QP	
10		6.0340	23.89	11.38	35.27	50.00	-14.73	AVG	
11		14.8900	26.95	9.00	35.95	60.00	-24.05	QP	
12		14.8900	22.04	9.00	31.04	50.00	-18.96	AVG	

*:Maximum data x:Over limit l:over margin

Engineer Signature: Rex

6. TEST RADIATED EMISSION REQUIREMENT


6.1 Limits Of Radiated Disturbances At 3m Distances For Class B

Frequency MHz	Field Strength uV/m	Field Strength dBuV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Note: Adjust the brightness and contrast to maximum

Emissions attenuated more than 20 dB below the permissible value are not reported.

6.2: Block Of Radiation Interference

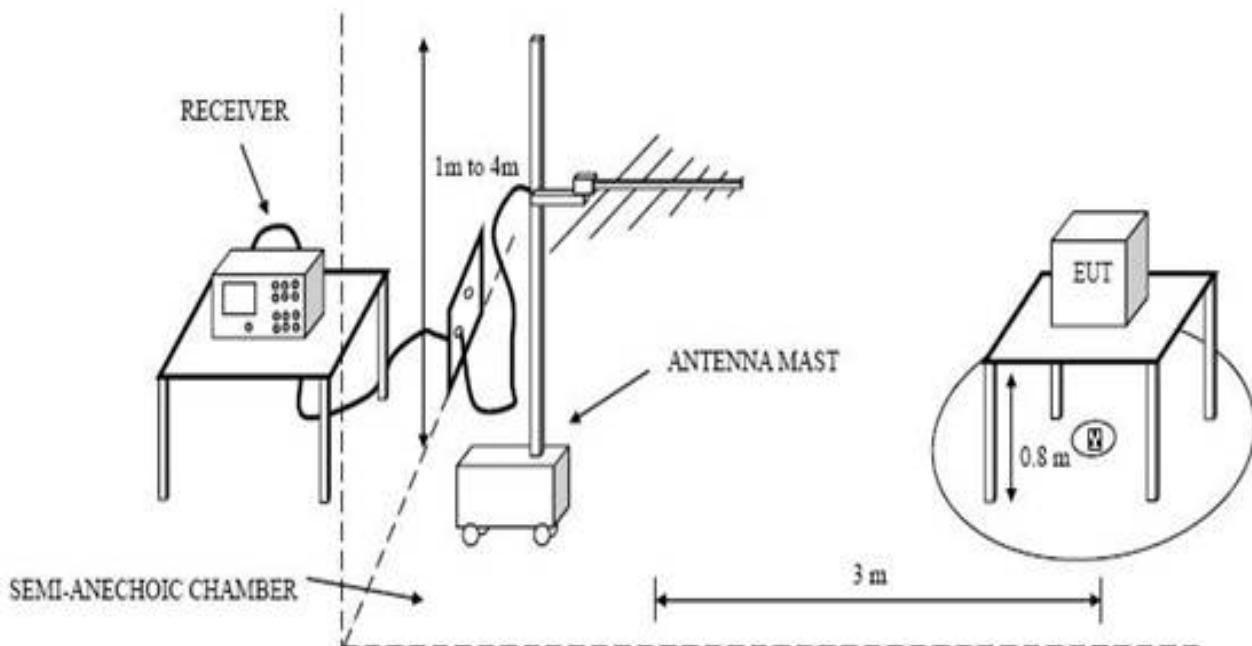

6.3 Preliminary Radiated Emission Test

In the frequency range above 30MHz,Bi-log Test Antenna(30MHz to 1GHz)and Horn Test Antenna (above 1GHz)are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

Preliminary Radiated Emission Test			
Frequency Range Investigated		30MHz to 5000MHz	
Mode of operation	Details	Phase	Date#
VGA Display	800*600	H/V	
	1024*768	H/V	
	1280*1024	H/V	
DVI Display	800*600	H/V	
	1024*768	H/V	
	1280*1024	H/V	

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing

6.4 Test Result Of Radiation Emission Test



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File : HL1916AMT-R FCC

Data #11

Date: 2011-9-23

Time: 10:58:38

70.0 dBuV/m

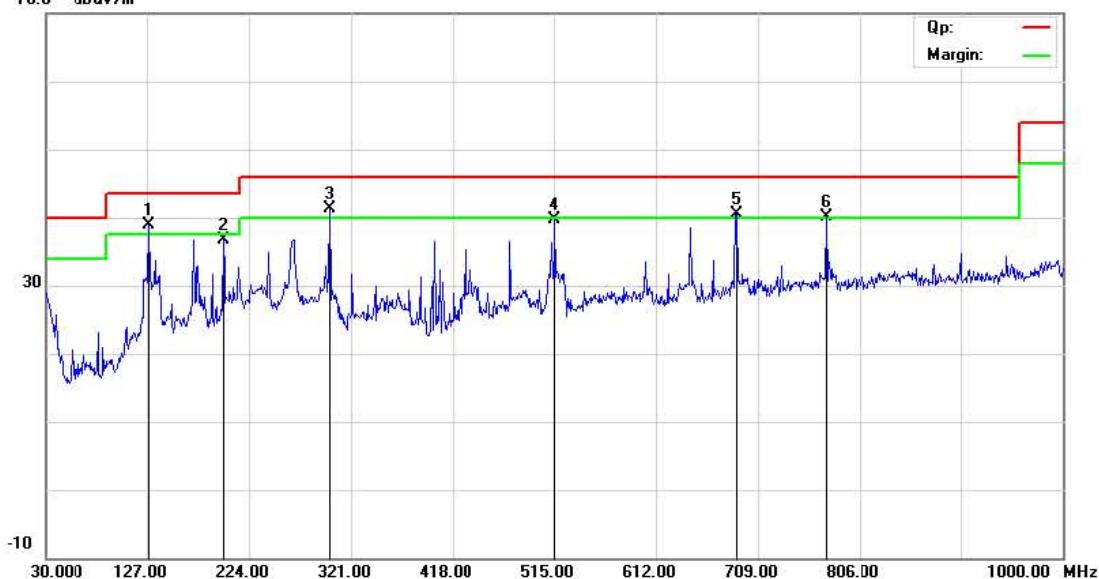

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: 19"LCD Monitor

Distance: 3m

M/N: HL1916AMT-R

Mode: Running "H" Pattern

Note: DVI 1280*1024 60Hz

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	128.9398	21.29	17.70	38.99	43.50	-4.51	QP		0
2		199.7500	19.42	17.38	36.80	43.50	-6.70	QP		0
3	I	300.6298	22.13	19.13	41.26	46.00	-4.74	QP		0
4		515.9700	18.10	21.64	39.74	46.00	-6.26	QP		0
5	I	688.6300	16.20	24.40	40.60	46.00	-5.40	QP		0
6	I	773.9900	14.11	26.02	40.13	46.00	-5.87	QP		0

*:Maximum data x:Over limit I:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : HL1916AMT-R FCC

Data #12

Date: 2011-9-23

Time: 11:05:09

70.0 dBuV/m



Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: 19"LCD Monitor

Distance: 3m

M/N: HL1916AMT-R

Mode: Running "H" Pattern

Note: DVI 1280*1024 60Hz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		128.9398	17.79	17.70	35.49	43.50	-8.01	QP		0	
2		199.7500	17.42	17.38	34.80	43.50	-8.70	QP		0	
3		266.6800	17.77	18.47	36.24	46.00	-9.76	QP		0	
4		515.9700	18.10	21.64	39.74	46.00	-6.26	QP		0	
5	*	687.6598	17.49	24.40	41.89	46.00	-4.11	QP		0	
6	!	773.9900	14.11	26.02	40.13	46.00	-5.87	QP		0	

*:Maximum data x:Over limit !:over margin

Engineer Signature: Sky



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement

File : HL1916AMT

Data : #1

Date: 2011-9-23

Time: 08:10:42

70.0 dBuV/m



Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15 B 1000-5000MHz PK

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 19" LCD Monitor

Distance:

M/N: HL1916AMT-R

Mode: Running "H"Pattern

Note: DVI 1280*1024

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		1140.000	47.27	47.27	47.27	74.00	-26.73	peak			
2		1140.000	42.27	42.27	42.27	54.00	-11.73	AVG			
3		1580.000	49.43	49.43	49.43	74.00	-24.57	peak			
4	*	1580.000	44.43	44.43	44.43	54.00	-9.57	AVG			
5		1920.000	45.30	45.30	45.30	74.00	-28.70	peak			
6		1920.000	40.00	40.00	54.00	54.00	-14.00	AVG			
7		2810.000	49.18	49.18	74.00	74.00	-24.82	peak			
8		2810.000	40.38	40.38	54.00	54.00	-13.62	AVG			
9		3270.000	48.66	48.66	74.00	74.00	-25.34	peak			
10		3270.000	41.46	41.46	54.00	54.00	-12.64	AVG			
11		3840.000	43.28	43.28	74.00	74.00	-30.72	peak			
12		3840.000	37.36	37.36	54.00	54.00	-16.64	AVG			

*:Maximum data x:Over limit !:over margin

Engineer Signature:

Kavin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File : HL1916AMT-R

Data : #2

Date: 2011-9-23

Time: 08:13:35

70.0 dBuV/m

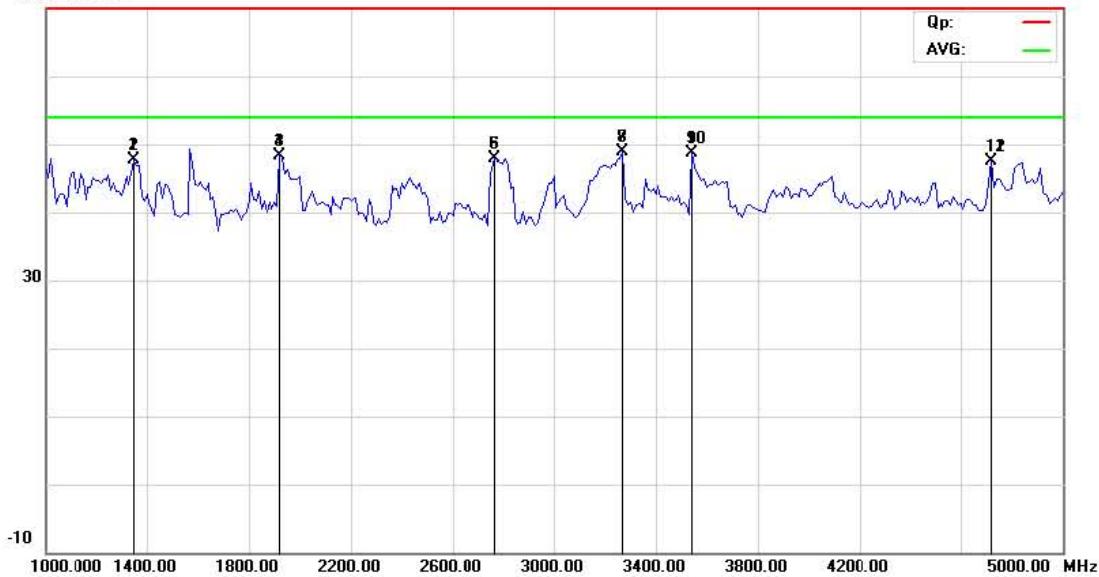

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15 B 1000-5000MHz PK

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 19" LCD Monitor

Distance:

M/N: HL1916AMT-R

Mode: Running "H" Pattern

Note: DVI 1280*1024

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1350.000	47.66	47.66	74.00	-26.34	peak			
2		1350.000	42.66	47.66	54.00	-11.34	AVG			
3		1920.000	48.37	48.37	74.00	-25.63	peak			
4		1920.000	43.31	48.31	54.00	-10.69	AVG			
5		2770.000	47.95	47.95	74.00	-26.05	peak			
6		2770.000	40.35	40.35	54.00	-13.65	AVG			
7		3270.000	48.90	48.90	74.00	-25.10	peak			
8	*	3270.000	43.90	48.90	54.00	-10.10	AVG			
9		3540.000	48.66	48.66	74.00	-25.34	peak			
10		3540.000	40.16	40.16	54.00	-13.84	AVG			
11		4720.000	47.50	47.50	74.00	-26.50	peak			
12		4720.000	41.90	41.90	54.00	-12.10	AVG			

*:Maximum data x:Over limit !:over margin

Engineer Signature:

Kavin