

APPLICATION CERTIFICATION

On Behalf of
Fine Offset Electronics Co., Ltd.

Professional Wireless Weather Station
Model No.: WH7, WH1

FCC ID: WA5915MTX

Prepared for : Fine Offset Electronics Co., Ltd.
Address : 4/F, Block B3, Eastern Industrial Park, Overseas Town,
Nanshan, Shenzhen, Guangdong, China

Prepared by : Accurate Technology Co., Ltd.
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20080792
Date of Test : May 05, 2008
Date of Report : May 08, 2008

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. THE FIELD STRENGTH OF RADIATION EMISSION	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	8
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	9
4.6. The Field Strength of Radiation Emission Measurement Results	10
5. 20DB OCCUPIED BANDWIDTH	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c).....	11
5.3. EUT Configuration on Measurement	12
5.4. Operating Condition of EUT	12
5.5. Test Procedure	12
5.6. Measurement Result	13
6. DURATION TIME AND SILENT PERIOD MEASUREMENT.....	14
6.1. Block Diagram of Test Setup.....	14
6.2. Duration Time and silent period measurement according to FCC Part 15 Section 15.231(e).....	14
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	15
6.6. Measurement Result	16
7. AVERAGE FACTOR MEASUREMENT	17
7.1. Block Diagram of Test Setup.....	17
7.2. Average factor Measurement according to ANSI 63.4: 2003.....	17
7.3. EUT Configuration on Measurement	18
7.4. Operating Condition of EUT	18
7.5. Test Procedure	18
7.6. Measurement Result	19
APPENDIX I (TEST CURVES) (8pages)	

Test Report Certification

Applicant : Fine Offset Electronics Co., Ltd.
 Manufacturer : Fine Offset Electronics Co., Ltd.
 EUT Description : Professional Wireless Weather Station
 (A) MODEL NO.: WH7, WH1
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: DC 3.0V (AAA Battery ×2)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.231: 2007 & ANSI 63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : May 05, 2008

Prepared by : 
 (Engineer)

Reviewer : 
 (Quality Manager)

Approved & Authorized Signer : 
 (Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Professional Wireless Weather Station
Model Number	:	WH7, WH1 (Note: There are two model numbers of the EUT, the basic model number is WH7, the alternate model WH1 is electrically and mechanically 100% identical to the basic model, except for the model designation. So we chosen model WH7 to have test and test results are applicable to all of the model number.)
Operation Frequency	:	915MHz
Power Supply	:	DC 3.0V(AAA Battery ×2)
Applicant	:	Fine Offset Electronics Co., Ltd.
Address	:	4/F, Block B3, Eastern Industrial Park, Overseas Town, Nanshan, Shenzhen, Guangdong, China
Manufacturer	:	Fine Offset Electronics Co., Ltd.
Address	:	4/F, Block B3, Eastern Industrial Park, Overseas Town, Nanshan, Shenzhen, Guangdong, China
Date of sample received	:	April 22, 2008
Date of Test	:	May 05, 2008

1.2. Description of Test Facility

EMC Lab	:	Listed by FCC The Registration Number is 274801 Listed by Industry Canada The Registration Number is IC4174 Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L0579
Name of Firm	:	Shenzhen Academy of Metrology& Quality Inspection
Site Location	:	Bldg. Metrology& Quality Inspection, Longzhu Road, Nanshan, Shenzhen, Guangdong, P.R. China

1.3.Measurement Uncertainty

Conducted emission expanded uncertainty = 3.5dB, k=2

Radiated emission expanded uncertainty = 4.5dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.29.2009
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.23.2009
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2009
Bilog Antenna	Chase	CBL6112B	2591	01.23.2009
Horn Antenna	Rohde&Schwarz	HF906	100013	01.23.2009
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.29.2009
Pre-Amplifier	Agilent	8447D	2944A10619	03.29.2009
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100305	03.29.2009
L.I.S.N.	Rohde&Schwarz	ESH3-Z5	100310	03.29.2009

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(e)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(e)	Release Time Silent period	Compliant

The product is a periodic operated weather station transmitter.
Section 15.231 (a) and (b) are not applicable.

4. THE FIELD STRENGTH OF RADIATION EMISSION


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Professional Wireless Weather Station)

4.1.2. Anechoic Chamber Test Setup Diagram

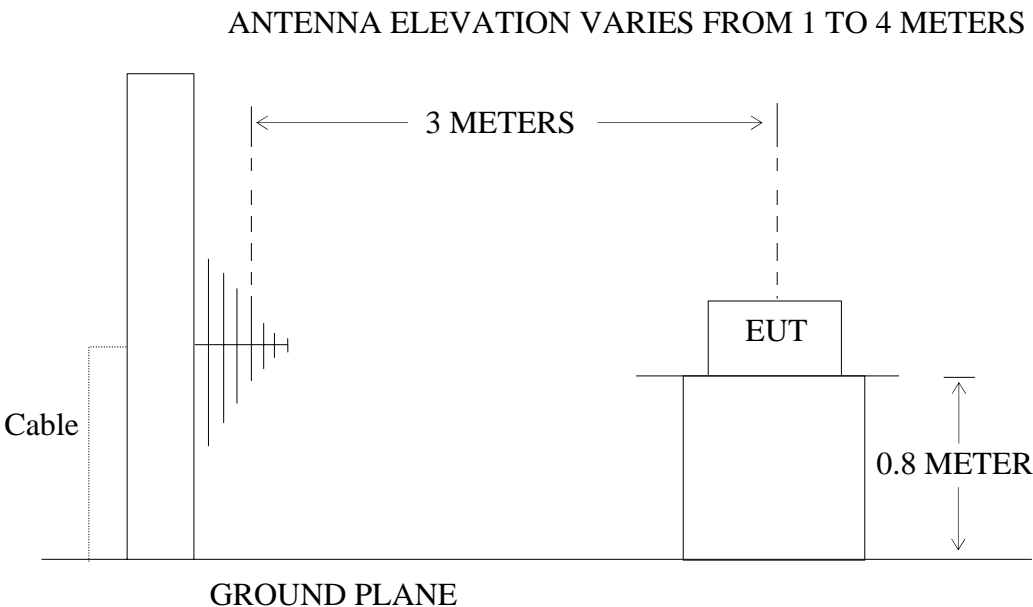

(EUT: Professional Wireless Weather Station)

4.2. The Field Strength of Radiation Emission Measurement Limits

4.2.1 Radiation Emission Measurement Limits According to Section 15.231(e)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [$\mu\text{V/m}$]	Field Strength of Spurious Emission [Average] [$\mu\text{V/m}$]
40.66-40.70	1000	100
70-130	500	50
130-174	500 - 1500	50-150
174-260	1500	150
260-470	1500-5000	150-500
Above 470	5000	500

Where F is the frequency in MHz, The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174MHz, $\mu\text{V/m}$ at 3 meters= $22.72727(F)-2454.545$; For the band 260-470MHz, $\mu\text{V/m}$ at 3 meters= $16.6667(F)-2833.3333$. The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

4.2.2 Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section 15.209.

4.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Professional Wireless Weather Station (EUT)

Model Number	: WH7
Serial Number	: N/A
Manufacturer	: Fine Offset Electronics Co., Ltd.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 3.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in measuring modes (TX) measure it.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz, and 1MHz in 1000-10000MHz.

The frequency range from 30MHz to 10000MHz is checked.

4.6. The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 30MHz to 10000MHz is investigated.

Date of Test:	May 05, 2008	Temperature:	25°C
EUT:	Professional Wireless Weather Station	Humidity:	50%
Model No.:	WH7	Power Supply:	DC 3.0V(AAA Battery ×2)
Test Mode:	TX	Test Engineer:	Feng

Fundamental Emission

Frequency (MHz)	Reading (dBμV/m)	Factor Corr.	Average Factor	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
914.930	89.2	-11.8	-5.1	72.3	77.4	74.0	94.0	1.7	16.6	Horizontal
914.930	88.5	-11.8	-5.1	71.6	76.7	74.0	94.0	2.4	17.3	Vertical

Spurious Emission

Frequency (MHz)	Reading (dBμV/m)	Factor Corr.	Average Factor	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
1829.866	62.3	-5.4	-5.1	51.8	56.9	54.0	74.0	2.2	17.1	Horizontal
*2744.796	44.7	-2.6	-5.1	37.0	42.1	54.0	74.0	17.0	31.9	
*3659.717	36.5	0.1	-5.1	31.5	36.6	54.0	74.0	22.5	37.4	
1829.866	62.7	-5.4	-5.1	52.2	57.3	54.0	74.0	1.8	16.7	Vertical
*2744.796	40.9	-2.6	-5.1	33.2	38.3	54.0	74.0	20.8	35.7	

Note:

1. *: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission Above 1000MHz and falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

3. The spectral diagrams in appendix 1 display the measurement of peak values with corrected factors counted.

5. 20DB OCCUPIED BANDWIDTH


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Professional Wireless Weather Station)

5.1.2. Anechoic Chamber Test Setup Diagram

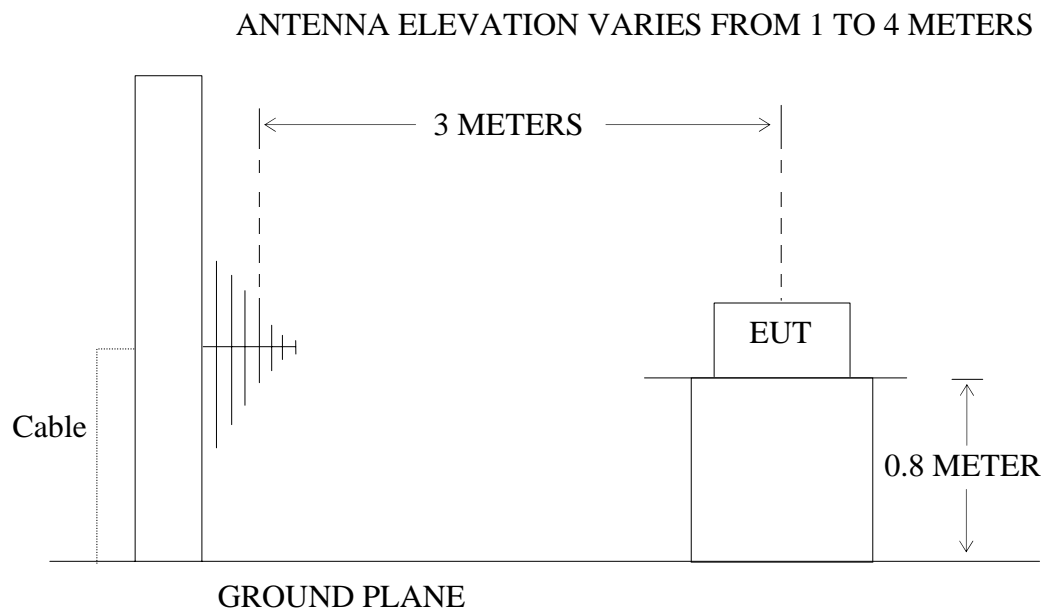

(EUT: Professional Wireless Weather Station)

5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.5% of the center frequency. Therefore, the bandwidth of the emission limit is $915\text{MHz} \times 0.5\% = 4575\text{KHz}$.

Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Professional Wireless Weather Station (EUT)

Model Number : WH7
Serial Number : N/A
Manufacturer : Fine Offset Electronics Co., Ltd.

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in measuring mode (TX) measure it.

5.5.Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 300kHz.

5.5.2. Set SPA Max hold. Mark peak, -20dB

5.6. Measurement Result

The EUT does meet the FCC requirement.

-20dB bandwidth = 30.3KHz <4575KHz.

The spectral diagrams in appendix I.

6. DURATION TIME AND SILENT PERIOD MEASUREMENT


6.1. Block Diagram of Test Setup

6.1.1. Block diagram of connection between the EUT and simulators



(EUT: Professional Wireless Weather Station)

6.1.2. Anechoic Chamber Test Setup Diagram

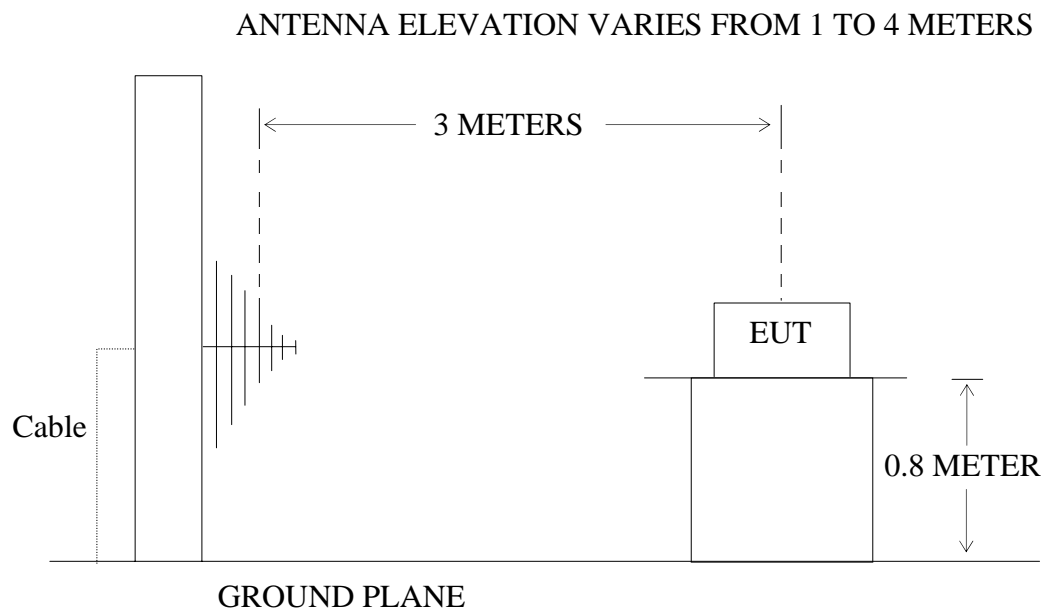

(EUT: Professional Wireless Weather Station)

6.2. Duration Time and silent period measurement according to FCC Part 15

Section 15.231(e)

Section 15.231(e) In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.3.EUT Configuration on Measurement

The following equipment are installed on duration time and silent period measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. Professional Wireless Weather Station (EUT)

Model Number : WH7
Serial Number : N/A
Manufacturer : Fine Offset Electronics Co., Ltd.

6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in measuring mode (TX) measure it.

6.5.Test Procedure

6.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,

VBW =30kHz, Span = 0Hz.

6.5.2. Set EUT as normal operation.

6.5.3. Set SPA View. Delta Mark time.

6.6. Measurement Result

The EUT does meet the FCC requirement.

Duration time = 0.055 second < 1 second

Silent period = 48.06 seconds > 30 times the duration of the transmission > 10seconds

The spectral diagrams in appendix I.

7. AVERAGE FACTOR MEASUREMENT


7.1. Block Diagram of Test Setup

7.1.1. Block diagram of connection between the EUT and simulators

EUT

(EUT: Professional Wireless Weather Station)

7.1.2. Anechoic Chamber Test Setup Diagram

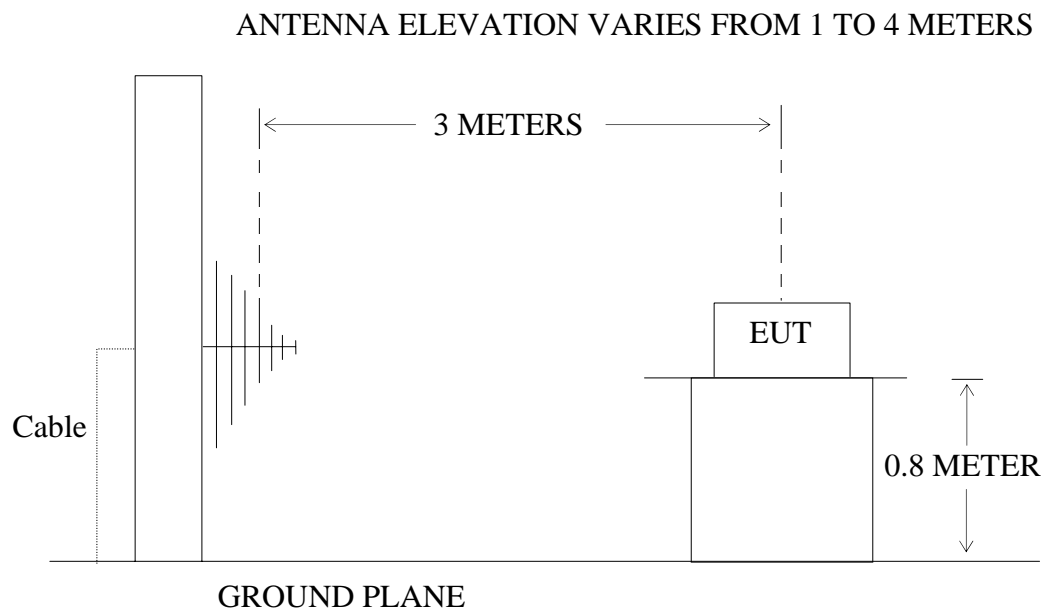

(EUT: Professional Wireless Weather Station)

7.2. Average factor Measurement according to ANSI 63.4: 2003

ANSI 63.4: 2003 Section 13.1.4.2 Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

Average factor in dB = $20 \log (\text{duty cycle})$

7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. Professional Wireless Weather Station (EUT)

Model Number : WH7
Serial Number : N/A
Manufacturer : Fine Offset Electronics Co., Ltd.

7.4.Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7D.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in measuring mode (TX) measure it.

7.5.Test Procedure

7.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,

VBW = 30kHz, Span = 0Hz.

7.5.3. Set EUT as normal operation.

7.5.4. Set SPA View. Delta Mark time.

7.6. Measurement Result

The duty cycle is simply the on time divided by the period:

Effective period of one cycle = 100ms

Sum of pulse width = 55.2ms

Duty Cycle = $55.2\text{ms}/100\text{ms} = 0.5520$

Therefore, the average factor is found by $20\log 0.5520 = -5.1\text{dB}$

The spectral diagrams in appendix I.


APPENDIX I (Test Curves)

Radiated Disturbance

FCC Part 15

EUT: Professional Wireless Weather Station
Manufacturer: Fine Offset Electronics Co., Ltd.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Test Specification: Horizontal
Comment: DC 3.0V

M/N: WH7

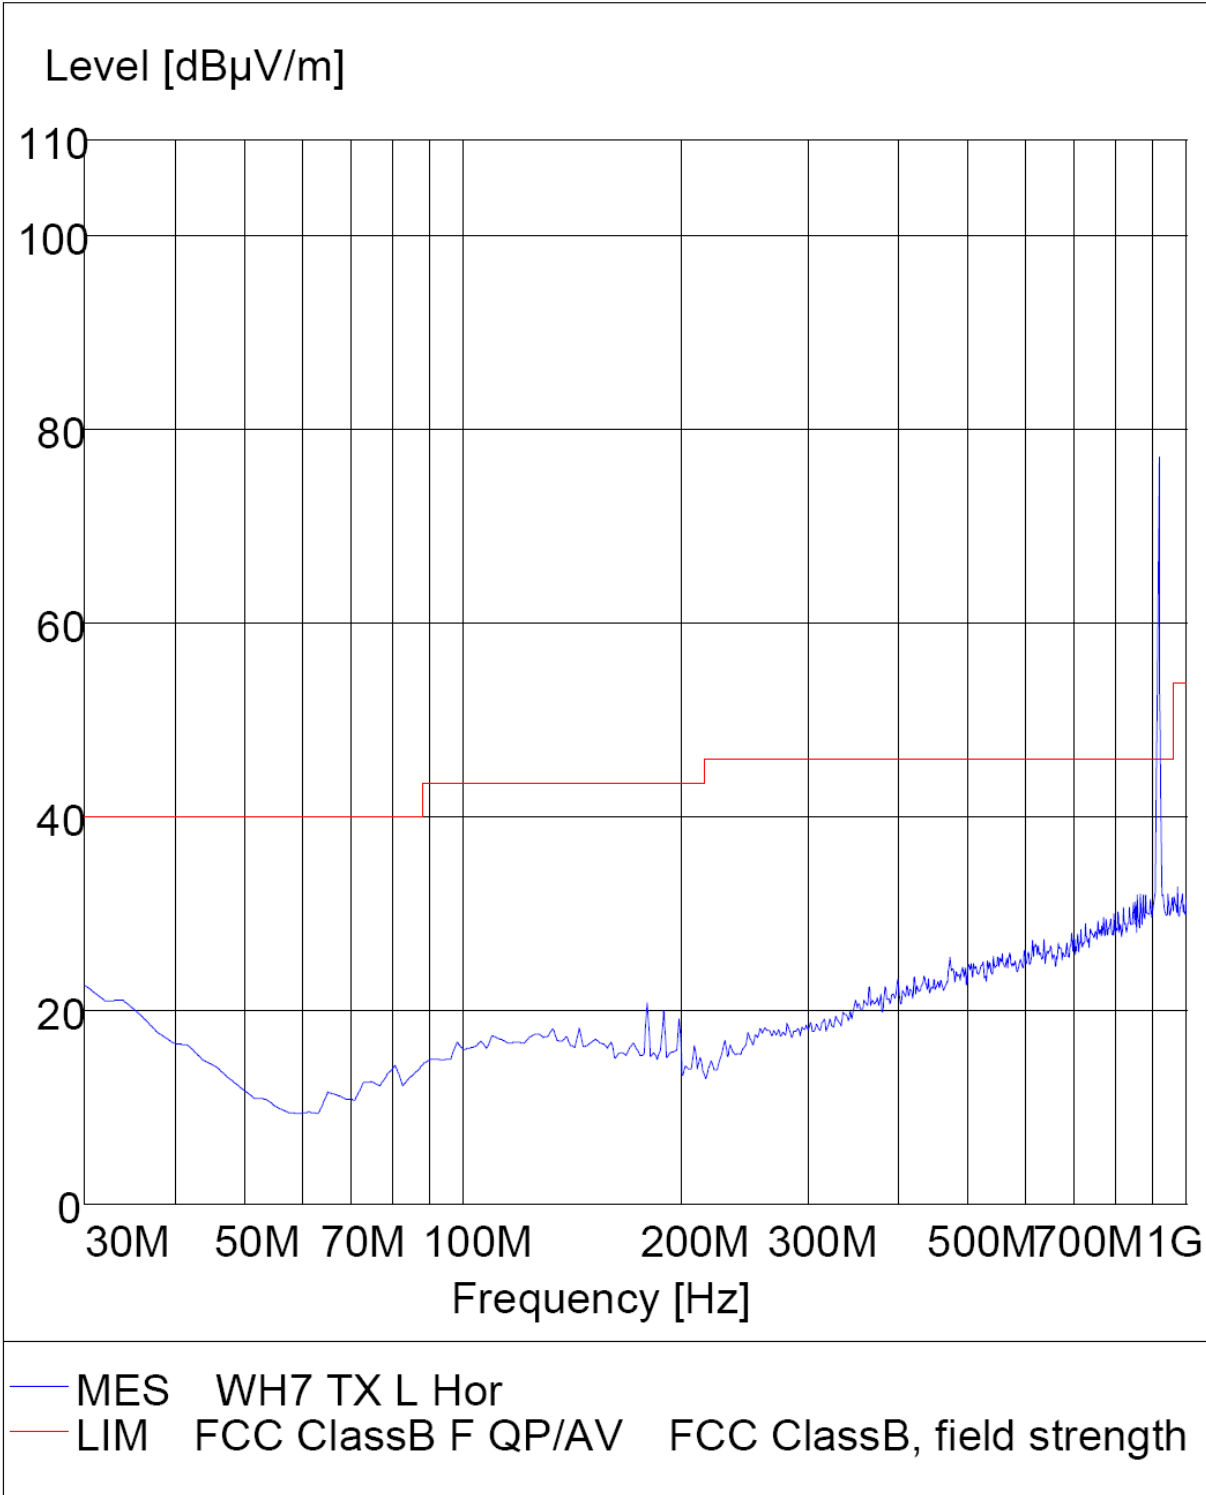


Radiated Disturbance

FCC Part 15

EUT: Professional Wireless Weather Station
Manufacturer: Fine Offset Electronics Co., Ltd.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Test Specification: Vertical
Comment: DC 3.0V

M/N: WH7

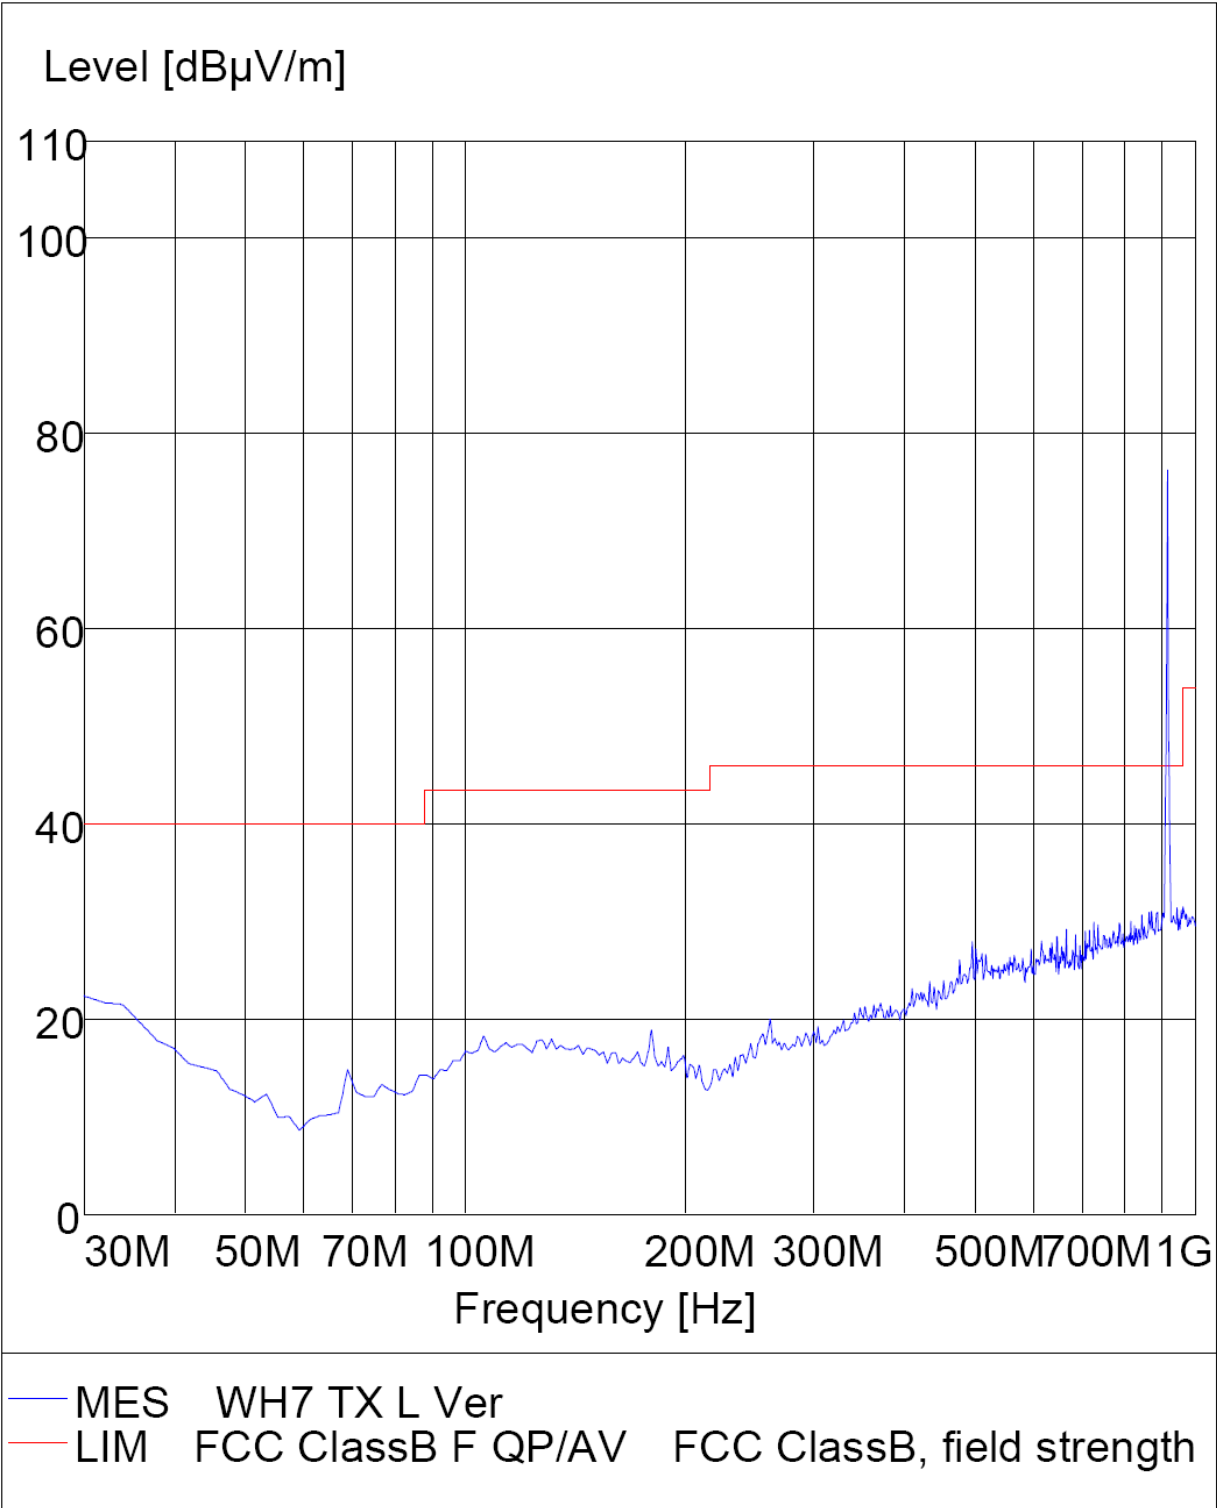


Radiated Disturbance

FCC Part 15

EUT: Professional Wireless Weather Station
 Manufacturer: Fine Offset Electronics Co., Ltd.
 Operating Condition: TX
 Test Site: ATC EMC Lab.SAC
 Test Specification: Horizontal
 Comment : DC 3.0V

M/N: WH7

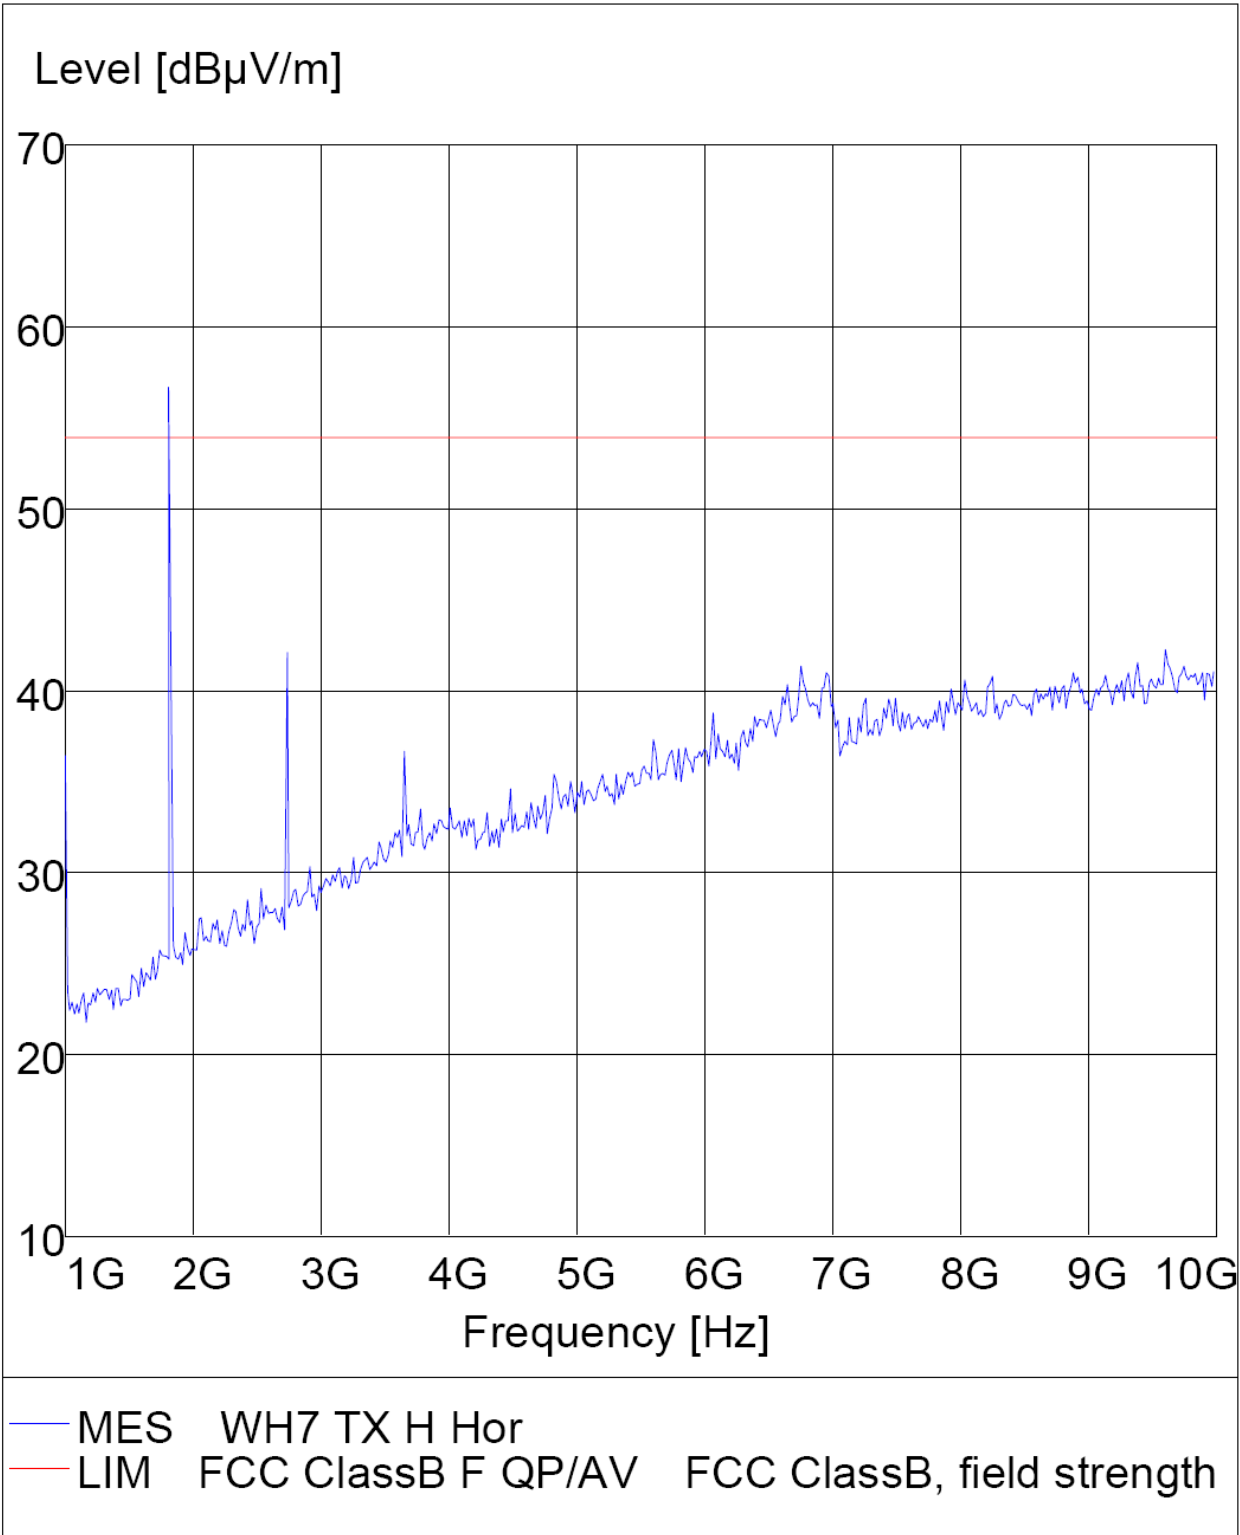


Radiated Disturbance

FCC Part 15


EUT: Professional Wireless Weather Station
Manufacturer: Fine Offset Electronics Co., Ltd.
Operating Condition: TX
Test Site: ATC EMC Lab.SAC
Test Specification: Vertical
Comment : DC 3.0V

M/N: WH7

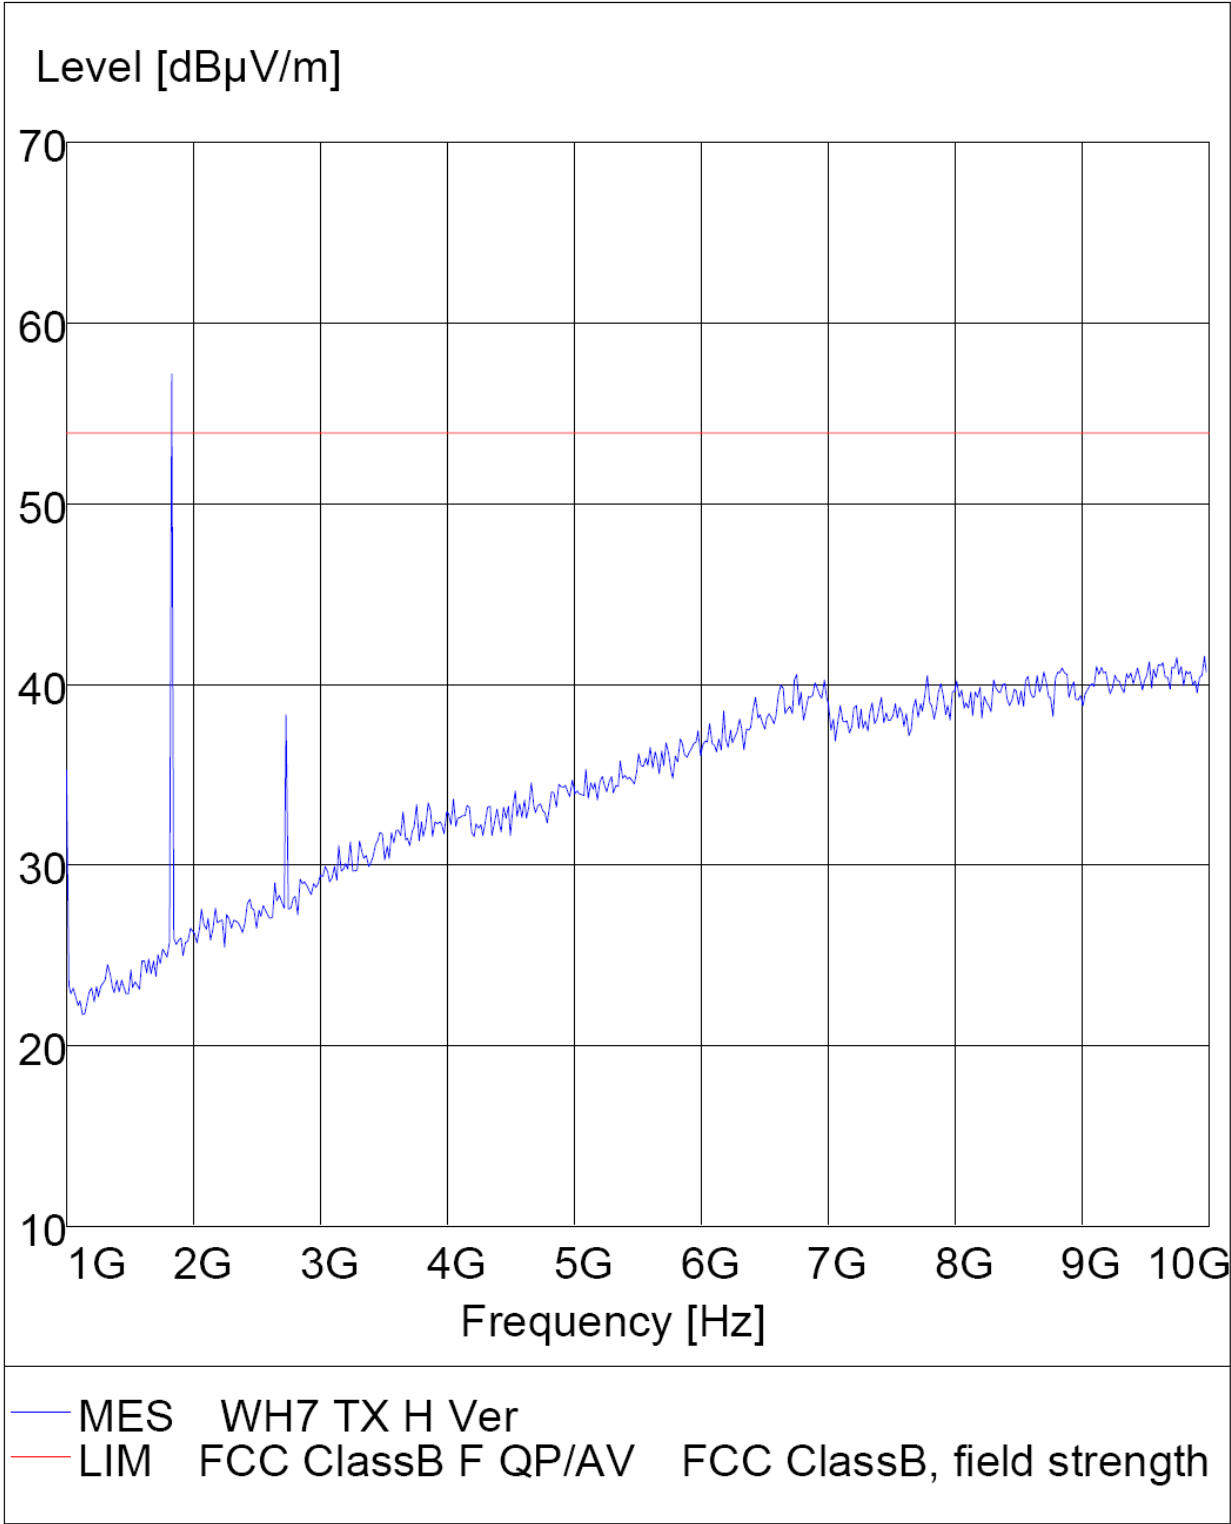





1 PK
VIEW

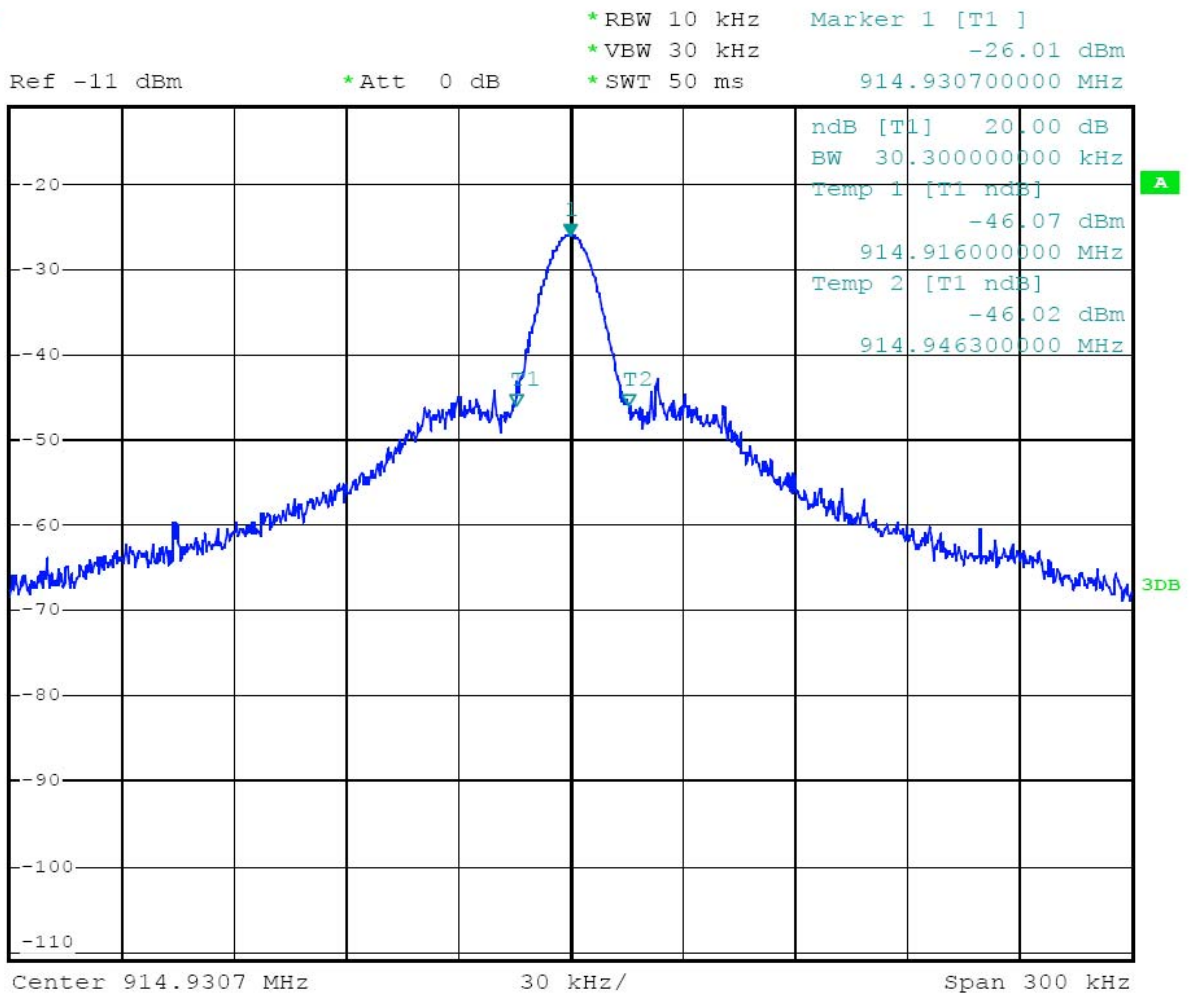

-20 dB bandwidth = 30.3kHz

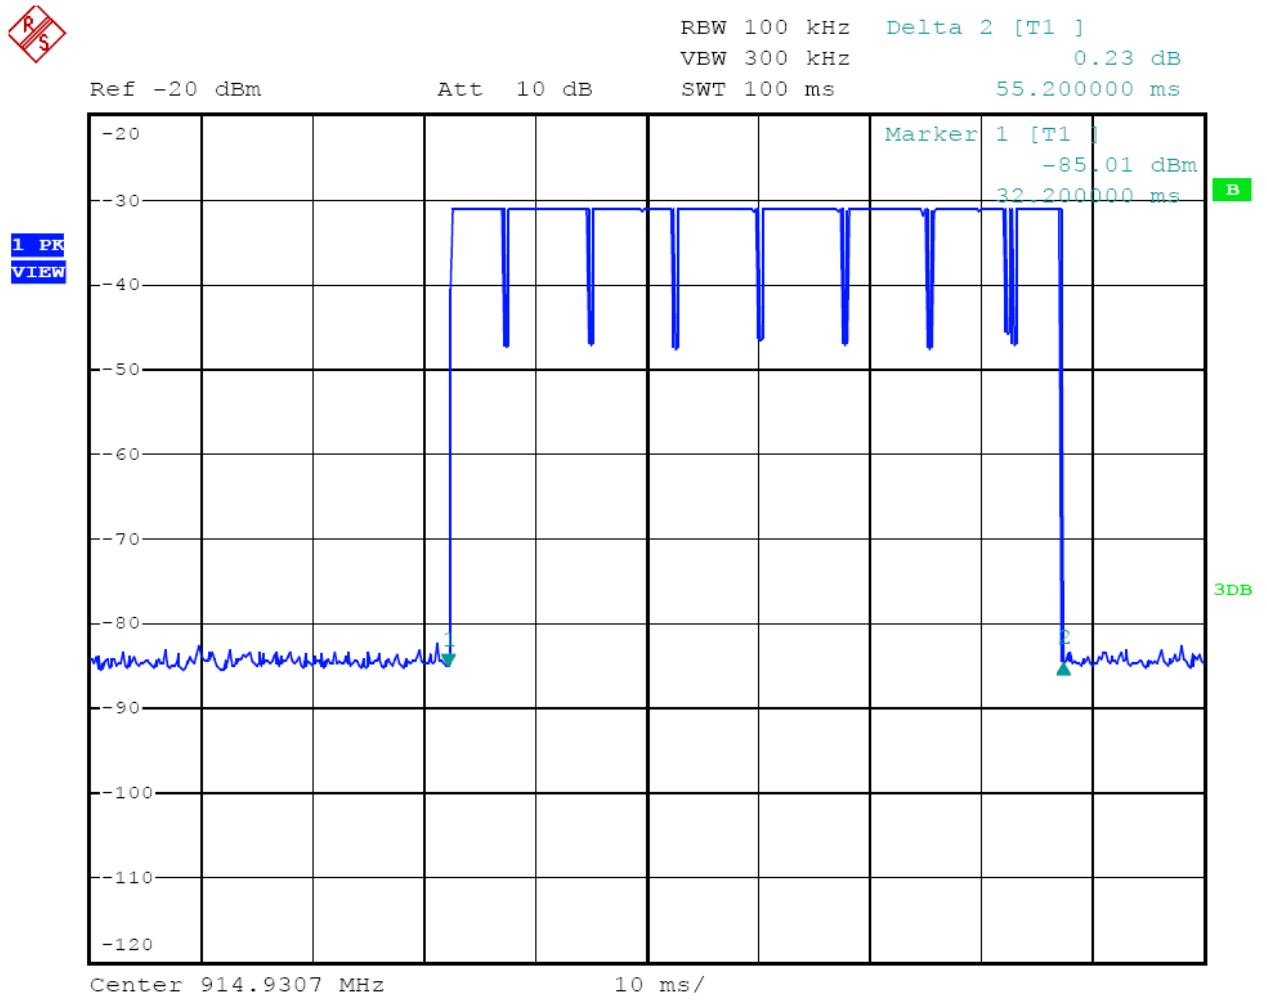


The Duration time = 55.2ms

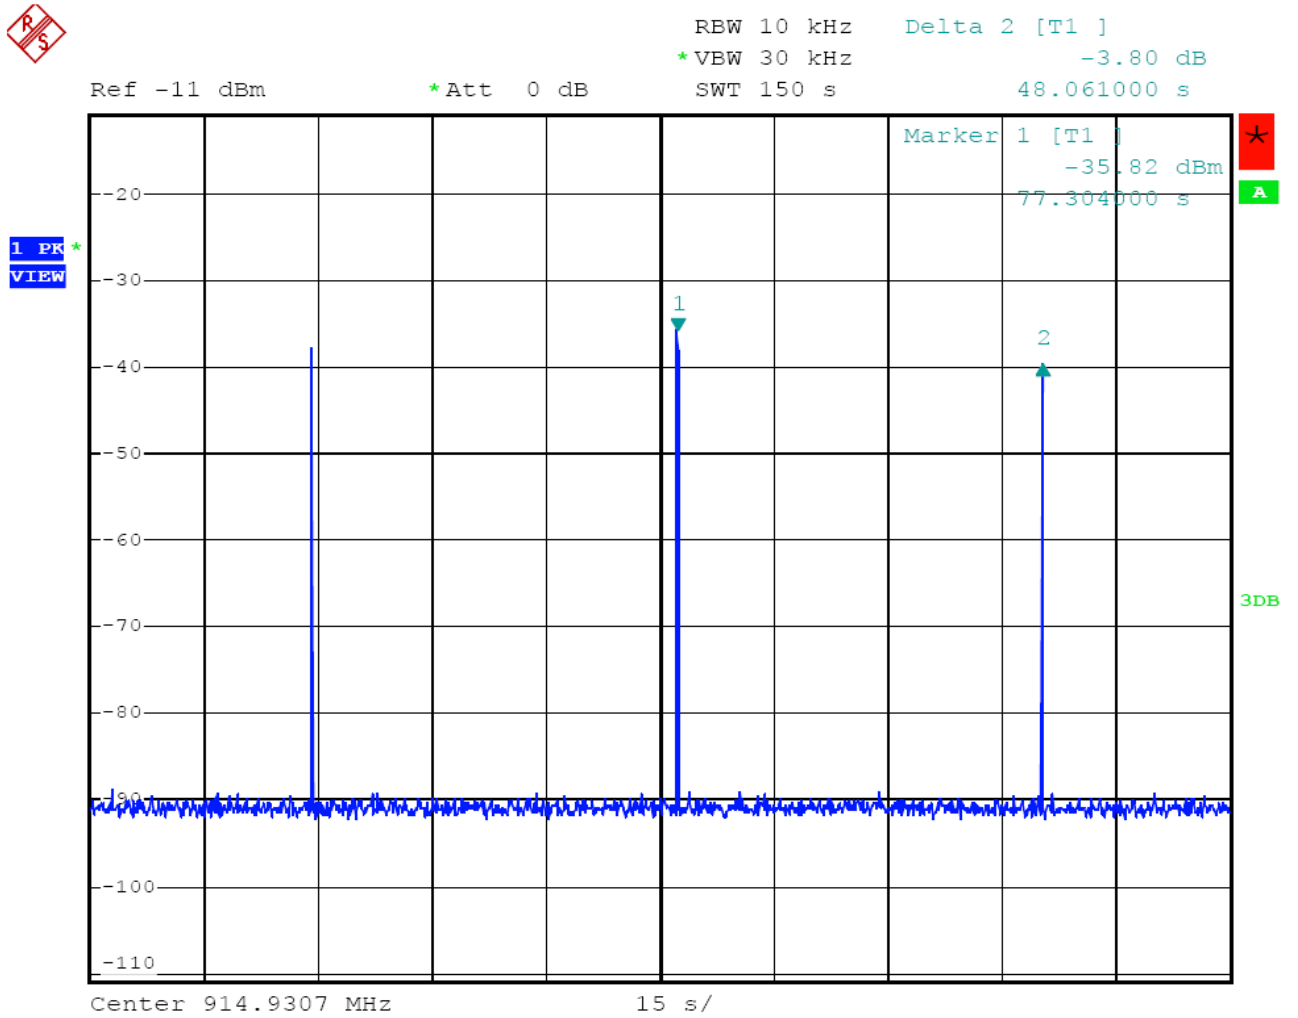

The Silent period = 48.06s



1 PK
VIEW

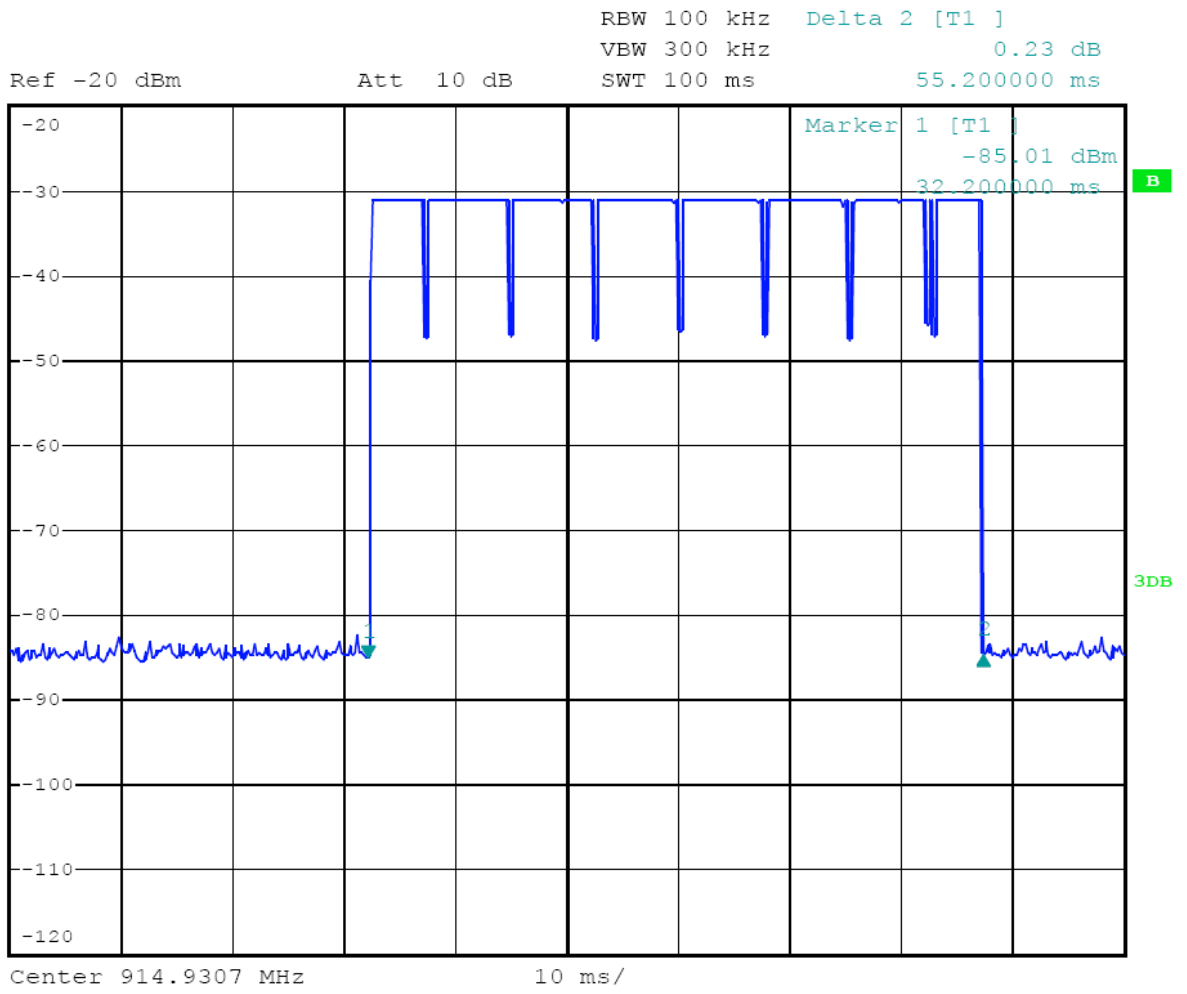

The Sum of pulse width = 55.2ms