


Antenna Specification


ITEM	SPEC
Antenna type	PCB Antenna(B)
MAX GAIN	1.5dbi
Polarization	Horizontal
Azimuth Beam Pattern	Omni-directional
Impedance	50ohm
Antenna Length	26mm

Antenna Photo & Length(mm)

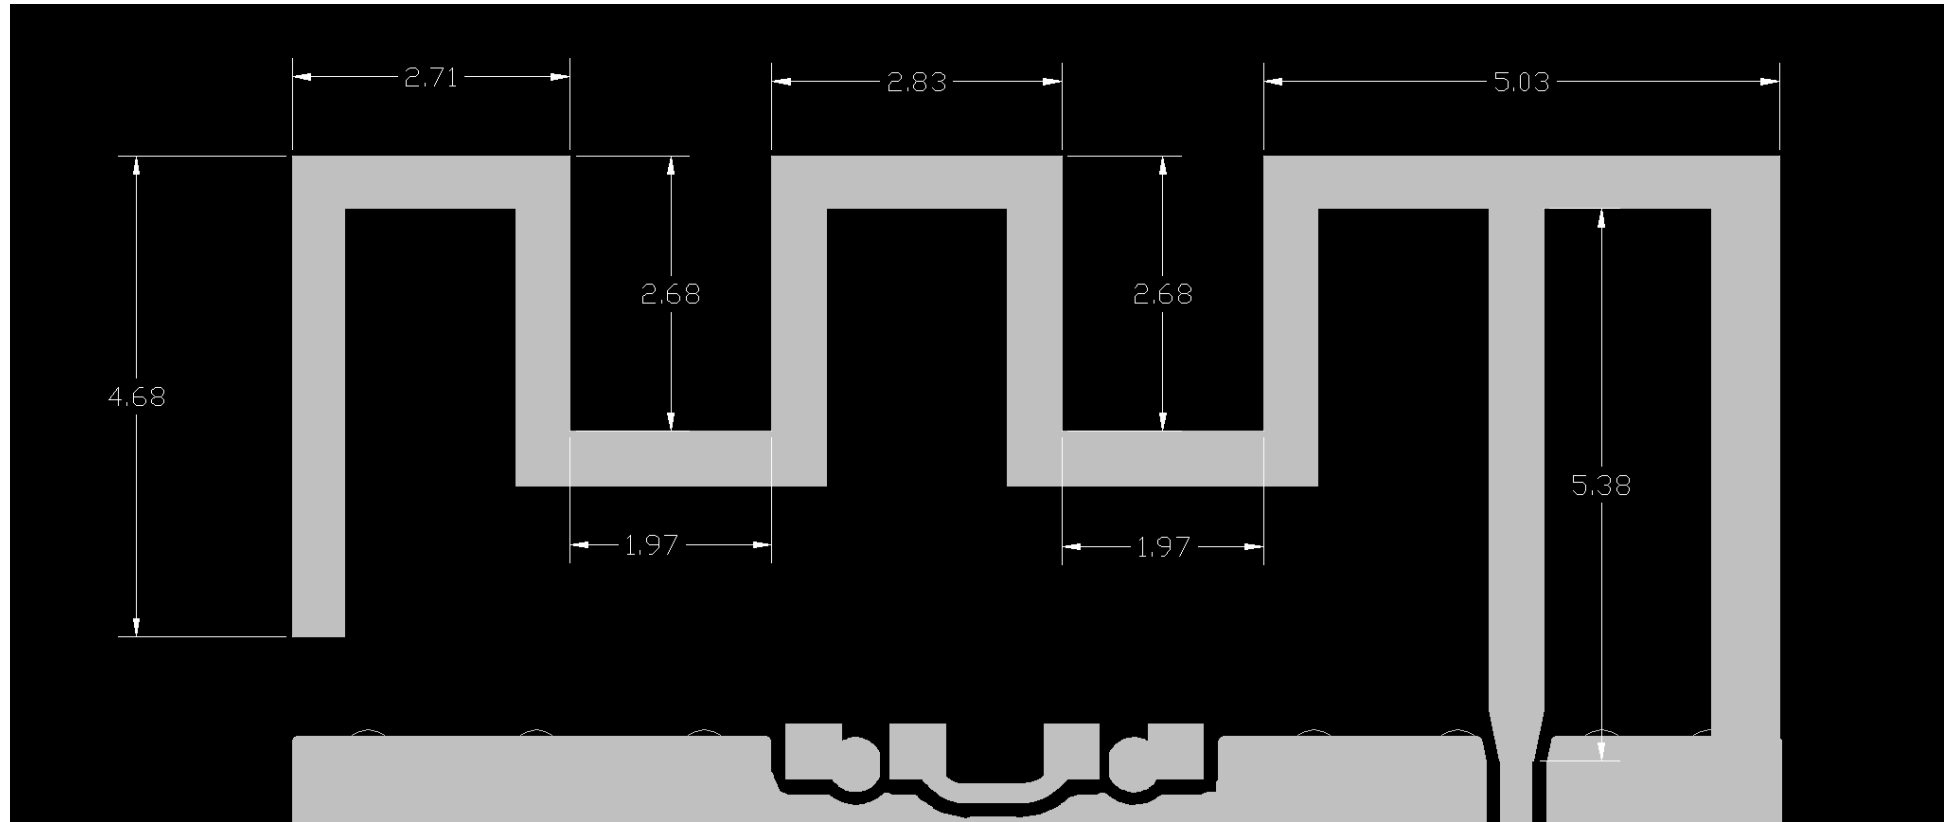


Coordinate System Reference:Antenna


Top view

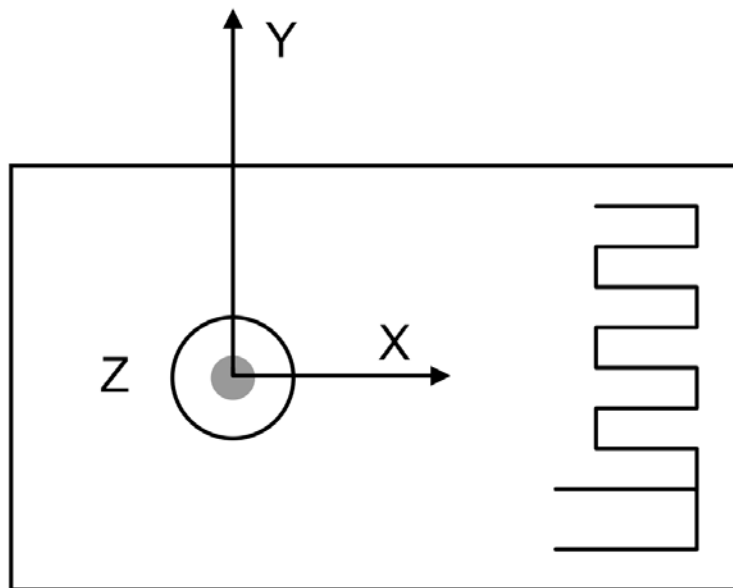


Side view

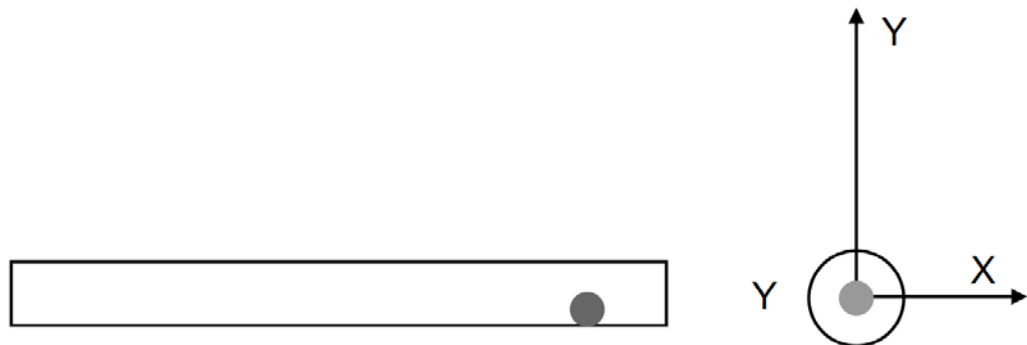


3D Radiation pattern $f = 2410\text{MHz}$

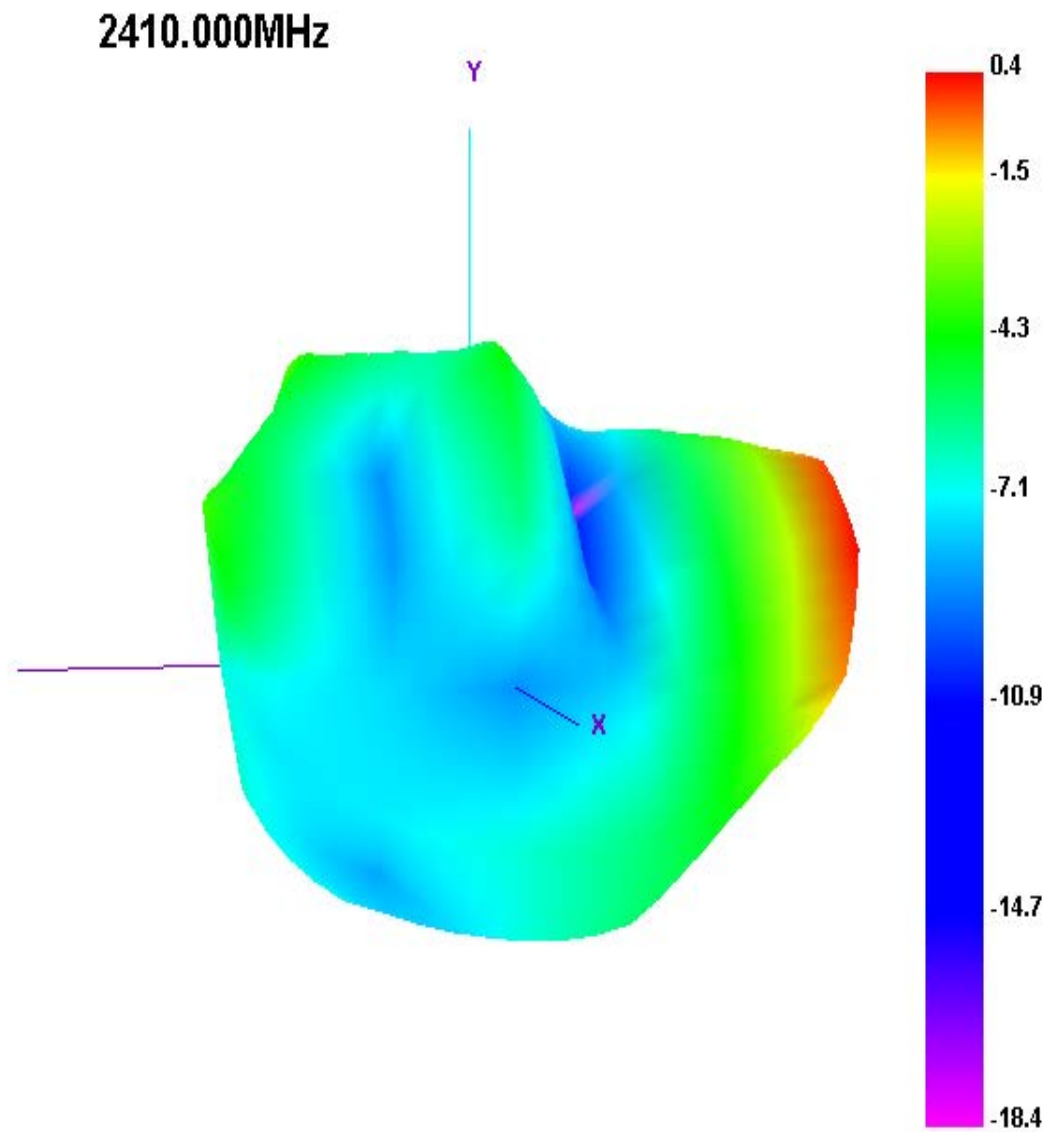

3D Radiation pattern f = 2440MHz

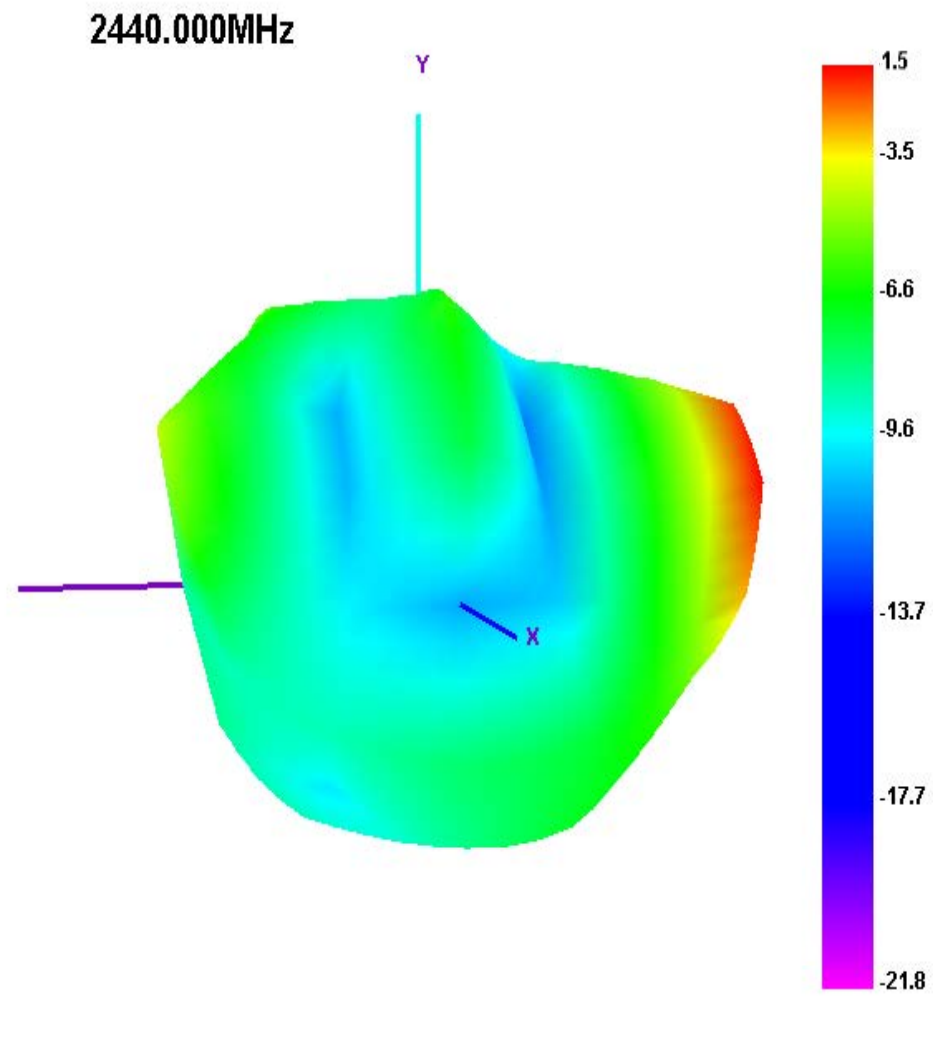

3D Radiation pattern f = 2480MHz

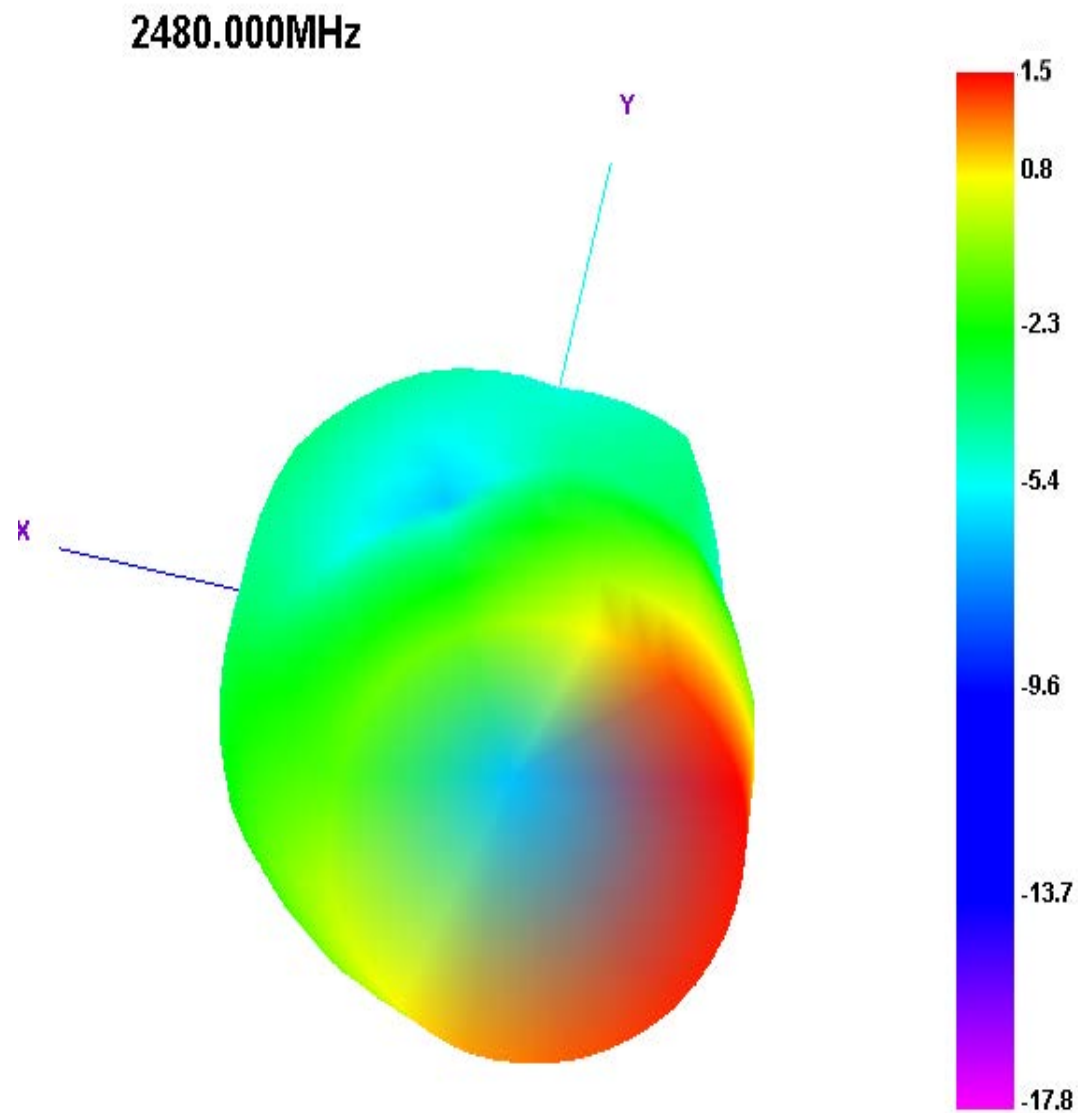

Measurements summary

Frequency(GHz)	Gain(dBi)	CP Gain(dBi)	CO Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	-1.2	--	--	--	14.99
2410	0.38	--	--	--	22.46
2420	0.37	--	--	--	23.3
2430	-0.72	--	--	--	18.25
2440	1.5	--	--	--	15.28
2450	-1.11	--	--	--	16.63
2460	-2.04	--	--	--	13.09
2470	-0.95	--	--	--	17.24
2480	1.5	--	--	--	21.51

2490	0.38	--	--	--	24.89
2500	0.36	--	--	--	24.18

Wireless-Tag Technology Co., Ltd
801, Block A, Building 6, Shenzhen International Innovation Valley, Dashi Road, Xili Community, Xili Street, Nanshan District, Shenzhen