



FCC RF Test Report

APPLICANT : CASTLES TECHNOLOGY CO., LTD.
EQUIPMENT : POS Terminal
BRAND NAME : 
MODEL NAME : S1MINI2
FCC ID : WIYS1MINI2001
STANDARD : 47 CFR Part 90(S)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Mar. 29, 2025 ~ May 07, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	5
1.6 Maximum Conducted Power and Emission Designator	6
1.7 Testing Site.....	6
1.8 Test Software	6
1.9 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	12
3.3 Emissions Mask Measurement	13
3.4 Emissions Mask – Out Of Band Emissions Measurement.....	15
3.5 Field Strength of Spurious Radiation Measurement	16
3.6 Frequency Stability Measurement.....	19
4 LIST OF MEASURING EQUIPMENT	21
5 MEASUREMENT UNCERTAINTY	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG531202D	Rev. 01	Initial issue of report	May 15, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	—	Report only	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	—	Report only	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 43.32 dB at 2448.00 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

CASTLES TECHNOLOGY CO., LTD.

6F, NO.207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT, NEW TAIPEI CITY 231030, TAIWAN (R.O.C.)

1.2 Manufacturer

CASTLES TECHNOLOGY CO., LTD.

6F, NO.207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT, NEW TAIPEI CITY 231030, TAIWAN (R.O.C.)

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	POS Terminal
Brand Name	 CASTLES TECHNOLOGY
Model Name	S1MINI2
FCC ID	WIYS1MINI2001
IMEI Code	Conducted: 350125910010942 Radiation: 350125910010900
HW Version	HW-V-1D.00
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	814 ~ 824 MHz
Rx Frequency	859 ~ 869 MHz
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz
Maximum Output Power to Antenna	21.98 dBm
Antenna Gain	-2.3 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power and Emission Designator

LTE Band 26		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
1.4	814.7 ~ 823.3	0.1542	1M09G7D	0.1303	1M10W7D
3	815.5 ~ 822.5	0.1567	2M72G7D	0.1279	2M69W7D
5	816.5 ~ 821.5	0.1552	4M47G7D	0.1300	4M49W7D
10	819.0	0.1570	9M01G7D	0.1276	9M03W7D
15	824	0.1578	13M5G7D	0.1300	13M4W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	Part2224_Ver5.0 200330	5.0
2.	03CH04-KS	AUDIX	E3	210616



1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR 90(S)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 971168 D02 Misc Rev Approv License Devices v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	v	-	v	v	v	-	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v		-			v		v	
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	-	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v			-	v			v	v	v
Frequency Stability	26				v		-	v			-			v		v	
Radiated Spurious Emission	26			v			-	v			-	v			v	v	v
	26				v		-	v			-	v				v	
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.																

2.2 Connection Diagram of Test System

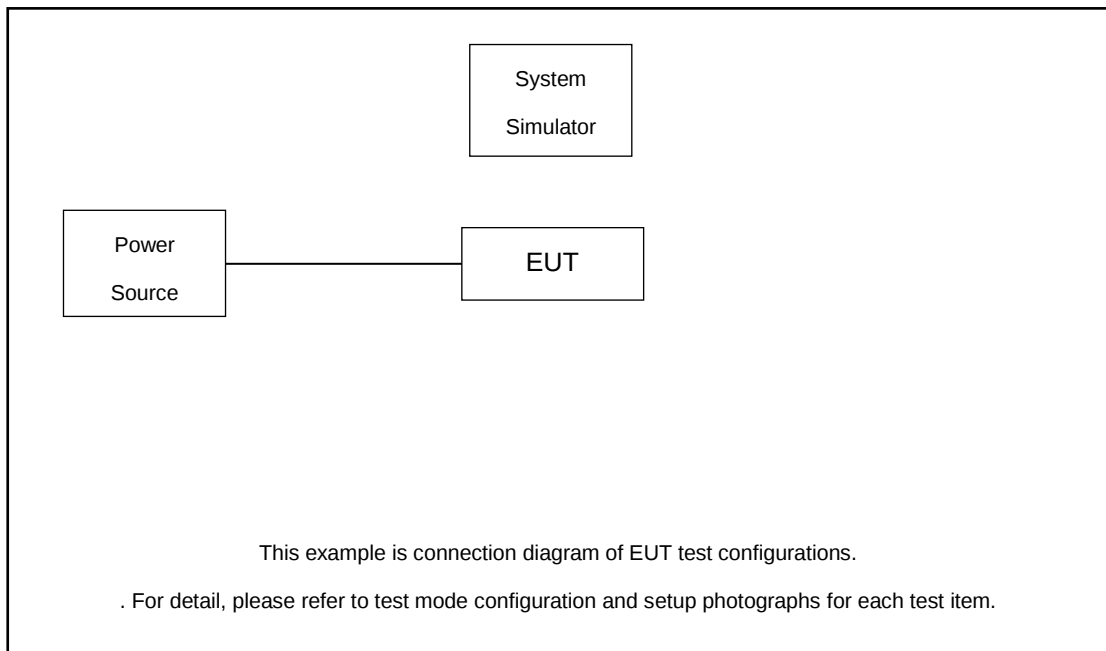

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	USB Cable	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

The following shows an offset computation example with RF cable loss 4.6dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.6 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	26740	-
	Frequency	-	819	-
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5
1.4	Channel	26697	26740	26783
	Frequency	814.7	819	823.3

LTE Band 26 Cross-rule Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	-	Middle	-
15	Channel	-	26790	-
	Frequency	-	824	-
10	Channel	-	26790	-
	Frequency	-	824	-
5	Channel	-	26790	-
	Frequency	-	824	-
3	Channel	-	26790	-
	Frequency	-	824	-
1.4	Channel	-	26790	-
	Frequency	-	824	-

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup



3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor $10 \log (1\% \text{ of OBW/measured RBW})(\text{dB})$ was compensated, if required.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

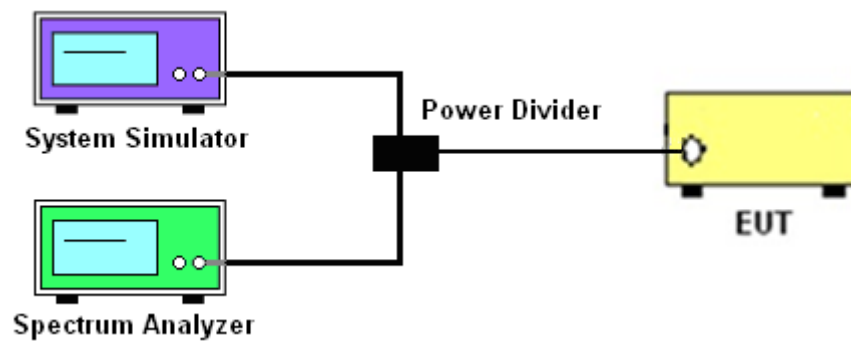

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.4.4 Test Setup

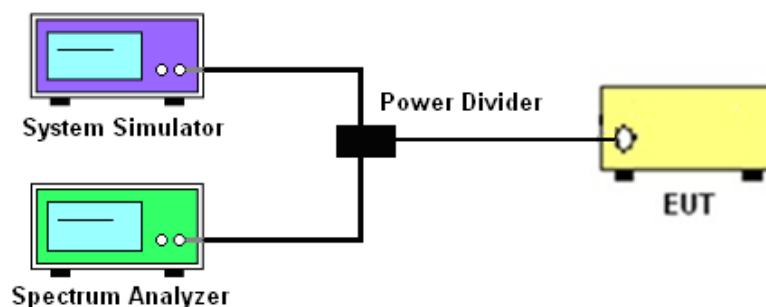

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

3.5.4 Test Setup

For radiated test from 30MHz

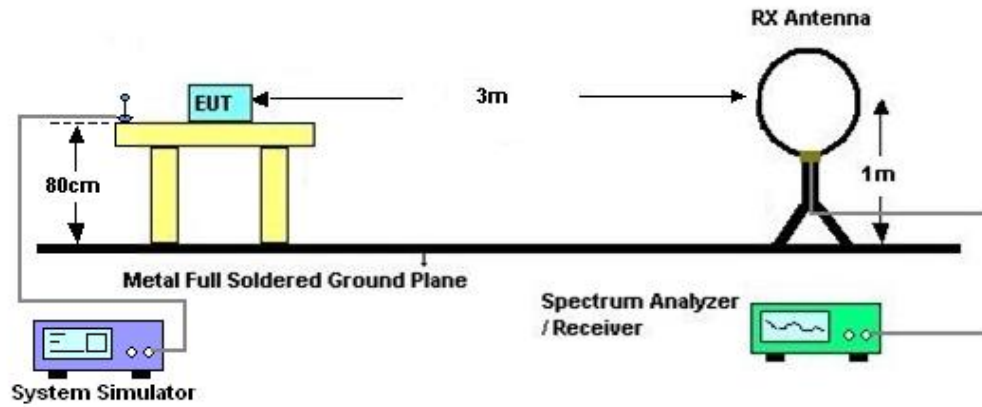

For radiated test from 30MHz to 1GHz

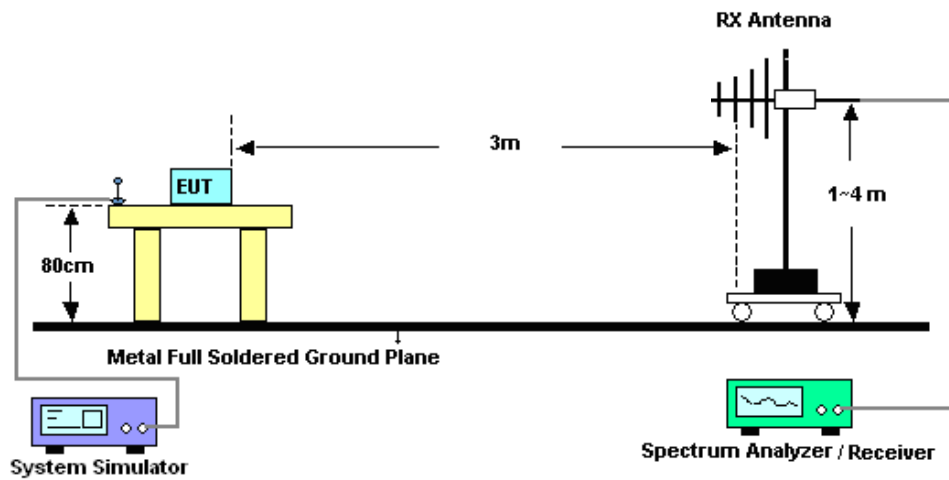

For radiated test above 1GHz



3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
4. battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

3.6.5 Test Setup



3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Mar. 29, 2025~ May 07, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Mar. 29, 2025~ May 07, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Mar. 29, 2025~ May 07, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 11, 2024	Apr. 11, 2025	Oct. 10, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Apr. 11, 2025	Sep. 07, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Nov. 23, 2024	Apr. 11, 2025	Nov. 22, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Apr. 11, 2025	Aug. 15, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 03, 2024	Apr. 11, 2025	Jul. 02, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 09, 2024	Apr. 11, 2025	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz-18Ghz	Oct. 09, 2024	Apr. 11, 2025	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 11, 2025	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 11, 2025	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 11, 2025	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.50 dB
Frequency Stability	±0.04 ppm

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power (Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.		ERP	
Channel					26790			26790	
Frequency (MHz)					824			824	
15	QPSK	1	0		21.98			0.0566	
15	QPSK	1	37		21.85			0.0550	
15	QPSK	1	74		21.80			0.0543	
15	QPSK	36	0		21.00			0.0452	
15	QPSK	36	20		20.93			0.0445	
15	QPSK	36	39		20.85			0.0437	
15	QPSK	75	0		20.94			0.0446	
15	16QAM	1	0		21.14			0.0467	
15	16QAM	1	37		20.91			0.0443	
15	16QAM	1	74		20.76			0.0428	
15	16QAM	36	0		19.96			0.0356	
15	16QAM	36	20		19.86			0.0348	
15	16QAM	36	39		19.70			0.0335	
15	16QAM	75	0		19.72			0.0337	
15	64QAM	1	0		20.07			0.0365	
15	64QAM	1	37		19.71			0.0336	
15	64QAM	1	74		19.88			0.0349	
15	64QAM	36	0		19.00			0.0285	
15	64QAM	36	20		18.78			0.0271	
15	64QAM	36	39		18.96			0.0282	
15	64QAM	75	0		18.79			0.0272	
Channel					26740			26740	
Frequency (MHz)					819			819	
10	QPSK	1	0		21.96			0.0564	
10	QPSK	1	25		21.75			0.0537	
10	QPSK	1	49		21.80			0.0543	
10	QPSK	25	0		20.89			0.0441	
10	QPSK	25	12		20.71			0.0423	
10	QPSK	25	25		20.92			0.0444	
10	QPSK	50	0		20.89			0.0441	
10	16QAM	1	0		21.06			0.0458	
10	16QAM	1	25		20.82			0.0434	
10	16QAM	1	49		20.77			0.0429	
10	16QAM	25	0		19.86			0.0348	
10	16QAM	25	12		19.85			0.0347	
10	16QAM	25	25		19.73			0.0337	
10	16QAM	50	0		19.68			0.0333	



10	64QAM	1	0		20.11			0.0368	
10	64QAM	1	25		19.81			0.0344	
10	64QAM	1	49		19.69			0.0334	
10	64QAM	25	0		18.92			0.0280	
10	64QAM	25	12		18.81			0.0273	
10	64QAM	25	25		18.85			0.0275	
10	64QAM	50	0		18.80			0.0272	
Channel				26715	26740	26765	26690	26740	26790
Frequency (MHz)				816.5	819	821.5	814	819	824
5	QPSK	1	0	21.91	21.79	21.63	0.0557	0.0542	0.0522
5	QPSK	1	12	21.64	21.62	21.69	0.0524	0.0521	0.0530
5	QPSK	1	24	21.63	21.78	21.69	0.0522	0.0541	0.0530
5	QPSK	12	0	20.83	20.90	20.94	0.0435	0.0442	0.0446
5	QPSK	12	7	20.79	20.92	20.69	0.0431	0.0444	0.0421
5	QPSK	12	13	20.62	20.81	20.64	0.0414	0.0433	0.0416
5	QPSK	25	0	20.80	20.82	20.75	0.0432	0.0434	0.0427
5	16QAM	1	0	21.00	21.14	20.94	0.0452	0.0467	0.0446
5	16QAM	1	12	20.67	20.74	20.83	0.0419	0.0426	0.0435
5	16QAM	1	24	20.78	20.94	20.71	0.0430	0.0446	0.0423
5	16QAM	12	0	19.68	19.87	19.77	0.0333	0.0348	0.0340
5	16QAM	12	7	19.84	19.72	19.85	0.0346	0.0337	0.0347
5	16QAM	12	13	19.64	19.81	19.63	0.0330	0.0344	0.0330
5	16QAM	25	0	19.56	19.73	19.71	0.0324	0.0337	0.0336
5	64QAM	1	0	19.84	20.00	19.95	0.0346	0.0359	0.0355
5	64QAM	1	12	19.70	19.81	19.75	0.0335	0.0344	0.0339
5	64QAM	1	24	19.75	19.77	19.60	0.0339	0.0340	0.0327
5	64QAM	12	0	18.88	18.99	18.76	0.0277	0.0284	0.0270
5	64QAM	12	7	18.75	18.83	18.80	0.0269	0.0274	0.0272
5	64QAM	12	13	18.73	18.82	18.74	0.0268	0.0274	0.0269
5	64QAM	25	0	18.61	18.88	18.64	0.0261	0.0277	0.0262
Channel				26705	26740	26775	26690	26740	26790
Frequency (MHz)				815.5	819	822.5	814	819	824
3	QPSK	1	0	21.75	21.95	21.69	0.0537	0.0562	0.0530
3	QPSK	1	8	21.80	21.73	21.62	0.0543	0.0535	0.0521
3	QPSK	1	14	21.77	21.65	21.76	0.0540	0.0525	0.0538
3	QPSK	8	0	20.84	20.88	20.88	0.0436	0.0440	0.0440
3	QPSK	8	4	20.87	20.81	20.88	0.0439	0.0433	0.0440
3	QPSK	8	7	20.75	20.86	20.85	0.0427	0.0438	0.0437
3	QPSK	15	0	20.81	20.90	20.76	0.0433	0.0442	0.0428
3	16QAM	1	0	21.01	21.07	20.97	0.0453	0.0459	0.0449
3	16QAM	1	8	20.71	20.81	20.82	0.0423	0.0433	0.0434
3	16QAM	1	14	20.79	20.75	20.69	0.0431	0.0427	0.0421
3	16QAM	8	0	19.86	19.87	19.83	0.0348	0.0348	0.0345
3	16QAM	8	4	19.79	19.85	19.90	0.0342	0.0347	0.0351
3	16QAM	8	7	19.69	19.82	19.64	0.0334	0.0344	0.0330
3	16QAM	15	0	19.64	19.84	19.84	0.0330	0.0346	0.0346
3	64QAM	1	0	19.93	20.12	20.01	0.0353	0.0369	0.0360
3	64QAM	1	8	19.62	19.84	19.81	0.0329	0.0346	0.0344
3	64QAM	1	14	19.73	19.78	19.68	0.0337	0.0341	0.0333
3	64QAM	8	0	18.94	19.04	18.99	0.0281	0.0288	0.0284



3	64QAM	8	4	18.83	18.90	18.70	0.0274	0.0279	0.0266
3	64QAM	8	7	18.77	18.95	18.80	0.0270	0.0282	0.0272
3	64QAM	15	0	18.76	18.93	18.84	0.0270	0.0281	0.0275
Channel				26697	26740	26783	26690	26740	26790
Frequency (MHz)				814.7	819	823.3	814	819	824
1.4	QPSK	1	0	21.69	21.77	21.88	0.0530	0.0540	0.0553
1.4	QPSK	1	3	21.76	21.68	21.62	0.0538	0.0528	0.0521
1.4	QPSK	1	5	21.34	21.59	21.69	0.0489	0.0518	0.0530
1.4	QPSK	3	0	21.76	21.67	21.82	0.0538	0.0527	0.0546
1.4	QPSK	3	1	21.62	21.87	21.65	0.0521	0.0552	0.0525
1.4	QPSK	3	3	21.60	21.61	21.60	0.0519	0.0520	0.0519
1.4	QPSK	6	0	20.93	21.02	20.93	0.0445	0.0454	0.0445
1.4	16QAM	1	0	20.96	20.89	20.83	0.0448	0.0441	0.0435
1.4	16QAM	1	3	20.64	20.89	20.83	0.0416	0.0441	0.0435
1.4	16QAM	1	5	20.97	21.15	20.82	0.0449	0.0468	0.0434
1.4	16QAM	3	0	20.79	20.80	20.82	0.0431	0.0432	0.0434
1.4	16QAM	3	1	20.79	20.94	20.80	0.0431	0.0446	0.0432
1.4	16QAM	3	3	20.94	21.04	20.74	0.0446	0.0456	0.0426
1.4	16QAM	6	0	20.19	20.08	19.91	0.0375	0.0366	0.0352
1.4	64QAM	1	0	19.83	19.86	19.78	0.0345	0.0348	0.0341
1.4	64QAM	1	3	19.78	19.89	19.68	0.0341	0.0350	0.0333
1.4	64QAM	1	5	19.77	19.86	19.72	0.0340	0.0348	0.0337
1.4	64QAM	3	0	19.92	19.94	19.60	0.0352	0.0354	0.0327
1.4	64QAM	3	1	19.66	19.82	19.72	0.0332	0.0344	0.0337
1.4	64QAM	3	3	19.64	19.73	19.56	0.0330	0.0337	0.0324
1.4	64QAM	6	0	18.89	19.02	18.84	0.0278	0.0286	0.0275



LTE Band 26


26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)	
BW	15MHz	
Mod.	QPSK	16QAM
Mid CH	14.54	14.42
BW	10MHz	
Mod.	QPSK	16QAM
Mid CH	9.65	9.67
BW	5MHz	
Mod.	QPSK	16QAM
Mid CH	4.94	4.84
BW	3MHz	
Mod.	QPSK	16QAM
Mid CH	2.97	2.96
BW	1.4MHz	
Mod.	QPSK	16QAM
Mid CH	1.27	1.30




LTE Band 26

Middle Channel / 15MHz / QPSK

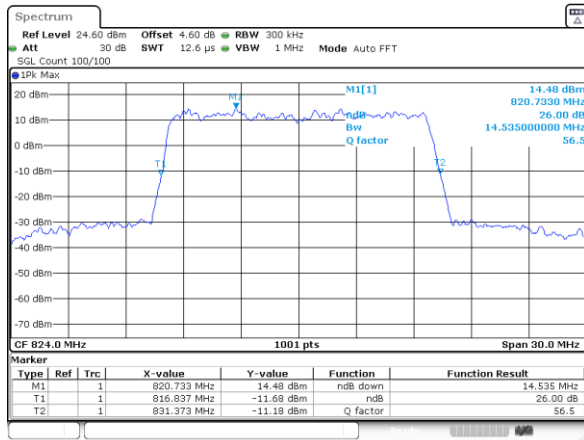


Date: 1.APR.2025 01:22:22

Middle Channel / 15MHz / 16QAM

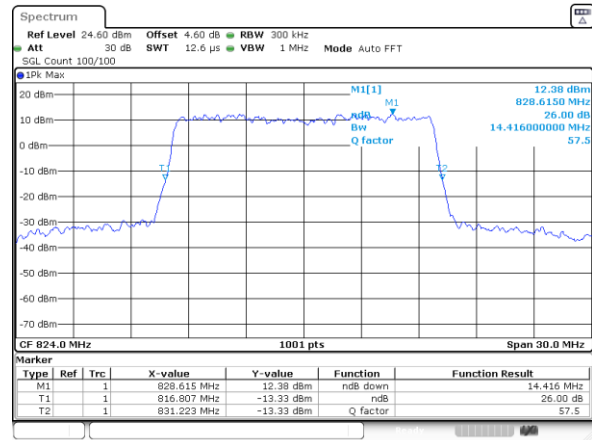


Date: 1.APR.2025 01:23:47

Middle Channel / 10MHz / QPSK

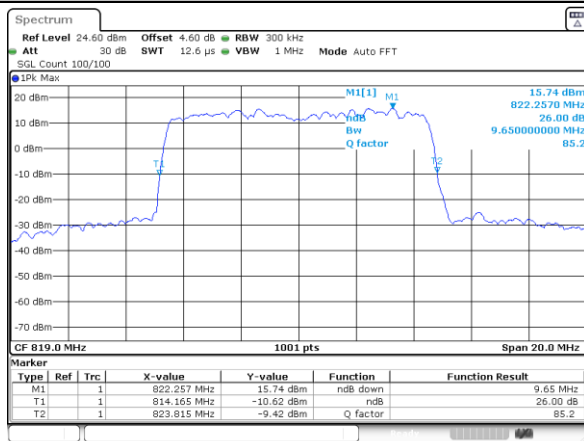

Date: 31.MAR.2025 22:46:20


Middle Channel / 10MHz / 16QAM

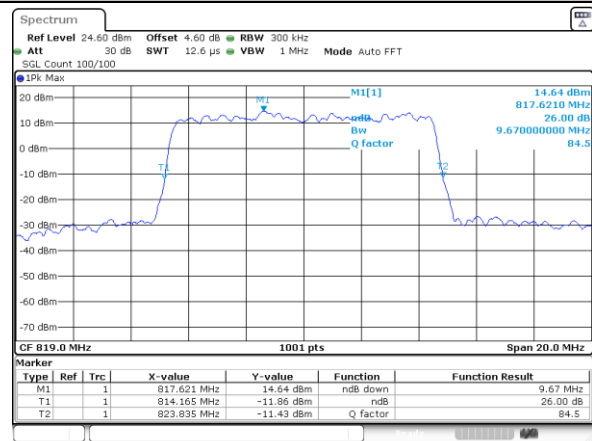

Date: 31.MAR.2025 22:45:53


LTE Band 26

Middle Channel / 5MHz / QPSK

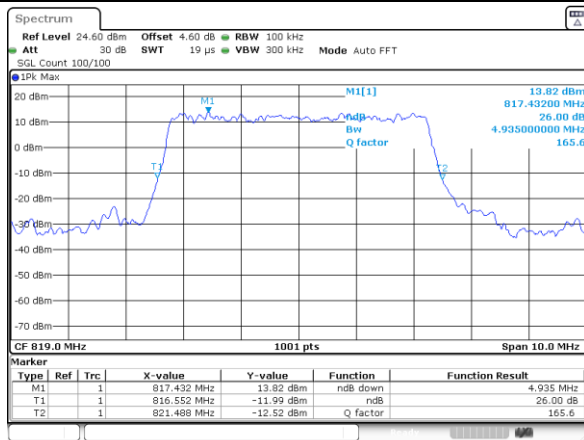

Date: 31.MAR.2025 23:08:43

Middle Channel / 5MHz / 16QAM

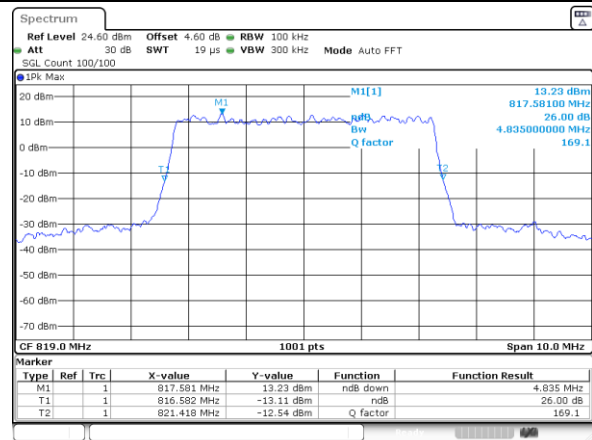


Date: 31.MAR.2025 23:08:10




LTE Band 26

Middle Channel / 3MHz / QPSK

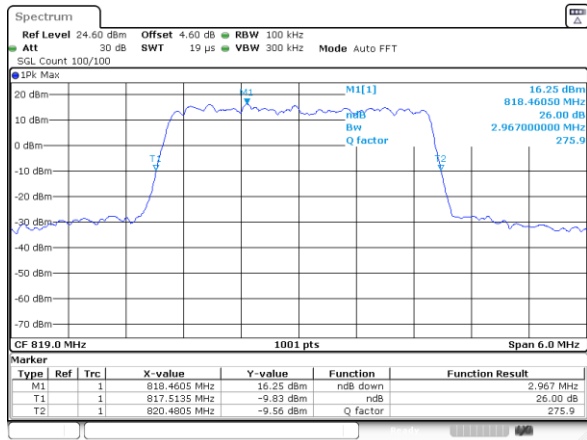

Date: 31.MAR.2025 23:06:13


Middle Channel / 3MHz / 16QAM

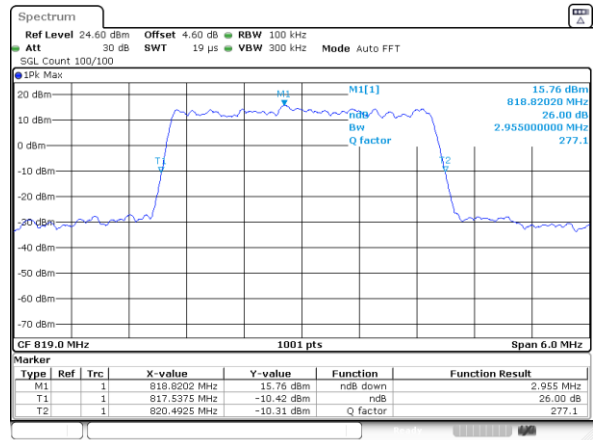

Date: 31.MAR.2025 23:06:39


LTE Band 26

Middle Channel / 1.4MHz / QPSK

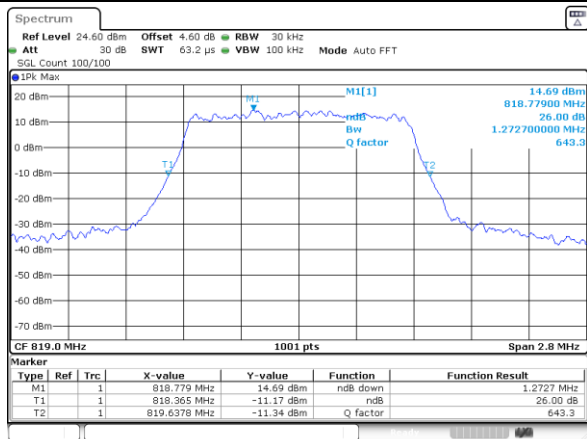

Date: 31.MAR.2025 23:03:43

Middle Channel / 1.4MHz / 16QAM

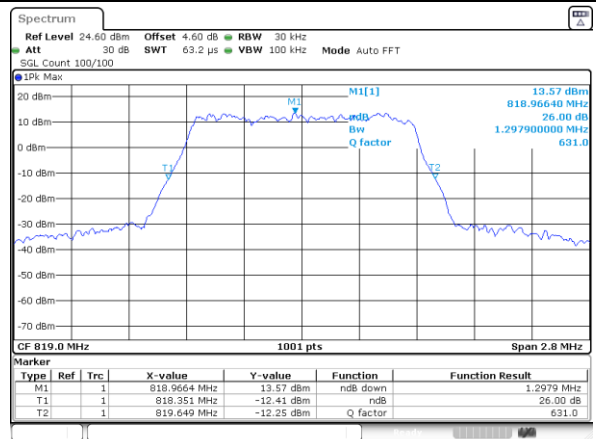

Date: 31.MAR.2025 23:04:09


**Occupied Bandwidth**

Mode	LTE Band 26 : 99%OBW(MHz)	
BW	15MHz	
Mod.	QPSK	16QAM
Mid CH	13.49	13.43
BW	10MHz	
Mod.	QPSK	16QAM
Mid CH	9.01	9.03
BW	5MHz	
Mod.	QPSK	16QAM
Mid CH	4.47	4.49
BW	3MHz	
Mod.	QPSK	16QAM
Mid CH	2.72	2.69
BW	1.4MHz	
Mod.	QPSK	16QAM
Mid CH	1.09	1.10




LTE Band 26

Middle Channel / 15MHz / QPSK

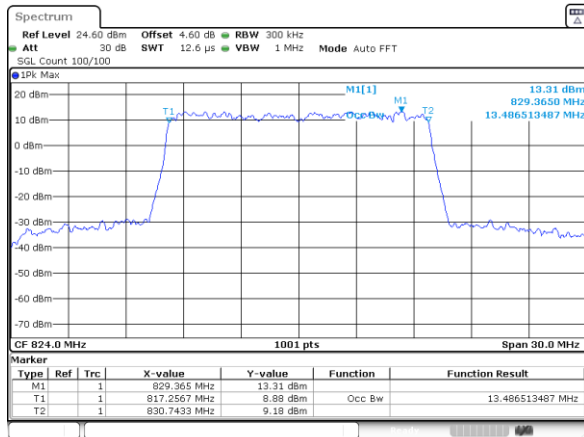


Date: 1.APR.2025 01:21:47

Middle Channel / 15MHz / 16QAM

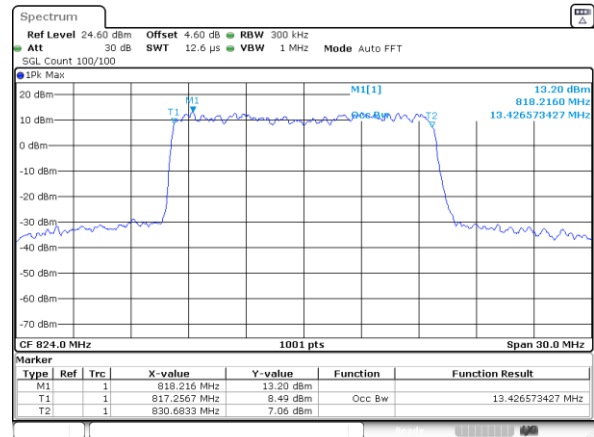


Date: 1.APR.2025 01:23:24

Middle Channel / 10MHz / QPSK

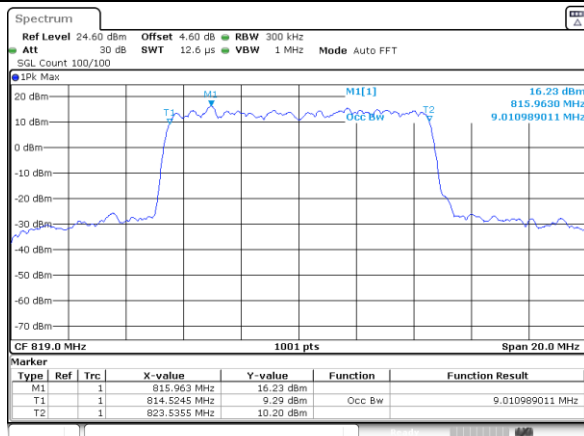

Date: 31.MAR.2025 22:45:12


Middle Channel / 10MHz / 16QAM

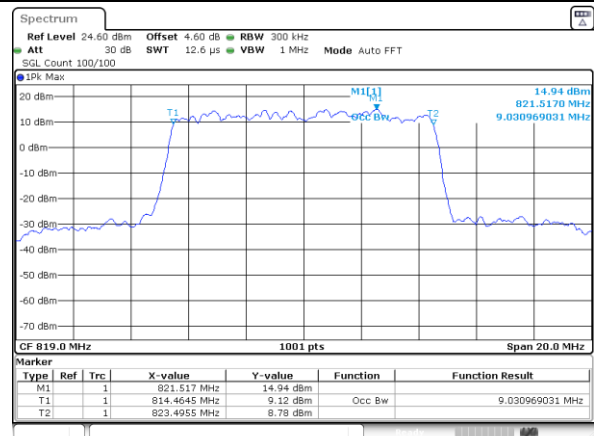

Date: 31.MAR.2025 22:45:38


LTE Band 26

Middle Channel / 5MHz / QPSK

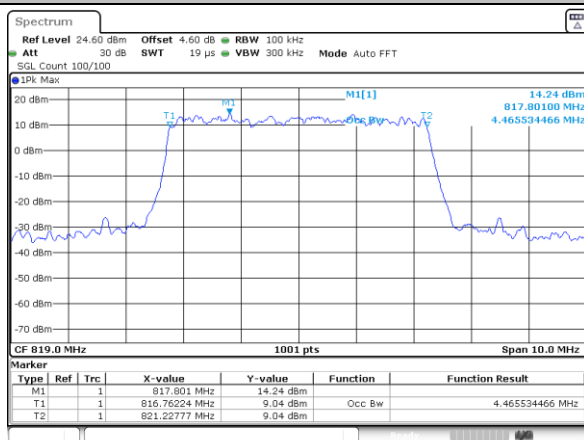

Date: 31.MAR.2025 23:08:29

Middle Channel / 5MHz / 16QAM

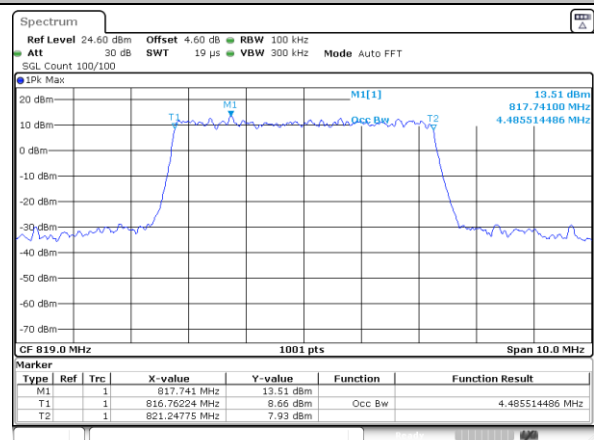


Date: 31.MAR.2025 23:09:24




LTE Band 26

Middle Channel / 3MHz / QPSK

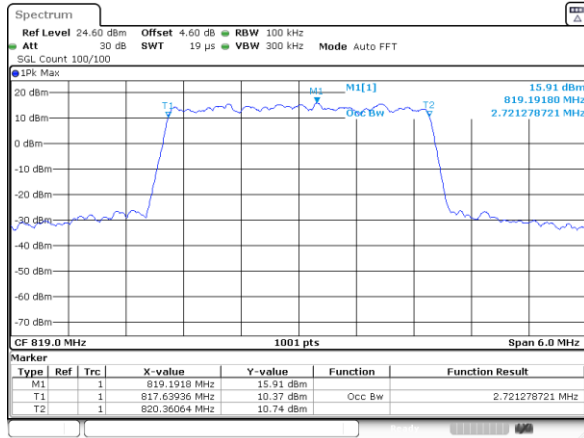


Middle Channel / 3MHz / 16QAM

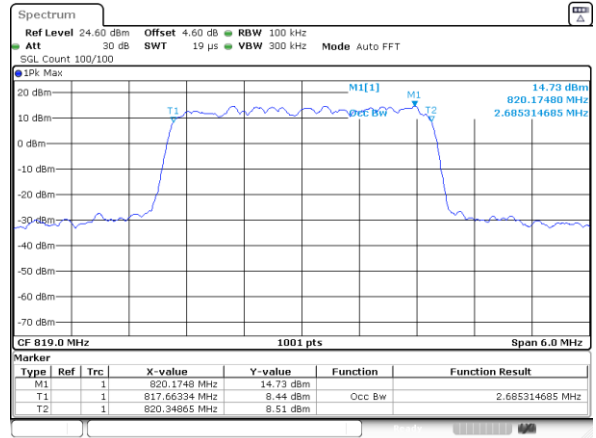






LTE Band 26

Middle Channel / 1.4MHz / QPSK

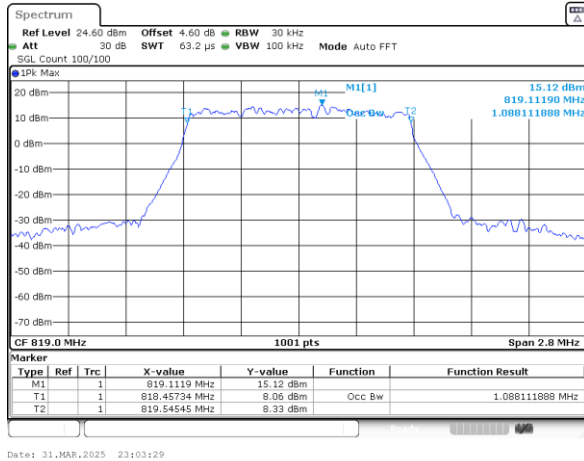

Middle Channel / 1.4MHz / 16QAM

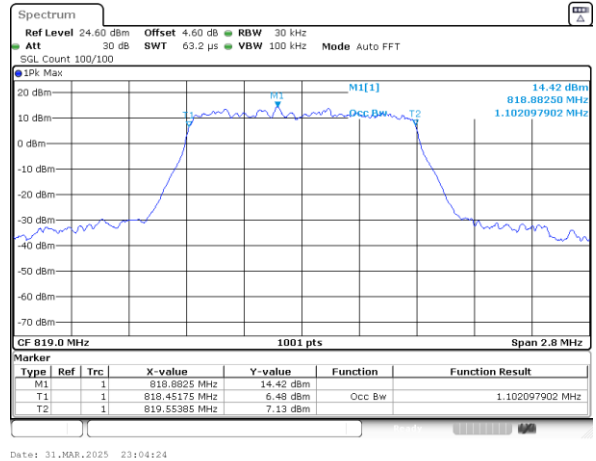


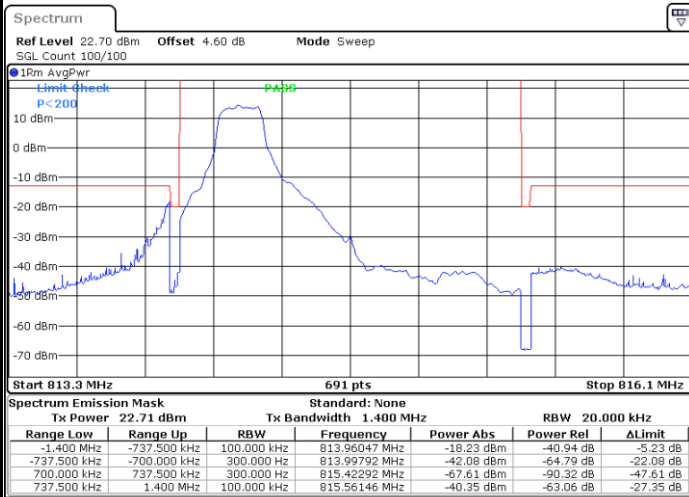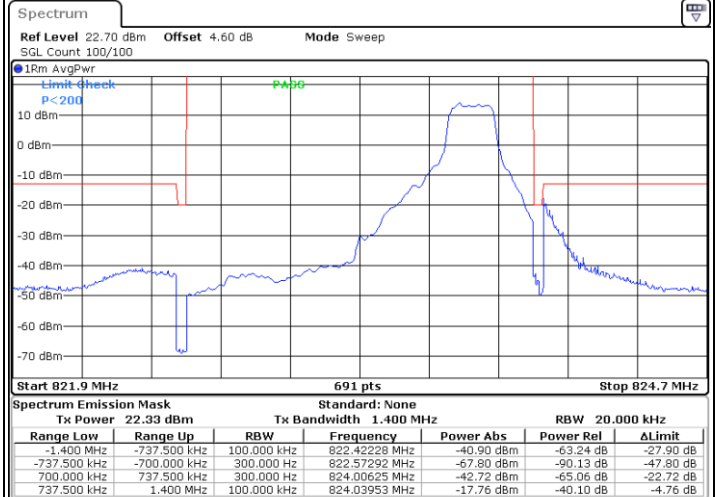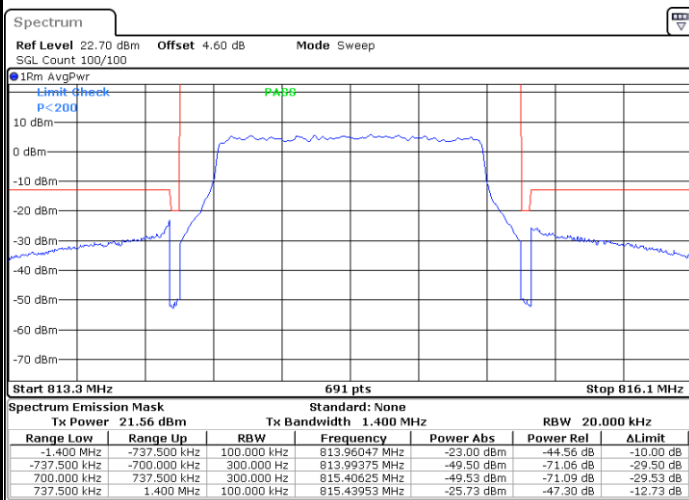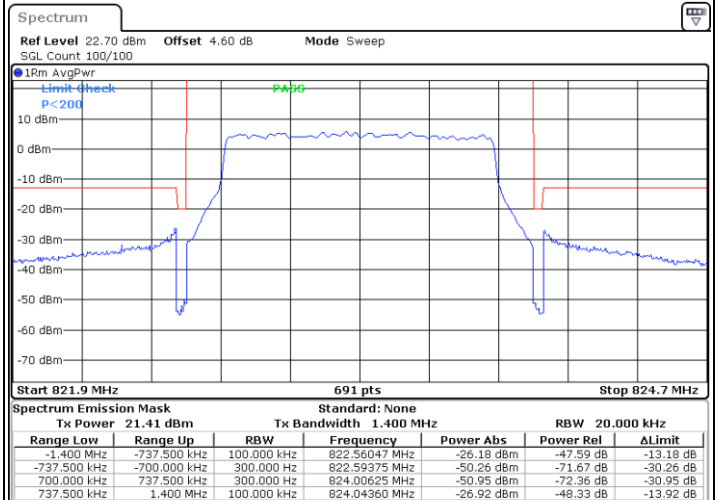**Conducted Band Edge****LTE Band 26 / 1.4MHz / QPSK****Lowest Band Edge / 1RB****Highest Band Edge / 1RB****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




LTE Band 26 / 1.4MHz / 16QAM


Lowest Band Edge / 1 RB

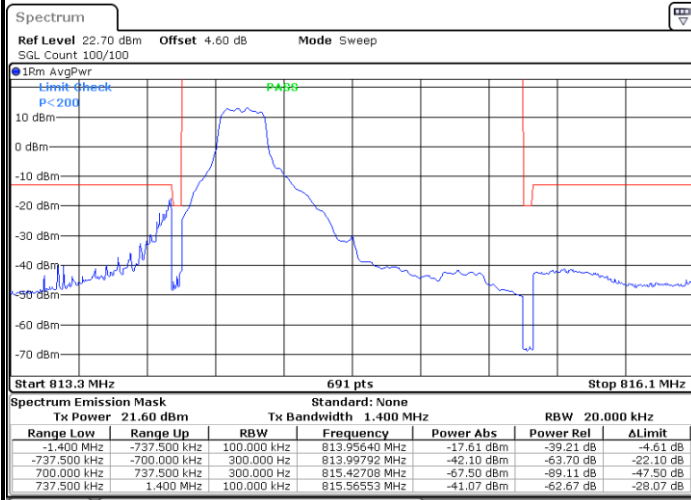


Highest Band Edge / 1 RB

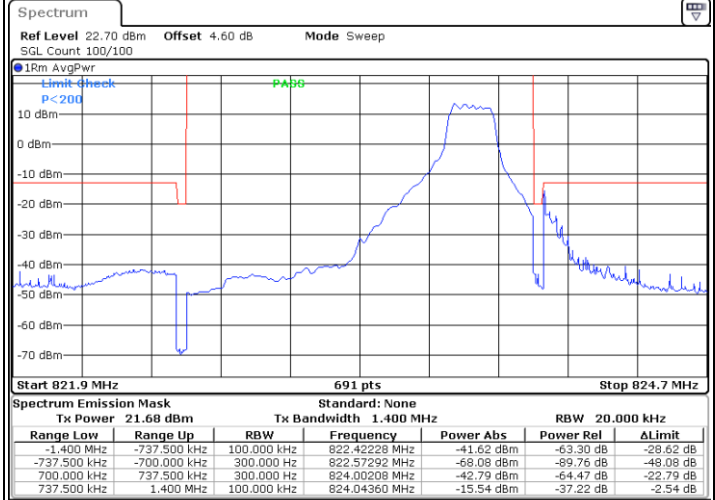

Lowest Band Edge / Full RB

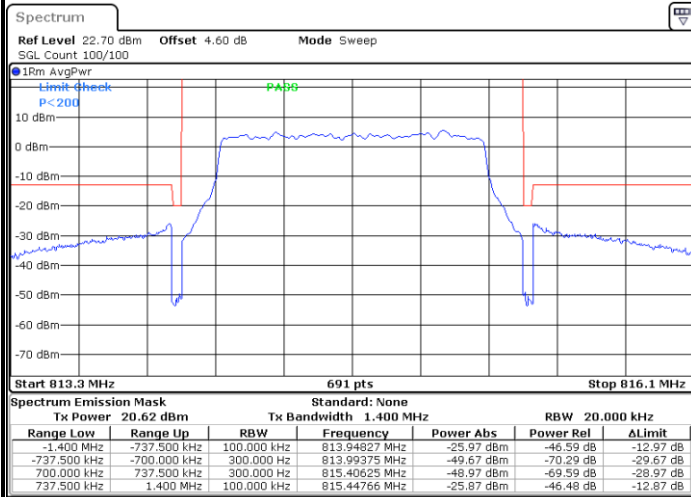


Highest Band Edge / Full RB

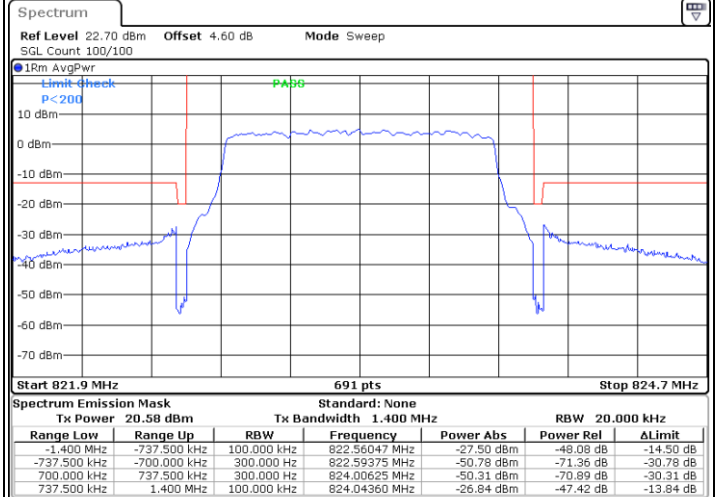




LTE Band 26 / 1.4MHz / 64QAM


Lowest Band Edge / 1 RB

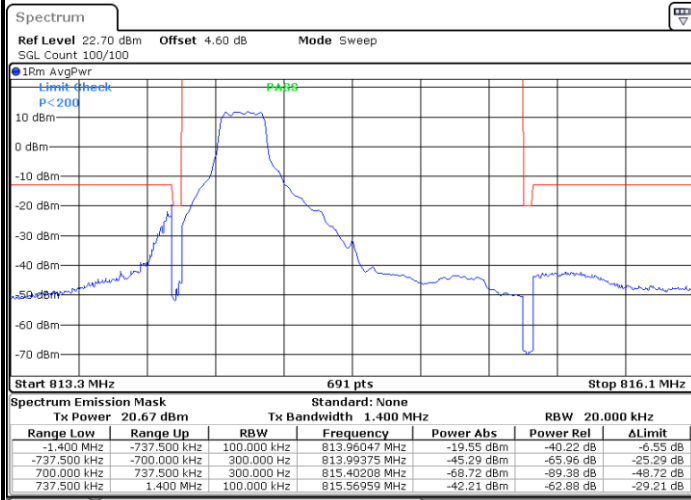


Highest Band Edge / 1 RB

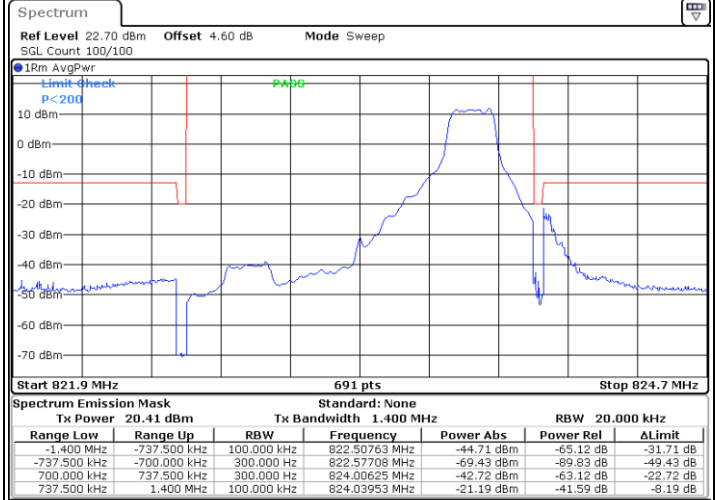

Lowest Band Edge / Full RB

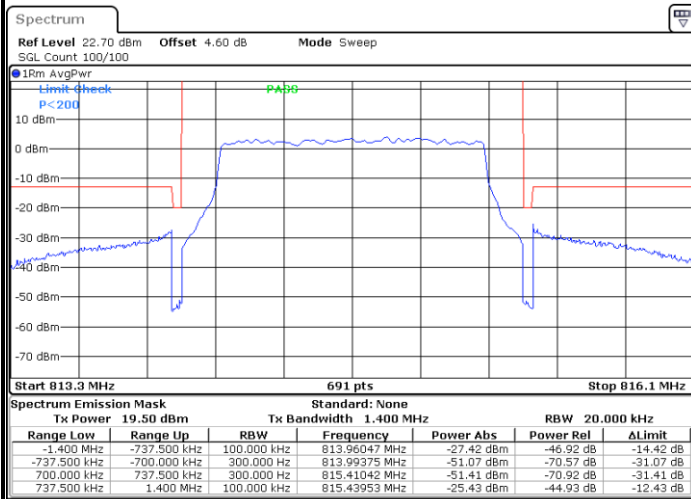


Highest Band Edge / Full RB

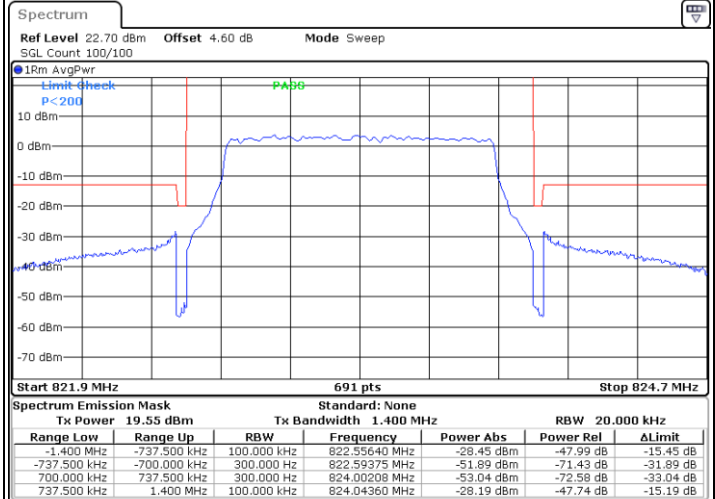




LTE Band 26 / 3MHz / QPSK


Lowest Band Edge / 1RB

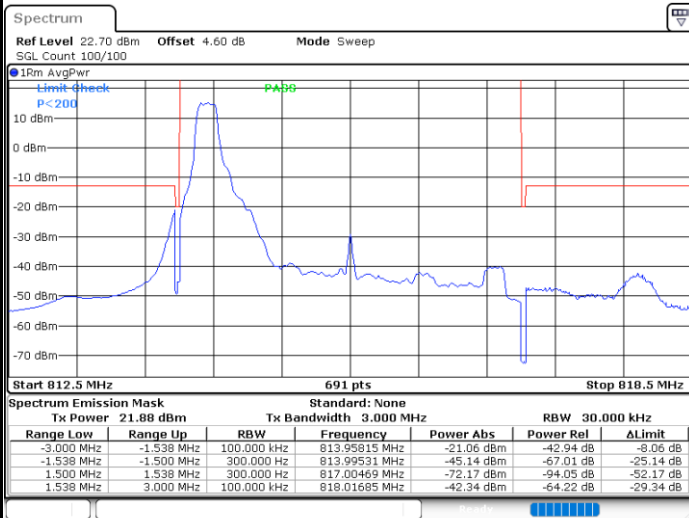


Highest Band Edge / 1 RB

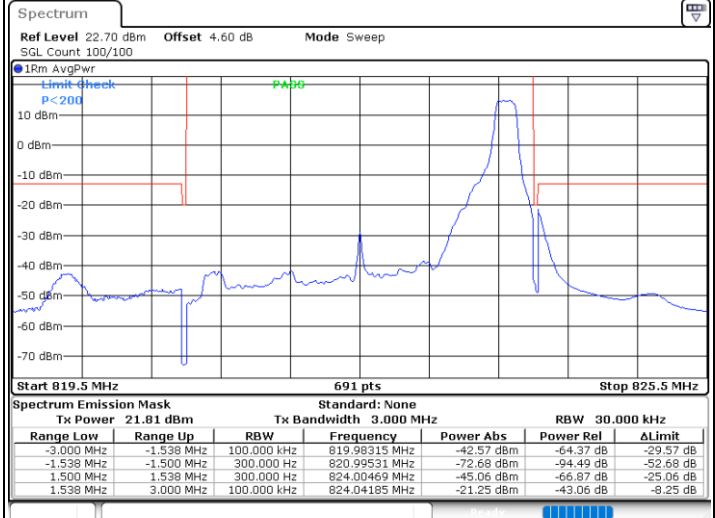

Lowest Band Edge / Full RB

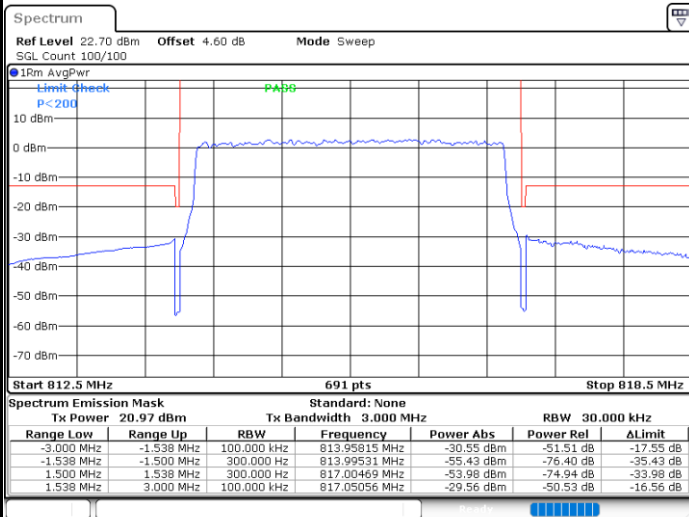


Highest Band Edge / Full RB

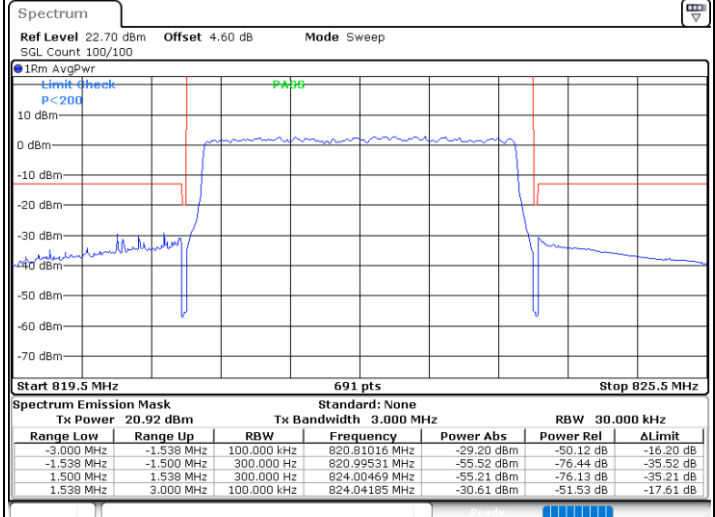




LTE Band 26 / 3MHz / 16QAM


Lowest Band Edge / 1 RB

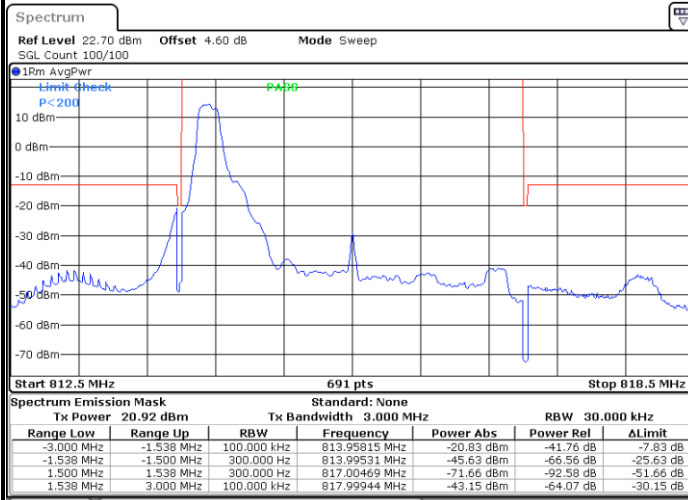


Highest Band Edge / 1 RB

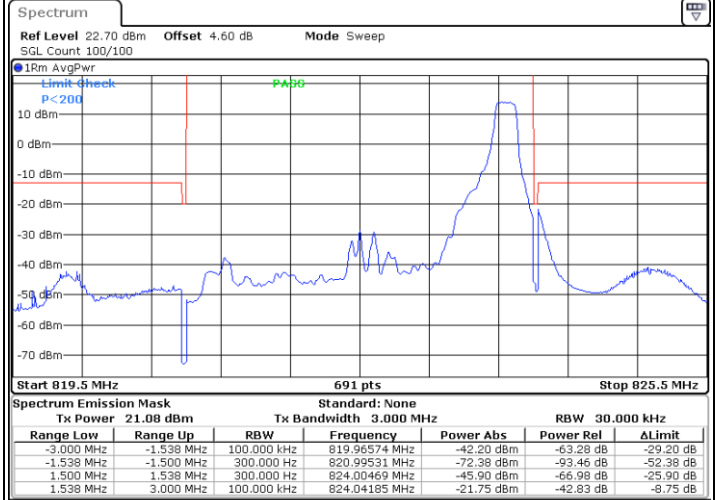

Lowest Band Edge / Full RB

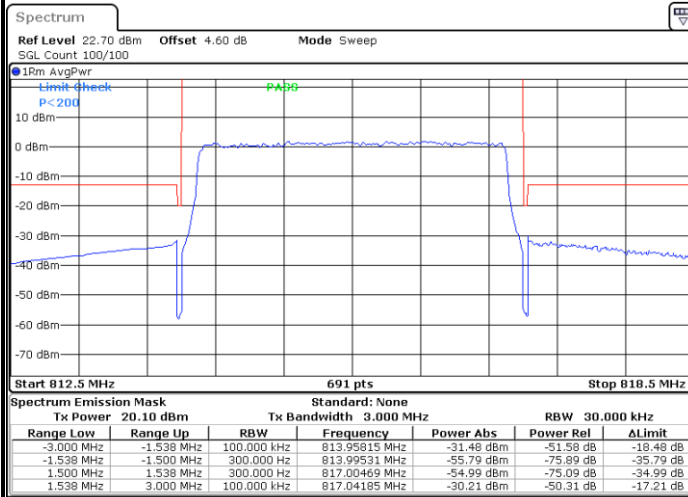


Highest Band Edge / Full RB

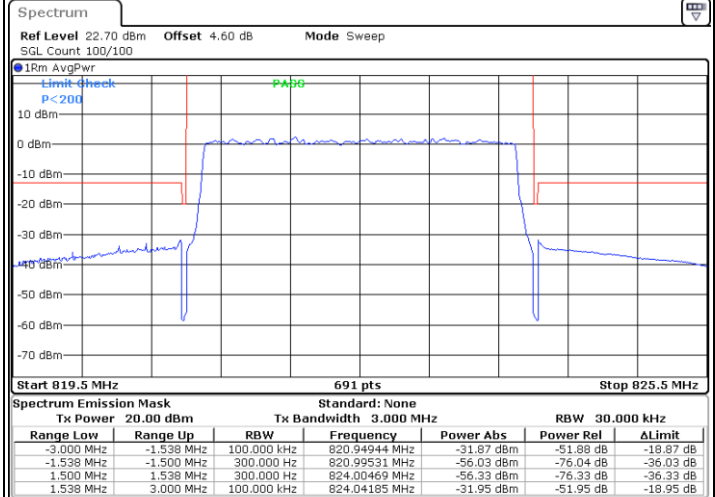




LTE Band 26 / 3MHz / 64QAM


Lowest Band Edge / 1 RB

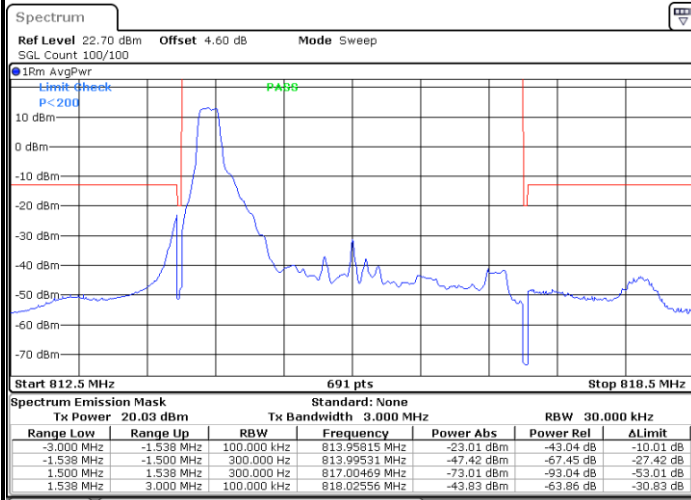


Highest Band Edge / 1 RB

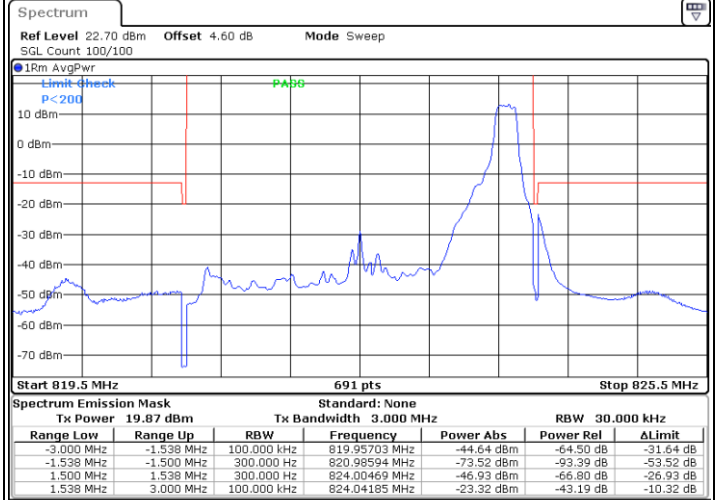

Lowest Band Edge / Full RB

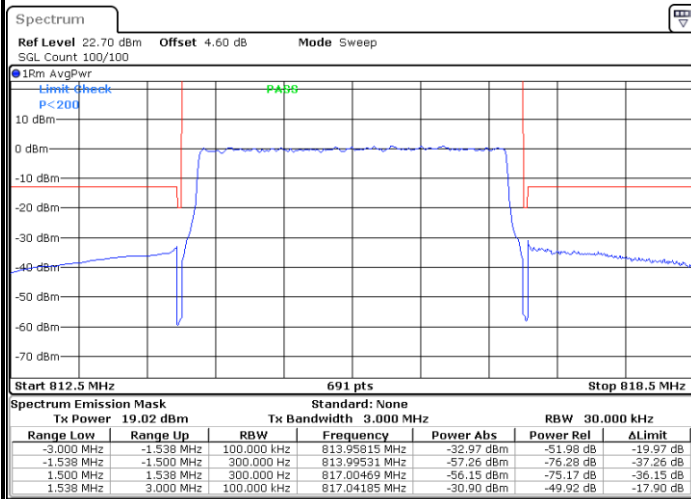


Highest Band Edge / Full RB

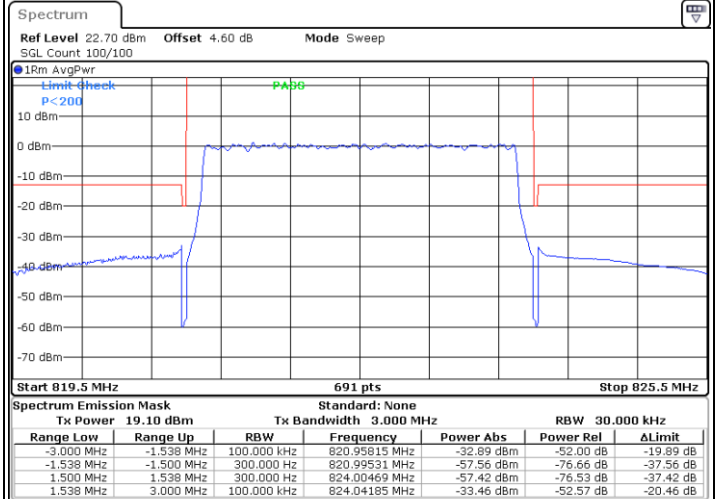




LTE Band 26 / 5MHz / QPSK


Lowest Band Edge / 1 RB

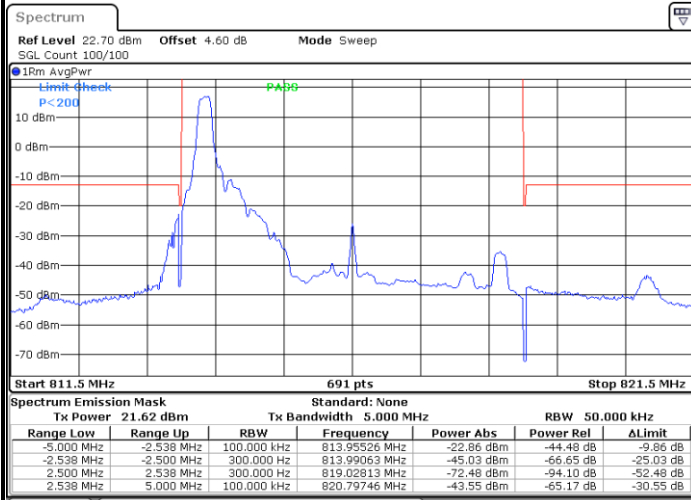


Highest Band Edge / 1 RB

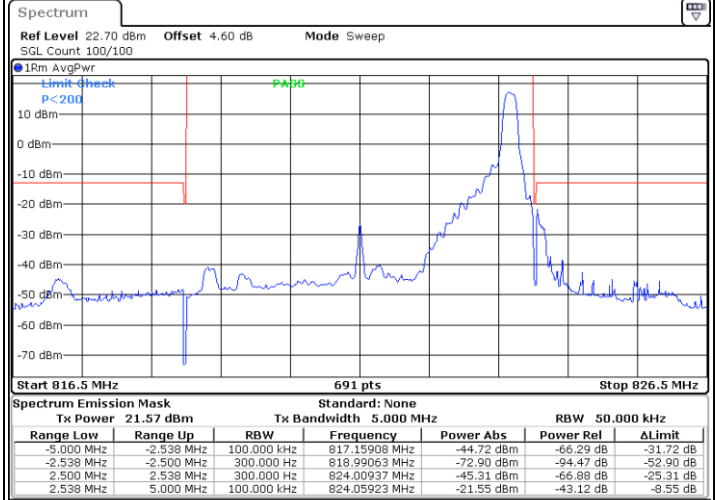

Lowest Band Edge / Full RB

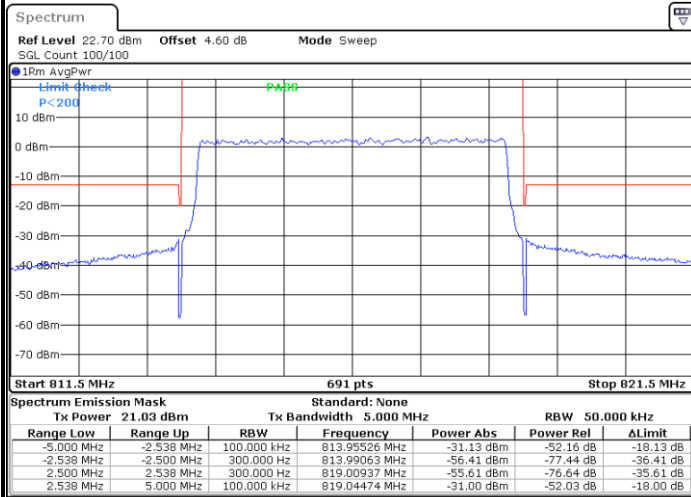


Highest Band Edge / Full RB

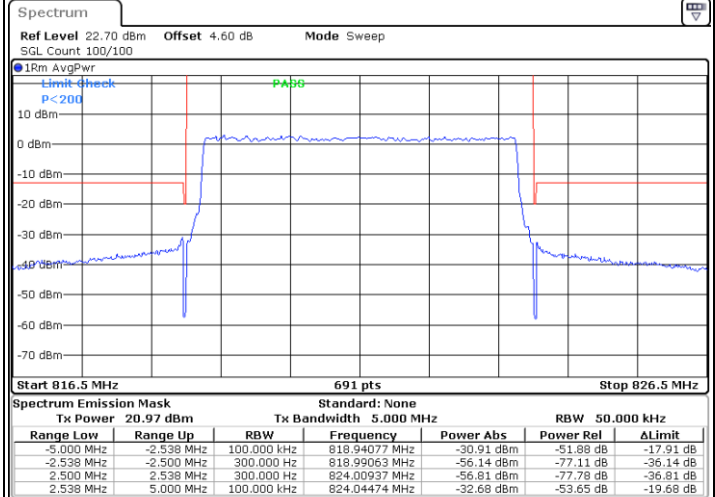




LTE Band 26 / 5MHz / 16QAM


Lowest Band Edge / 1RB

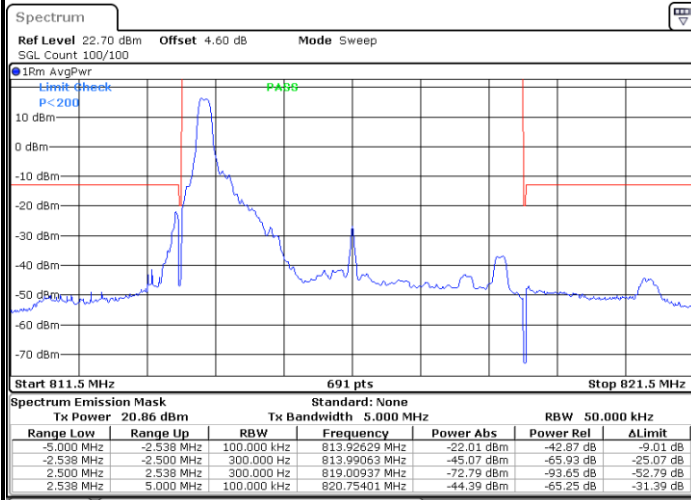


Highest Band Edge / 1 RB

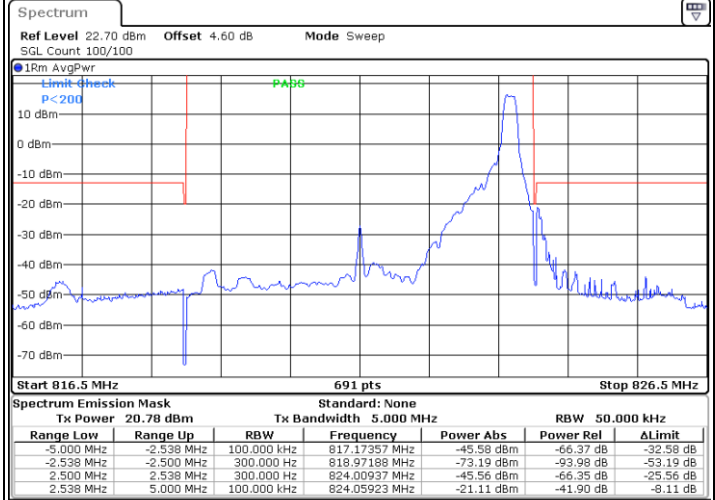

Lowest Band Edge / Full RB

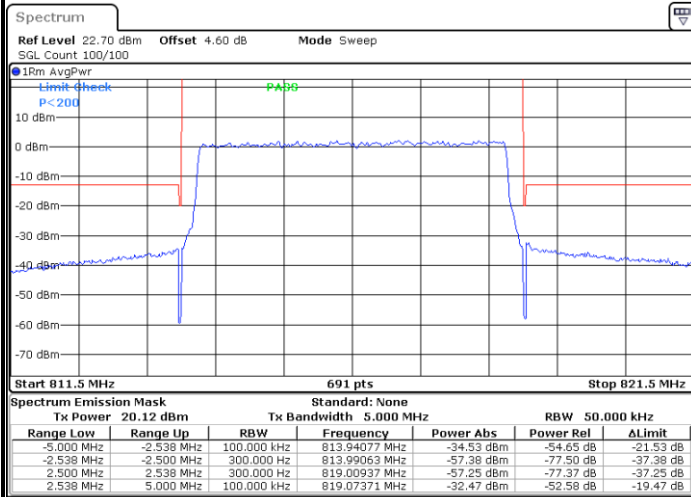


Highest Band Edge / Full RB

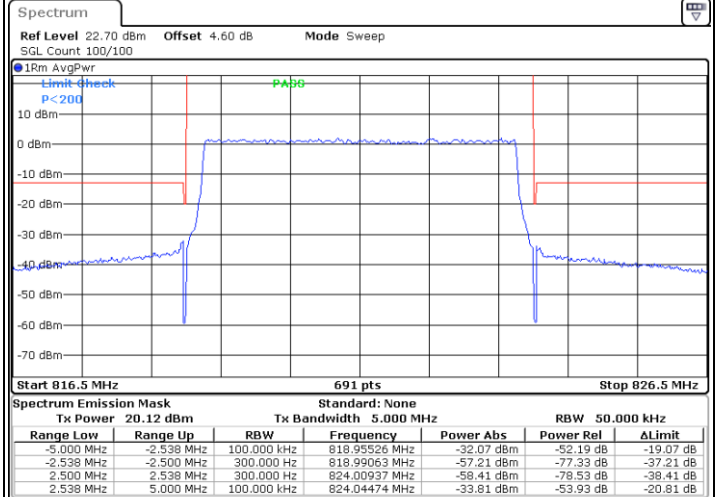




LTE Band 26 / 5MHz / 64QAM


Lowest Band Edge / 1RB

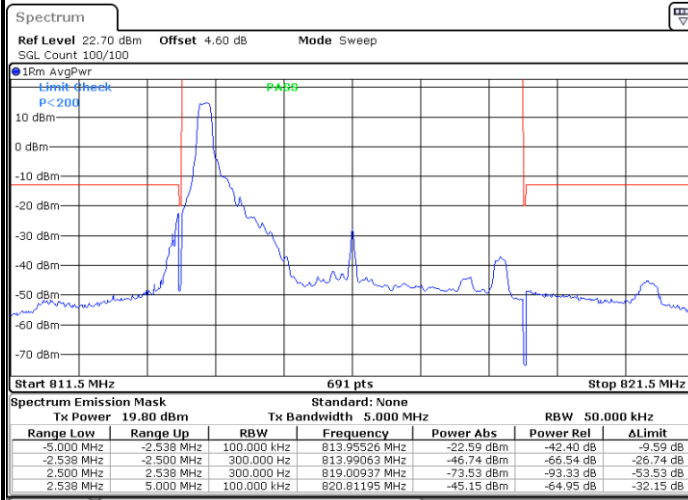


Highest Band Edge / 1 RB

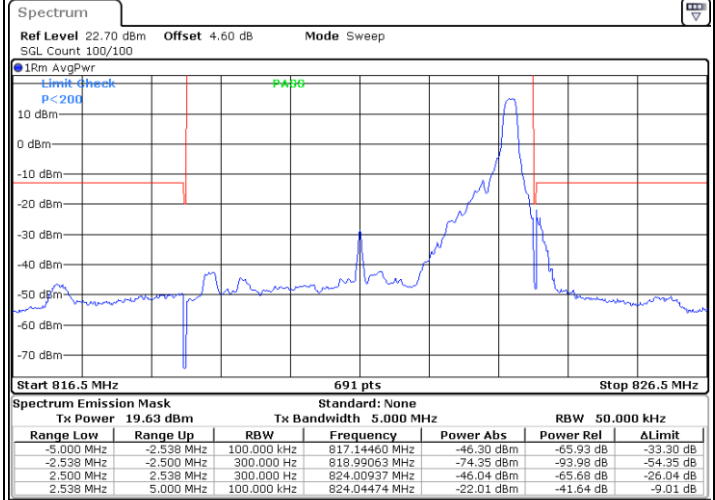

Lowest Band Edge / Full RB

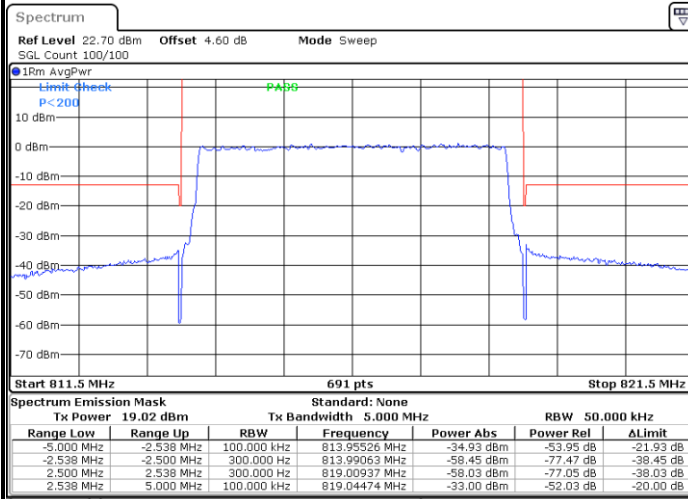

Highest Band Edge / Full RB

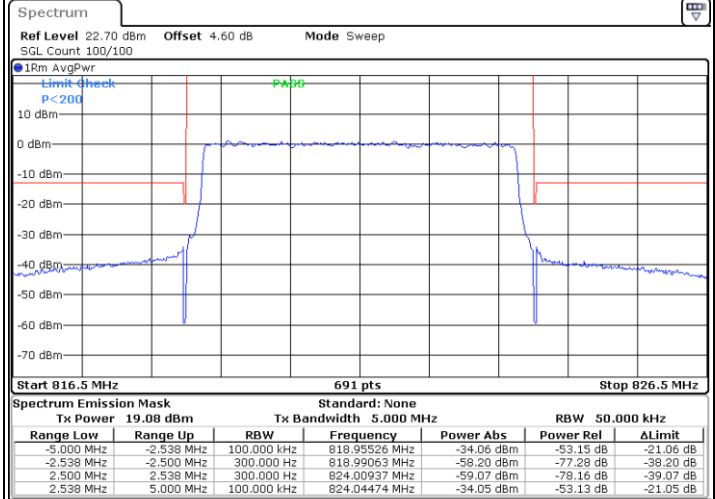





LTE Band 26 / 10MHz / QPSK

Middle Band Edge / 1 RB

Middle Band Edge / 1 RB max

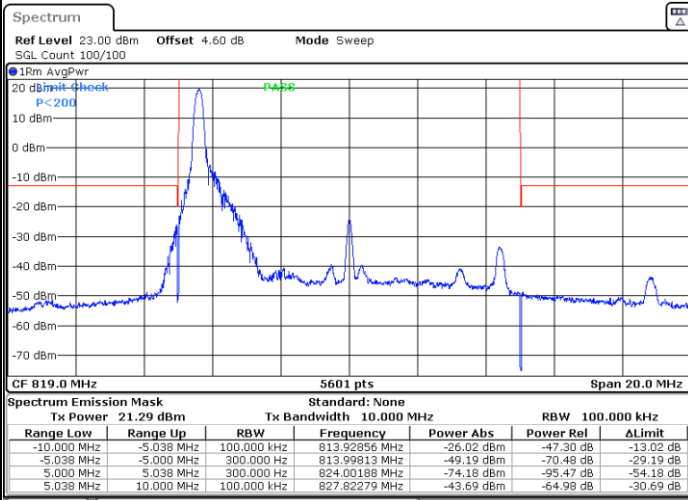


Date: 31.MAR.2025 22:21:15

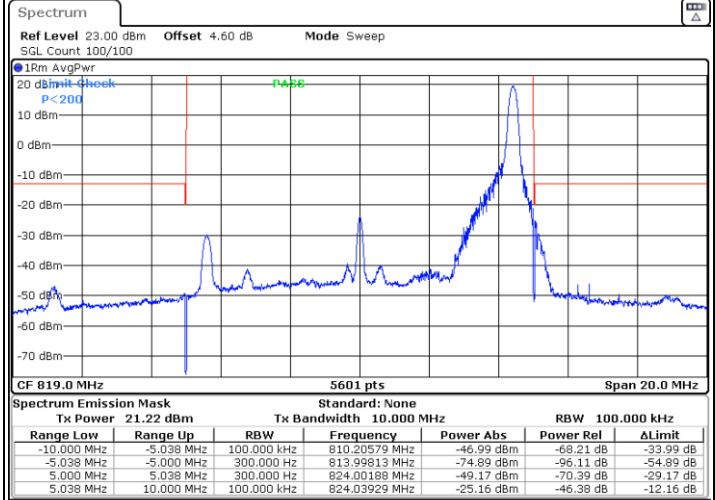

Date: 31.MAR.2025 22:28:32

Band Edge / Full RB

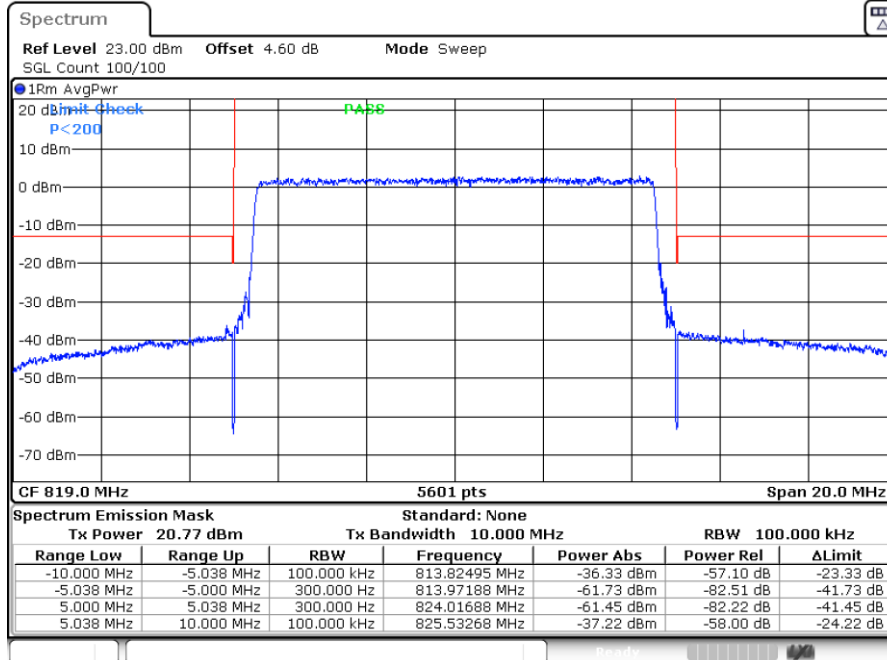


Date: 31.MAR.2025 22:29:25




LTE Band 26 / 10MHz / 16QAM

Middle Band Edge / 1 RB

Middle Band Edge / 1 RB max

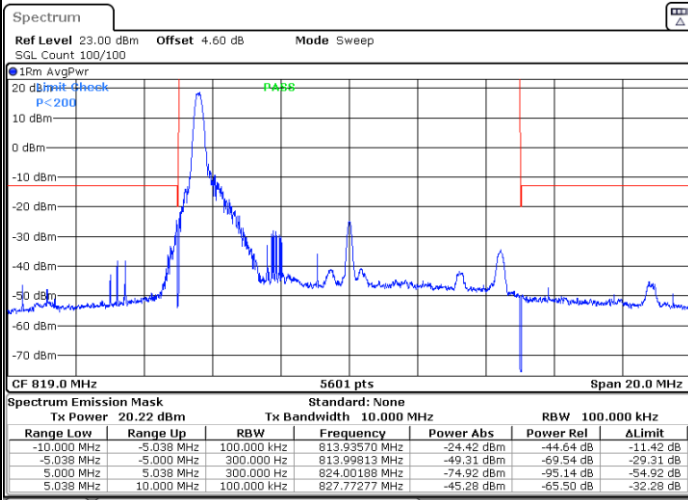


Date: 31.MAR.2025 22:22:08

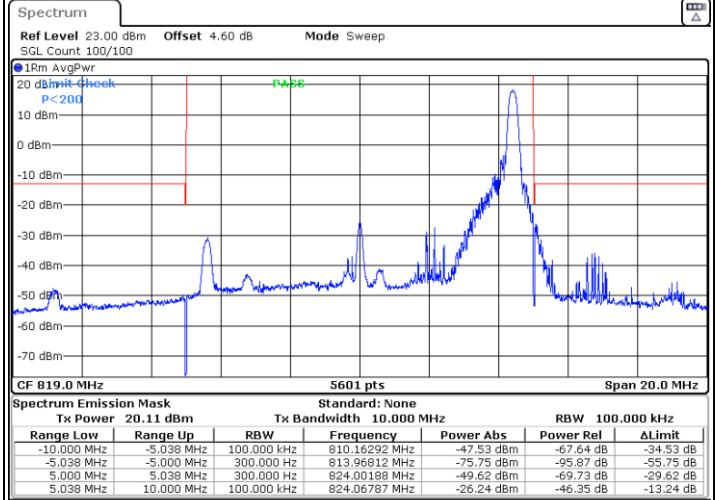

Date: 31.MAR.2025 22:26:28

Band Edge / Full RB

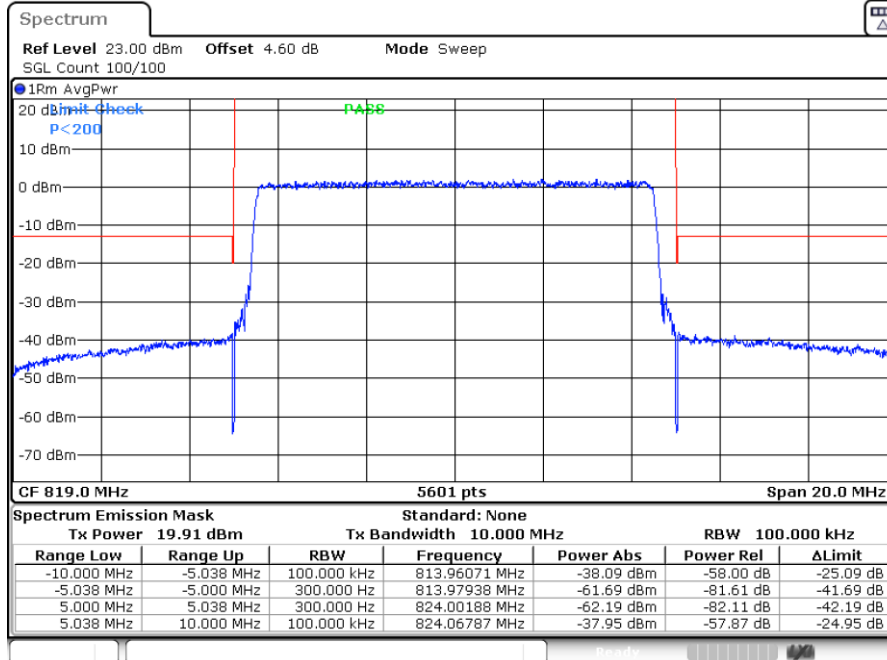


Date: 31.MAR.2025 22:30:21




LTE Band 26 / 10MHz / 64QAM

Middle Band Edge / 1 RB

Middle Band Edge / 1 RB max

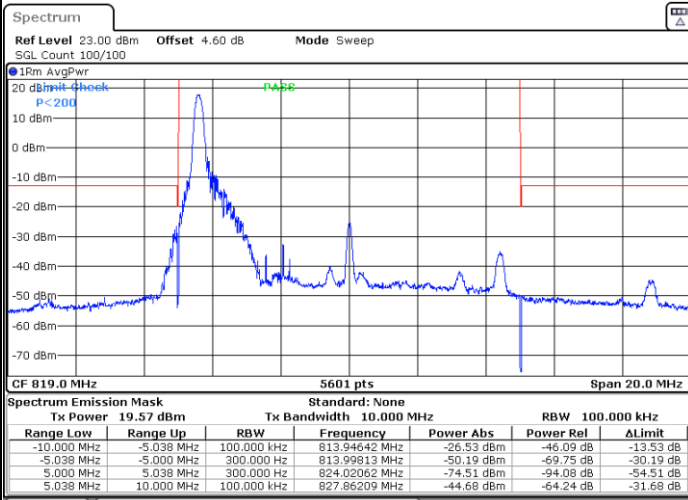


Date: 31.MAR.2025 22:23:01

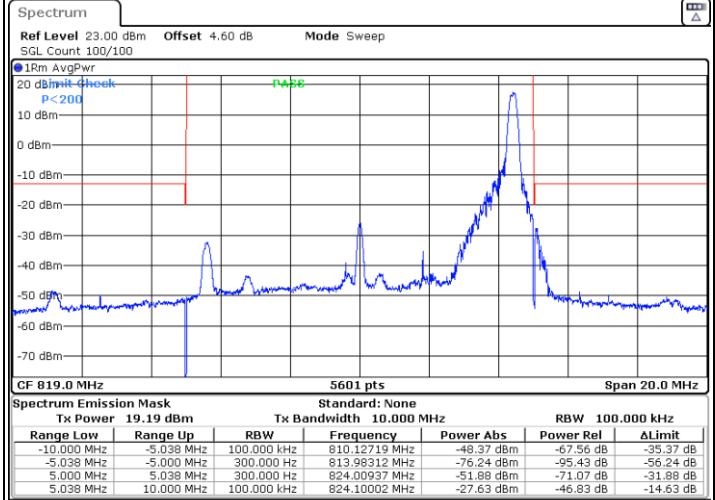

Date: 31.MAR.2025 22:23:55

Band Edge / Full RB

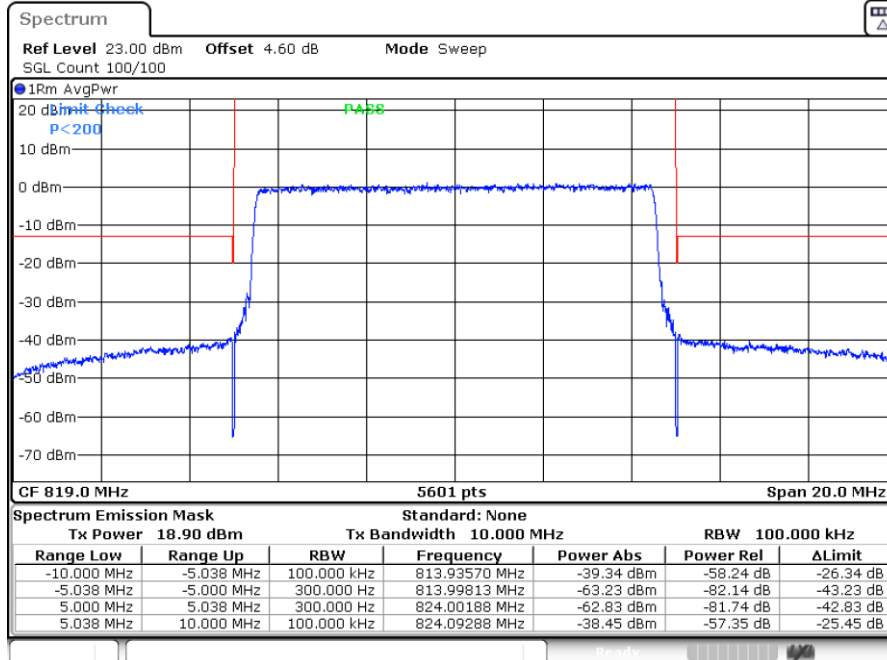


Date: 31.MAR.2025 22:31:18




LTE Band 26 / 15MHz / QPSK

Highest Band Edge / 1 RB

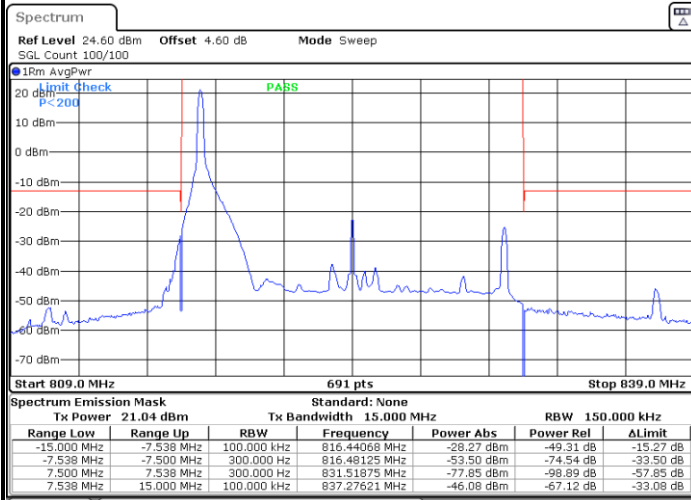


Date: 1.APR.2025 01:07:18

Highest Band Edge / 1 RB max

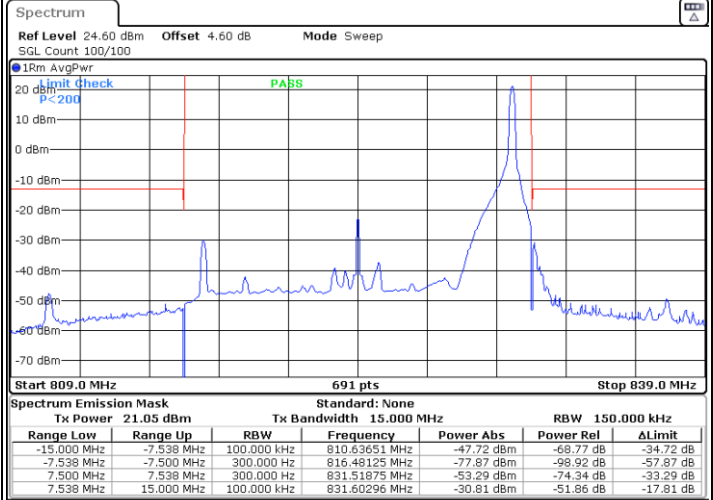

Date: 1.APR.2025 01:16:06

Band Edge / Full RB

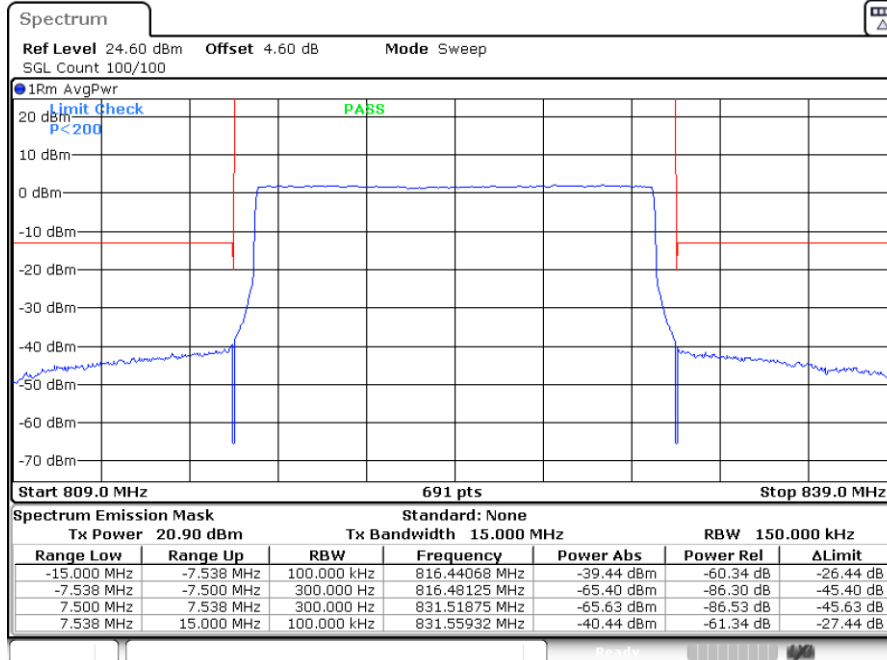


Date: 1.APR.2025 01:17:12




LTE Band 26 / 15MHz / 16QAM

Highest Band Edge / 1 RB

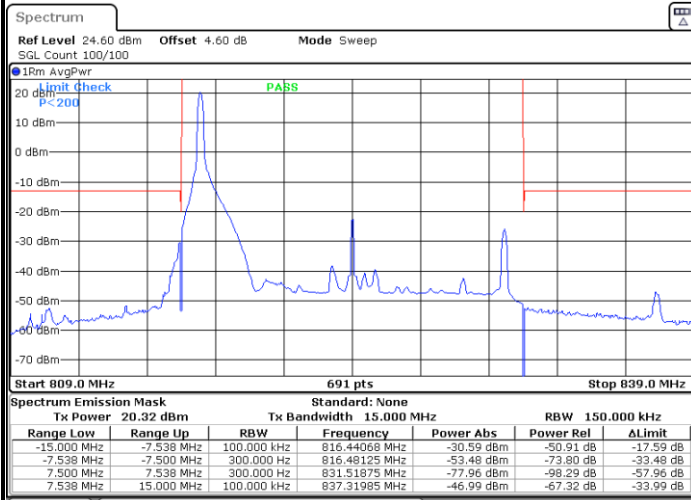


Date: 1.APR.2025 01:08:38

Highest Band Edge / 1 RB max

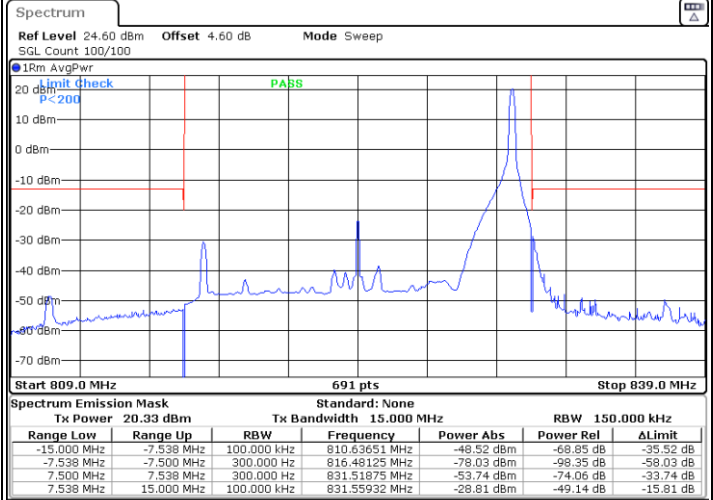

Date: 1.APR.2025 01:14:20

Band Edge / Full RB

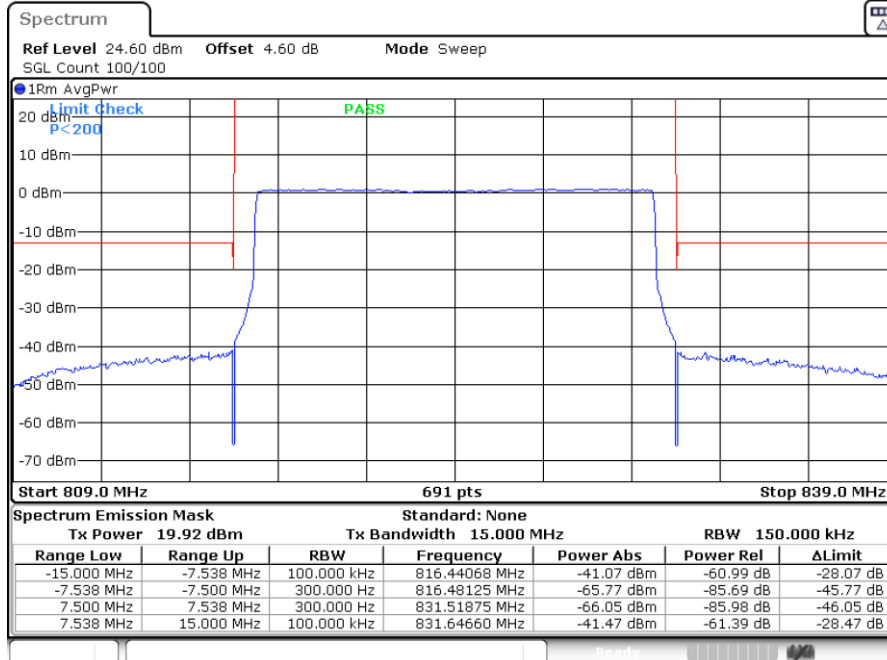


Date: 1.APR.2025 01:18:24




LTE Band 26 / 15MHz / 64QAM

Highest Band Edge / 1 RB

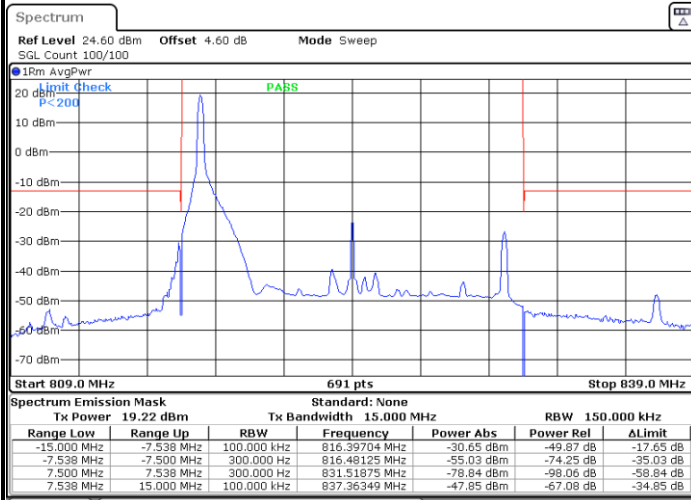


Date: 1.APR.2025 01:09:53

Highest Band Edge / 1 RB max

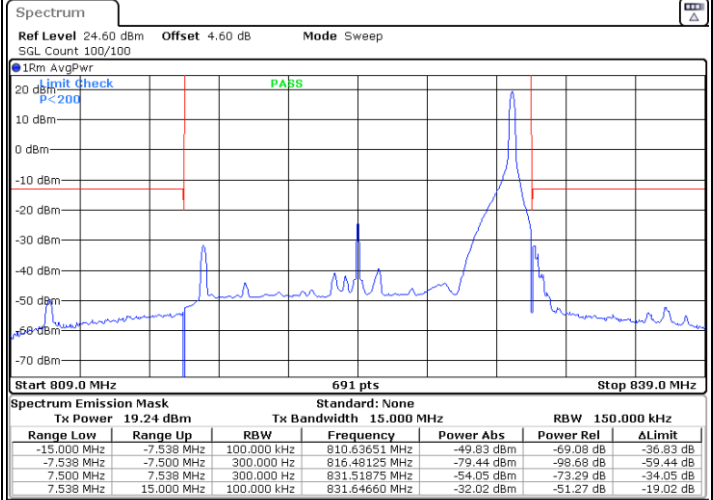

Date: 1.APR.2025 01:11:07

Band Edge / Full RB

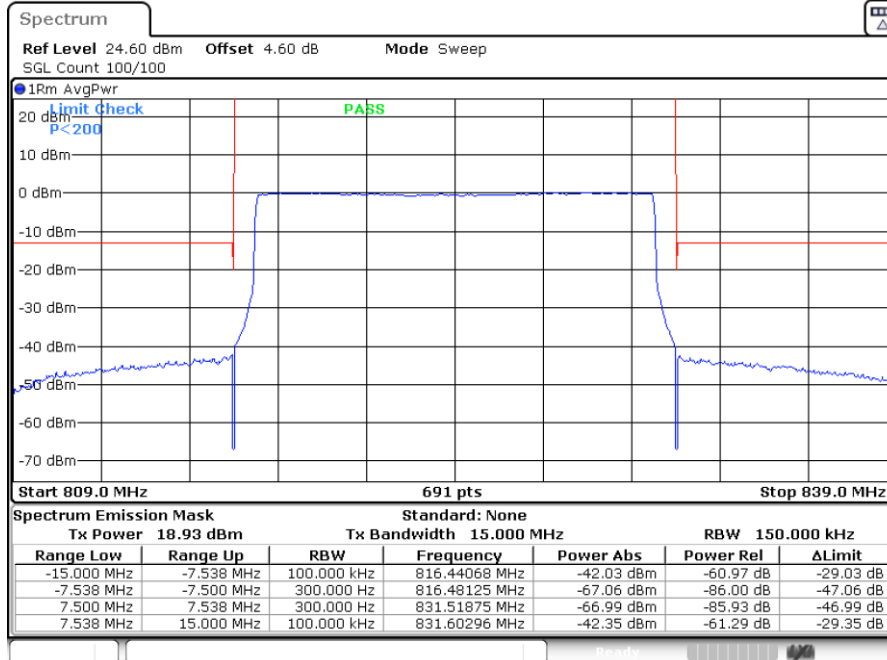


Date: 1.APR.2025 01:19:37




Conducted Spurious Emission

LTE Band 26 / 1.4MHz


Lowest Channel / QPSK

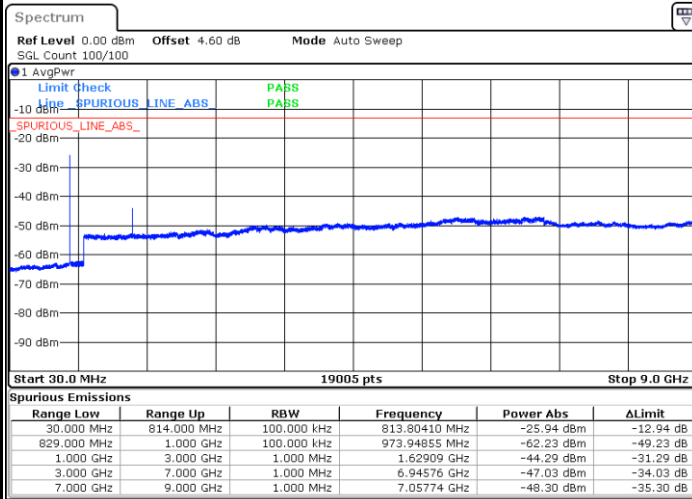

Middle Channel / QPSK

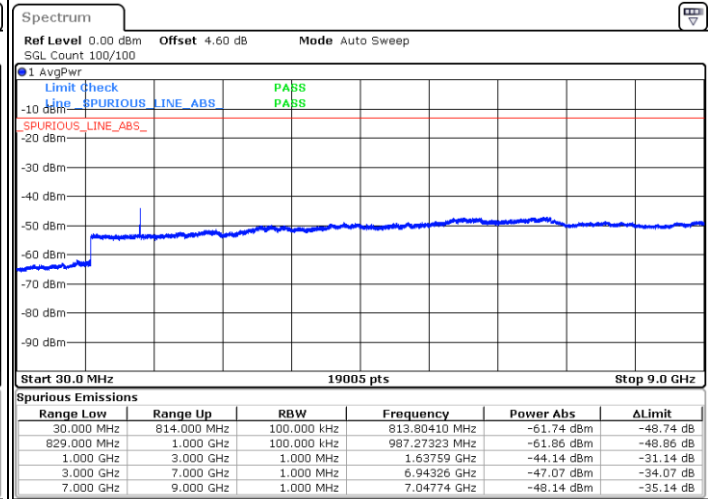


Highest Channel / QPSK

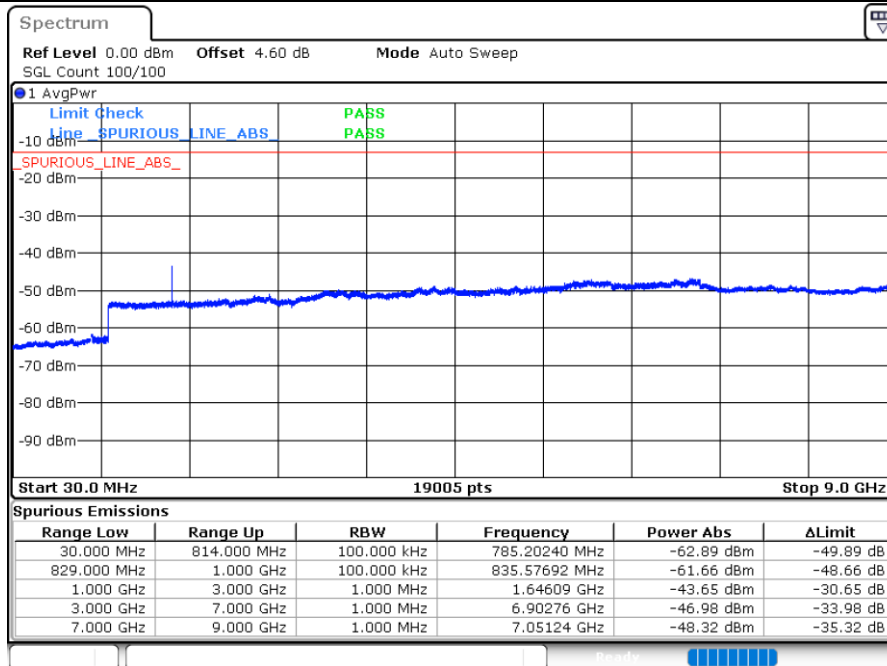




LTE Band 26 / 3MHz

Lowest Channel / QPSK

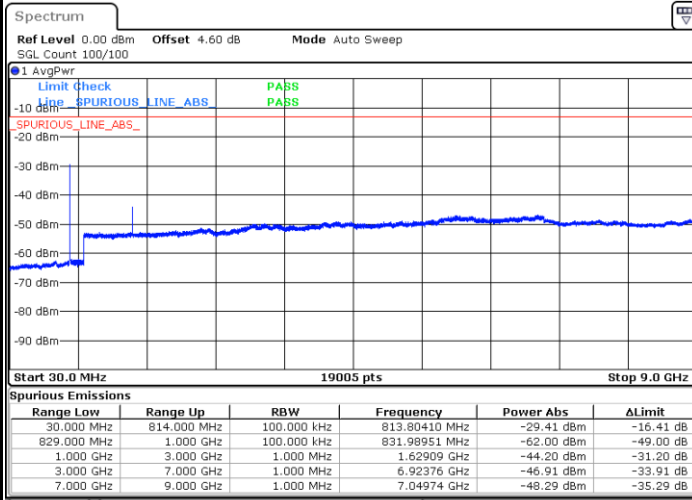


Date: 7.MAY.2025 16:51:41

Middle Channel / QPSK

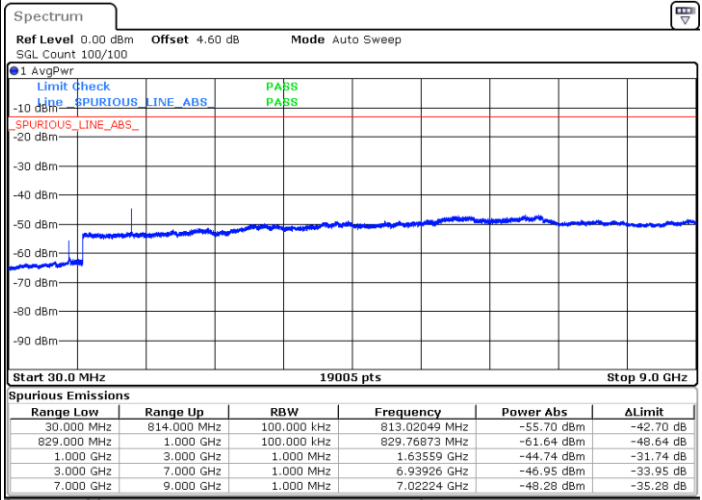

Date: 7.MAY.2025 16:52:31

Highest Channel / QPSK

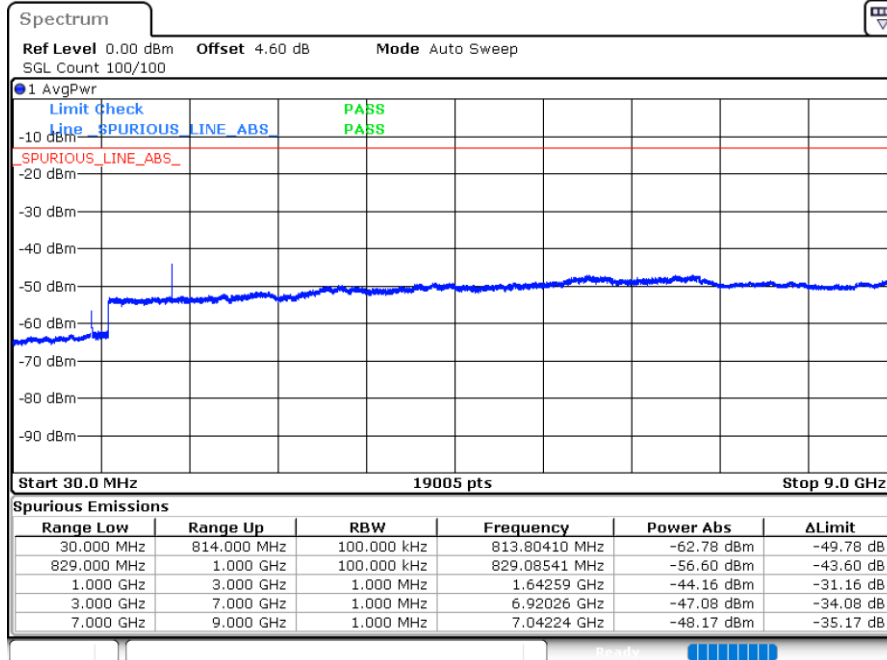


Date: 7.MAY.2025 16:53:20




LTE Band 26 / 5MHz


Lowest Channel / QPSK

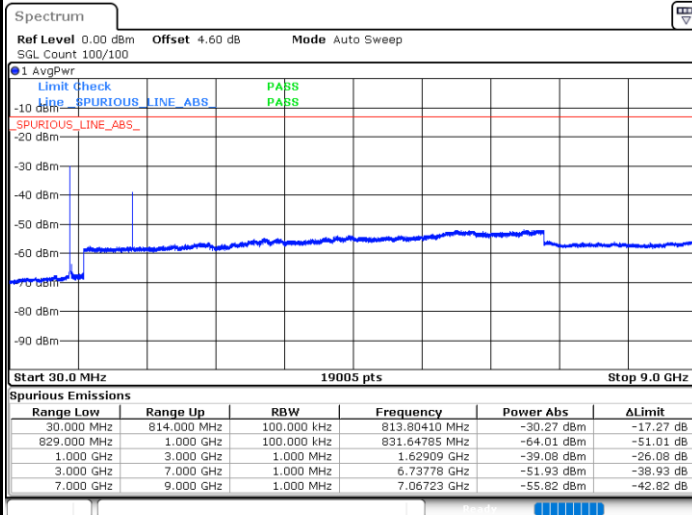

Middle Channel / QPSK

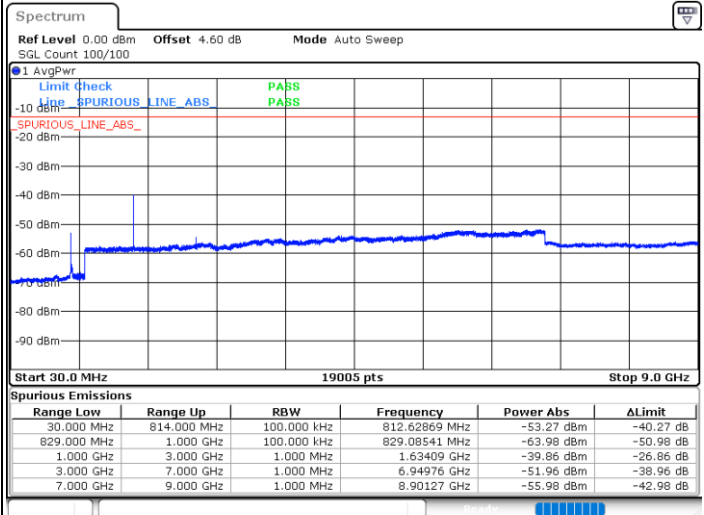


Highest Channel / QPSK

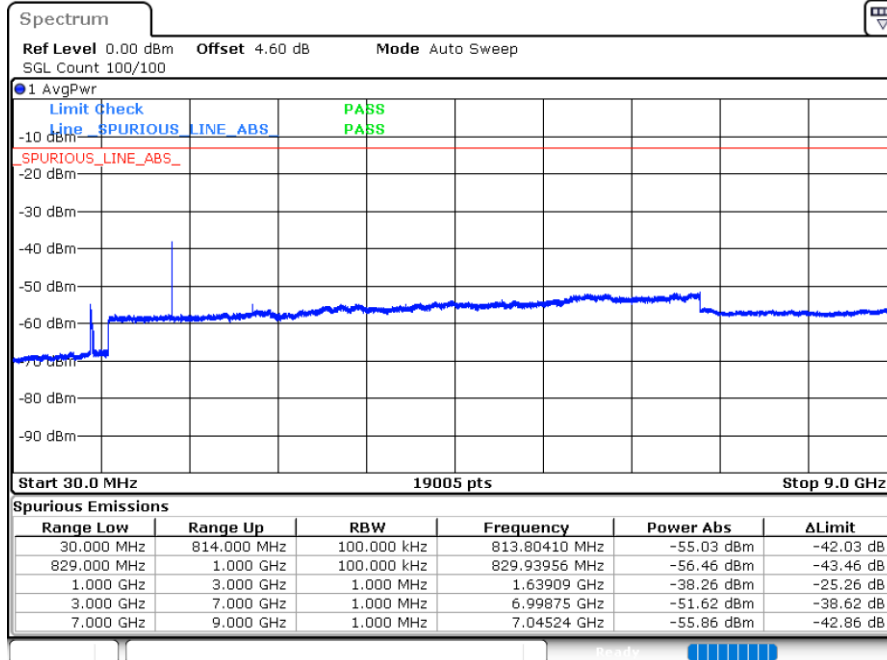



LTE Band 26 / 10MHz


Middle Channel / QPSK

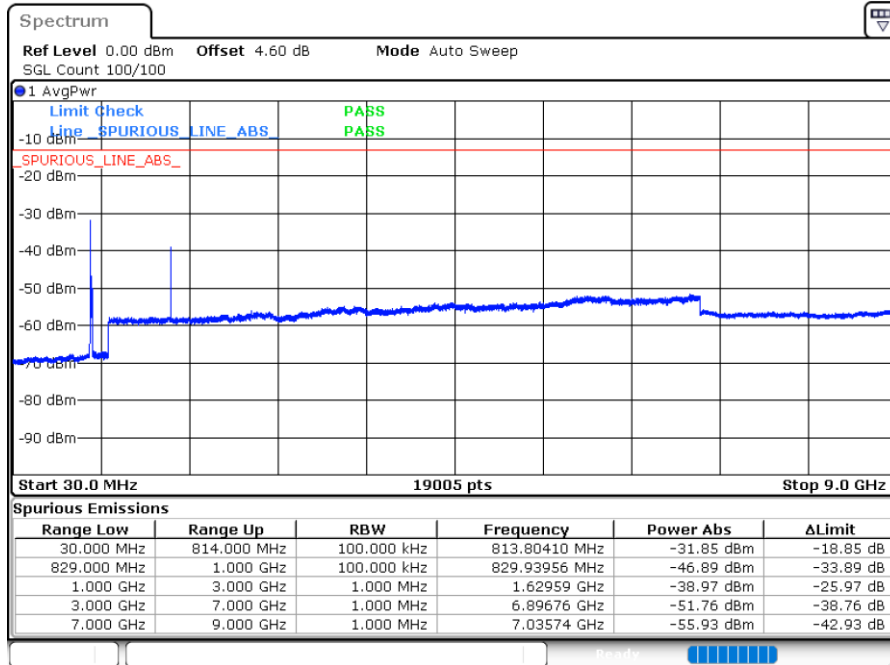

Date: 7.MAY.2025 16:56:42

LTE Band 26 / 15MHz

Middle Channel / QPSK

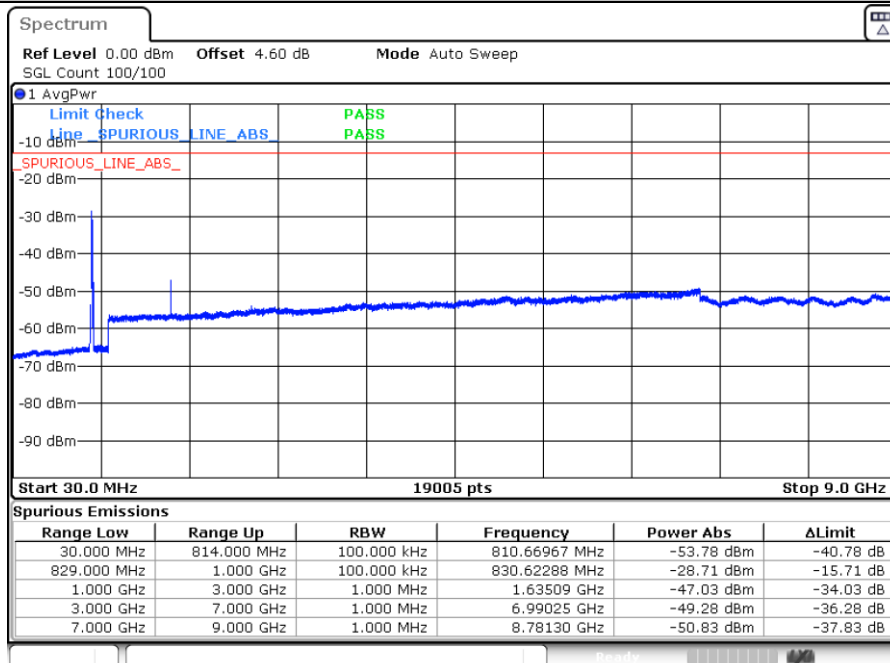

Date: 1.APR.2025 01:25:05

**Frequency Stability**

Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	2.5ppm
		Deviation (ppm)	Result
50	Normal Voltage	0.0025	PASS
40	Normal Voltage	0.0038	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0028	
0	Normal Voltage	0.0030	
-10	Normal Voltage	0.0029	
-20	Normal Voltage	0.0017	
-30	Normal Voltage	0.0043	
20	Maximum Voltage	0.0038	
20	Normal Voltage	0.0025	
20	Battery End Point	0.0031	

Note:

1. Normal Voltage = 3.87V ; Battery End Point (BEP) =3.5V. ; Maximum Voltage =4.45V
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	23~25°C
		Relative Humidity :	41~42%

LTE Band 26 / 5MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1624	-63.18	-13	-50.18	-70.15	1.58	10.70	H
	2440	-59.02	-13	-46.02	-67.27	2.102	12.50	H
	3256	-57.27	-13	-44.27	-66.16	2.856	13.90	H
	1624	-62.33	-13	-49.33	-69.30	1.58	10.70	V
	2440	-57.41	-13	-44.41	-65.66	2.10	12.50	V
	3256	-57.29	-13	-44.29	-66.18	2.86	13.90	V
Middle	1632	-63.14	-13	-50.14	-70.11	1.58	10.70	H
	2448	-58.82	-13	-45.82	-67.07	2.102	12.50	H
	3264	-57.58	-13	-44.58	-66.47	2.856	13.90	H
	1632	-61.48	-13	-48.48	-68.45	1.58	10.70	V
	2448	-56.32	-13	-43.32	-64.57	2.10	12.50	V
	3264	-57.49	-13	-44.49	-66.38	2.86	13.90	V
Highest	1640	-61.82	-13	-48.82	-68.79	1.58	10.70	H
	2456	-59.41	-13	-46.41	-67.66	2.102	12.50	H
	3280	-57.53	-13	-44.53	-66.42	2.856	13.90	H
	1640	-61.52	-13	-48.52	-68.49	1.58	10.70	V
	2456	-57.35	-13	-44.35	-65.60	2.10	12.50	V
	3280	-57.78	-13	-44.78	-66.67	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 10MHz / QPSK								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1632	-63.28	-13	-50.28	-70.25	1.58	10.70	H
	2440	-59.41	-13	-46.41	-67.66	2.102	12.50	H
	3256	-57.00	-13	-44.00	-65.89	2.856	13.90	H
	1632	-62.21	-13	-49.21	-69.18	1.58	10.70	V
	2440	-57.37	-13	-44.37	-65.62	2.10	12.50	V
	3256	-57.41	-13	-44.41	-66.30	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.