



A.5 EMISSION LIMITATIONS MEASUREMENT

| | | | |
|--|------------|--------------|--|
| Test Date | 2016/03/01 | Temp./Hum. | 25°C/55% |
| Mode | 802.11a | UNII Band | I |
| | | Frequency | TX 5180MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |



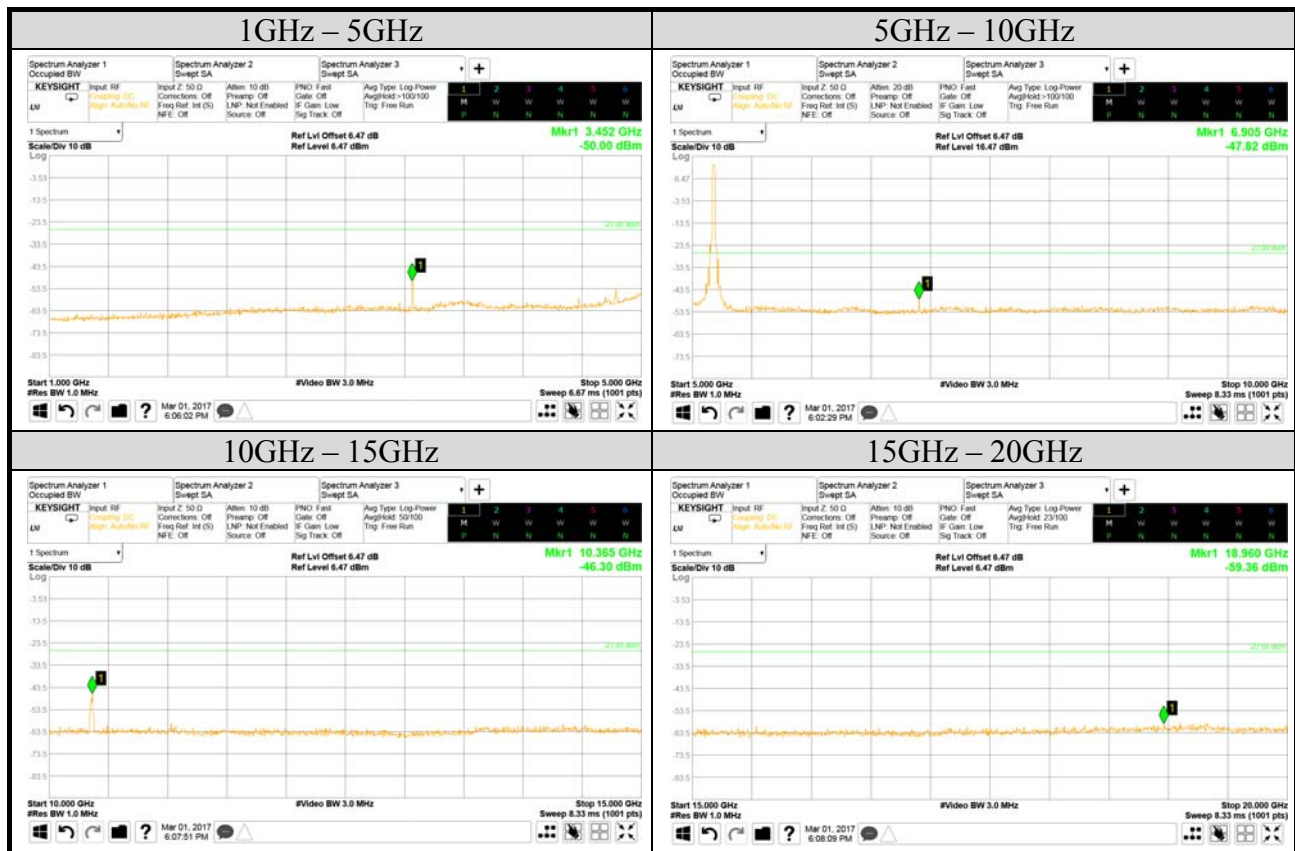

| | | | |
|--|------------|--------------|--|
| Test Date | 2016/03/01 | Temp./Hum. | 25°C/55% |
| Mode | 802.11a | UNII Band | I |
| | | Frequency | TX 5200MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |

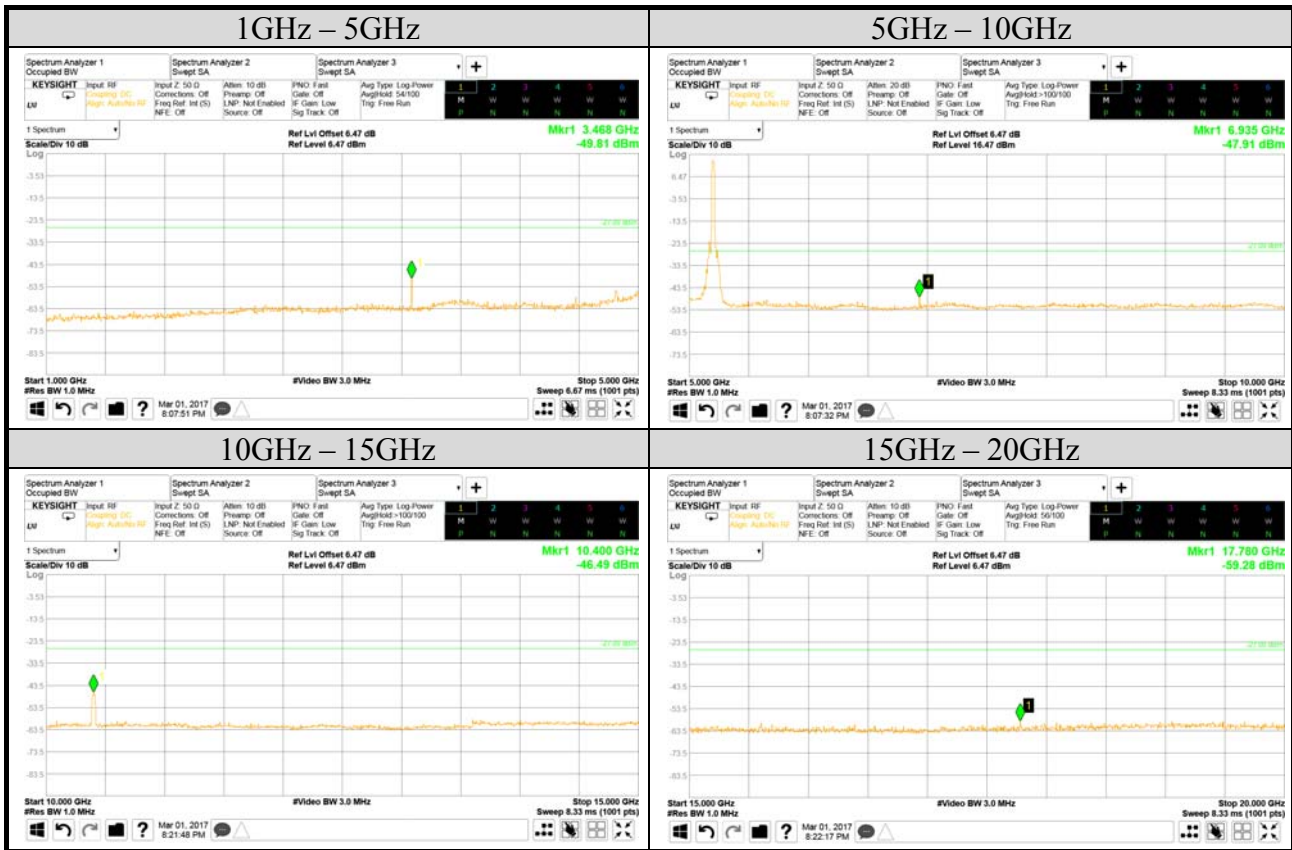



| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/01 | Temp./Hum. | 25°C/55% |
| Mode | 802.11a | UNII Band | I |
| | | Frequency | TX 5240MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2A |
| | | Frequency | TX 5260MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2A |
| | | Frequency | TX 5300MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2A |
| | | Frequency | TX 5320MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |






AUDIX Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan


Tel: +886 2 26099301
 Fax: +886 2 26099303

| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2C |
| | | Frequency | TX 5500MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |

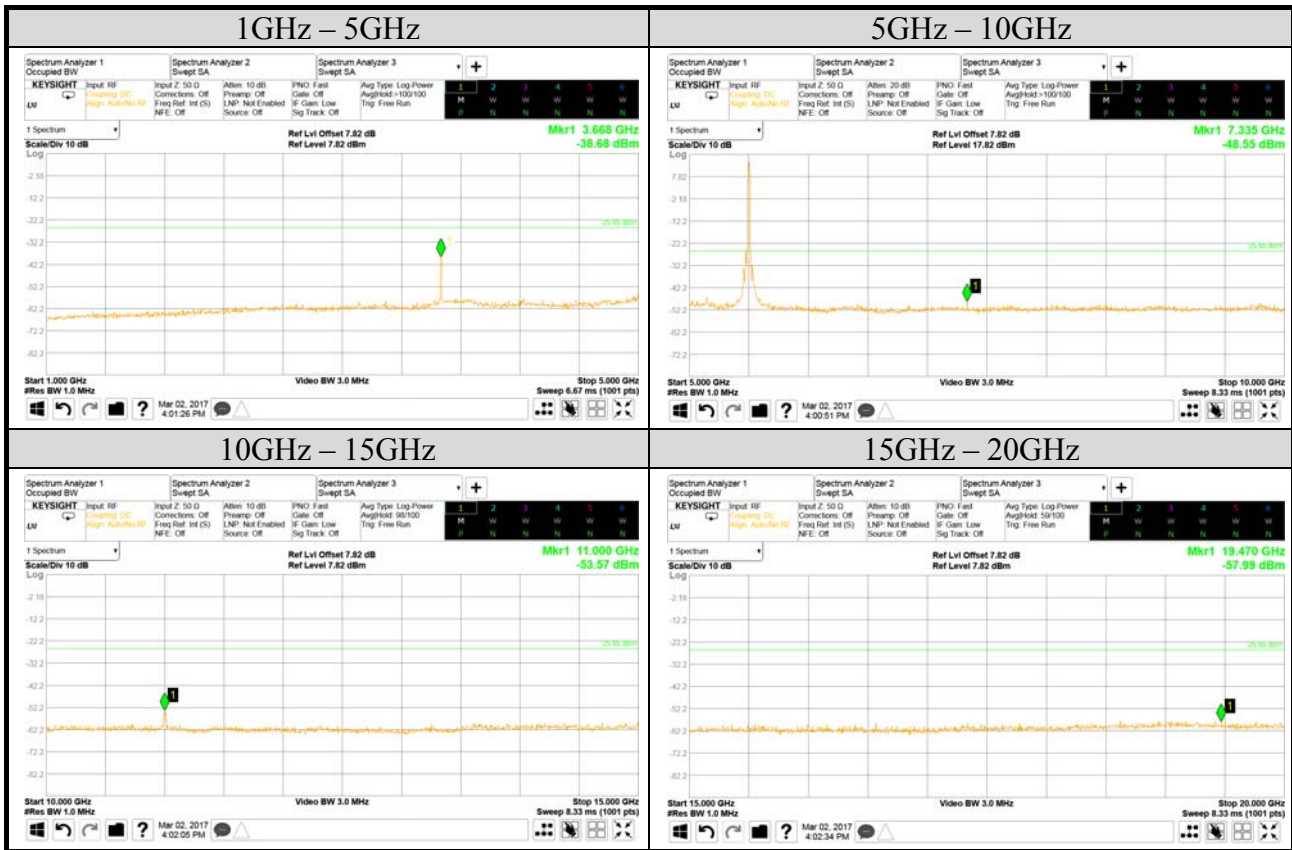



| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/09 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2C |
| | | Frequency | TX 5600MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |

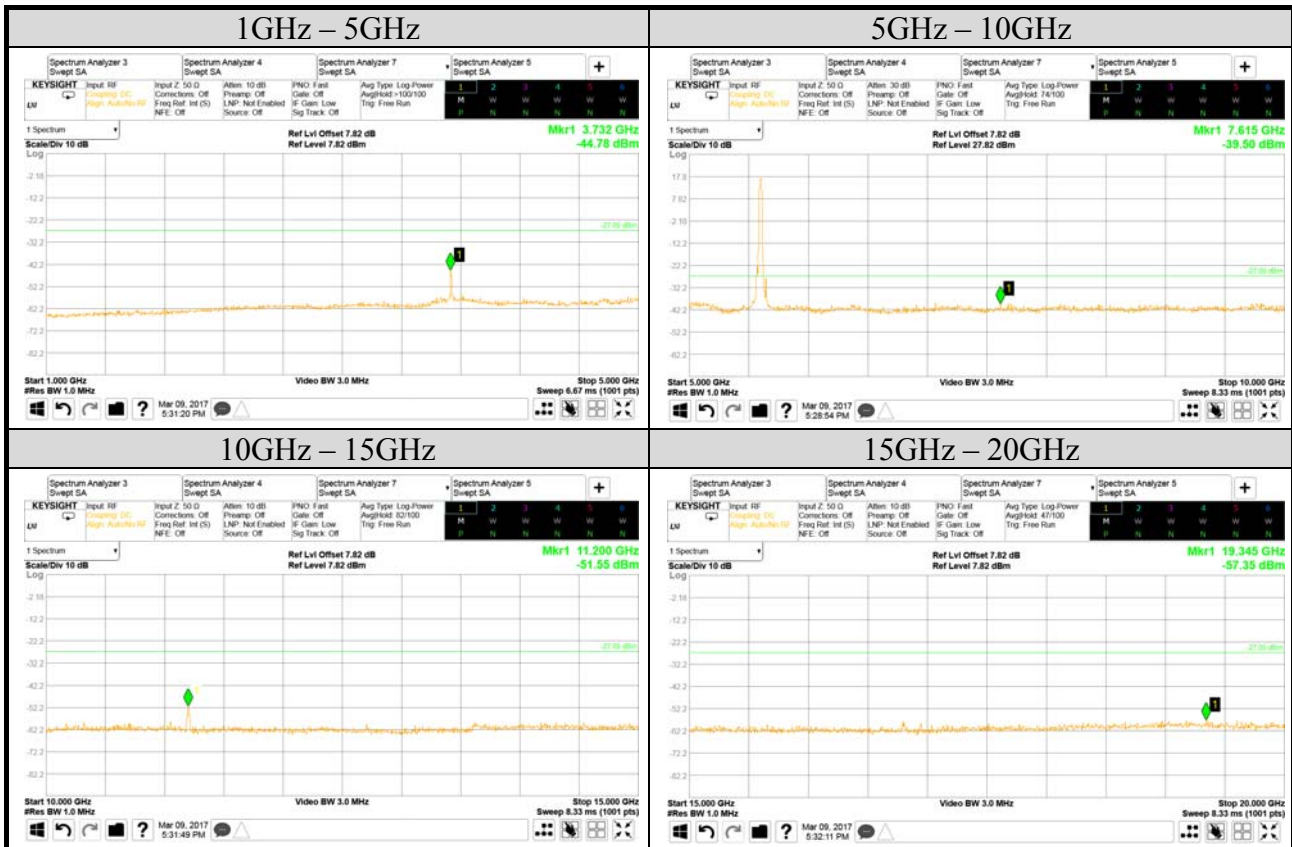




| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/09 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2C |
| | | Frequency | TX 5700MHz |
| Cable Loss | 3.4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | II-2C |
| | | Frequency | TX 5720MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |

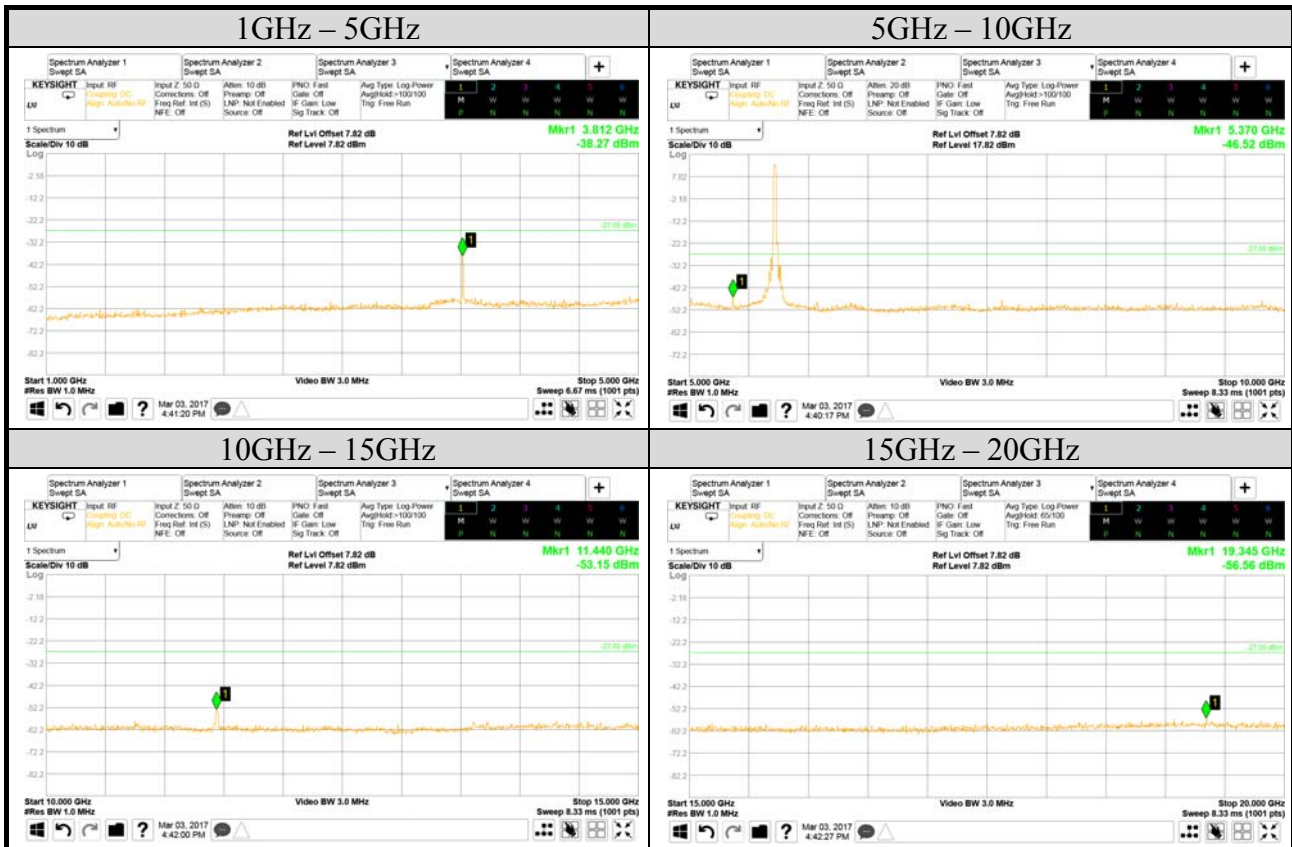





AUDIX Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
 Fax: +886 2 26099303

| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | III |
| | | Frequency | TX 5745MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |

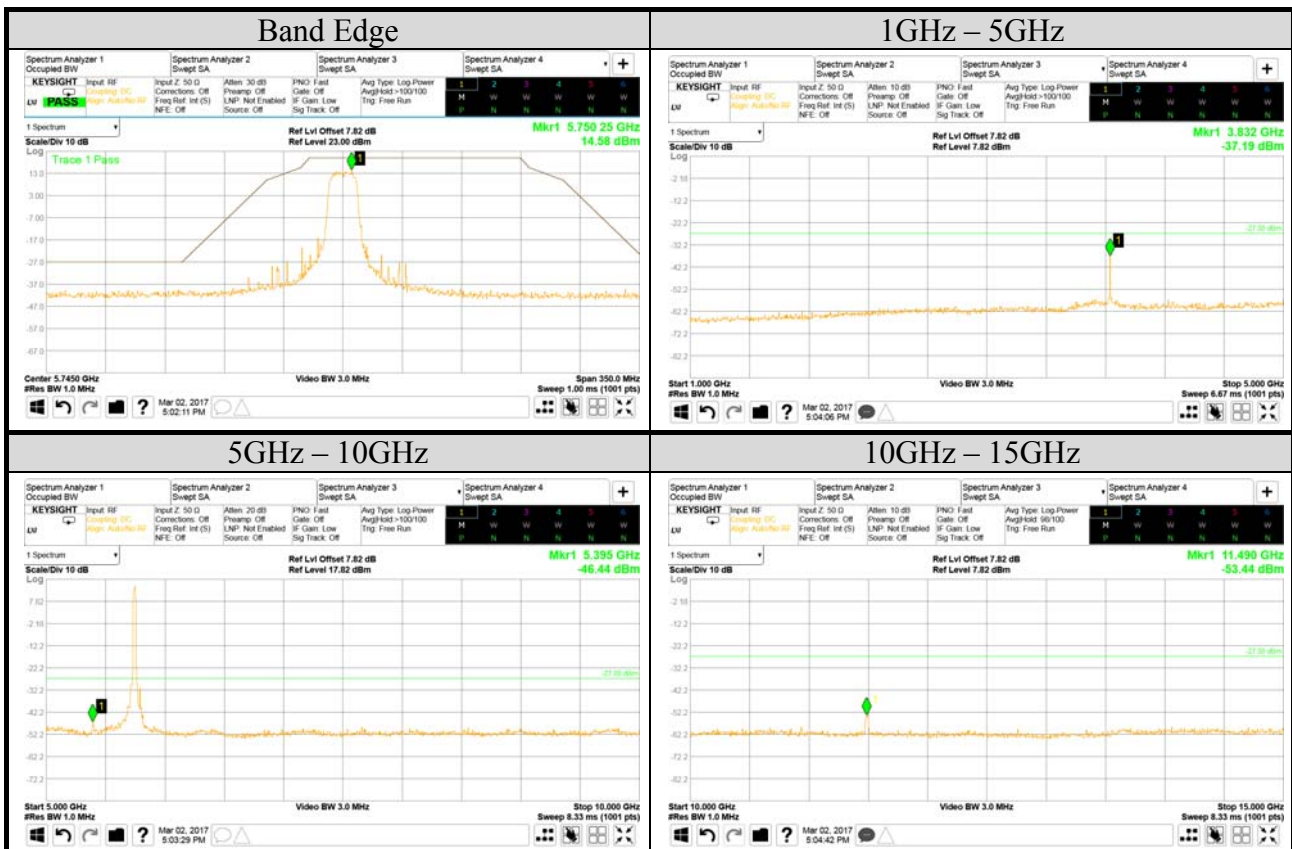

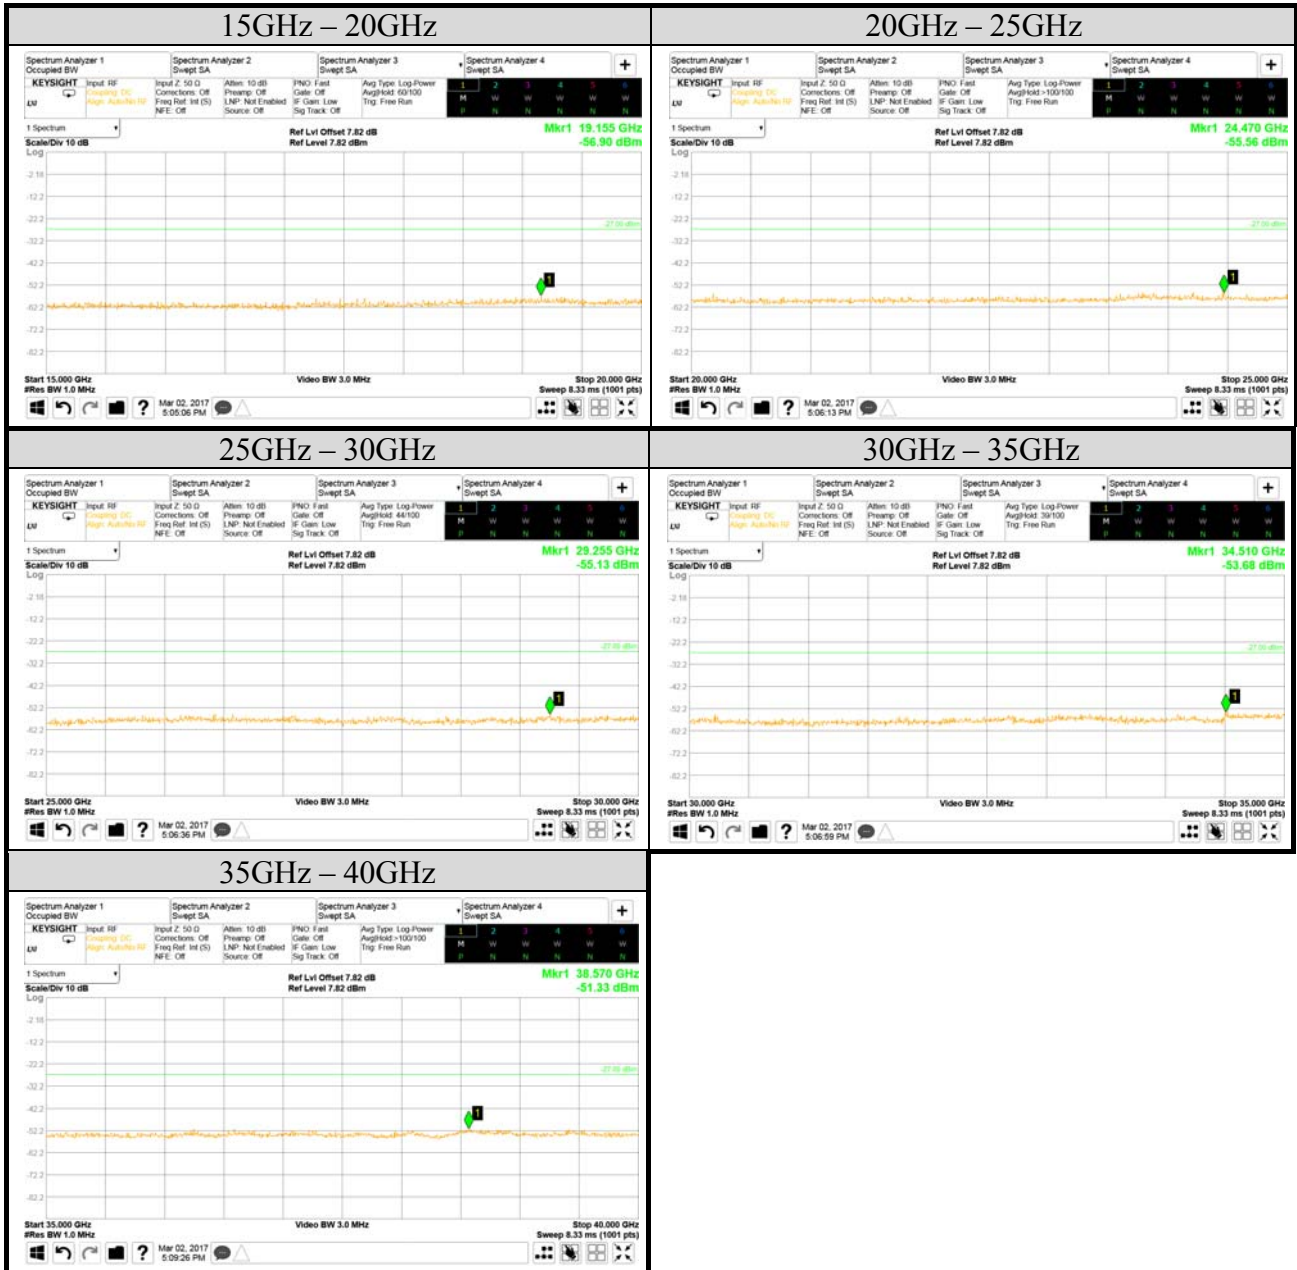


| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | III |
| | | Frequency | TX 5785MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11a | UNII Band | III |
| | | Frequency | TX 5825MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |

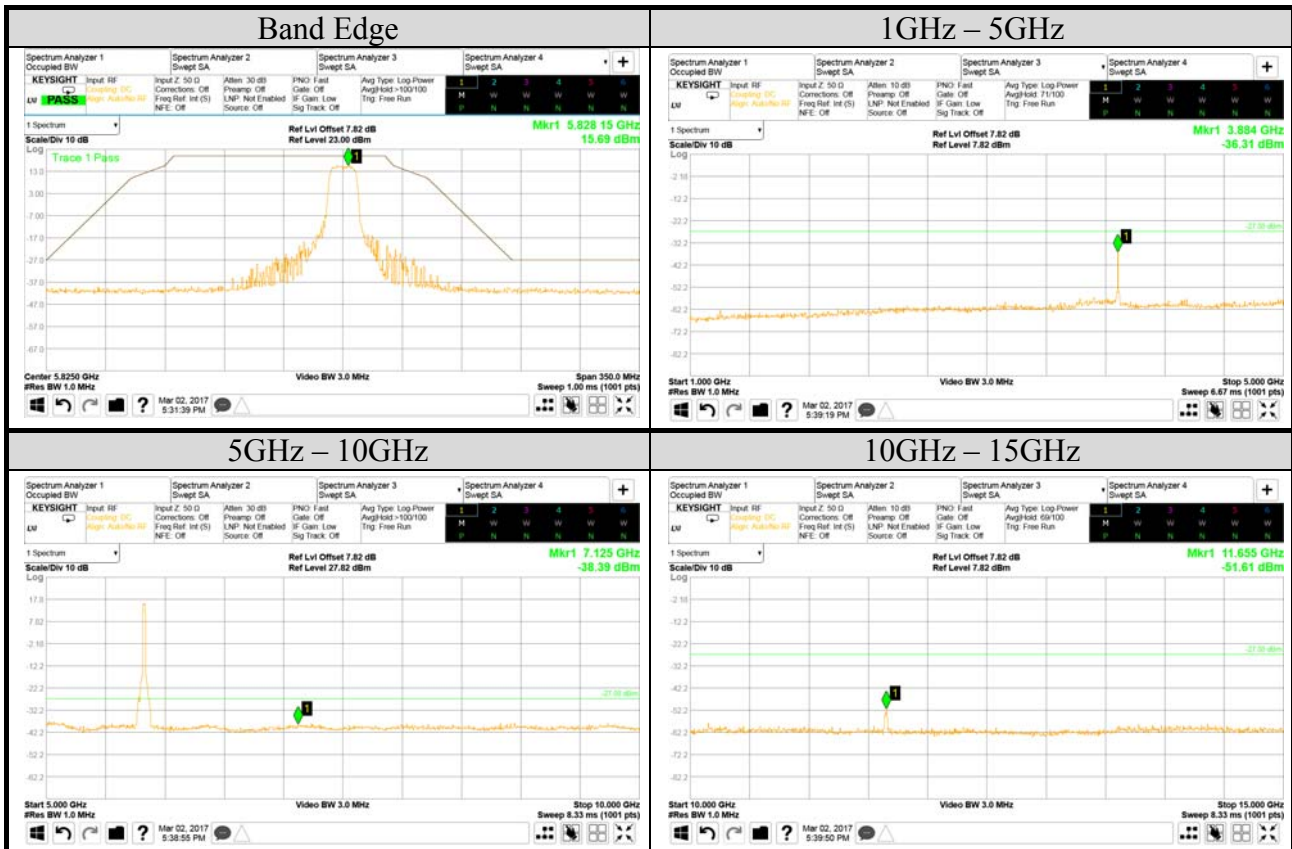



| | | | |
|--|----------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11ac-VHT20 | UNII Band | I |
| | | Frequency | TX 5180MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|----------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11ac-VHT20 | UNII Band | I |
| | | Frequency | TX 5200MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |





| | | | |
|--|----------------|--------------|--|
| Test Date | 2017/03/02 | Temp./Hum. | 24°C/56% |
| Mode | 802.11ac-VHT20 | UNII Band | I |
| | | Frequency | TX 5240MHz |
| Cable Loss | 4dB | Test Voltage | AC 120V, 60Hz (with Docking via AC Adapter) |
| Simultaneous Factor 10 log(n) (Note: "n" is antenna number) | | 3 | |



