

# TEST REPORT

of

**FCC Part 90 and Part 2**  
**FCC ID: WLD-DN430VMT**

Equipment Under Test : Vellux Multi Transmitter

Model Name : VMT200

Serial No. : N/A

Applicant : Dunan Co., Ltd.

Manufacturer : Dunan Co., Ltd.

Date of Test(s) : 2009-03-02 ~ 2009-04-10

Date of Issue : 2009-04-22

In the configuration tested, the EUT complied with the standards specified above.

Tested By:




Date

**2009-04-22**

---

**Geoffrey Do**

Approved By



Date

**2009-04-22**

---

**Charles Kim**

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

## Table of contents

<b>1. General information -----</b>	<b>3</b>
<b>2. Frequency stability -----</b>	<b>7</b>
<b>3. Carrier output power -----</b>	<b>12</b>
<b>4. Conducted spurious emission -----</b>	<b>13</b>
<b>5. Radiated spurious emission -----</b>	<b>17</b>
<b>6. Emission mask -----</b>	<b>21</b>
<b>7. Occupied bandwidth -----</b>	<b>24</b>
<b>8. Transient frequency behaviour -----</b>	<b>27</b>
<b>9. RF exposure evaluation -----</b>	<b>33</b>

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General information

### 1.1. Testing laboratory

SGS Testing Korea Co., Ltd.  
Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040  
[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

Telephone : +82 +31 428 5700  
FAX : +82 +31 427 2371

### 1.2. Details of applicant

Applicant : Dunan Co., Ltd.  
Address : #304 Hansol B/D, 145-1, Gumi-dong, Bundang-gu, Seongnam-si, Gyunggi-do, Korea  
Contact Person : Kwan-Hong Hong  
Phone No. : 82-31-715-4513  
Fax No. : 82-31-715-4531

### 1.3. Description of EUT

<b>Kind of Product</b>	Vellux Multi Transmitter
<b>Model Name</b>	VMT200
<b>Serial Number</b>	N/A
<b>Power Supply</b>	AC 120 V
<b>Frequency Range</b>	431 MHz ~ 439 MHz(Tx)
<b>Output power (mW)</b>	10
<b>Modulation Technique</b>	FSK
<b>Emission designator</b>	F1D
<b>Number of Channels</b>	320
<b>Operating Conditions</b>	-20 °C ~ 50 °C
<b>Antenna Type</b>	Connector type (Dipole Ant.)

### 1.4. Details of modification

-N/A

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**1.5. Test equipment list**

Equipment	Manufacturer	Model	Cal due.
Signal Generator	Agilent	E4438C	Apr. 01, 2010
Spectrum Analyzer	Agilent	E4440A	Apr. 01, 2010
Spectrum Analyzer	H.P.	8565E	Oct. 01, 2009
Power Meter	Agilent	E4416A	Apr. 01, 2010
Power Sensor	Agilent	E9327A	Apr. 01, 2010
Modulation Analyzer	H.P	8901B	Oct. 09, 2009
Digital Oscilloscope	Tektronix	TDS305413	Mar. 10, 2010
Four-port Junction pad	Anritsu	MA1612A	Apr. 03, 2010
Dummy Load	BIRD	8404	Oct. 01, 2009
Attenuator	Agilent	8494B	Apr. 01, 2010
AC Power Supply	Daekwang	Slidacs	Oct. 01, 2009
Preamplifier	H.P.	8447F	Jul. 03, 2009
Preamplifier	Agilent	8449B	Apr. 01, 2010
High Pass Filter	Mini-Circuits	WHK3.0/18G-10SS	Oct. 01, 2009
High Pass Filter	Wainwright	NHP-800+	Apr. 01, 2010
Tem/Hum Chamber	Han-Gil	HGTP-4050	Oct. 02, 2009
Horn Antenna	SCHWARZBECK	BBHA9120D(0600)	Jun. 16, 2009
Dipole Antenna	975/958	VHAP/UHAP	Jan. 18, 2010

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Equipment	Manufacturer	Model	Cal due.
Ultra Broadband Antenna	R & S	HL562	Oct. 09, 2009
Horn Antenna	R & S	HF 906	Oct. 09, 2009
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 3.5 m x 3.5 m)	Jan. 31, 2010

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

## 1.6. Summary of test results

The EUT has been tested according to the following specifications:

Applied standard : Part 90 and 2		
Standard section	Test item	Result
90.213	Frequency stability	Complied
90.205	Carrier output power	Complied
90.210	Emission mask	Complied
90.210	Radiated spurious emission	Complied
90.210	Conducted spurious emission	Complied
90.214	Transient frequency behavior	Complied
1.1307(b)(1)	RF exposure evaluation	Complied


## 1.7. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL003048	Initial

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2. Frequency stability

### 2.1. Test setup

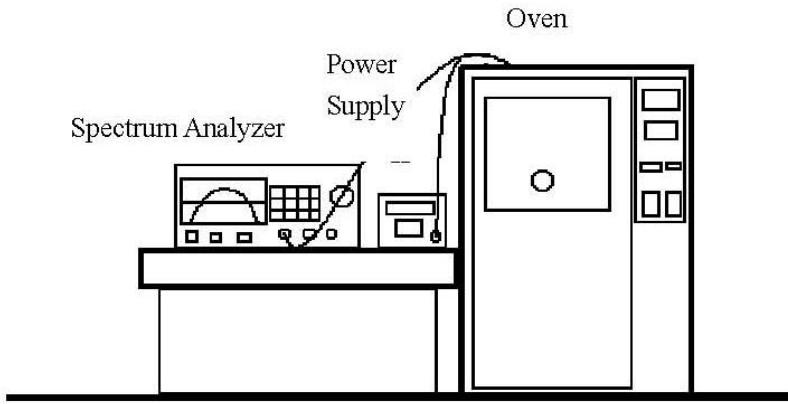

### 2.2. Limit

1. According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
2. According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
3. According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 25KHz channel separation.

### 2.3. Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The transmission time was measured with the spectrum analyzer using  $\text{RBW}=1\text{ kHz}$ ,  $\text{VBW}=1\text{ kHz}$ .
3. Set the temperature of chamber to  $-30^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the highest temperature  $50^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test result

Ambient temperature : 22 °C

Relative humidity : 46 % R.H.

Test voltage (V)	Reference frequency (MHz)	Measure frequency (MHz)	Frequency deviation (Hz)	Frequency deviation (ppm)	Limit (ppm)
AC 138 V	431.00	430.999659	-341	-0.79	2.5
AC 120 V		430.999642	-358	-0.83	2.5
AC 102 V		430.999639	-361	-0.84	2.5
AC 138 V	434.79	434.789374	-626	-1.44	2.5
AC 120 V		434.789371	-629	-1.45	2.5
AC 102 V		434.789372	-628	-1.44	2.5
AC 138 V	439.00	438.999329	-671	-1.53	2.5
AC 120 V		438.999331	-669	-1.52	2.5
AC 102 V		438.999328	-672	-1.53	2.5

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Operation frequency : 431.00 MHz

Temp. (°C)	Measure frequency (MHz)	Frequency deviation (Hz)	Frequency deviation (ppm)	Limit (ppm)
-30	430.999620	-380	-0.88	2.5
-20	430.999565	-435	-1.01	2.5
-10	430.999524	-476	-1.10	2.5
0	430.999588	-412	-0.96	2.5
10	430.999694	-306	-0.71	2.5
20	430.999760	-240	-0.56	2.5
30	430.999749	-251	-0.58	2.5
40	430.999686	-314	-0.73	2.5
50	430.999768	-232	-0.54	2.5

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Operation frequency : 434.79 MHz

Temp. (°C)	Measure frequency (MHz)	Frequency deviation (Hz)	Frequency deviation (ppm)	Limit (ppm)
-30	434.789909	-91	-0.21	2.5
-20	434.789792	-209	-0.48	2.5
-10	434.789911	-89	-0.20	2.5
0	434.789774	-226	-0.52	2.5
10	434.789797	-203	-0.47	2.5
20	434.789737	-263	-0.60	2.5
30	434.789865	-135	-0.31	2.5
40	434.789966	-34	-0.08	2.5
50	434.789950	-50	-0.11	2.5

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Operation frequency : 439.00 MHz

Temp. (°C)	Measure frequency (MHz)	Frequency deviation (Hz)	Frequency deviation (ppm)	Limit (ppm)
-30	438.999366	-634	-1.45	2.5
-20	438.999366	-634	-1.45	2.5
-10	438.999413	-587	-1.34	2.5
0	438.999511	-489	-1.11	2.5
10	438.999425	-575	-1.31	2.5
20	438.999465	-535	-1.22	2.5
30	438.999419	-581	-1.32	2.5
40	438.999302	-698	-1.59	2.5
50	438.999587	-413	-0.94	2.5

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3. Carrier output power

#### 3.1. Setup



#### 3.2. Limit

According to §90.205(r), the output power shall not exceed by more than 20 percent either the output power.

#### 3.3. Test procedure

1. The transmitter output was connected to the power meter through an attenuator.
2. The test has been performed at the frequencies (low, middle, high channels of the EUT operating band) and full rated power levels of the transmitter.

#### 3.4. Test result

Ambient temperature : 22 °C  
Relative humidity : 46 % R.H.

Power level: 10 mW

Frequency (MHz)	Conducted power (mW)	Limit (mW)
431.00	3.50	12
434.79	3.78	12
439.00	3.93	12

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 4. Conducted spurious emission

### 4.1. Setup



### 4.2. Limit

According to §90.210, For 25 kHz channel: Spurious attenuated in dB=  $43 + 10\log(\text{Power output in watts})$   
Alternatively, an equivalent absolute level of -13 dBm is taken.

### 5.3. Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using
  - 1) RBW : 100 kHz(< 1GHz), 1 MHz(> 1 GHz).
  - 2) VBW : 100 kHz(< 1GHz), 1 MHz(> 1 GHz).

### 5.4. Test result



Ambient temperature : 22 °C  
Relative humidity : 46 % R.H.

Please refer to the following.

---



*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Low channel

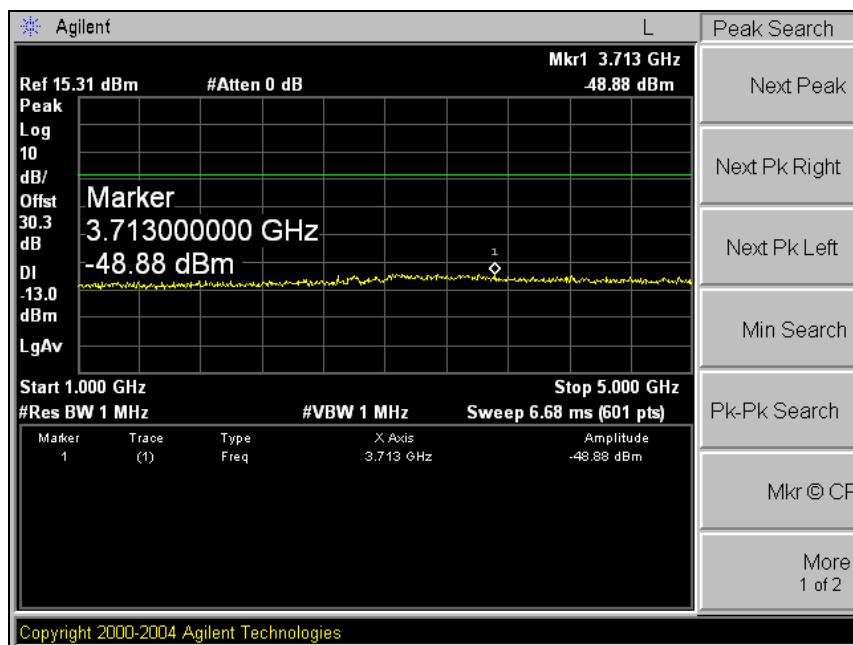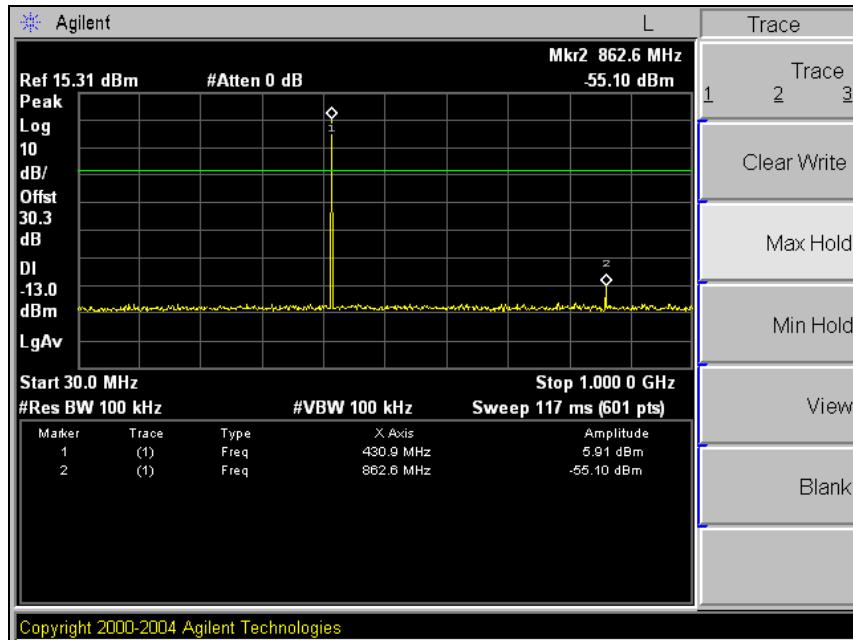


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

### Middle channel

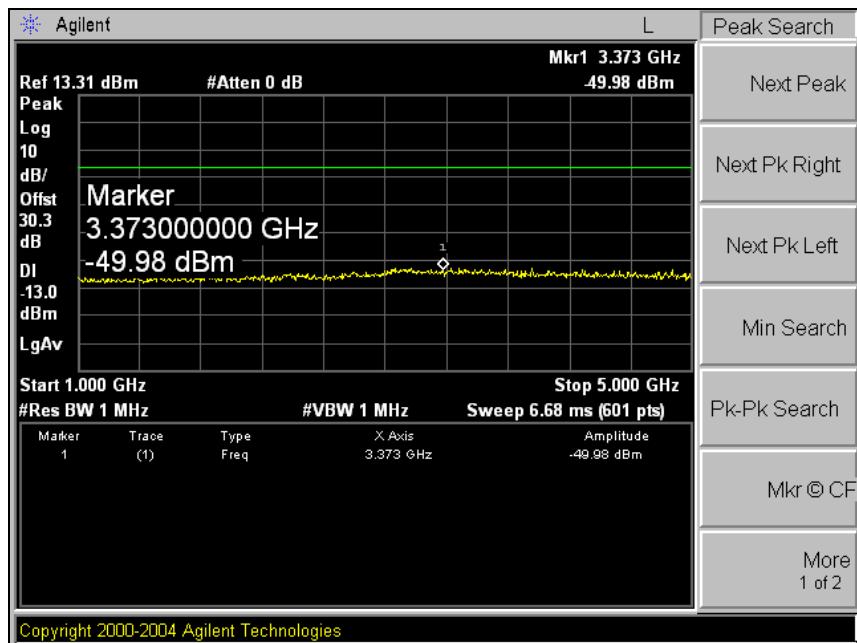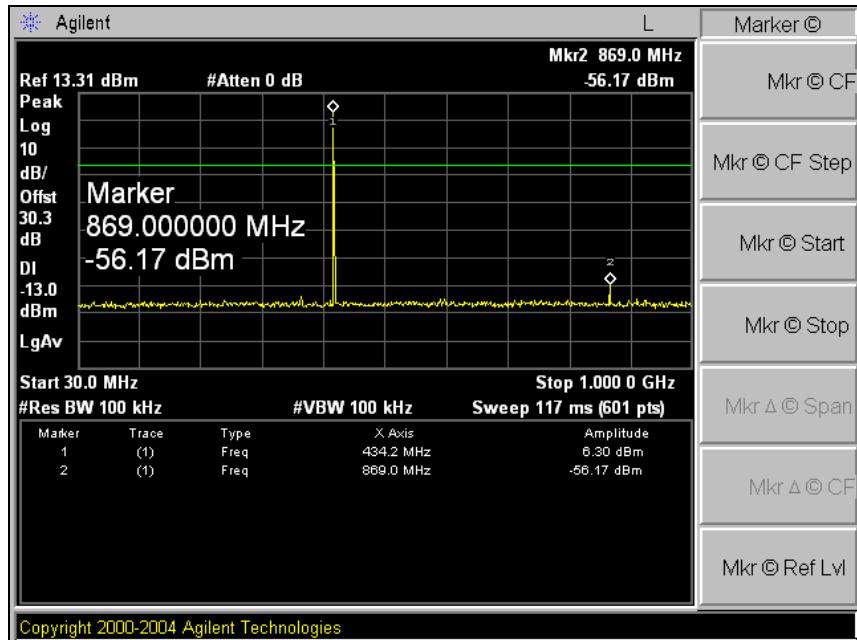

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High channel

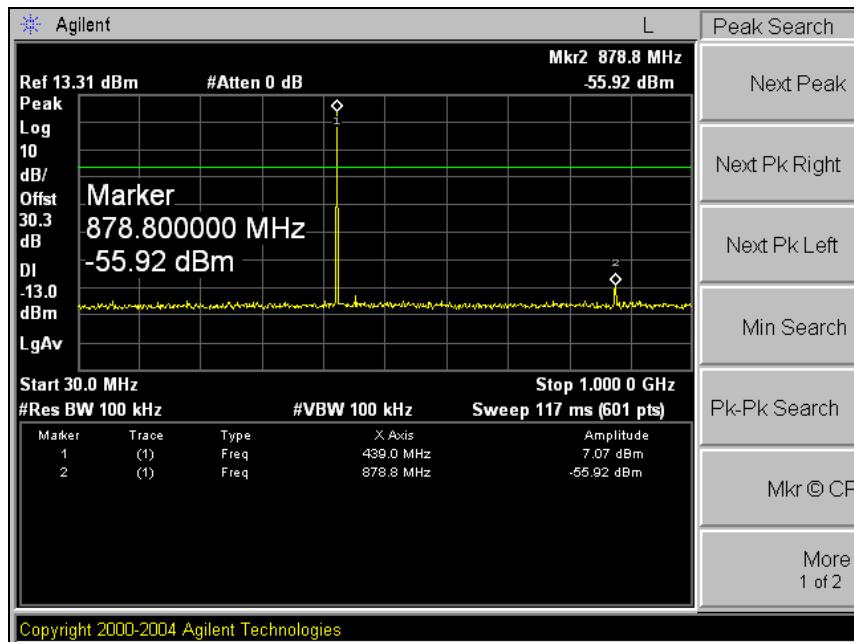


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


## 5. Radiated spurious emission

## 5.1. Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

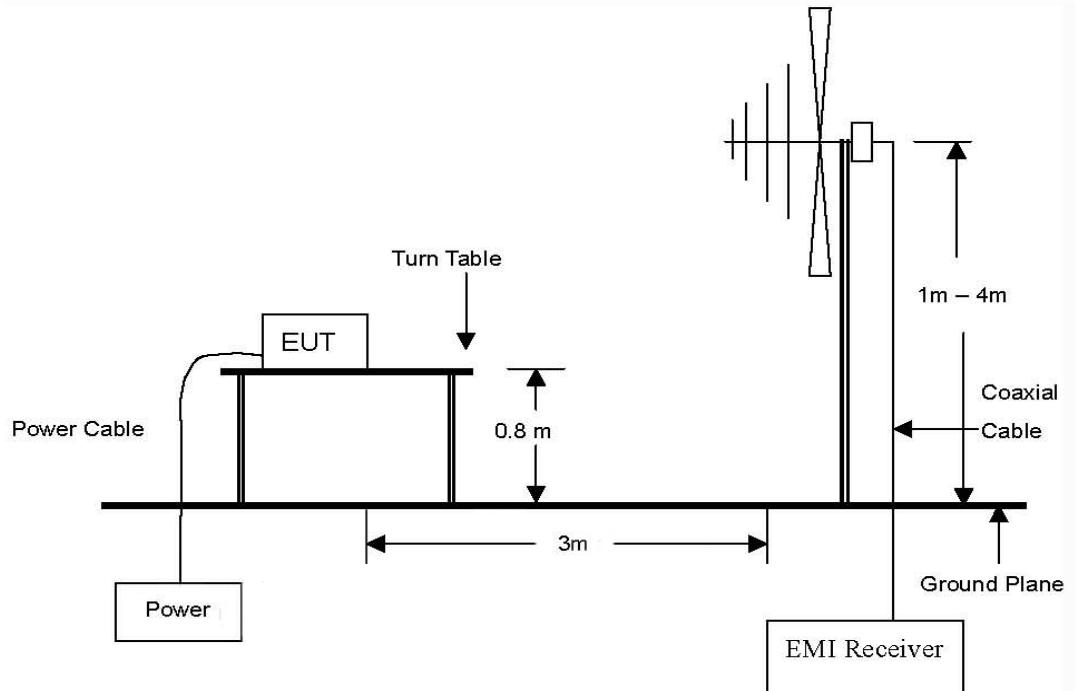


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 5 GHz Emissions.

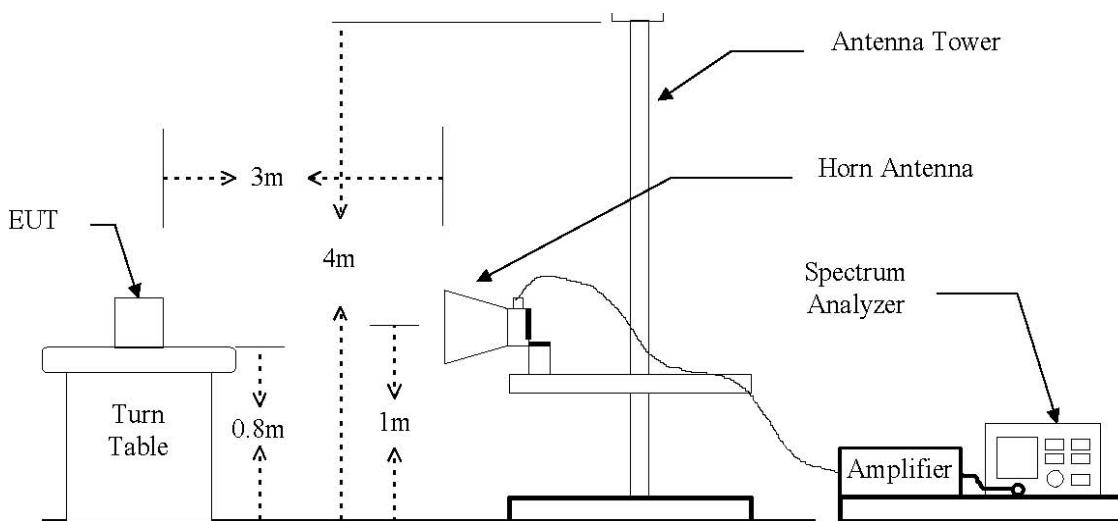

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup for substituted method

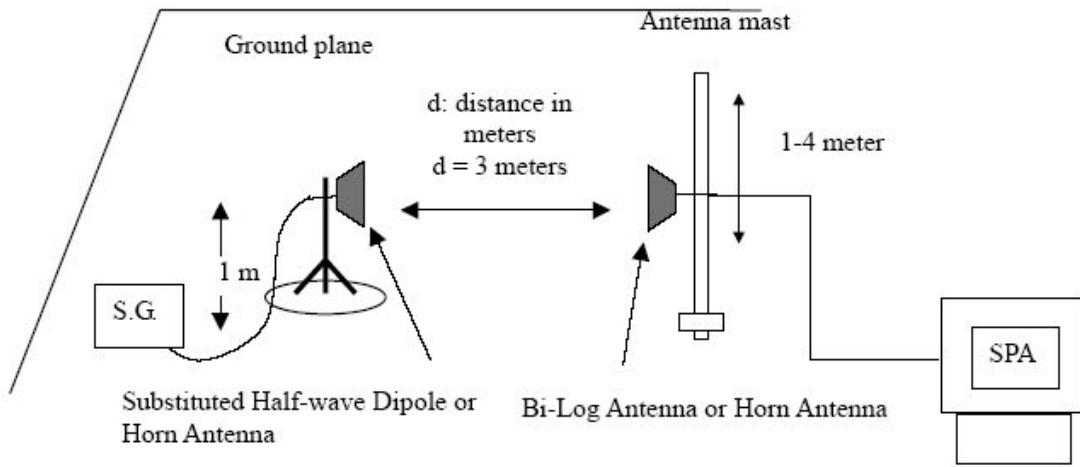

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 5.2. Limit

According to §90.210, For 25 kHz channel: Spurious attenuated in dB=  $43 + 10\log(\text{Power output in watts})$   
Alternatively, an equivalent absolute level of -13 dBm is taken.

## 5.3. Test procedure : Based on ANSI/TIA EIA 603C 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using
  - 1) RBW : 100 kHz(< 1GHz), 1 MHz(> 1 GHz).
  - 2) VBW : 100 kHz(< 1GHz), 1 MHz(> 1 GHz).
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
7. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole(below 1000 MHz) or horn antenna(above 1000 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

## 5.4 Test result

Ambient temperature : 22 °C

Relative humidity : 45 % R.H.

Channel	Freq. (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G Level (dBm)	Ant. gain (dBd)	E.R.P. (dBm)	Limit (dBm)
Low	862.00	H	3.37	-57.32	-10.58	-43.37	-13.00
	862.00	V	3.37	-65.24	-10.58	-51.29	-13.00
	1293.00	H	4.00	-48.87	2.52	-47.40	-13.00
	1293.00	V	4.00	-47.68	2.52	-46.21	-13.00
	1724.00	H	4.71	-48.21	4.05	-47.55	-13.00
	1724.00	V	4.71	-49.27	4.05	-48.61	-13.00
	2155.00	H	5.42	-50.75	5.21	-50.54	-13.00
	2155.00	V	5.42	-53.53	5.21	-53.32	-13.00

All spurious emission at low, middle and high channel are not detected above 2200 MHz.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Channel	Freq. (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G Level (dBm)	Ant. gain (dBd)	E.R.P. (dBm)	Limit (dBm)
Middle	869.58	H	3.40	-57.41	-10.60	-43.41	-13.00
	869.58	V	3.40	-67.71	-10.60	-53.71	-13.00
	1304.37	H	4.01	-49.64	2.56	-48.19	-13.00
	1304.37	V	4.01	-48.45	2.56	-47.00	-13.00
	1739.16	H	4.73	-57.61	4.10	-56.98	-13.00
	1739.16	V	4.73	-51.11	4.10	-50.48	-13.00
	2173.95	H	5.46	-51.76	5.24	-51.55	-13.00
	2173.95	V	5.46	-48.67	5.24	-48.45	-13.00


■ All spurious emission at low, middle and high channel are not detected above 2200 MHz.

Channel	Freq. (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G Level (dBm)	Ant. gain (dBd)	E.R.P. (dBm)	Limit (dBm)
High	878.00	H	3.43	-57.67	-10.63	-43.61	-13.00
	878.00	V	3.43	-69.17	-10.63	-55.11	-13.00
	1317.00	H	4.06	-47.79	2.61	-46.34	-13.00
	1317.00	V	4.06	-49.30	2.61	-47.85	-13.00
	1756.00	H	4.76	-52.02	4.16	-51.42	-13.00
	1755.95	V	4.76	-53.53	4.16	-52.93	-13.00
	2195.00	H	5.49	-55.27	5.26	-55.04	-13.00
	2195.00	V	5.49	-48.57	5.26	-48.34	-13.00

All spurious emission at low, middle and high channel are not detected above 2200 MHz.

## 6.1. Emission mask

### 6.1. Setup

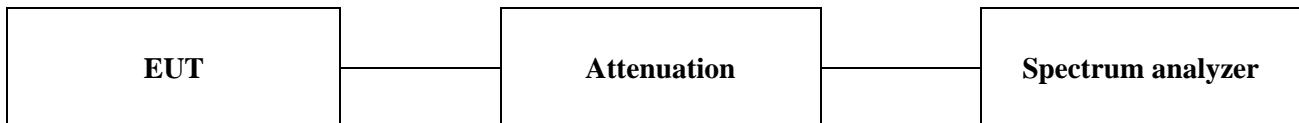

### 6.2. Limit

According to §90.210(c) Emission Mask C.

For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier output power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $fd_{in}$  kHz) of more than 5 kHz, but not more than 10 kHz: At least  $83 \log(fd/5)$  dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $fd_{in}$  kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least  $29 \log(fd/11)$  dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB.

### 6.3. Test procedure

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using
  - 1) RBW and VBW : 100 Hz
  - 2) SPAN : 200 kHz
3. Mark the frequency with maximum peak power as the center of the display of the spectrum analyzer.
4. Record the power spectrum analyzer and compare to the mask.

### 6.4. Test result


Ambient temperature : 22 °C

Relative humidity : 46 % R.H.


Please refer to the following.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Operation frequency : 431.00 MHz  
Channel spacing : 25 kHz

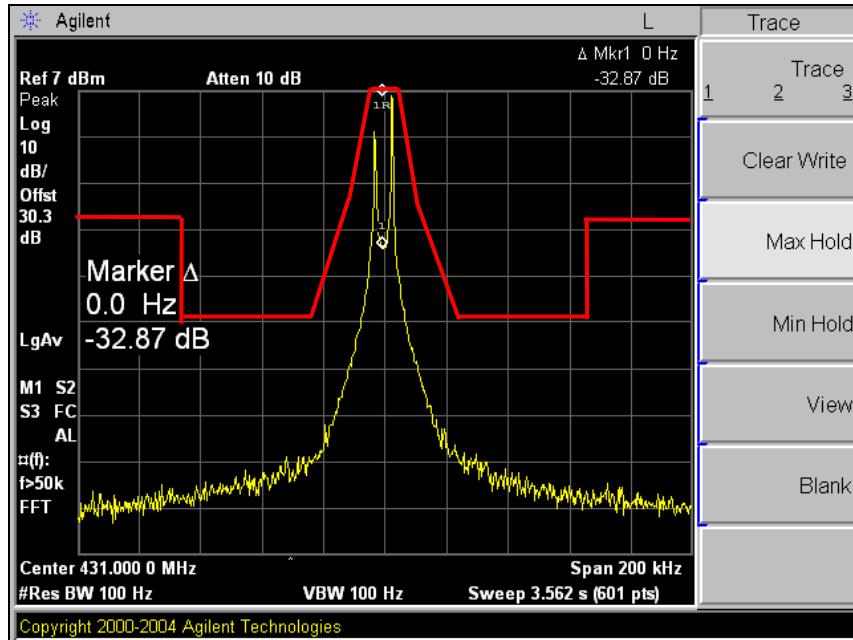


Operation frequency : 434.79 MHz  
Channel spacing : 25 kHz

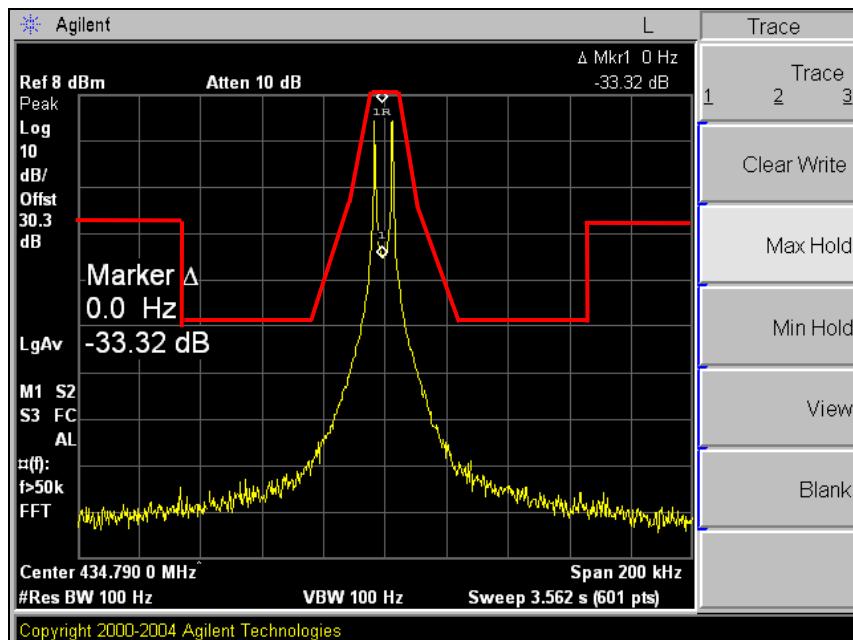

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operation frequency : 434.09 MHz  
Channel spacing : 25 kHz

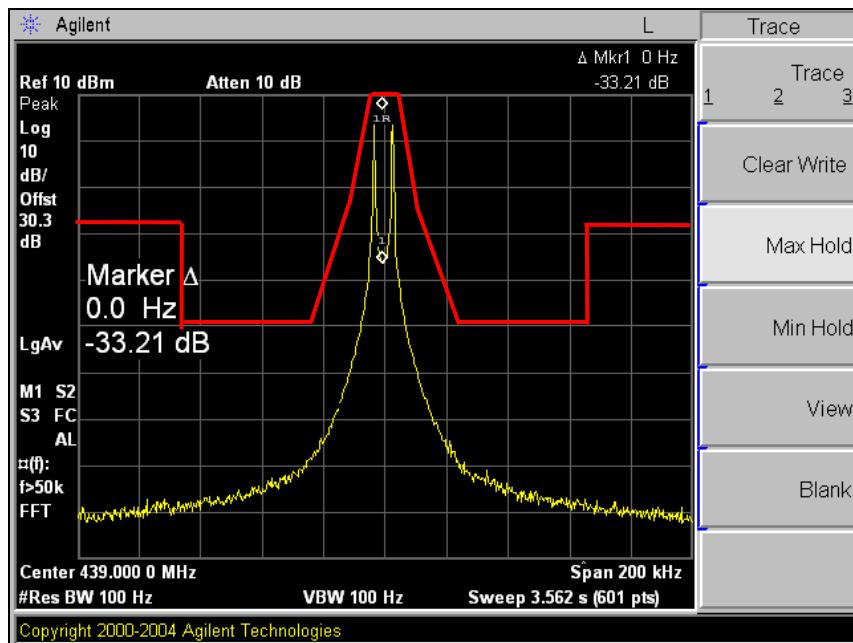

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 6. Occupied bandwidth

### 6.1. Setup



### 4.2. Limit

None

### 5.3. Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using
  - 1) RBW : 300 kHz
  - 2) VBW : 3 time

### 5.4. Test result


Ambient temperature : 24 °C  
Relative humidity : 42 % R.H.

Please refer to the following.


---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## Low channel

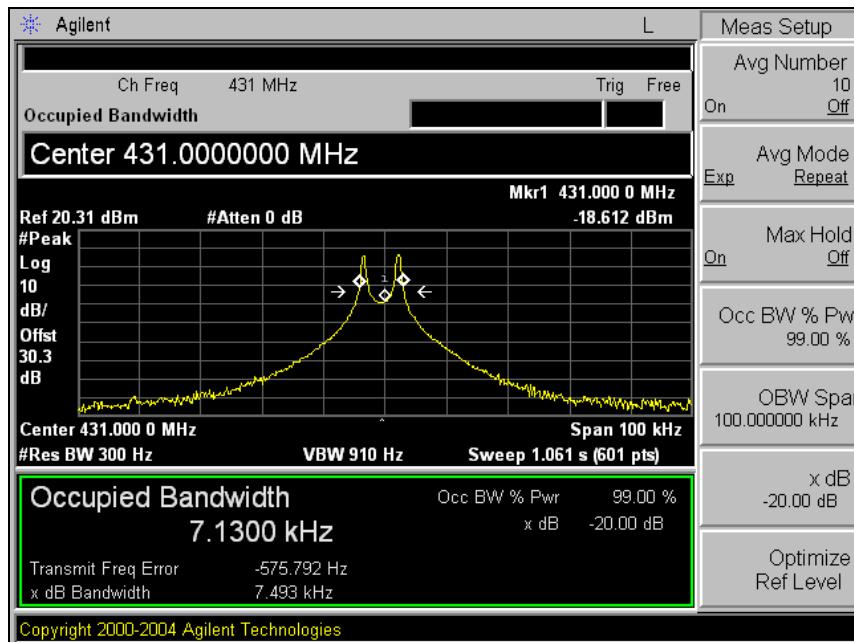


## Middle channel

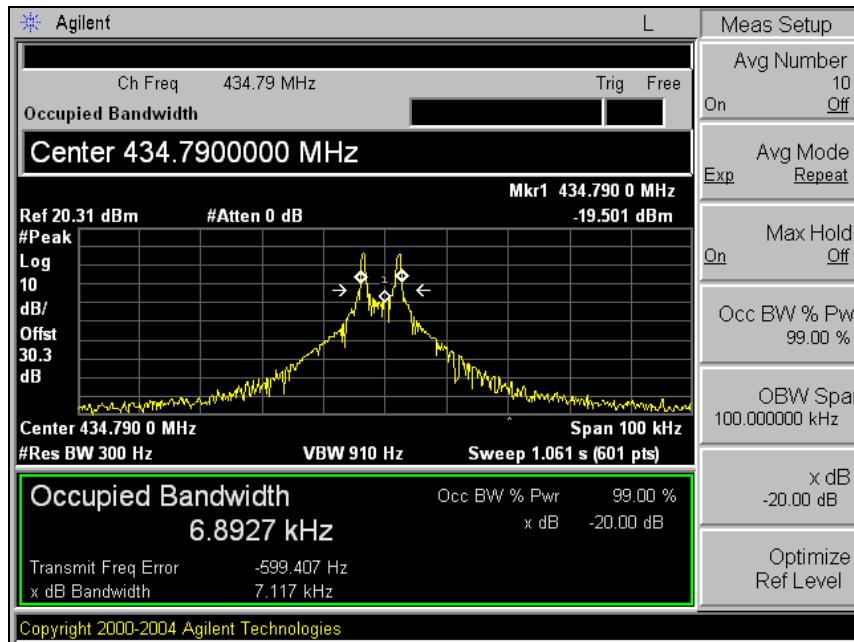

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## High channel

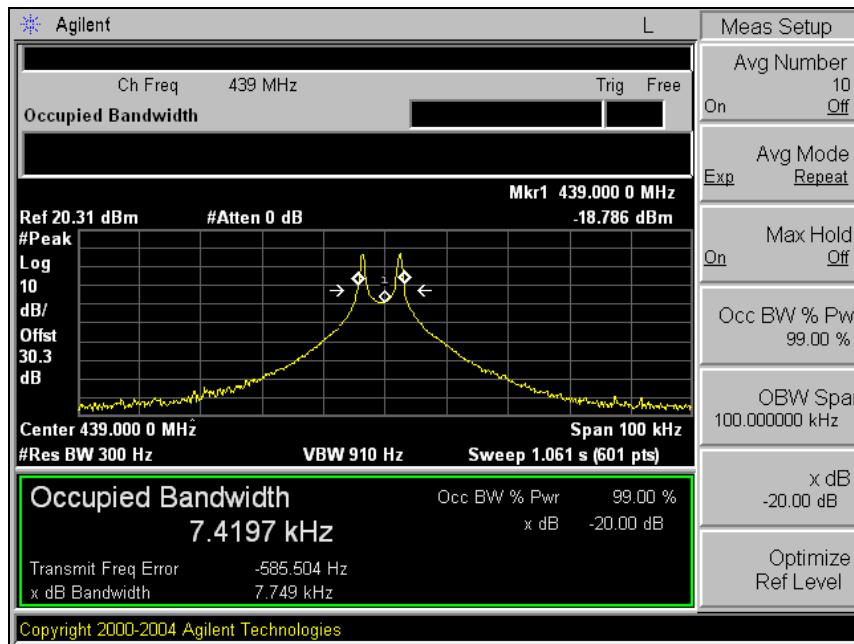

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Testing Korea Co., Ltd.


18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

## 8. Transient frequency behavior of the Transmitter

### 8.1. Test setup

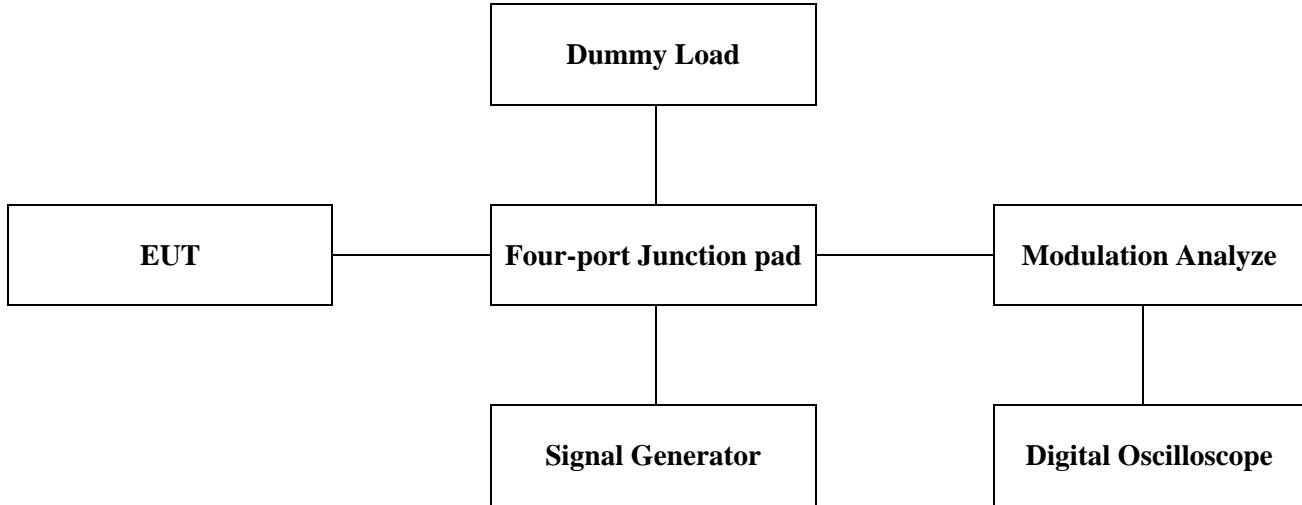

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Testing Korea Co., Ltd.

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

## 8.2. Limit

Time intervals <sup>1, 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient frequency behaviour for equipment designed to operate on 25 kHz channel			
t <sub>1</sub> <sup>4</sup> -----	±25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub> -----	±12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> -----	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behaviour for Equipment Designed to Operate on 12.5 kHz Channel			
t <sub>1</sub> <sup>4</sup> -----	±12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub> -----	±6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> -----	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behaviour for Equipment Designed to Operate on 6.25 kHz Channel			
t <sub>1</sub> <sup>4</sup> -----	±6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub> -----	±3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> -----	±6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup> <sub>on</sub> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t<sub>1</sub> is the time period immediately following t<sub>on</sub>.

t<sub>2</sub> is the time period immediately following t<sub>1</sub>.

t<sub>3</sub> is the time period from the instant when the transmitter is turned off until t<sub>off</sub>.

t<sub>off</sub> is the instant when the 1kHz test signal starts to rise.

<sup>2</sup> During the time from the end of t<sub>2</sub> to the beginning of t<sub>3</sub>, the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency .

<sup>4</sup> If the transmitter carrier output power rating is 6watts or less, the frequency difference during this time may exceed the maximum frequency difference for this period.

### 8.3. Test procedure

1. Set the test receiver to measure FM deviation with the audio bandwidth set at  $\leq 50$  Hz to  $\geq 15,000$  Hz, and tune the RF frequency to the transmitter assigned frequency.
2. Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 25$  kHz deviation and set its output level to -100dBm.
3. Key the transmitter.
4. Supply sufficient attenuation via the RF attenuator to provide an input level to the test receiver that is 40 dB below the test receiver maximum allowed input power when the transmitter is operating at its rated power level.
5. Unkey the transmitter.
6. Adjust the RF level of the signal generator to provide RF power into the RF power meter equal to the level this signal generator RF level shall be maintained throughout the rest of the measurement.
7. Connect the output of the RF combiner network to the input of the Modulation analyzer.
8. Set the horizontal sweep rate on the storage oscilloscope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone. Adjust the vertical amplitude control of the oscilloscope to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display.
9. Key the transmitter and observe the stored display. once the modulation Analyzer demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 kHz test signal is completely suppressed (including any capture time due to phasing) is considered to be  $t_{on}$ .  
The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$  . See the figure in the appropriate standards section.
10. During the time from the end of  $t_2$  to the beginning of  $t_3$  the frequency difference should not exceed the limits set by the FCC in 47 CFR 90.214 and outlined in 3.2.2. The allowed limit is equal to the transmitter frequency times its FCC frequency tolerance times  $\pm 4$  display divisions divided by 25 kHz.
11. Key the transmitter and observe the stored display. The trace should be maintained within the allowed divisions after the end of  $t_2$  and remain within it until the end of the trace. See the figure in the appropriate standards sections.
12. To test the transient frequency behavior during the period  $t_3$  the transmitter shall be keyed.
13. Adjust the oscilloscope trigger controls so it will trigger on a decreasing magnitude from the Modulation analyzer, at 1 division from the right side of the display, when the transmitter is turned off. Set the controls to store the display. The moment when the 1 kHz test signal starts to rise is considered to provide to  $t_{off}$ .
14. The transmitter shall be unkeyed.
15. Observe the display. The trace should remain within the allowed divisions during period  $t_3$ . See the figures in the appropriate standards section.

### 8.4. Test result


Ambient temperature : 22 °C  
Relative humidity : 45 % R.H.

Please refer to the following.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


Operation frequency : 431.00 MHz  
Channel spacing : 25 kHz

Switching from off to on ( $t_1$  &  $t_2$ )

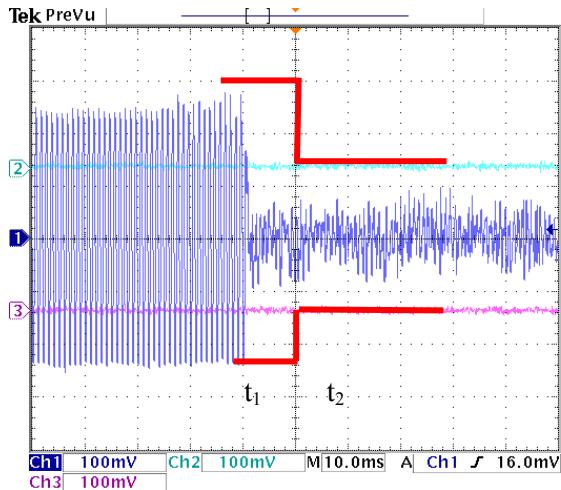

Channel separation  
1/2 Channel separation  
1/2 Channel separation  
Channel separation

Switching from on to off ( $t_3$ )

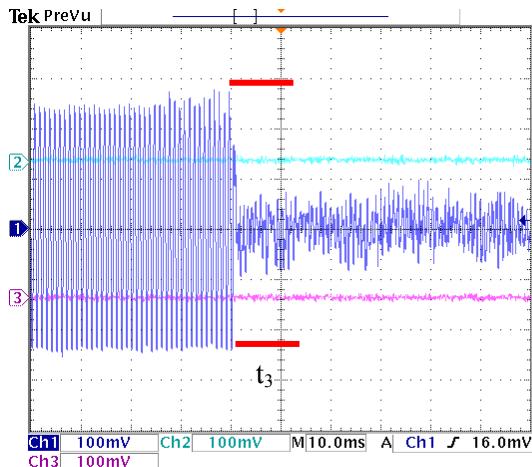


Channel separation  
1/2 Channel separation  
1/2 Channel separation  
Channel separation

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

Operation frequency : 434.79 MHz  
Channel spacing : 25 kHz

Switching from off to on ( $t_1$  &  $t_2$ )

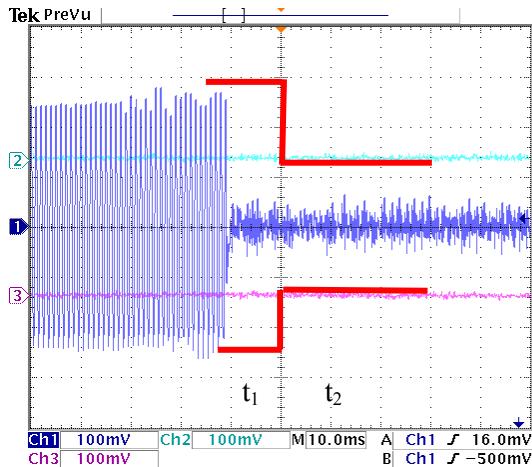


Channel separation

1/2 Channel separation

1/2 Channel separation

Channel separation

Switching from on to off ( $t_3$ )

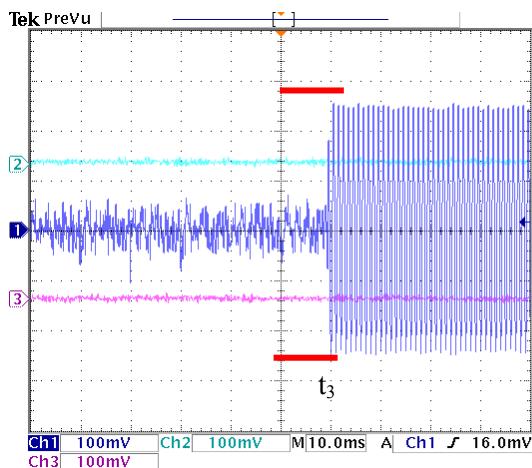

Channel separation


1/2 Channel separation

1/2 Channel separation

Channel separation

Operation frequency : 439 MHz  
Channel spacing : 25 kHz

Switching from off to on ( $t_1$  &  $t_2$ )

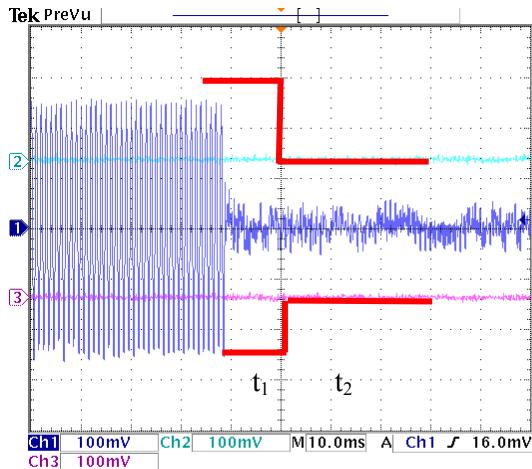


Channel separation

1/2 Channel separation

1/2 Channel separation

Channel separation

Switching from on to off ( $t_3$ )

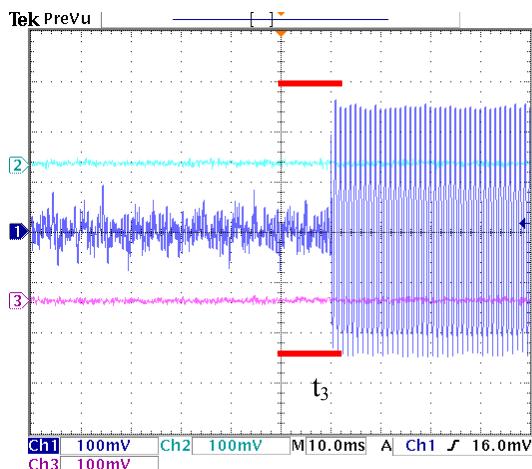

Channel separation

1/2 Channel separation

1/2 Channel separation

Channel separation

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 9. RF Exposure evaluation

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Average time
(A) Limits for Occupational /Control Exposures				
300 – 1500	--	--	<b>F/300</b>	<b>6</b>
1500 - 100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300 – 1500	--	--	F/1500	6
1500 - 100000	--	--	1	30

### 9.1. Friis transmission formula : $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where

$P_d$  = power density in  $\text{mW/cm}^2$

$P_{out}$  = output power to antenna in mW

$G$  = gain of antenna in linear scale

$\pi$  = 3.1416

$R$  = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE,  $f/300 \text{ mW/cm}^2$ . If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 9.2. Test result of RF exposure evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

Channel	Frequency (MHz)	Peak output power (dBm)	Antenna gain (dBi)	Power density at 20cm (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
Low	431.00	5.44	-6.31	0.00016	1.4435
Middle	434.79	5.77	-6.31	0.00018	1.4464
High	439.00	5.94	-6.31	0.00018	1.4493

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*