

Page 63 of 80

Report No.: CTC2025278191




3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)

Test Item	Limit	Frequency Range (MHz)	
Channel Separation	>25kHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5	

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Carrier Frequencies Separation (MHz)	Limit (MHz)	Verdict
GFSK	Hop_2441	1.003	>0.693	Pass
π/4-DQPSK	Hop_2441	1	>0.913	Pass
8-DPSK	Hop_2441	1.003	>0.913	Pass

CTC Laboratories, Inc.

TRF No: CTC-TR-059_A2 For anti-fake verification, please visit the official website of China Inspection And Testing Society: yz.cncaq.com

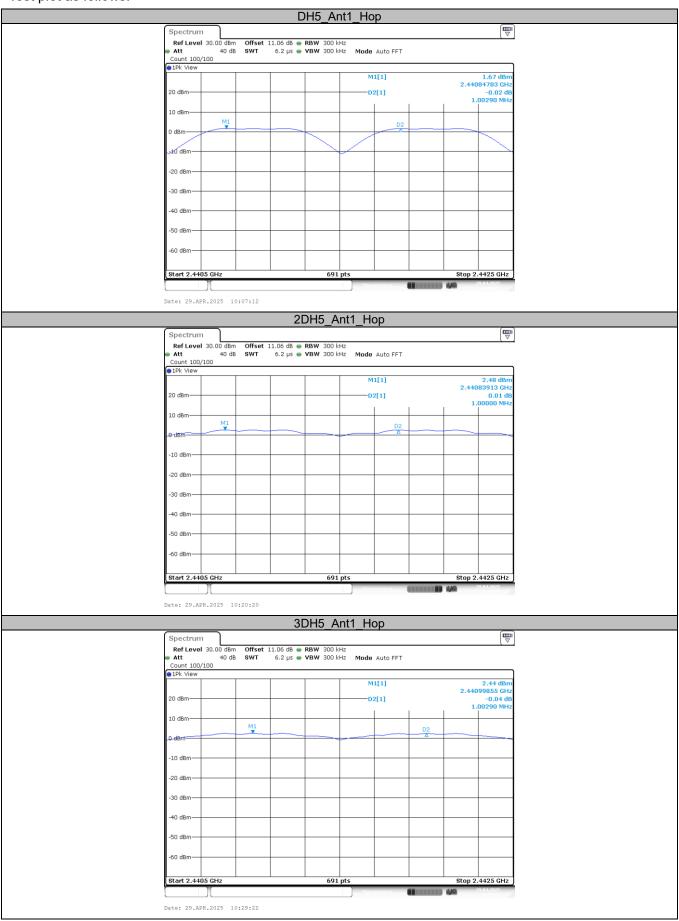

Page 65 of 80

Report No.: CTC2025278191




3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Number of Hopping Channel	≥15

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

Test Mode


Please refer to the clause 2.4.

Test Result

Test Mode	Channel Number	Limit	Verdict
GFSK	79	≥15	Pass
π/4-DQPSK	79	≥15	Pass
8-DPSK	79	≥15	Pass

TRF No: CTC-TR-059 A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society: $\underline{\mathsf{vz.cncaq.com}}$

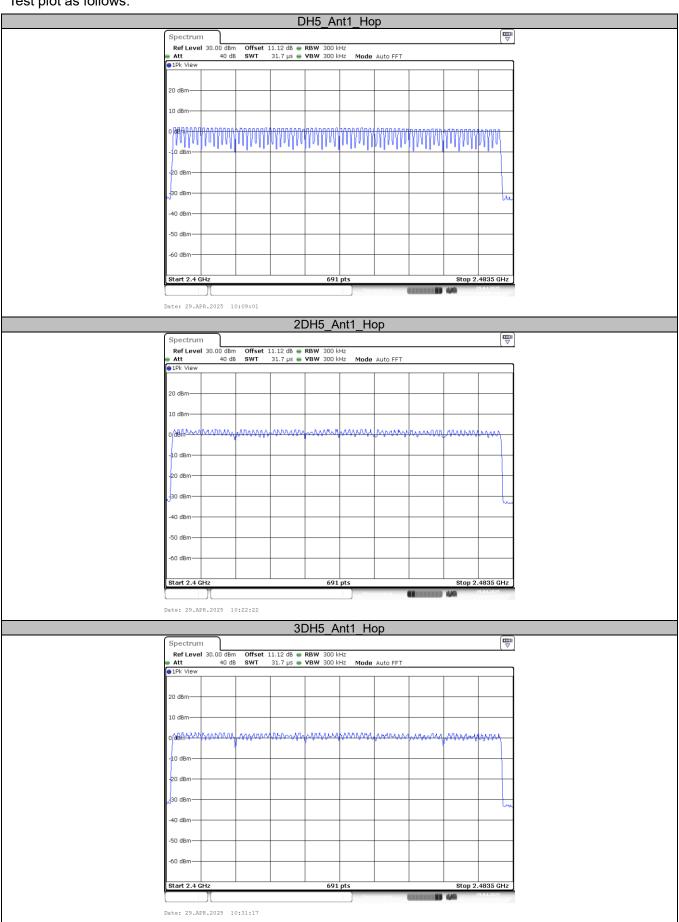

Page 67 of 80

Report No.: CTC2025278191




3.8. Dwell Time

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)

Section	Test Item	Limit
15.247 (a)(iii) RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
- (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.

TRF No: CTC-TR-059 A2


For anti-fake verification, please visit the official website of China Inspection And Testing Society: $\underline{\mathsf{vz.cncaq.com}}$






TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Нор	0.379	330	0.125	≤0.4	PASS
DH3	Ant1	Нор	1.628	200	0.326	≤0.4	PASS
DH5	Ant1	Нор	2.868	110	0.315	≤0.4	PASS
2DH1	Ant1	Нор	0.388	330	0.128	≤0.4	PASS
2DH3	Ant1	Нор	1.633	160	0.261	≤0.4	PASS
2DH5	Ant1	Нор	2.872	80	0.23	≤0.4	PASS
3DH1	Ant1	Нор	0.388	320	0.124	≤0.4	PASS
3DH3	Ant1	Нор	1.631	200	0.326	≤0.4	PASS
3DH5	Ant1	Нор	2.874	130	0.374	≤0.4	PASS


For anti-fake verification, please visit the official website of China Inspection And Testing Society : $\underline{\text{yz.cncaq.com}}$ TRF No: CTC-TR-059_A2

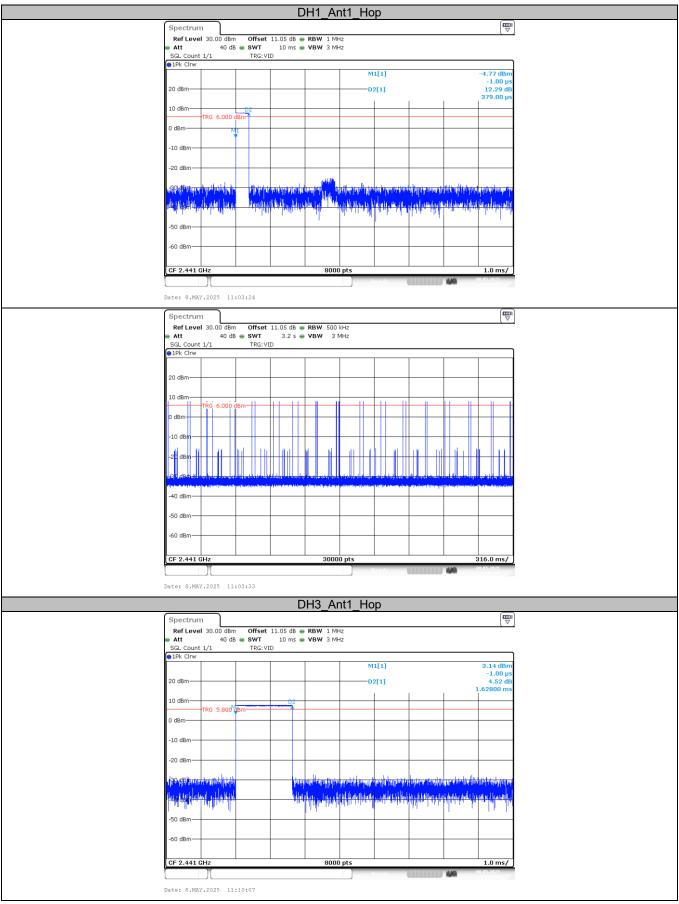




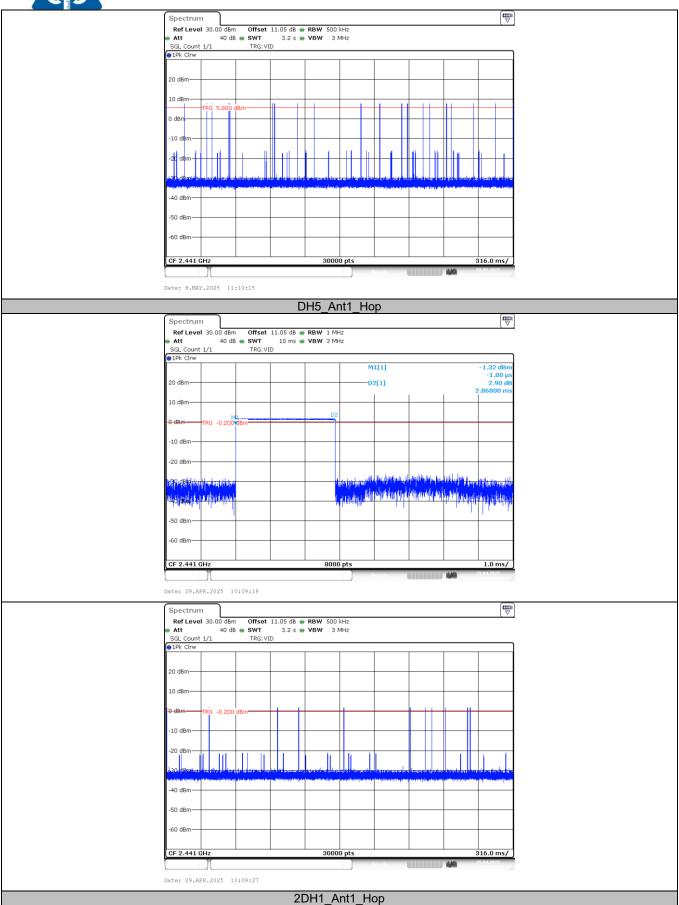




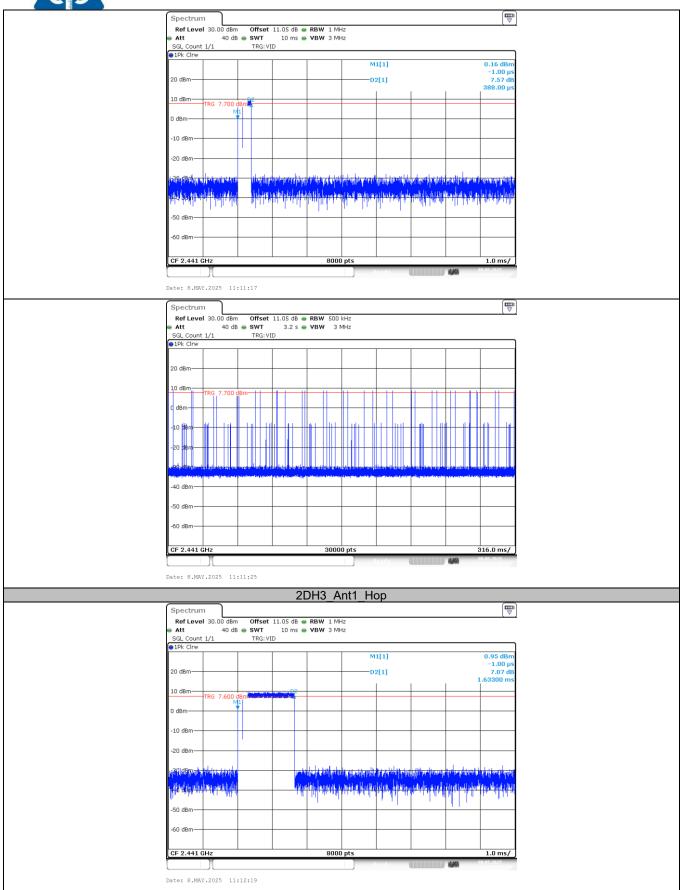




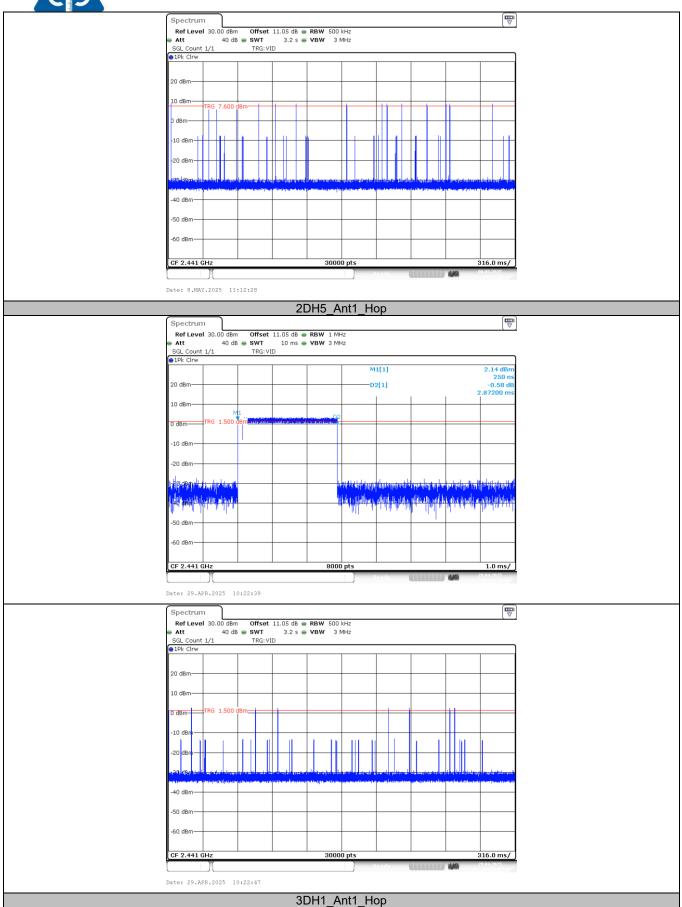



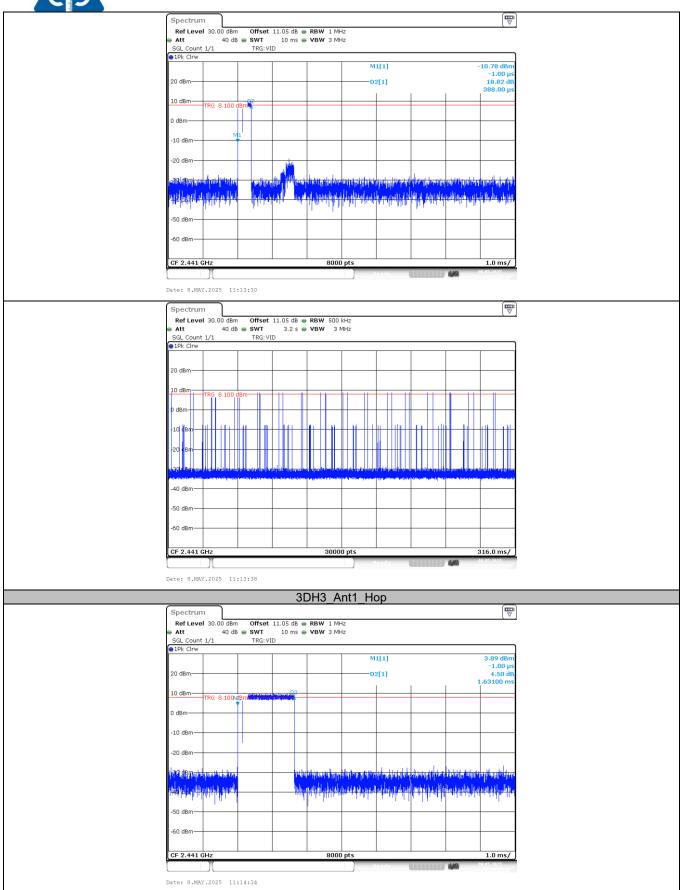



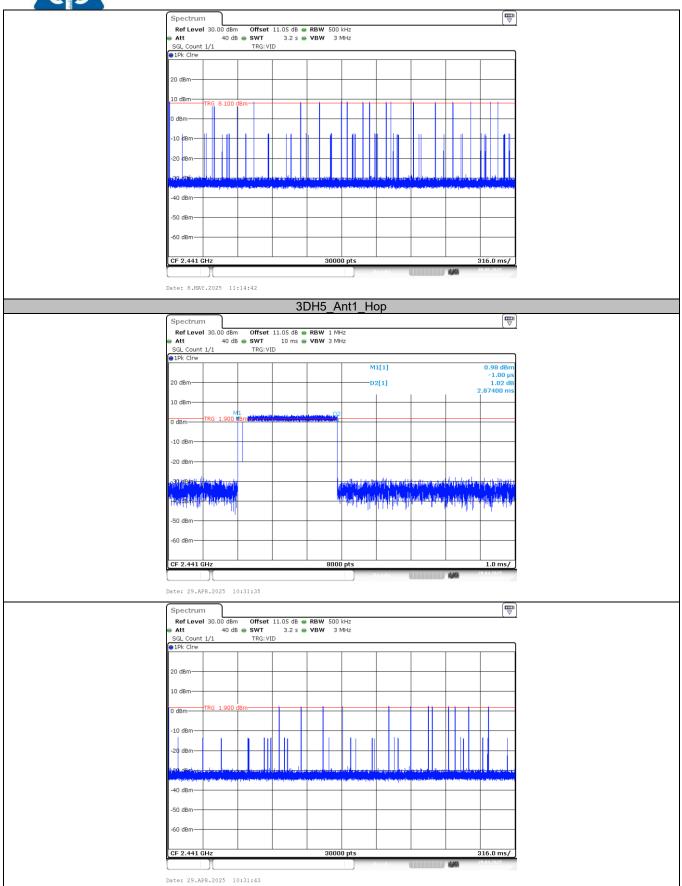

Page 75 of 80

Report No.: CTC2025278191




3.9. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1)

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part15.247 (b)(1)	Maximum Conducted Output Power	Hopping Channels≥75, Power <1W(30dBm); Others <125mW(21dBm)	2400~2483.5

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Set RBW > 20dB Bandwidth.
 - (2) Set VBW ≥ RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - (6) Span = Approximately five times the 20dB bandwidth, centered on a hopping channel.

Test Mode


Please refer to the clause 2.4.

Test Result


Test Mode	Frequency (MHz)	Conducted Output Power (dBm)	FCC Limit (dBm)	Verdict
	2402	2.78	≤30	Pass
GFSK	2441	2.44	≤30	Pass
	2480	1.58	≤30	Pass
	2402	4.45	≤30	Pass
π/4-DQPSK	2441	4.22	≤30	Pass
	2480	3.41	≤30	Pass
	2402	4.78	≤30	Pass
8-DPSK	2441	4.82	≤30	Pass
	2480	3.90	≤30	Pass

CTC Laboratories, Inc.


TRF No: CTC-TR-059_A2 For anti-fake verification, please visit the official website of China Inspection And Testing Society: yz.cncaq.com

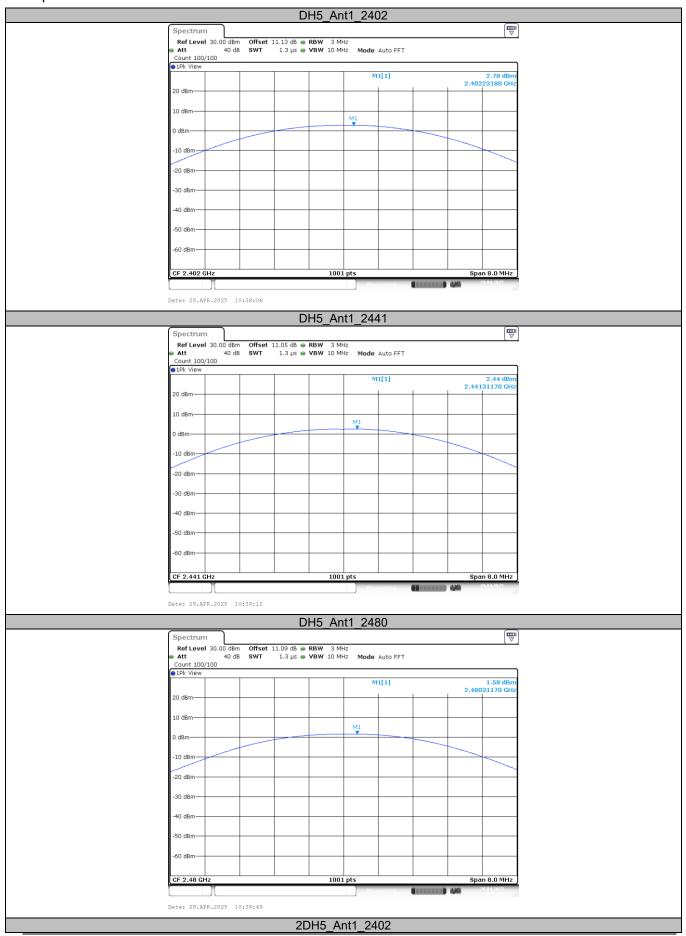



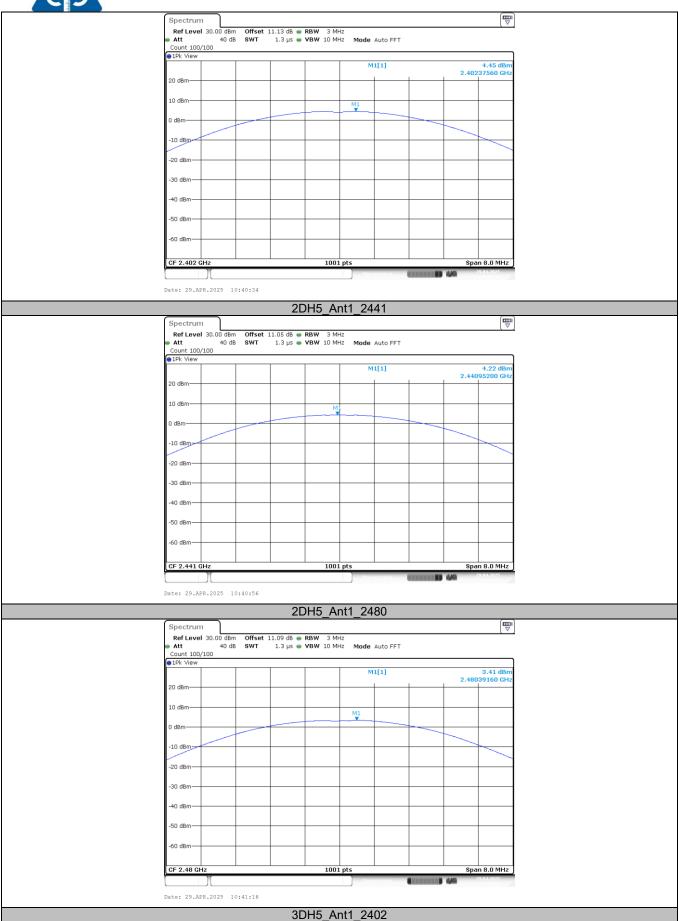



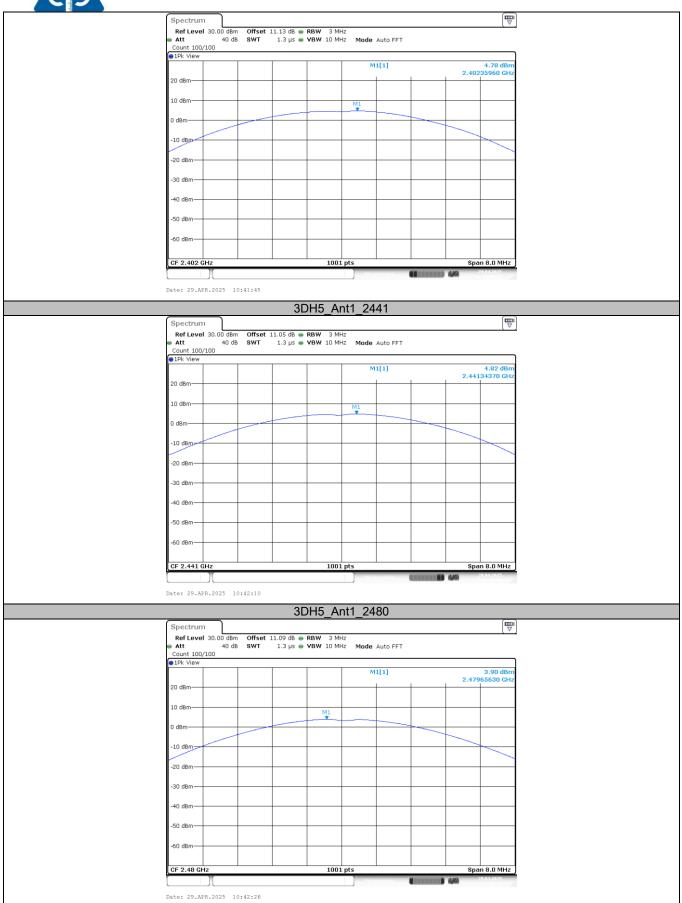




Limit

None, for report purposes only.

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to test channel center frequency.

Set the span to 0Hz. Set the RBW to 10MHz.

Set the VBW to 10MHz.

Detector: Peak. Sweep time: Auto.

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Frequency (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	Final Setting for VBW (Hz)
	2402	0.00	0.00	100	10
GFSK	2441	0.00	0.00	100	10
	2480	0.00	0.00	100	10
	2402	0.00	0.00	100	10
π/4-DQPSK	2441	0.00	0.00	100	10
	2480	0.00	0.00	100	10
	2402	0.00	0.00	100	10
8-DPSK	2441	0.00	0.00	100	10
	2480	0.00	0.00	100	10

TRF No: CTC-TR-059_A2 For anti-fake verification, please visit the official website of China Inspection And Testing Society: yz.cncaq.com

Page 80 of 80

Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: CTC2025278191

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional	gain of the	antenna is I	ess than 6	dBi, please	refer to the	EUT internal	photographs	antenna
photo.								

CTC Laboratories, Inc.

For anti-fake verification, please visit the official website of China Inspection And Testing TRF No: CTC-TR-059 A2

Society: <u>yz.cncaq.com</u>