



ELECTRICAL TESTING
0839.01

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

**ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249;
RSS-210 issue 8 Annex 2**

FOR:

**Visonic Ltd.
Control Panel (Z-wave module)
Model: PM-360(433) ADT
FCC ID:WP3PM360433**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Test configuration.....	5
6.4	Changes made in the EUT	5
6.5	EUT test positions	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 2 requirements.....	8
7.1	Field strength of emissions.....	8
7.2	Band edge emission.....	17
7.3	Conducted emissions	21
7.4	Antenna requirements	24
7.5	Occupied bandwidth test	25
8	APPENDIX A Test equipment and ancillaries used for tests.....	29
9	APPENDIX B Measurement uncertainties.....	30
10	APPENDIX C Test laboratory description	31
11	APPENDIX D Specification references	31
12	APPENDIX E Test equipment correction factors.....	32
13	APPENDIX F Abbreviations and acronyms.....	40



1 Applicant information

Client name: Visonic Ltd.
Address: 24 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3645 6832
Fax: +972 3645 6788
E-mail: Visonic Ltd.
Contact name: 24 Habarzel street, Tel Aviv 69710, Israel

2 Equipment under test attributes

Product name: Z-wave module of Control Panel
Product type: Transceiver
Model(s): PM-360 (433) ADT
Serial number: 1916150170
Hardware version: 90-208059
Software release: JS-702955
Receipt date 04-May-15

3 Manufacturer information

Manufacturer name: Visonic Ltd.
Address: 24 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3645 6832
Fax: +972 3645 6788
E-Mail: Visonic Ltd.
Contact name: 24 Habarzel street, Tel Aviv 69710, Israel

4 Test details

Project ID: 28637
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 04-May-15
Test completed: 25-Aug-15
Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; RSS-210 issue 8 Annex 2



5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	Pass
Section 15.249(d)/RSS-210, section A2.9, Band edge emissions	Pass
Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission	Pass
Section 15.203/ RSS-Gen, Section 8.3, Antenna requirement	Pass
Section 15.215(c) / RSS-Gen, Section 6.6, Occupied bandwidth	Pass

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer Mrs. E. Pitt, test engineer	August 25, 2015	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 9, 2016	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	August 14, 2016	

6 EUT description

6.1 General information

The EUT, Control panel PM-360(433) ADT is a wireless control panel powered via external AC/DC adaptor. The panel comprises four Visonic RF boards with below radio modules:

1. PG-2 module- communication within the alarm system in 433 MHz band
2. WiFi module with Visonic antenna, connected to RF PCB
 - a. 802.11b
 - b. 802.11g
 - c. 802.11n
3. Z-wave module with Visonic antenna connected to RF board
4. Cellular module UE910NAR modular approved with FCC ID:RI7UE910NA, IC: 5131A-UE910NA used for 3G/2G modes with Visonic antenna connected to RF board.


All radios could operate simultaneously.

The present test report involves the test results for certification of 902 – 928 MHz Z-wave module as a part of a composite application for certification.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adaptor	1	Unshielded	2.0

6.3 Test configuration

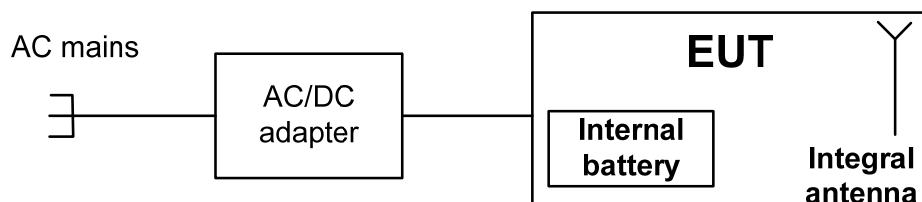


6.4 Changes made in the EUT


No changes were implemented in the EUT during the testing.

6.5 EUT test positions

Photograph 6.5.1 EUT in vertical position

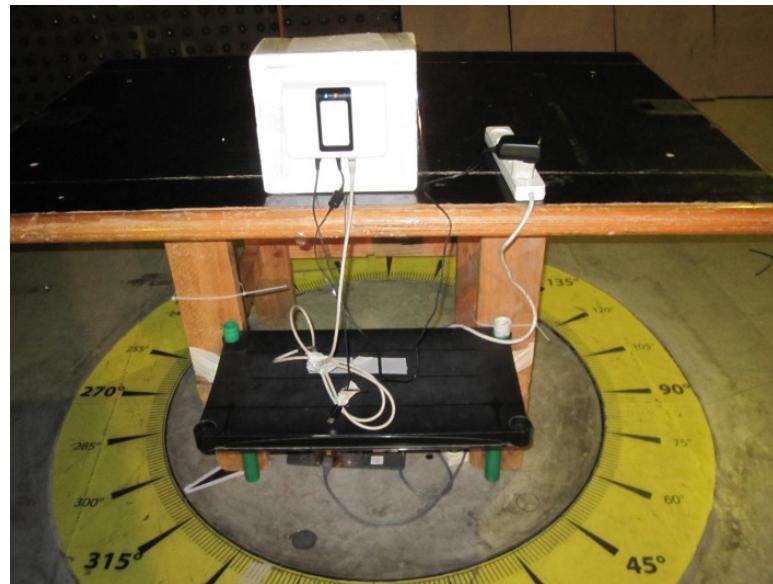

Photograph 6.5.2 EUT in horizontal position

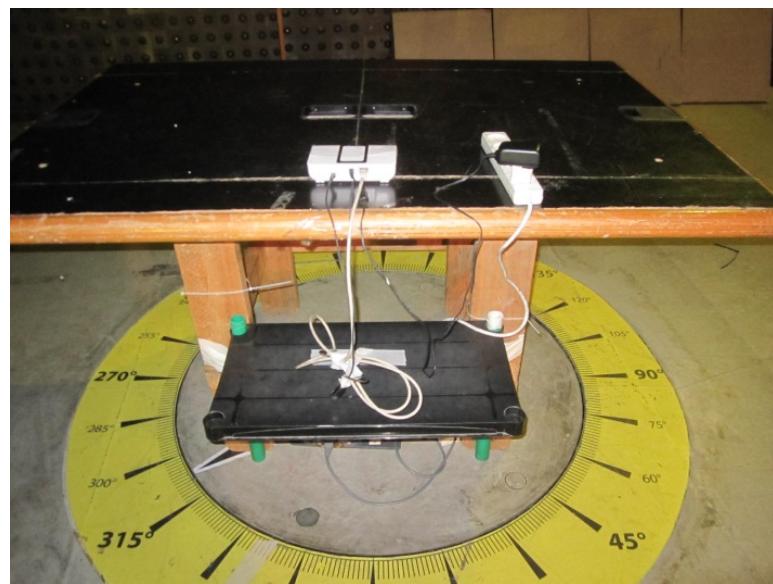



6.6 Transmitter characteristics

Type of equipment				
<input checked="" type="checkbox"/> V	Stand-alone (Equipment with or without its own control provisions)			
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)			
	Plug-in card (Equipment intended for a variety of host systems)			
Assigned frequency range		902 – 928 MHz		
Operating frequency range		908.4 MHz, 916.1 MHz		
Maximum field strength of carrier		Peak 92.1 dB μ V/m at 3 m distance		
Is transmitter output power variable?		<input checked="" type="checkbox"/> V	No	
			continuous variable	
		<input checked="" type="checkbox"/> Yes	stepped variable with stepsize	dB
			minimum RF power	dBm
			maximum RF power	dBm
Antenna connection				
unique coupling	standard connector	<input checked="" type="checkbox"/> V	Integral	with temporary RF connector
		<input checked="" type="checkbox"/> V		without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer	Model number		Gain
Integral	Visonic	Built-in helical antenna		0 dBi
Transmitter aggregate data rate/s		40 kbps at 908.4 MHz; 100 kbps at 916.1 MHz		
Type of modulation		2FSK		
Modulating test signal (baseband)		PRBS		
Transmitter power source				
Battery	Nominal rated voltage		Battery type	
DC	Nominal rated voltage			
<input checked="" type="checkbox"/> V	AC mains	Nominal rated voltage	120 VAC	Frequency Hz



HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict: PASS	
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 2 requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)		
	Peak	Average	Quasi-Peak
902 – 928	NA	NA	94

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
902 – 928	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(µV/m)*				
	Peak	Quasi Peak	Average	Attenuation below carrier	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)	
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$L_{m2} = L_{m1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.



HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			


7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.
- 7.1.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.1.2.3 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.
- 7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.1.3.3 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz

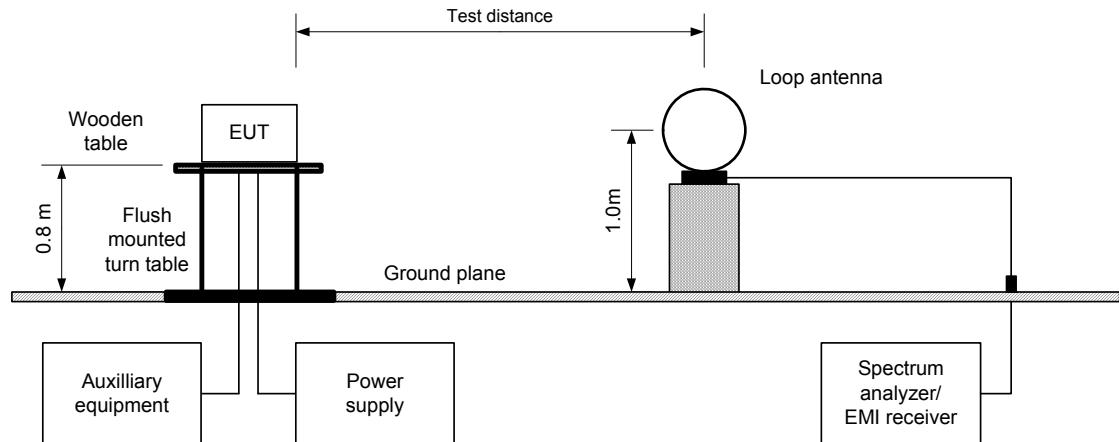




HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

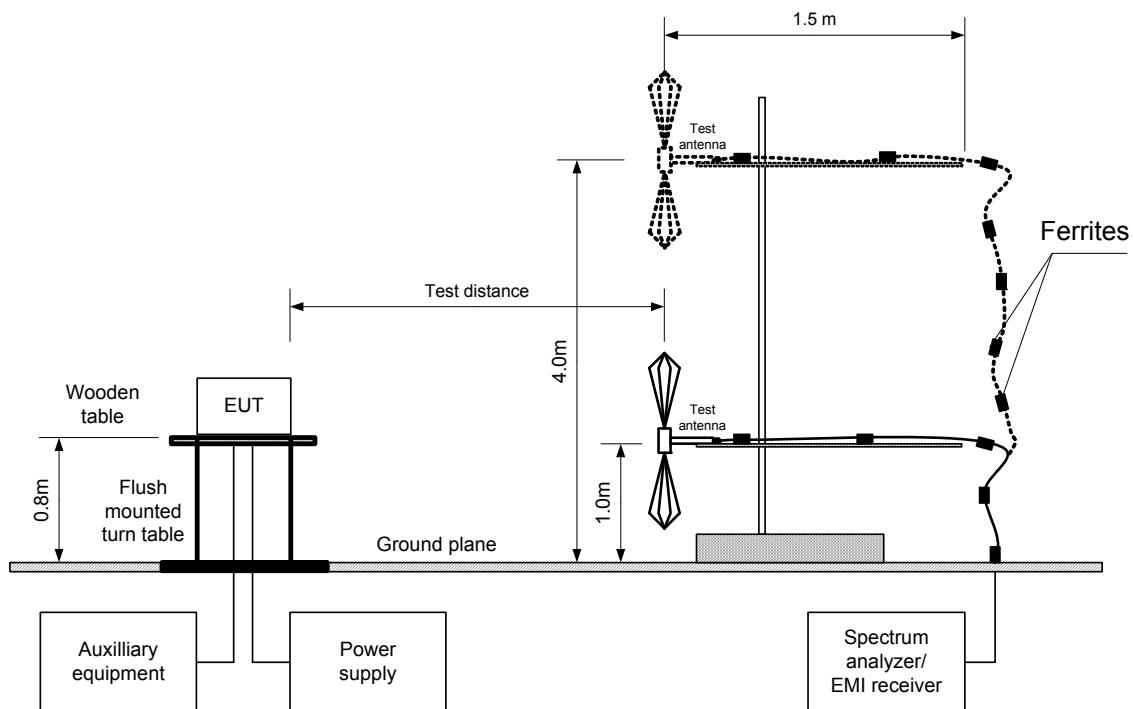



HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict: PASS	
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE:	3 m
EUT POSITION:	Vertical and Horizontal
MODULATION:	2FSK
MODULATING SIGNAL:	PRBS
INVESTIGATED FREQUENCY RANGE:	0.009 – 10000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Fundamental emission

Frequency, MHz	Antenna		Azimuth, degrees*	Peak emission, dB(µV/m)	Quasi-peak			Verdict
	Pol.	Height, m			Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
908.4	Hor	1.4	142	92.0	91.7	94.0	-2.3	Pass
916.1	Hor	1.5	34	92.5	92.1	94.0	-1.9	Pass

Spurious emissions

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
Spurious emissions											
1888.95	Hor	2.0	10	48.01	74	-25.99	NA	44.88	54	-9.12	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m).

*** The EUT vertical position considered as the worst case.

Reference numbers of test equipment used

HL 0446	HL 0604	HL 1984	HL 4353	HL 4575	HL 4922		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




HERMON LABORATORIES


Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.1 Radiated emission measurements at low fundamental frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 EUT PLANE: Vertical and Horizontal
 ANTENNA POLARIZATION: Vertical and horizontal

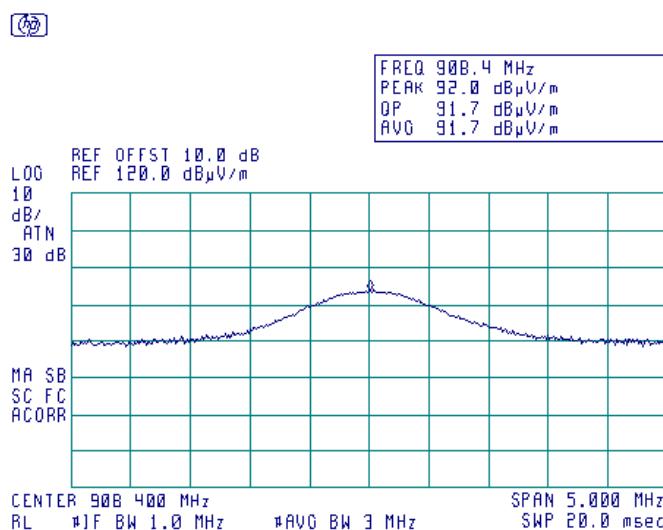**Plot 7.1.2 Radiated emission measurements at the high fundamental frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 EUT PLANE: Vertical and Horizontal
 ANTENNA POLARIZATION: Vertical and Horizontal

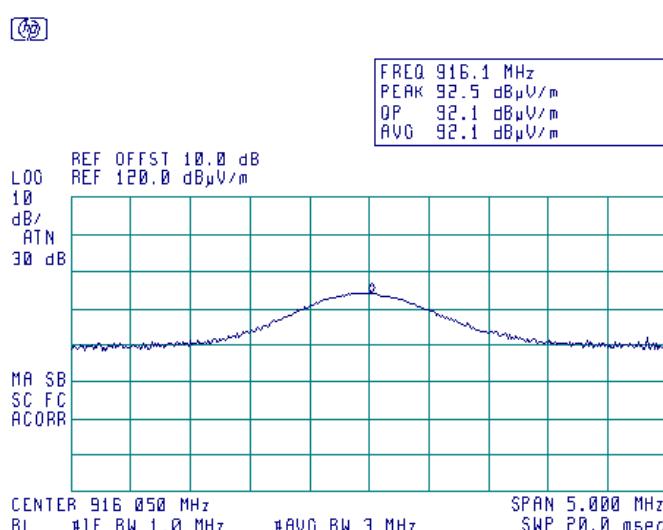



HERMON LABORATORIES


Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.3 Radiated emission measurements from 9 to 150 kHz at the low and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical/ Horizontal)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 9.3 kHz
71.47 dB μ V/m

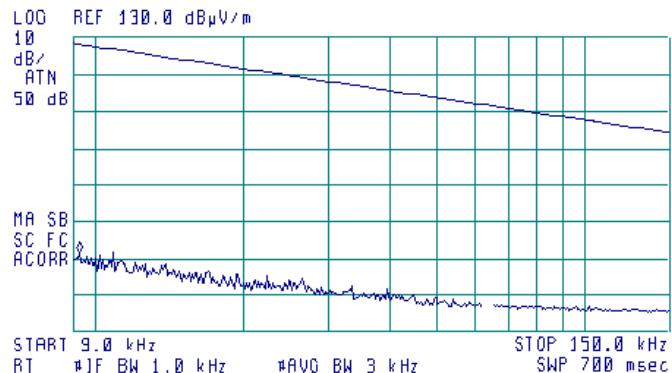

Plot 7.1.4 Radiated emission measurements from 0.15 to 30 MHz at the low and high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical/ Horizontal)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 160 kHz
57.41 dB μ V/m






HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			


Plot 7.1.5 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

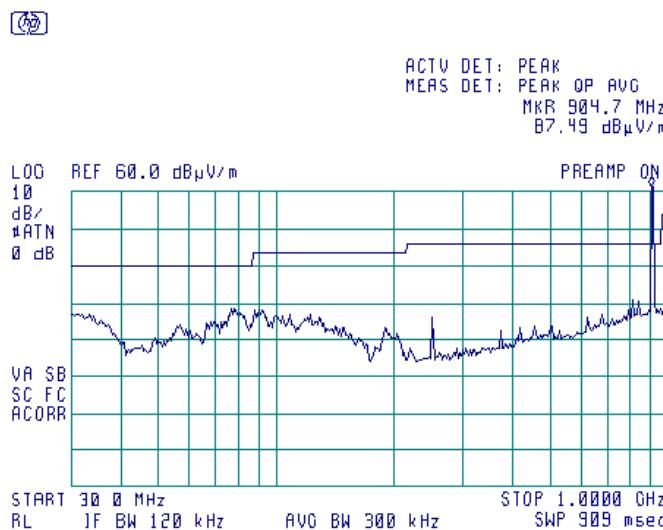

Plot 7.1.6 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

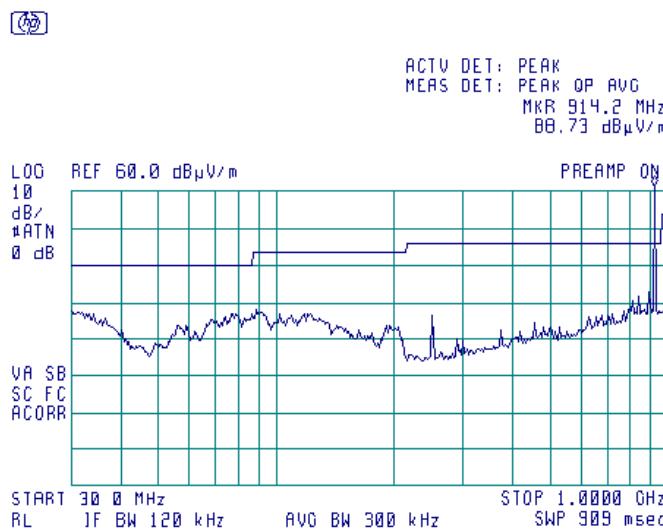




HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.7 Radiated emission measurements from 1000 to 6500 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

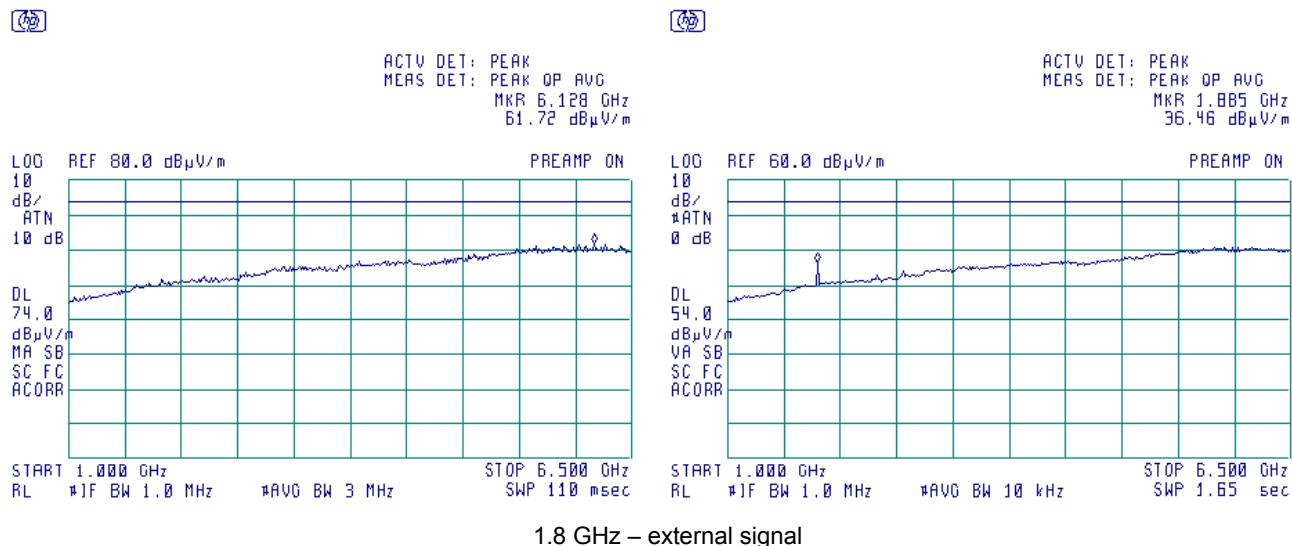

1.8 GHz – external signal

Plot 7.1.8 Radiated emission measurements from 6500 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

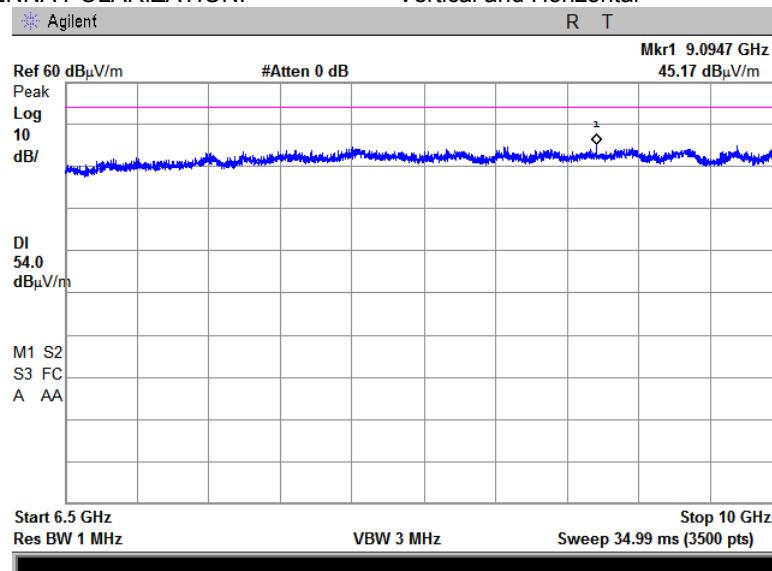




HERMON LABORATORIES

Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions		
Test procedure:	ANSI C63.10 sections 6.5, 6.6		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.9 Radiated emission measurements from 1000 to 6500 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

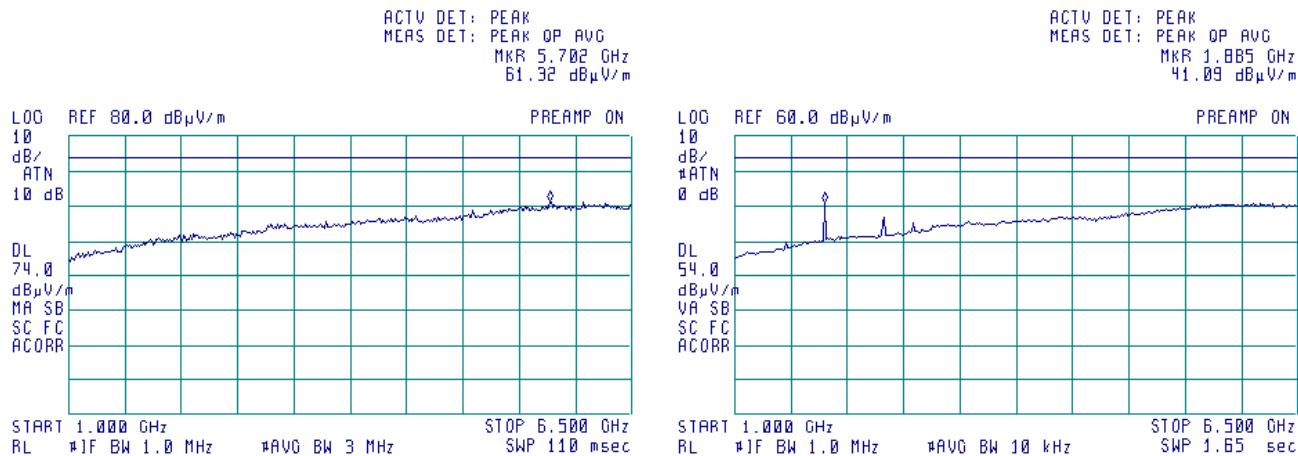

1.8 GHz – external signal

Plot 7.1.10 Radiated emission measurements from 6500 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

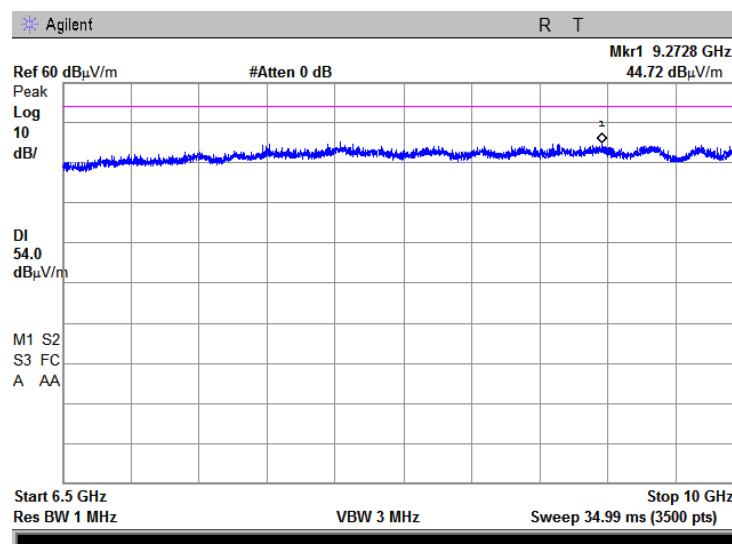



HERMON LABORATORIES

Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions		
Test procedure:	ANSI C63.10 section 6.10		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC
Remarks:			

7.2 Band edge emission

7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dBμV/m		Attenuation below carrier, dBc
	Peak	QP	
902.000 - 928.000	NA	46.0	50

7.2.2 Test procedure


- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.2.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.
- 7.2.2.4 The test results were recorded in Table 7.2.2 and shown in the associated plots.



HERMON LABORATORIES

Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions		
Test procedure:	ANSI C63.10 section 6.10		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC
Remarks:			

Figure 7.2.1 Band edge emission measurement set up

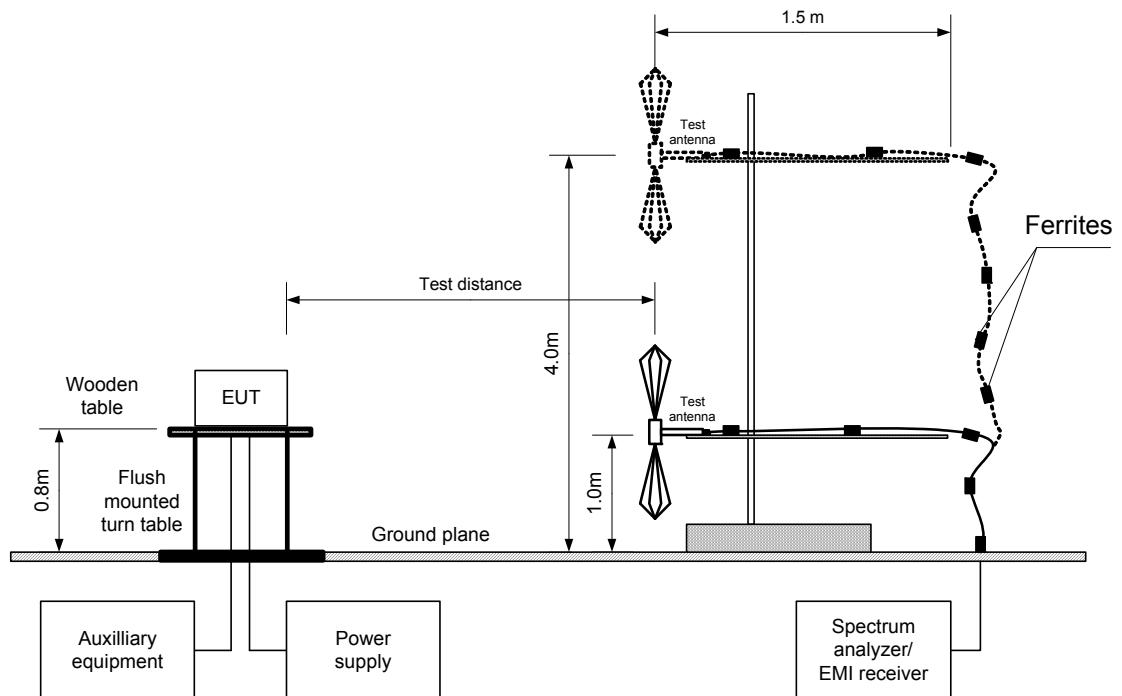



HERMON LABORATORIES

Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions		
Test procedure:	ANSI C63.10 section 6.10		
Test mode:	Compliance	Verdict: PASS	
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC
Remarks:			

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 902-928 MHz
DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 120 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION: 2FSK

Modulation envelope		Measured peak emission, dB μ V/m	Measured QP emission, dB μ V/m	QP limit, dB μ V/m	Margin, dB *	Verdict
Edge	Frequency, MHz					
Low	902	30.59	NA	46.0	-15.41	Pass
High	928	30.91	NA	46.0	-15.09	Pass

* - Margin, dB = Measured value - Limit

Reference numbers of test equipment used

HL 0521	HL 0604	HL 4353	HL 4722				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions		
Test procedure:	ANSI C63.10 section 6.10		
Test mode:	Compliance	Verdict:	PASS
Date(s):	11-Jun-15		
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC
Remarks:			

Plot 7.2.1 Low band edge emission test result

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 901.31 MHz
30.59 dB μ V/m

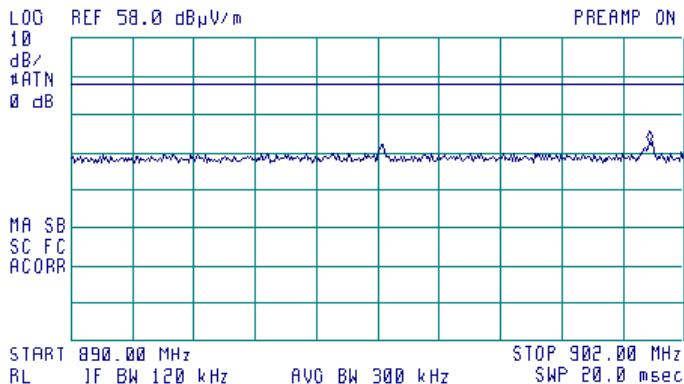


Plot 7.2.2 High band edge emission test result

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 928.05 MHz
30.91 dB μ V/m

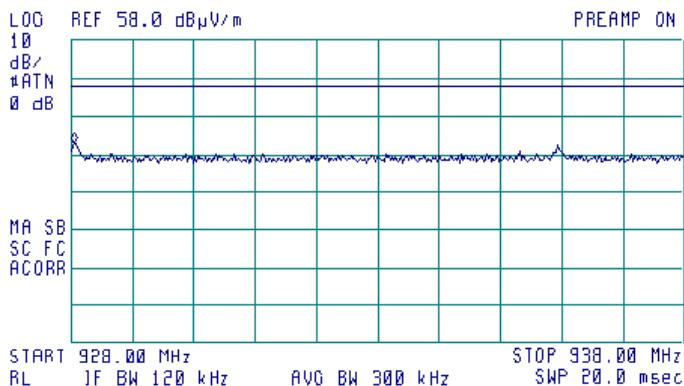



HERMON LABORATORIES

Test specification:	Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission		
Test procedure:	ANSI C63.10 section 6.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Apr-15		
Temperature: 22.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

7.3 Conducted emissions

7.3.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.
- 7.3.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.3.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 7.3.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.3.2.4 The worst test results (the lowest margins) were recorded in Table 7.3.2 and shown in the associated plots.

Figure 7.3.1 Setup for conducted emission measurements, table-top equipment

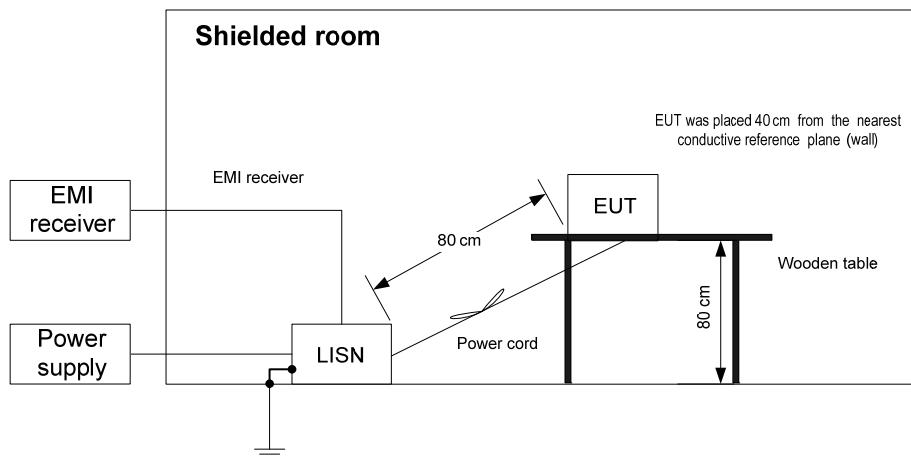



HERMON LABORATORIES

Test specification:	Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission		
Test procedure:	ANSI C63.10 section 6.2		
Test mode:	Compliance	Verdict: PASS	
Date(s):	27-Apr-15		
Temperature: 22.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

Table 7.3.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.150	53.02	51.09	66.00	-14.91	38.45	56.00	-17.55	L1	Pass
0.160	50.67	43.35	65.48	-22.13	28.74	55.48	-26.74		
0.189	47.92	42.50	64.05	-21.55	26.00	54.05	-28.05		
0.409	37.40	32.88	57.68	-24.80	23.67	47.68	-24.01		
7.805	29.73	25.47	60.00	-34.53	17.33	50.00	-32.67		
0.150	52.73	50.78	65.96	-15.18	35.23	55.96	-20.73		
0.163	52.86	43.57	65.35	-21.78	22.17	55.35	-33.18		
0.194	48.54	45.03	63.88	-18.85	26.95	53.88	-26.93		
0.280	39.65	37.42	60.85	-23.43	18.12	50.85	-32.73		
0.510	28.69	25.27	56.00	-30.73	13.29	46.00	-32.71		
0.597	27.47	21.83	56.00	-34.17	10.33	46.00	-35.67		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 1425	HL 1513	HL 3612	HL 3774	HL 4527		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission		
Test procedure:	ANSI C63.10 section 6.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	27-Apr-15		
Temperature: 22.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

Plot 7.3.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 150 kHz
50.16 dB μ V

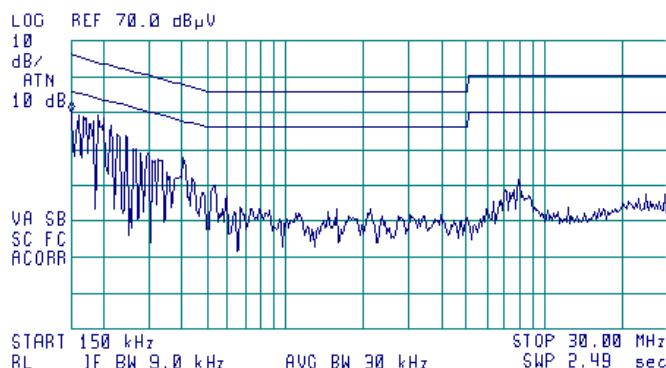


Plot 7.3.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 150 kHz
52.07 dB μ V

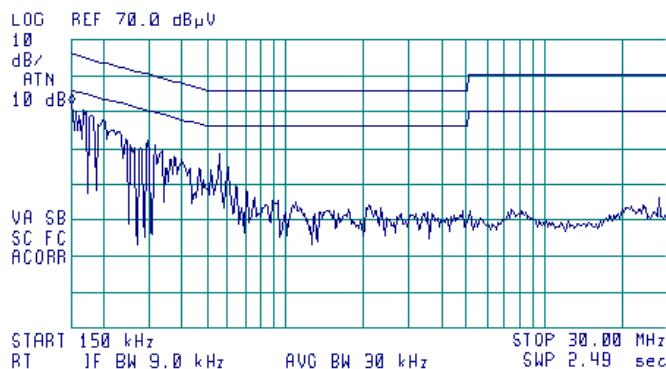



HERMON LABORATORIES

Test specification:	Section 15.203 / RSS-Gen, Section 7.1.4, Antenna requirement		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Aug-15		
Temperature: 24 °C	Air Pressure: 1010 hPa	Relative Humidity: 56 %	Power Supply: 120 VAC
Remarks:			

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly





HERMON LABORATORIES

Test specification:	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth		
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Jun-15		
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

7.5 Occupied bandwidth test

7.5.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Occupied bandwidth limits according to FCC §15.215

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

Table 7.5.2 Occupied bandwidth limits according to RSS-Gen

Assigned frequency, MHz	Modulation envelope reference points*, %
902 - 928	99.0

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- 7.5.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.5.3 and associated plot.
- 7.5.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.5.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification:	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth		
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Jun-15		
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

Table 7.5.3 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND 902 – 928 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATING SIGNAL: Enable

MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Band edge	OBW, kHz	Cross point frequency, MHz	Modulation band edge, MHz	Assigned band edge, MHz	Verdict
Low	104.05	908.339	908.339	902.0	Pass
High	112.50	916.050	916.050	928.0	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99%

Band edge	OBW, kHz	Cross point frequency, MHz	Modulation band edge, MHz	Assigned band edge, MHz	Verdict
Low	85.0614	NA	NA	NA	Pass
High	85.3719	NA	NA	NA	Pass

Reference numbers of test equipment used

HL 2909	HL 4273						
---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth		
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jun-15		
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.1 Occupied bandwidth test result, low frequency

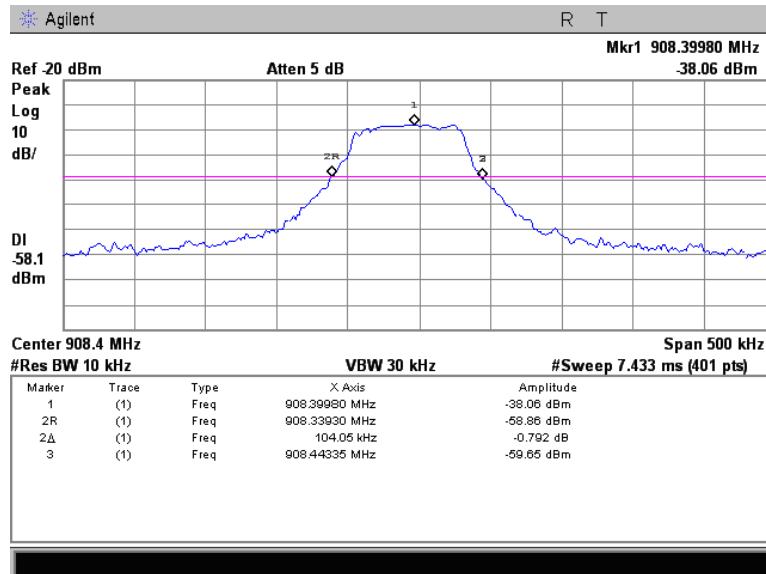

Plot 7.5.2 Occupied bandwidth test result, low frequency (99% power)

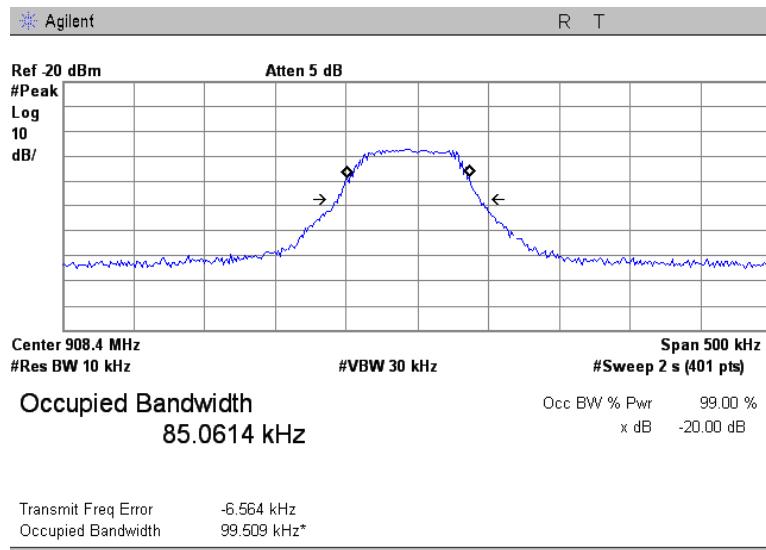





HERMON LABORATORIES

Test specification:	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth		
Test procedure:	ANSI C63.10 section 6.9.2		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Jun-15		
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.3 Occupied bandwidth test result, high frequency

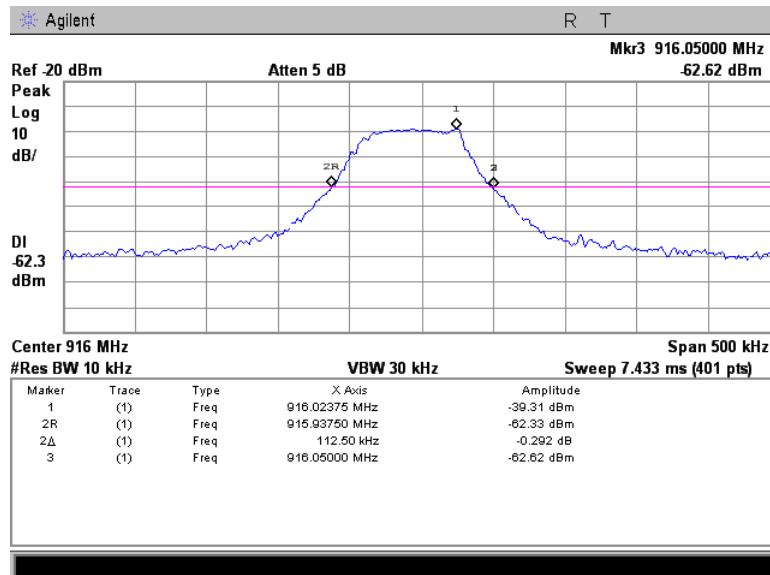

Plot 7.5.4 Occupied bandwidth test result, high frequency (99% power)

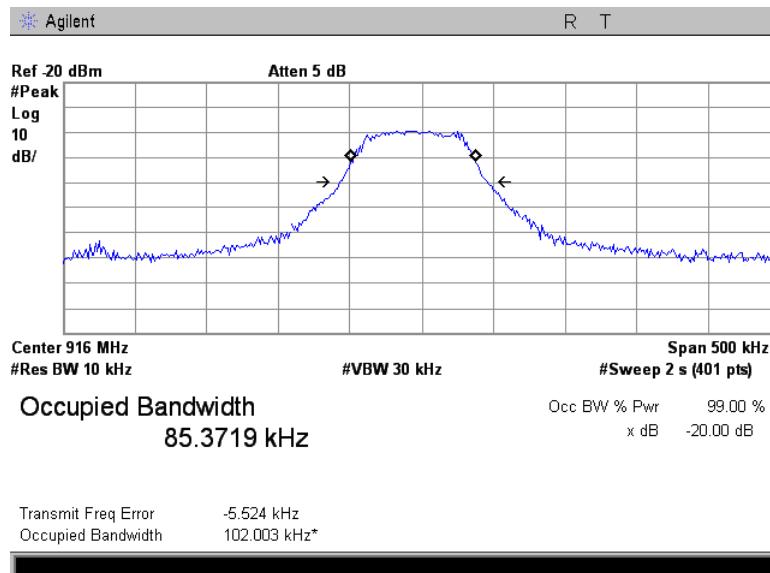



HERMON LABORATORIES

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check*	Due Cal./Check*
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	13-Jan-15	13-Jan-16
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	13-Oct-15	13-Oct-16
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	22-Oct-14	22-Oct-15
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	15-May-15	15-May-16
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Dec-14	24-Dec-15
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	08-Sep-15	08-Sep-16
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	17-Apr-15	17-Apr-16
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	22-Feb-15	22-Feb-16
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	07-Dec-14	07-Dec-15
3774	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N10W5+	NA	30-Dec-14	30-Dec-15
4273	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70045	28-May-15	28-May-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-15	15-Mar-16
4527	DC block , 50 Ohm, 10 MHz to 6 GHz	Mini-Circuits	BLK-6-N+	NA	13-Jan-15	13-Jan-17
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	05-Feb-15	05-Feb-16
4722	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	51228701 001	31-Aug-15	31-Aug-16
4922	Low Pass Filter, 50 Ohm, DC to 630 MHz, SMA/M-SMA/F	Mini-Circuits	VLF-630+	NA	01-Oct-15	01-Oct-17

*Calibration was valid at the testing time.



HERMON LABORATORIES

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telecification - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2015	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 4: 2014	General Requirements and Information for the Certification of Radiocommunication Equipment



HERMON LABORATORIES

12 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

**Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Cable loss
Cable coaxial, RG-214/U, N type-N type, 17 m
Teldor, HL 3612

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79



HERMON LABORATORIES

Cable loss
Test cable, Mini-Circuits, S/N 70045, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4273

Frequency, MHz	Cable loss, dB						
10	0.09	4800	1.76	9800	2.70	14800	3.59
30	0.11	4900	1.78	9900	2.71	14900	3.59
50	0.14	5000	1.81	10000	2.73	15000	3.60
100	0.20	5100	1.82	10100	2.75	15100	3.63
200	0.30	5200	1.86	10200	2.76	15200	3.67
300	0.38	5300	1.89	10300	2.79	15300	3.70
400	0.45	5400	1.92	10400	2.81	15400	3.68
500	0.50	5500	1.96	10500	2.82	15500	3.70
600	0.55	5600	2.00	10600	2.83	15600	3.71
700	0.60	5700	2.03	10700	2.87	15700	3.77
800	0.65	5800	2.04	10800	2.87	15800	3.75
900	0.69	5900	2.07	10900	2.88	15900	3.77
1000	0.73	6000	2.10	11000	2.89	16000	3.79
1100	0.77	6100	2.10	11100	2.91	16100	3.85
1200	0.80	6200	2.11	11200	2.92	16200	3.82
1300	0.84	6300	2.11	11300	2.94	16300	3.83
1400	0.88	6400	2.14	11400	2.95	16400	3.88
1500	0.92	6500	2.15	11500	2.98	16500	3.89
1600	0.95	6600	2.15	11600	3.00	16600	3.92
1700	0.98	6700	2.16	11700	3.02	16700	3.88
1800	1.01	6800	2.19	11800	3.04	16800	3.95
1900	1.04	6900	2.22	11900	3.08	16900	3.91
2000	1.07	7000	2.24	12000	3.09	17000	3.97
2100	1.09	7100	2.26	12100	3.12	17100	3.92
2200	1.13	7200	2.29	12200	3.13	17200	3.94
2300	1.15	7300	2.32	12300	3.16	17300	3.94
2400	1.18	7400	2.36	12400	3.17	17400	3.98
2500	1.21	7500	2.39	12500	3.19	17500	3.93
2600	1.24	7600	2.41	12600	3.20	17600	3.95
2700	1.27	7700	2.43	12700	3.21	17700	3.96
2800	1.30	7800	2.46	12800	3.21	17800	3.97
2900	1.34	7900	2.49	12900	3.22	17900	3.96
3000	1.36	8000	2.52	13000	3.22	18000	3.97
3100	1.38	8100	2.52	13100	3.24		
3200	1.41	8200	2.54	13200	3.24		
3300	1.45	8300	2.59	13300	3.27		
3400	1.46	8400	2.61	13400	3.28		
3500	1.49	8500	2.60	13500	3.31		
3600	1.51	8600	2.63	13600	3.31		
3700	1.55	8700	2.65	13700	3.35		
3800	1.34	8800	2.65	13800	3.37		
3900	1.36	8900	2.65	13900	3.40		
4000	1.38	9000	2.66	14000	3.43		
4100	1.41	9100	2.66	14100	3.45		
4200	1.45	9200	2.67	14200	3.46		
4300	1.46	9300	2.67	14300	3.46		
4400	1.49	9400	2.67	14400	3.49		
4500	1.51	9500	2.68	14500	3.50		
4600	1.55	9600	2.69	14600	3.50		
4700	1.34	9700	2.69	14700	3.52		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244, S/N 51228701001
HL 4722

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.22	9000	2.93
100	0.30	9500	3.06
300	0.52	10000	3.16
500	0.66	10500	3.20
1000	0.93	11000	3.34
1500	1.15	11500	3.39
2000	1.33	12000	3.48
2500	1.49	12500	3.55
3000	1.64	13000	3.66
3500	1.77	13500	3.75
4000	1.90	14000	3.76
4500	2.03	14500	3.87
5000	2.17	15000	3.98
5500	2.30	15500	4.01
6000	2.39	16000	4.14
6500	2.51	16500	4.15
7000	2.59	17000	4.32
7500	2.67	17500	4.36
8000	2.76	18000	4.38
8500	2.84		



HERMON LABORATORIES

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT