



**FCC PART 15C & RSS 247
TEST REPORT**

No. I18N00056-WLAN

for

Doro AB

Doro 4GLTE Clamshell phone

DFC-0180

with

Hardware Version: 1021

Software Version: CALM01A-S00A_DFC0180_113_

USERDEBUG_SECUREBOOT_180109

FCC ID: WS5DFC0180

IC: 8175A-DFC0180

Issued Date: 2018-02-27

Designation Number: CN1210

ISED Assigned Code: 23289

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001, Email: yewu@caict.ac.cn, www.cszit.com

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I18N00056-WLAN | Rev.0 | 1st edition | 2018-02-27 |

CONTENTS

| | |
|---|-----------|
| CONTENTS | 3 |
| 1. TEST LABORATORY | 4 |
| 1.1. TESTING LOCATION | 4 |
| 1.2. TESTING ENVIRONMENT | 4 |
| 1.3. PROJECT DATA | 4 |
| 1.4. SIGNATURE | 4 |
| 2. CLIENT INFORMATION..... | 5 |
| 2.1. APPLICANT INFORMATION | 5 |
| 2.2. MANUFACTURER INFORMATION | 5 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 6 |
| 3.1. ABOUT EUT | 6 |
| 3.2. INTERNAL IDENTIFICATION OF EUT | 6 |
| 3.3. INTERNAL IDENTIFICATION OF AE | 6 |
| 3.4. GENERAL DESCRIPTION..... | 6 |
| 4. REFERENCE DOCUMENTS | 7 |
| 4.1. DOCUMENTS SUPPLIED BY APPLICANT | 7 |
| 4.2. REFERENCE DOCUMENTS FOR TESTING | 7 |
| 5. TEST RESULTS | 8 |
| 5.1. SUMMARY OF TEST RESULTS | 8 |
| 5.2. STATEMENTS..... | 8 |
| 5.3. TERMS USED IN THE RESULT TABLE | 8 |
| 5.4. LABORATORY ENVIRONMENT..... | 9 |
| 6. TEST FACILITIES UTILIZED | 10 |
| 7. MEASUREMENT UNCERTAINTY | 11 |
| ANNEX A: DETAILED TEST RESULTS..... | 12 |
| A.0 ANTENNA REQUIREMENT | 12 |
| A.1 MAXIMUM OUTPUT POWER - CONDUCTED | 13 |
| A.2 PEAK POWER SPECTRAL DENSITY | 14 |
| A.3 6DB BANDWIDTH..... | 19 |
| A.4 BAND EDGES COMPLIANCE | 24 |
| A.5 CONDUCTED EMISSION | 28 |
| A.6 RADIATED EMISSION..... | 33 |
| A.7 99% OCCUPIED BANDWIDTH..... | 46 |
| A.8 AC POWERLINE CONDUCTED EMISSION..... | 51 |

1. Test Laboratory

1.1. Testing Location

Location: Shenzhen Academy of Information and Communications Technology
Address: Building G, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian District, Shenzhen, Guangdong
Province ,China
Postal Code: 518026
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001

1.2. Testing Environment

Normal Temperature: 15-30℃
Relative Humidity: 35-60%

1.3. Project data

Testing Start Date: 2018-01-15
Testing End Date: 2018-02-02

1.4. Signature



An Ran

(Prepared this test report)



Tang Weisheng

(Reviewed this test report)



Zhang Bojun

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Doro AB
Address: Magistratsvägen 10 SE-226 43 Lund Sweden
Contact Person Per Carlenhag
E-Mail per.carlenhag@doro.com
Telephone: +46 46 280 5000
Fax: +46 46 280 5001

2.2. Manufacturer Information

Company Name: CK TELECOM LTD.
Address: Technology Road. High-Tech Development Zone.
Heyuan, Guangdong, P.R. China
Contact Person Xin Li
E-Mail xin.li@ck-telecom.com
Telephone: 0755-26739100 ext.8515
Fax: 0755-26739600

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|---------------------|----------------------------|
| Description | Doro 4GLTE Clamshell phone |
| Model Name | DFC-0180 |
| Market Name | Doro7050 |
| RF Protocol | IEEE 802.11 b/g/n-HT20 |
| Operating Frequency | 2412MHz~2462MHz |
| Number of Channels | 11 |
| Antenna Type | Integrated |
| Antenna Gain | -1.5dBi |
| Power Supply | 3.8V DC by Battery |
| FCC ID | WS5DFC0180 |
| IC number | 8175A-DFC0180 |

Note: Components list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT

| EUT ID* | IMEI | HW Version | SW Version | Receive Date |
|----------------|-------------|-------------------|--|---------------------|
| EUT1 | / | 1021 | CALM01A-S00A_DFC01 80_113_USERDEBUG_ SECUREBOOT_180109 | 2018-01-15 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

| AE ID* | Description | Mode | Manufacturer |
|---------------|--------------------|-------------|---|
| AE1 | Battery | DBS-1350A | Veken |
| AE2 | Charger | A8-501000 | Dongguan Aohai Power Technolgy Co., LTD |

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) are a model of Mobile Phone with integrated antenna.

It consists of normal options: travel Charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------|---|------------------------------|
| FCC Part15 | FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz | 2016 |
| ANSI C63.10 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices | 2013 |
| RSS-247 | Spectrum Management and Telecommunications Radio Standards Specification Digital Transmission Systems (DTSSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices | Issue 2 February, 2017 |
| RSS-Gen | Spectrum Management and Telecommunications Radio Standards Specification General Requirements for Compliance of Radio Apparatus | Issue 4 November, 2014 |

5. Test Results

5.1. Summary of Test Results

| No | Test cases | Sub-clause of Part 15C | Sub-clause of IC | Verdict |
|----|-----------------------------|---------------------------|--|----------|
| 0 | Antenna Requirement | 15.203 | / | P |
| 1 | Maximum Output Power | 15.247 (b) | RSS-247 section 5.4 | P |
| 2 | Peak Power Spectral Density | 15.247 (e) | RSS-247 section 5.2 | P |
| 3 | 6dB Bandwidth | 15.247 (a) | RSS-247 section 5.2 | P |
| 4 | Band Edges Compliance | 15.247 (d) | RSS-247 section 5.5 | P |
| 5 | Conducted Emission | 15.247 (d) | RSS-247 section 5.5/ RSS-Gen section 6.13 | P |
| 6 | Radiated Emission | 15.247, 15.205, 15.209 | RSS-247 section 5.5/ RSS-Gen section 6.13 | P |
| 7 | AC Power line Conducted | 15.207 | RSS-Gen section 8.8 | P |
| 8 | Occupied Bandwidth | / | RSS-Gen section 6.6 | P |

See **ANNEX A** for details.

5.2. Statements

SAICT has evaluated the test cases requested by the applicant/matrix manufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

5.3. Terms used in the result table

Terms used in Verdict column

| | |
|----|---------------|
| P | Pass |
| NA | Not Available |
| F | Fail |

Abbreviations

| | |
|----------|---|
| AC | Alternating Current |
| AFH | Adaptive Frequency Hopping |
| BW | Band Width |
| E.I.R.P. | equivalent isotropic radiated power |
| ISM | Industrial, Scientific and Medical |
| R&TTE | Radio and Telecommunications Terminal Equipment |
| RF | Radio Frequency |
| Tx | Transmitter |

5.4. Laboratory Environment

Semi-anechoic Chamber did not exceed following limits along the EMC testing

| | |
|-----------------------------------|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4Ω |
| Normalised site attenuation (NSA) | < ±4dB, 3m/10m distance, from 30 to 1000 MHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 3000 MHz |

Shielded room did not exceed following limits along the EMC testing

| | |
|--------------------------|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4 Ω |

Fully-anechoic Chamber did not exceed following limits along the EMC testing

| | |
|------------------------------------|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 35 %, Max. = 60 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4Ω |
| Voltage Standing Wave Ratio (VSWR) | ≤6dB, from 1 to 18 GHz, 3m distance |

6. Test Facilities Utilized

Conducted test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Calibration Period |
|-----|------------------------|---------|---------------|-----------------|----------------------|--------------------|
| 1 | Vector Signal Analyzer | FSV40 | 100903 | Rohde & Schwarz | 2019.01.17 | 1 year |
| 2 | Power Sensor | U2021XA | MY55430013 | Agilent | 2019.02.01 | 1 year |
| 3 | Test Receiver | ESCI | 100702 | Rohde & Schwarz | 2018.06.25 | 1 year |
| 4 | LISN | ENV216 | 102067 | Rohde & Schwarz | 2018.07.19 | 1 year |

Radiated test system

| No. | Equipment | Model | Serial Number | Manufacturer | Calibration Due date | Calibration Period |
|-----|-------------------|-----------------------|---------------|-----------------|----------------------|--------------------|
| 1 | Chamber | FACT3-2.0 | 1285 | ETS-Lindgren | 2019.11.27 | 3 years |
| 2 | Test Receiver | ESR7 | 101676 | Rohde & Schwarz | 2018.11.29 | 1 year |
| 3 | Spectrum Analyser | FSV40 | 102192 | Rohde & Schwarz | 2018.05.22 | 1 year |
| 4 | BiLog Antenna | VULB9163 | 9163 329 | Schwarzbeck | 2020.02.27 | 3 years |
| 5 | Horn Antenna | 3117 | 00066577 | ETS-Lindgren | 2019.04.05 | 3 years |
| 6 | Loop Antenna | HLA6120 | 35779 | TESEQ | 2019.05.02 | 3 years |
| 7 | Horn Antenna | QSH-SL-1 8-26-S-20 | 17013 | Q-par | 2020.01.15 | 3 years |

Test software

| No. | Equipment | Manufacturer | Version |
|-----|------------------|-----------------|----------|
| 1 | TechMgr Software | CAICT | 2.1.1 |
| 2 | EMC32 | Rohde & Schwarz | 8.53.0 |
| 3 | EMC32 | Rohde & Schwarz | 10.01.00 |

EUT is engineering software provided by the customer to control the transmitting signal. The EUT was programmed to be in continuously transmitting mode.

Anechoic Chamber

Fully anechoic Chamber by ETS-Lindgren.

7. Measurement Uncertainty

| Test Name | Uncertainty | |
|---|--|---------|
| 1. RF Output Power - Conducted | ±1.32dB | |
| 2. Power Spectral Density - Conducted | ±2.32dB | |
| 3. Occupied channel bandwidth - Conducted | ±66Hz | |
| 4 Transmitter Spurious Emission - Conducted | $30\text{MHz} \leq f \leq 1\text{GHz}$ | ±1.41dB |
| | $1\text{GHz} \leq f \leq 7\text{GHz}$ | ±1.92dB |
| | $7\text{GHz} \leq f \leq 13\text{GHz}$ | ±2.31dB |
| | $13\text{GHz} \leq f \leq 26\text{GHz}$ | ±2.61dB |
| 5. Transmitter Spurious Emission - Radiated | $9\text{kHz} \leq f \leq 30\text{MHz}$ | ±1.84dB |
| | $30\text{MHz} \leq f \leq 1\text{GHz}$ | ±4.90dB |
| | $1\text{GHz} \leq f \leq 18\text{GHz}$ | ±5.32dB |
| | $18\text{GHz} \leq f \leq 40\text{GHz}$ | ±4.66dB |
| 6. AC Power line Conducted Emission | $150\text{kHz} \leq f \leq 30\text{MHz}$ | ±2.72dB |

ANNEX A: Detailed Test Results

A.0 Antenna requirement

Measurement Limit:

| Standard | Requirement |
|------------------------|--|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

**Conclusion: The Directional gains of antenna used for transmitting is -1.5 dBi.
The RF transmitter uses an integrate antenna without connector.**

A.1 Maximum Output Power - Conduced

Measurement of method :See ANSI C63.10-2013-Clause 11.9.2.3.2

Method AVGPm-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Measurement Limit:

| Standard | Limit (dBm) |
|---|-------------|
| FCC CRF Part 15.247(b) & RSS-247 Section 5.4 | < 30 |

Measurement Results:

| Mode | Channel | Frequency (MHz) | Data Rate | Average Conducted Power (dBm) | Conclusion |
|-----------------|---------|-----------------|-----------|-------------------------------|------------|
| 802.11b | CH 1 | 2412 | 1Mbps | 17.05 | P |
| | CH 6 | 2437 | | 17.42 | P |
| | CH 11 | 2462 | | 17.23 | P |
| 802.11g | CH 1 | 2412 | 6Mbps | 13.98 | P |
| | CH 6 | 2437 | | 13.68 | P |
| | CH 11 | 2462 | | 13.38 | P |
| 802.11n HT20 | CH 1 | 2412 | MCS0 | 14.12 | P |
| | CH 6 | 2437 | | 13.78 | P |
| | CH 11 | 2462 | | 13.45 | P |

Note:

Worst-case data rates as provided by the client were: 1Mbps (802.11b), 6Mbps (802.11g), MCS0 (802.11n). The following cases and test graphs are performed with this condition.

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

A.2 Peak Power Spectral Density

Measurement Limit:

| Standard | Limit |
|--|---------------|
| FCC CRF Part 15.247(e) & RSS-247 Section 5.2 | < 8 dBm/3 kHz |

Measurement Results:

| Mode | Channel | Frequency (MHz) | Test Results (dBm) | | Conclusion |
|--------------|---------|-----------------|--------------------|--------|------------|
| | | | Fig. | Value | |
| 802.11b | CH 1 | 2412 | Fig.1 | -5.05 | P |
| | CH 6 | 2437 | Fig.2 | -4.45 | P |
| | CH 11 | 2462 | Fig.3 | -4.53 | P |
| 802.11g | CH 1 | 2412 | Fig.4 | -6.96 | P |
| | CH 6 | 2437 | Fig.5 | -10.28 | P |
| | CH 11 | 2462 | Fig.6 | -10.35 | P |
| 802.11n HT20 | CH 1 | 2412 | Fig.7 | -10.09 | P |
| | CH 6 | 2437 | Fig.8 | -11.05 | P |
| | CH 11 | 2462 | Fig.9 | -10.02 | P |

See below for test graphs.

Conclusion: PASS

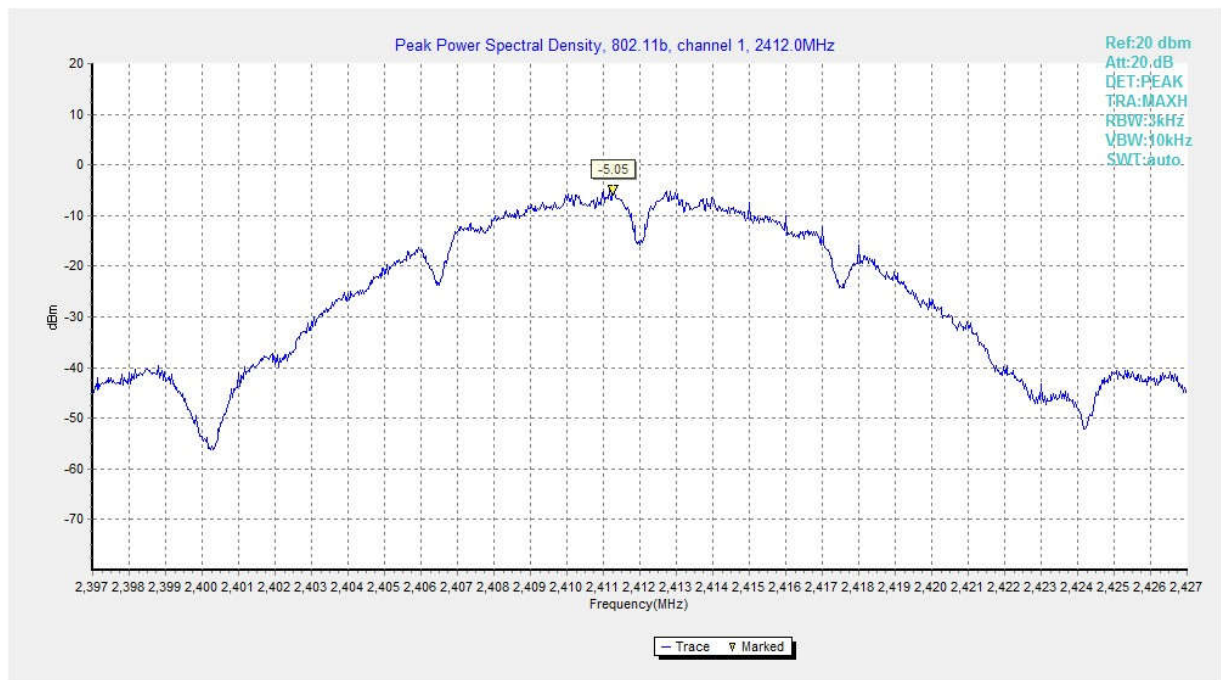


Fig.1 Power Spectral Density (802.11b, CH 1)

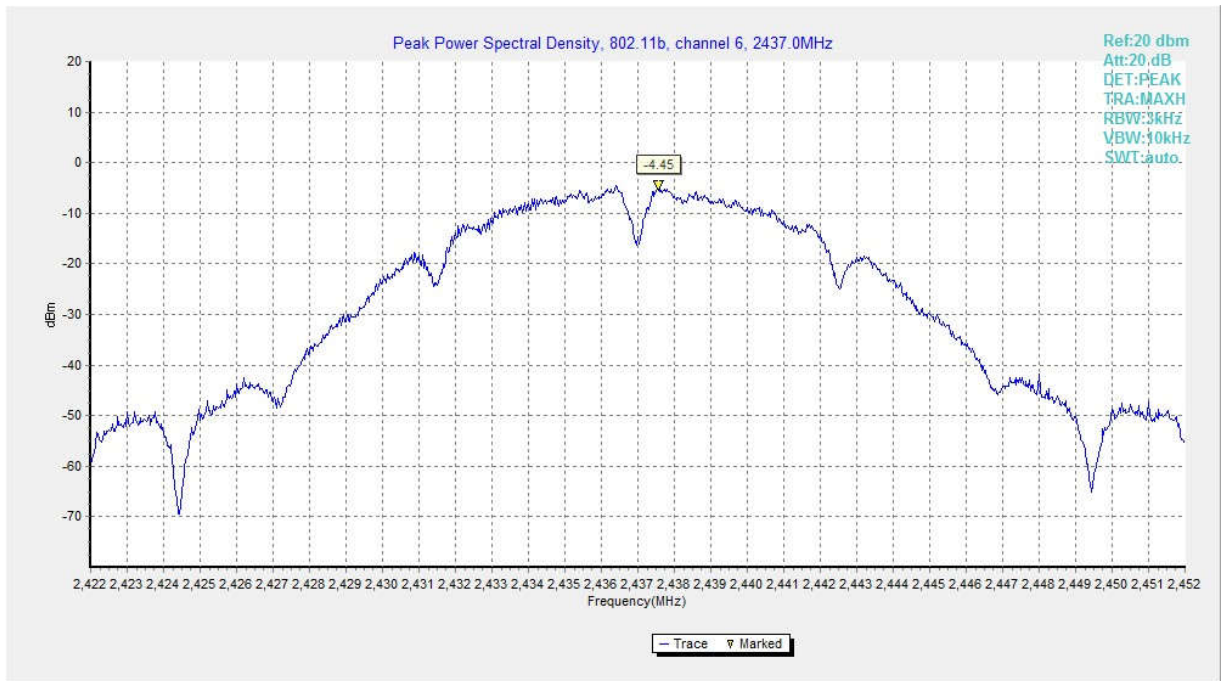


Fig.2 Power Spectral Density (802.11b, CH 6)

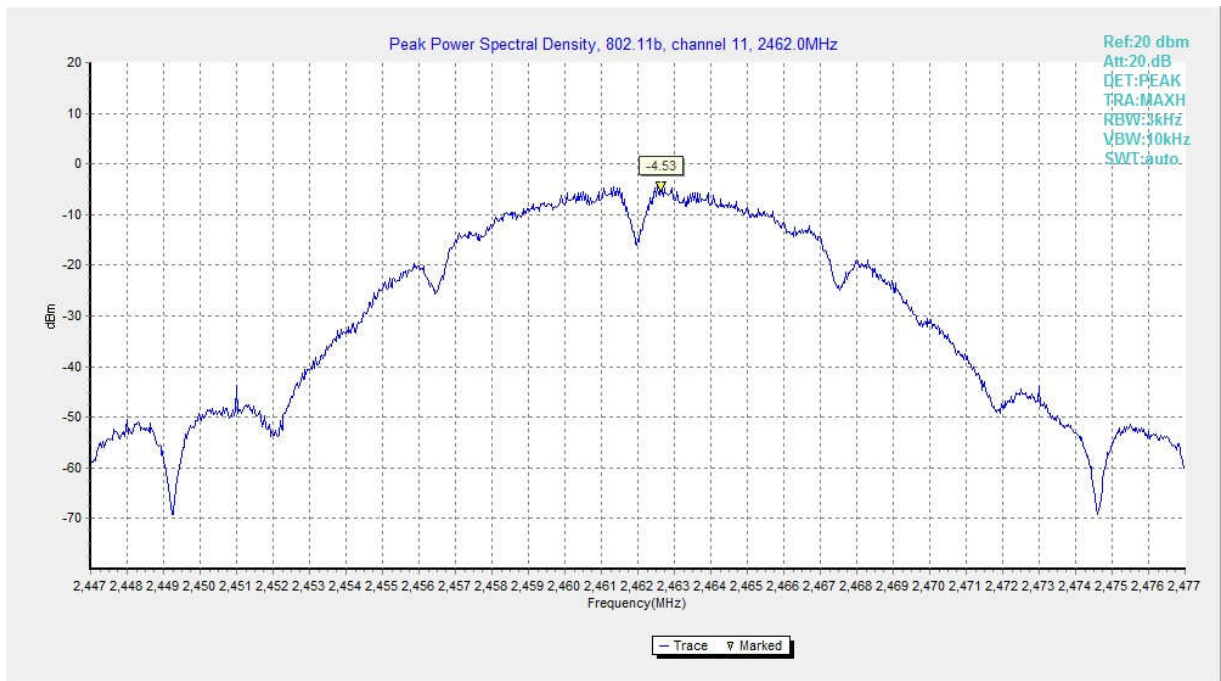


Fig.3 Power Spectral Density (802.11b, CH 11)

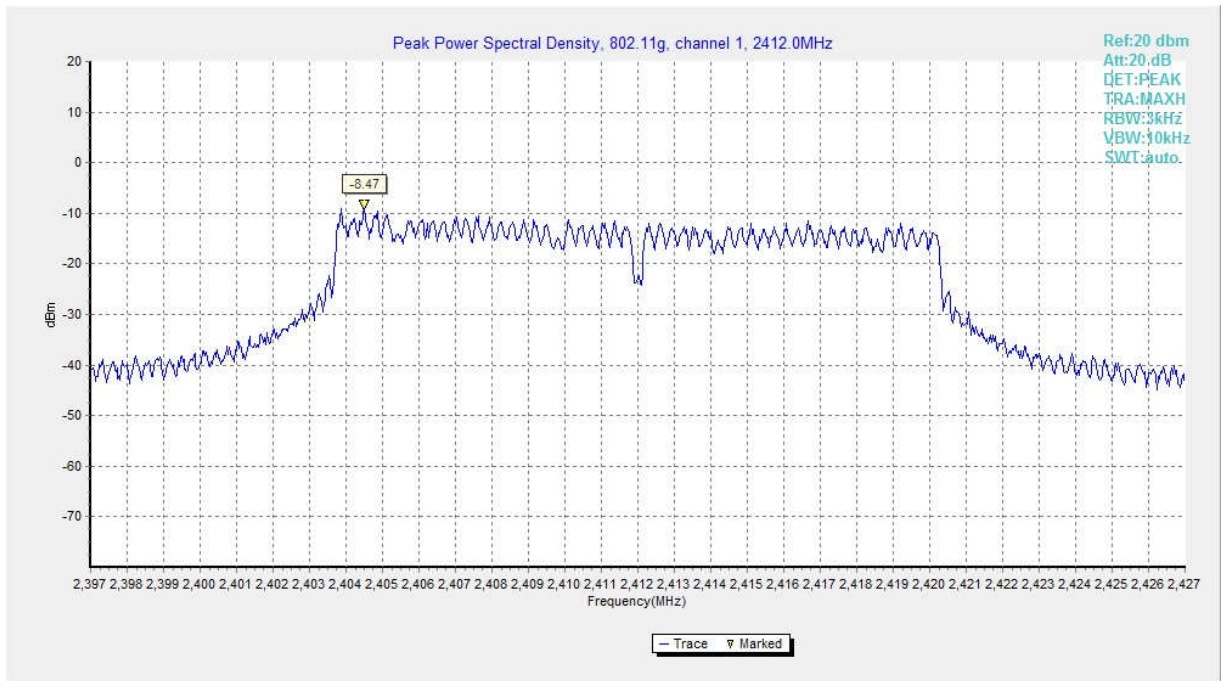


Fig.4 Power Spectral Density (802.11g, CH 1)

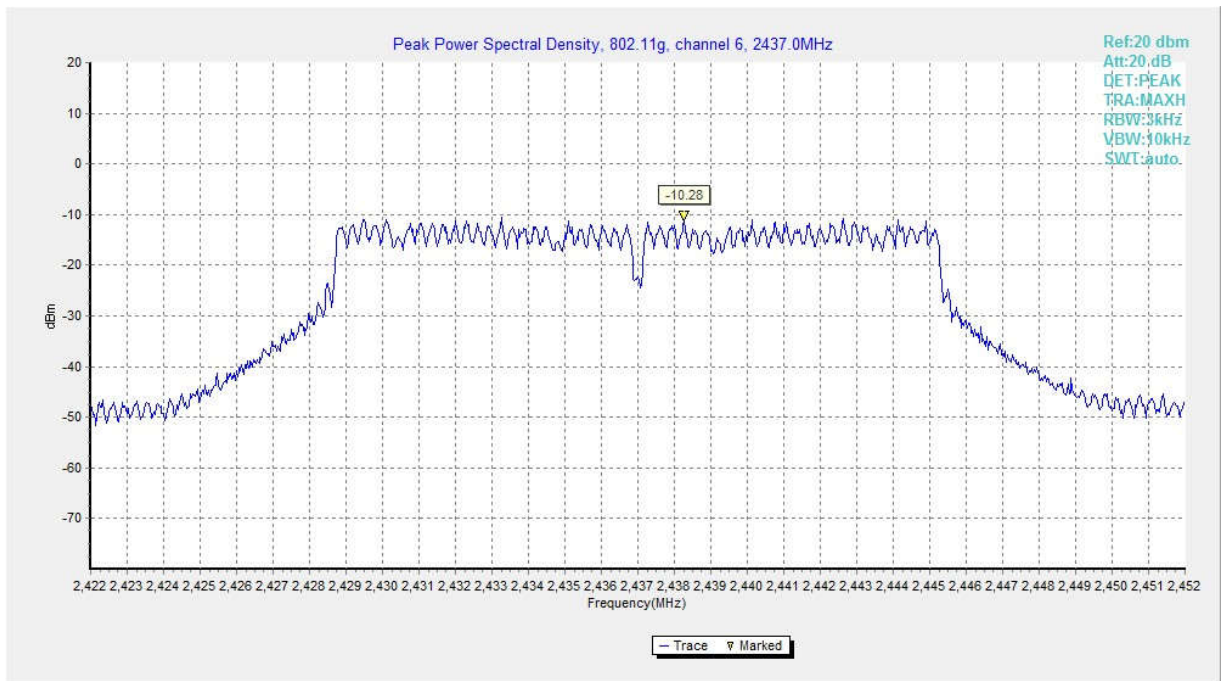


Fig.5 Power Spectral Density (802.11g, CH 6)

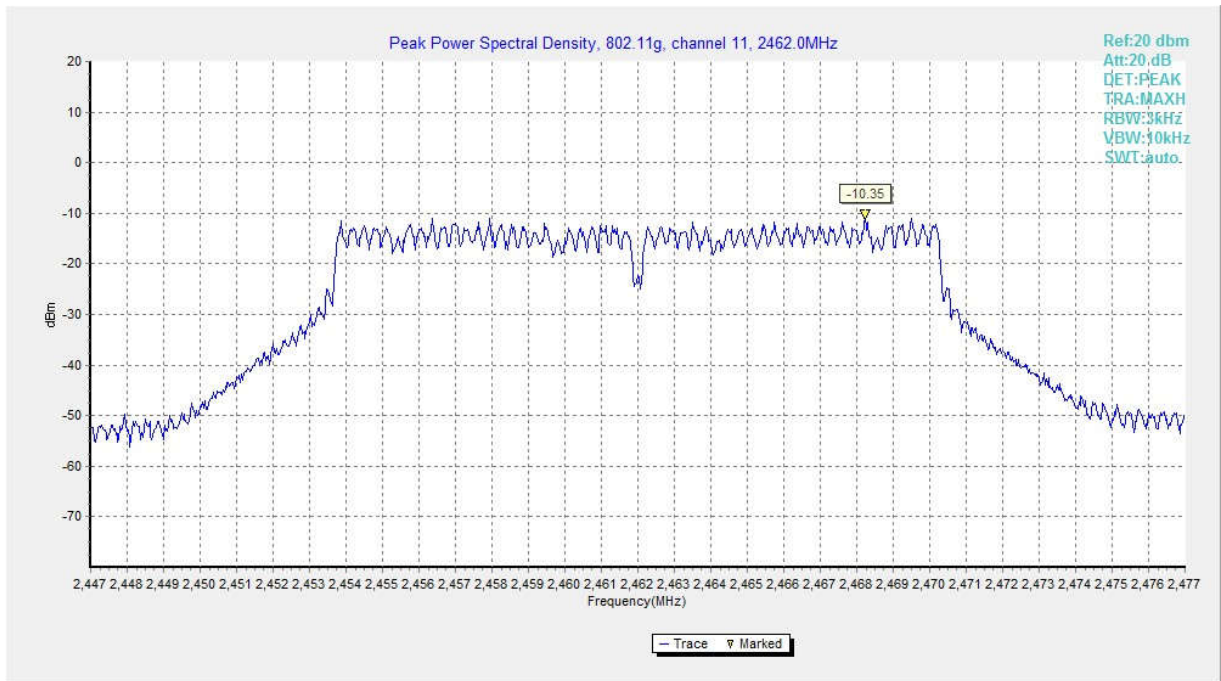


Fig.6 Power Spectral Density (802.11g, CH 11)

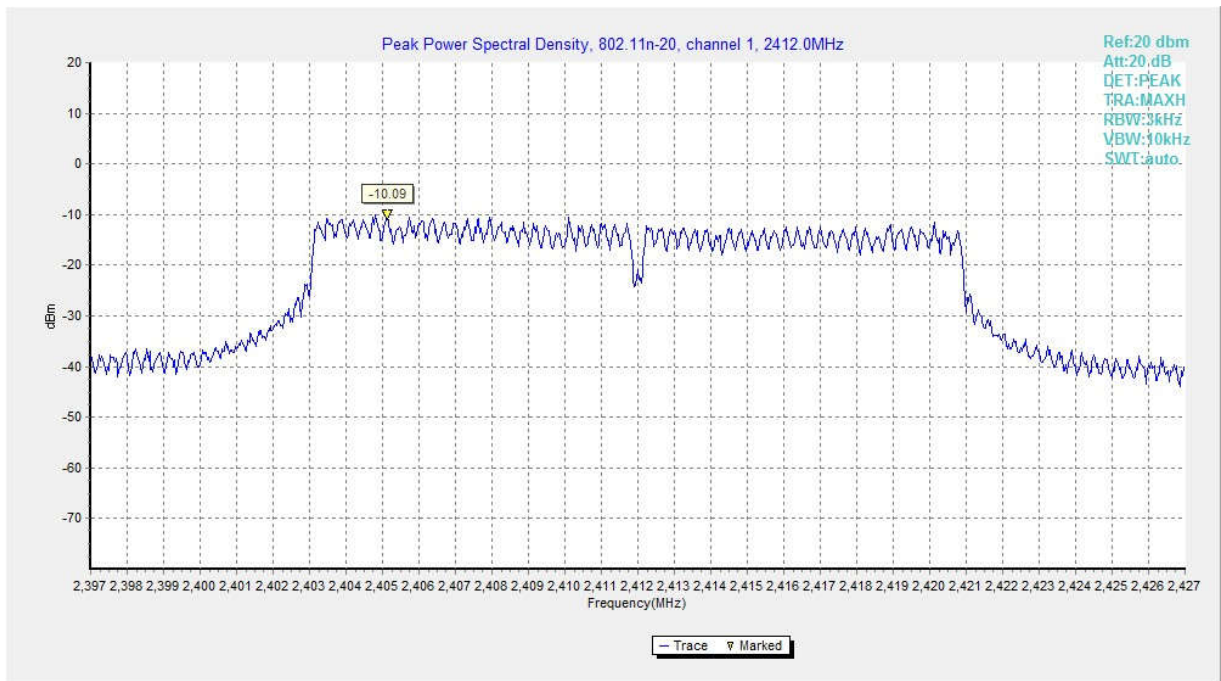


Fig.7 Power Spectral Density (802.11n HT20, CH 1)

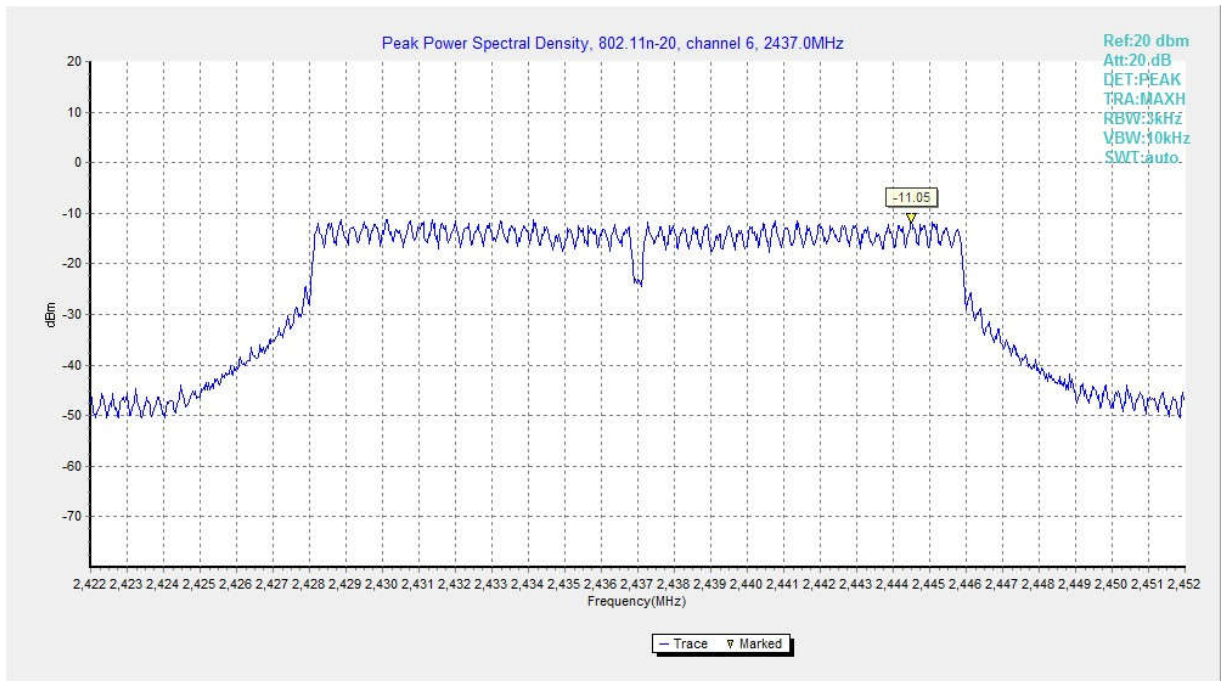


Fig.8 Power Spectral Density (802.11n HT20, CH 6)

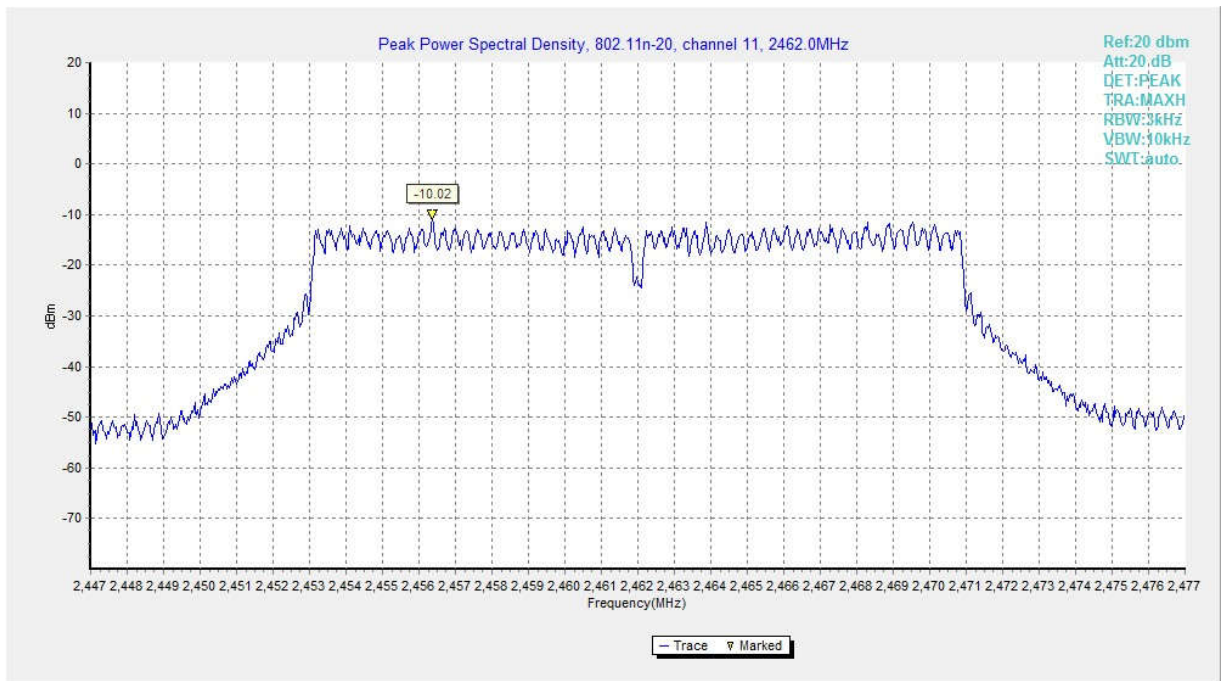


Fig.9 Power Spectral Density (802.11n HT20, CH 11)

A.3 6dB Bandwidth

Measurement Limit:

| Standard | Limit (kHz) |
|--|-------------|
| FCC 47 CFR Part 15.247 (a) & RSS-247 Section 5.2 | ≥ 500 |

Measurement Result:

| Mode | Channel | Frequency (MHz) | Test Results (kHz) | | Conclusion |
|--------------|---------|-----------------|---------------------|-------|------------|
| | | | Fig. | Value | |
| 802.11b | CH 1 | 2412 | Fig.10 | 7550 | P |
| | CH 6 | 2437 | Fig.11 | 7100 | P |
| | CH 11 | 2462 | Fig.12 | 7550 | P |
| 802.11g | CH 1 | 2412 | Fig.13 | 16350 | P |
| | CH 6 | 2437 | Fig.14 | 16400 | P |
| | CH 11 | 2462 | Fig.15 | 16350 | P |
| 802.11n HT20 | CH 1 | 2412 | Fig.16 | 16950 | P |
| | CH 6 | 2437 | Fig.17 | 17600 | P |
| | CH 11 | 2462 | Fig.18 | 17600 | P |

See below for test graphs.

Conclusion: PASS

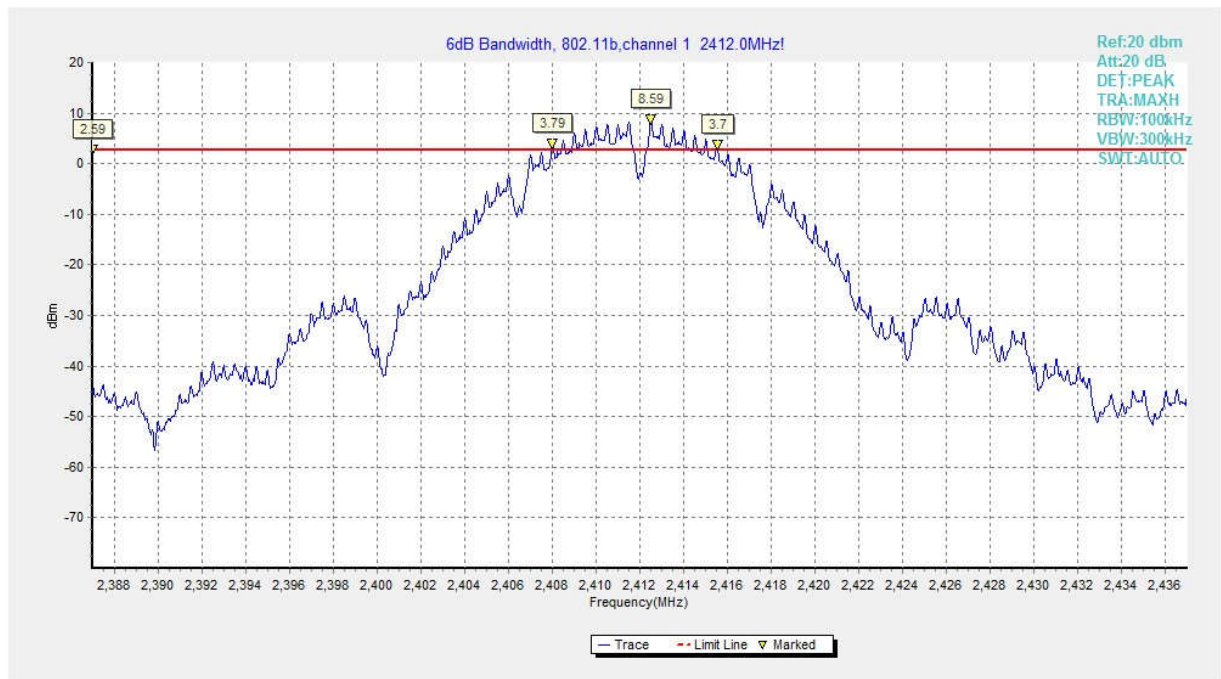


Fig.10 6dB Bandwidth (802.11b, CH 1)

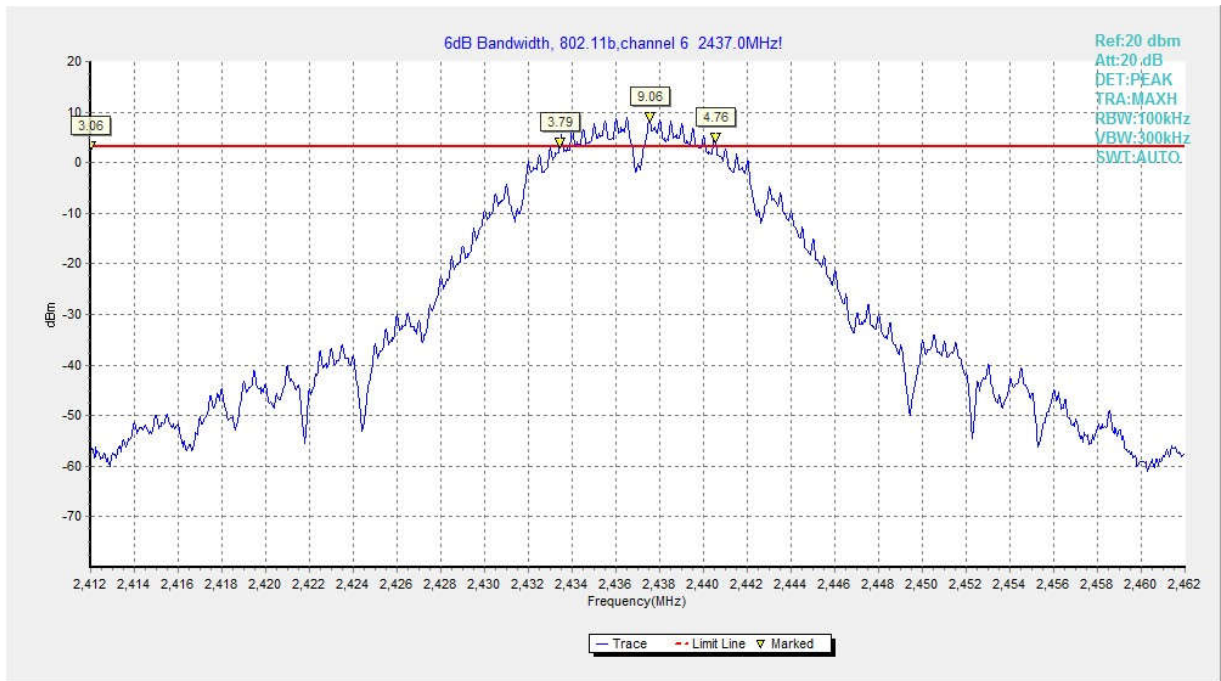


Fig.11 6dB Bandwidth (802.11b, CH 6)

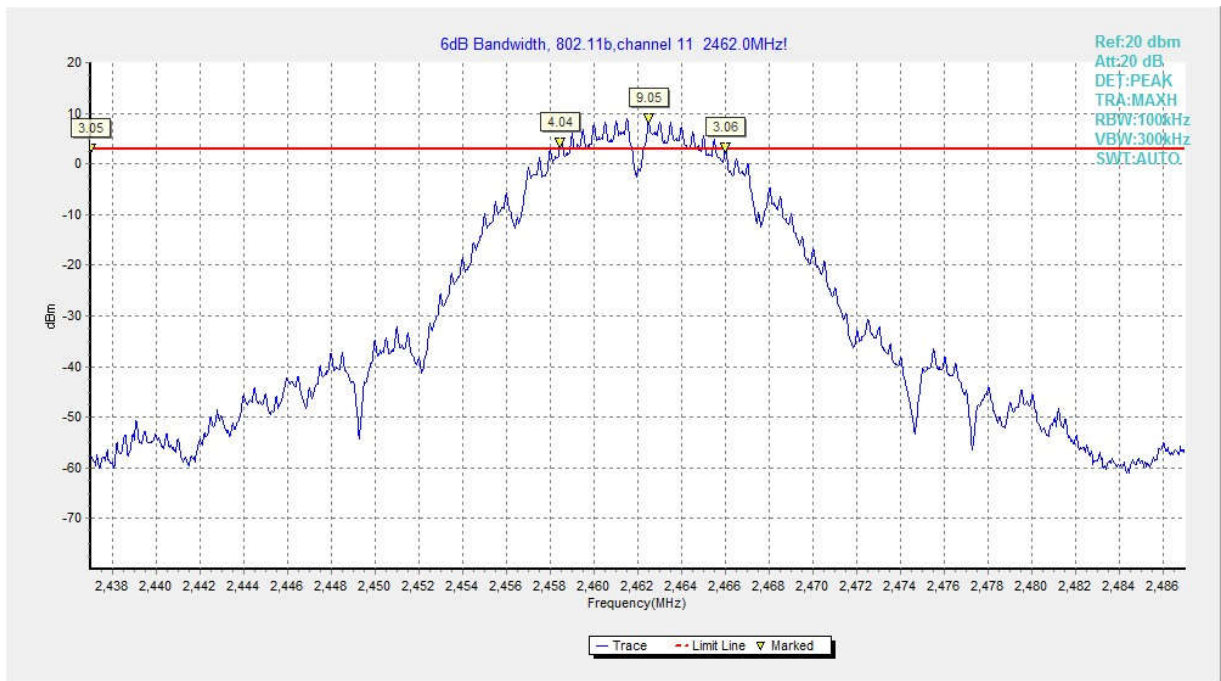


Fig.12 6dB Bandwidth (802.11b, CH 11)

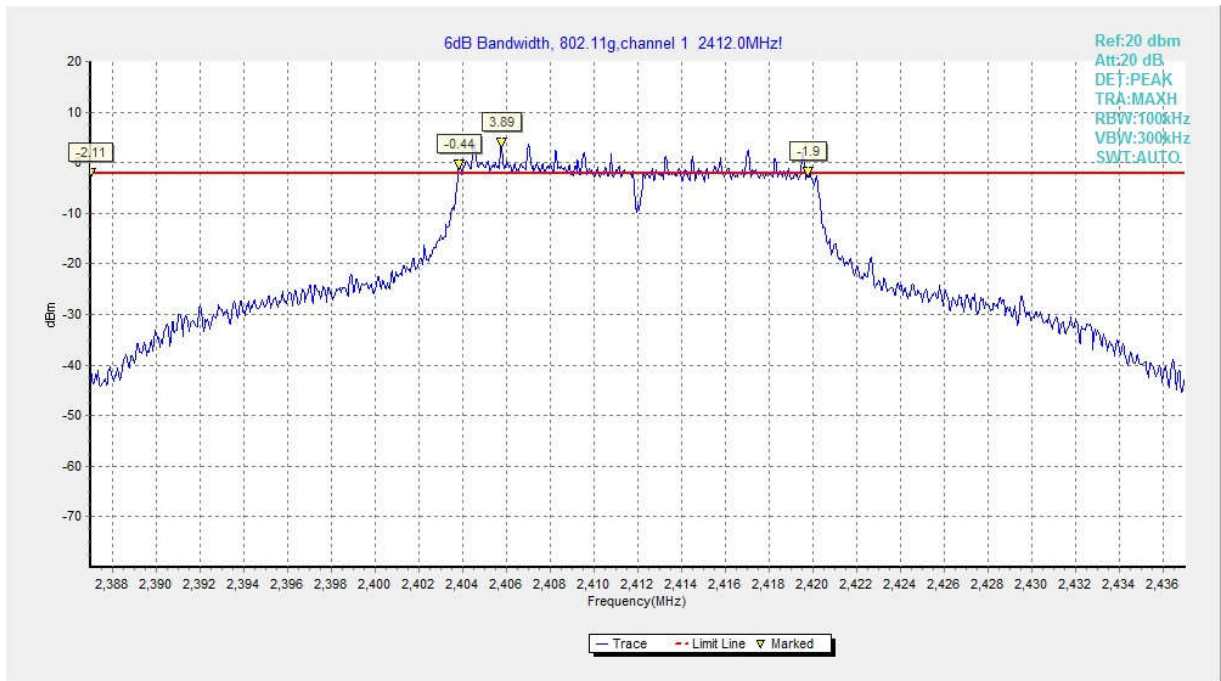


Fig.13 6dB Bandwidth (802.11g, CH 1)

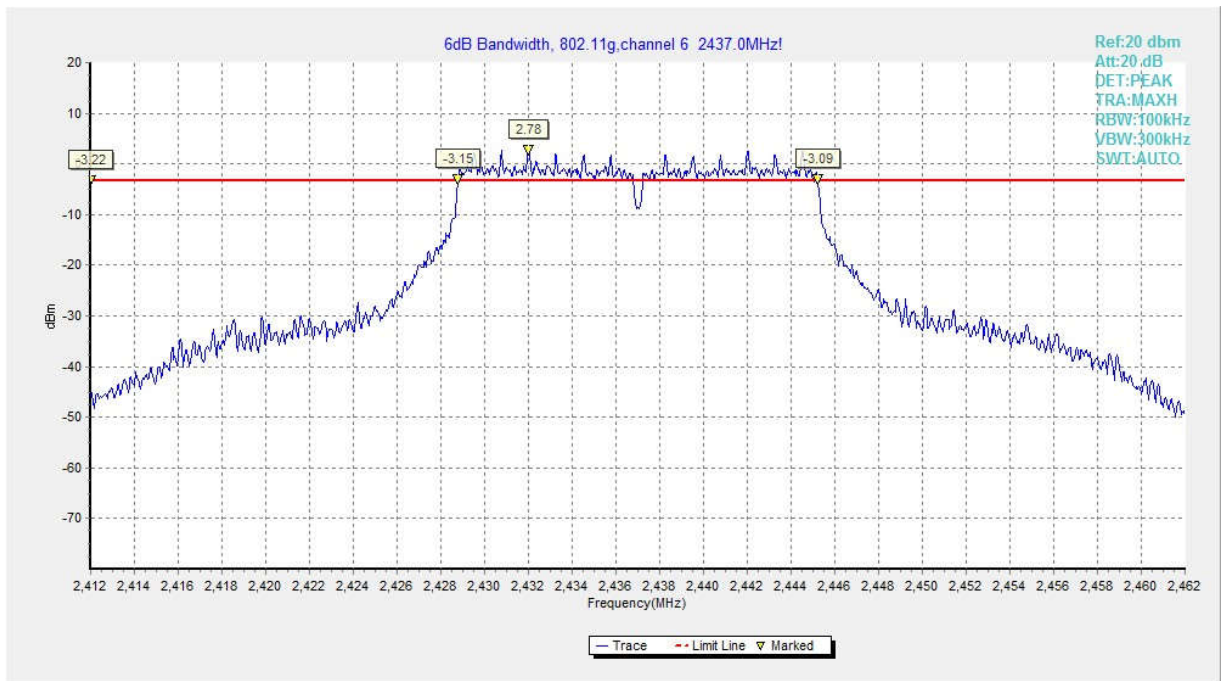


Fig.14 6dB Bandwidth (802.11g, CH 6)

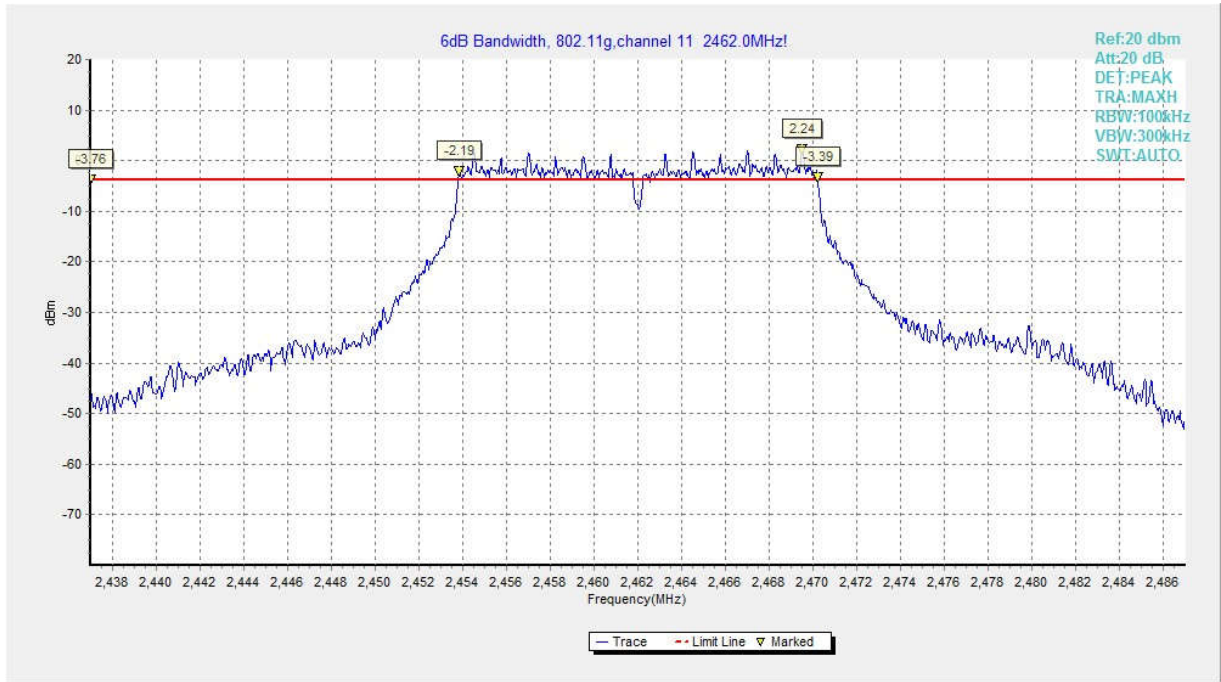


Fig.15 6dB Bandwidth (802.11g, CH 11)

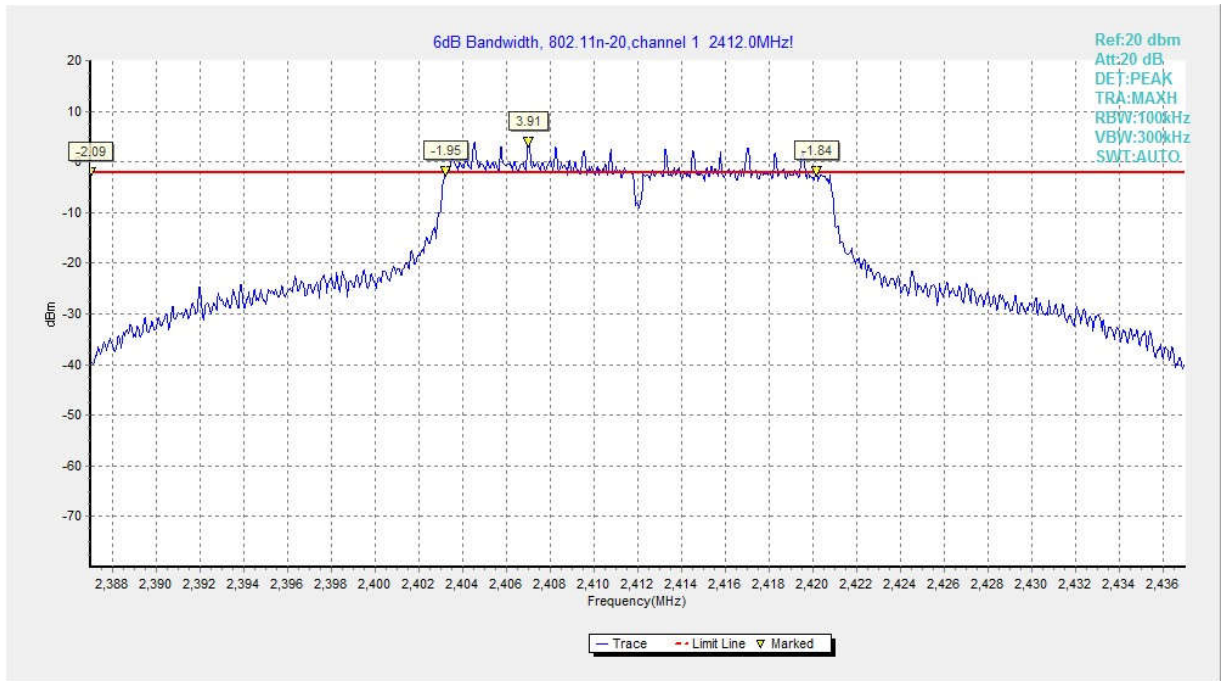


Fig.16 6dB Bandwidth (802.11n HT20, CH 1)

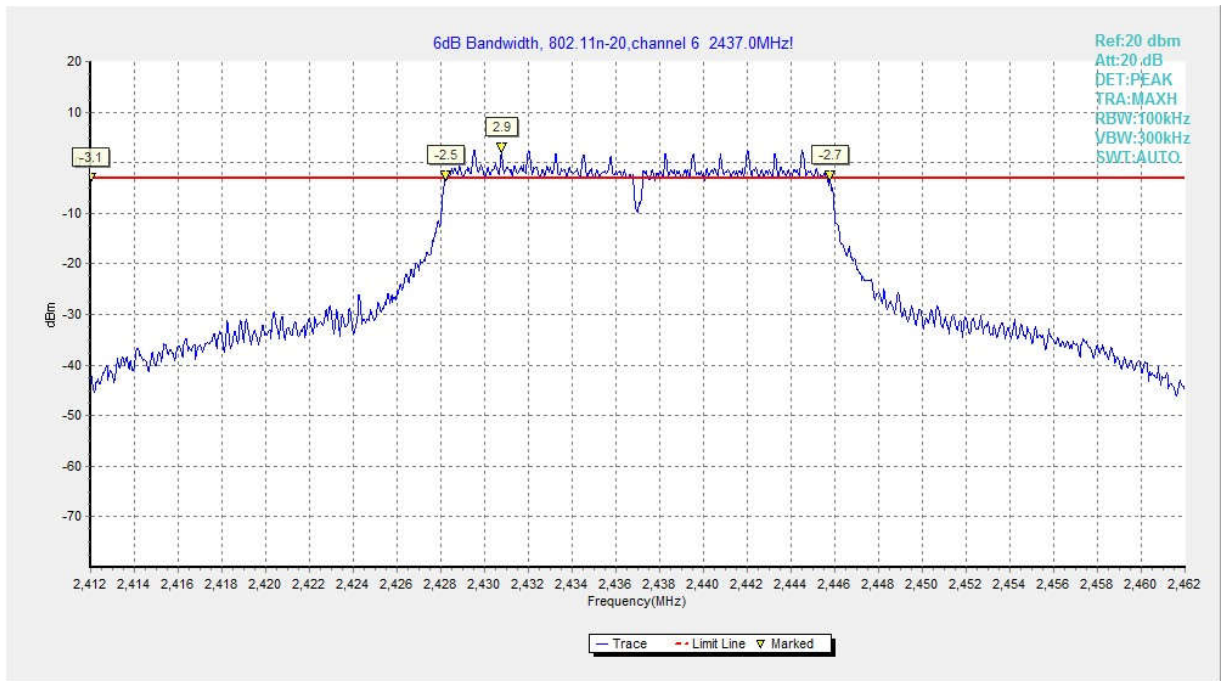


Fig.17 6dB Bandwidth (802.11n HT20, CH 6)

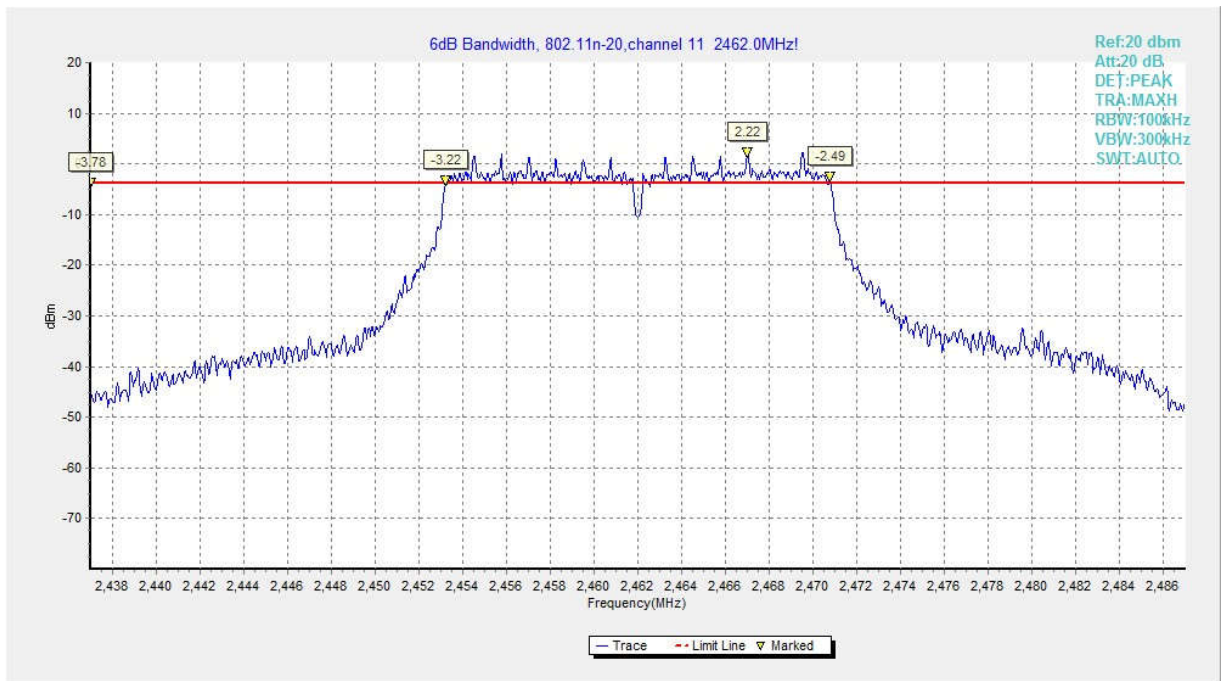


Fig.18 6dB Bandwidth (802.11n HT20, CH 11)

A.4 Band Edges Compliance

Measurement Limit:

| Standard | Limit (dBc) |
|---|-------------|
| FCC 47 CFR Part 15.247 (d) & RSS-247 Section 5.5 | > 20 |

Measurement Result:

| Mode | Channel | Frequency (MHz) | Test Results (dBc) | | Conclusion |
|-----------------|---------|-----------------|--------------------|-------|------------|
| | | | Fig. | Value | |
| 802.11b | CH1 | 2412 | Fig.19 | 45.82 | P |
| | CH11 | 2462 | Fig.20 | 66.54 | P |
| 802.11g | CH1 | 2412 | Fig.21 | 28.66 | P |
| | CH11 | 2462 | Fig.22 | 43.93 | P |
| 802.11n HT20 | CH1 | 2412 | Fig.23 | 27.44 | P |
| | CH11 | 2462 | Fig.24 | 41.51 | P |

See below for test graphs.

Conclusion: PASS

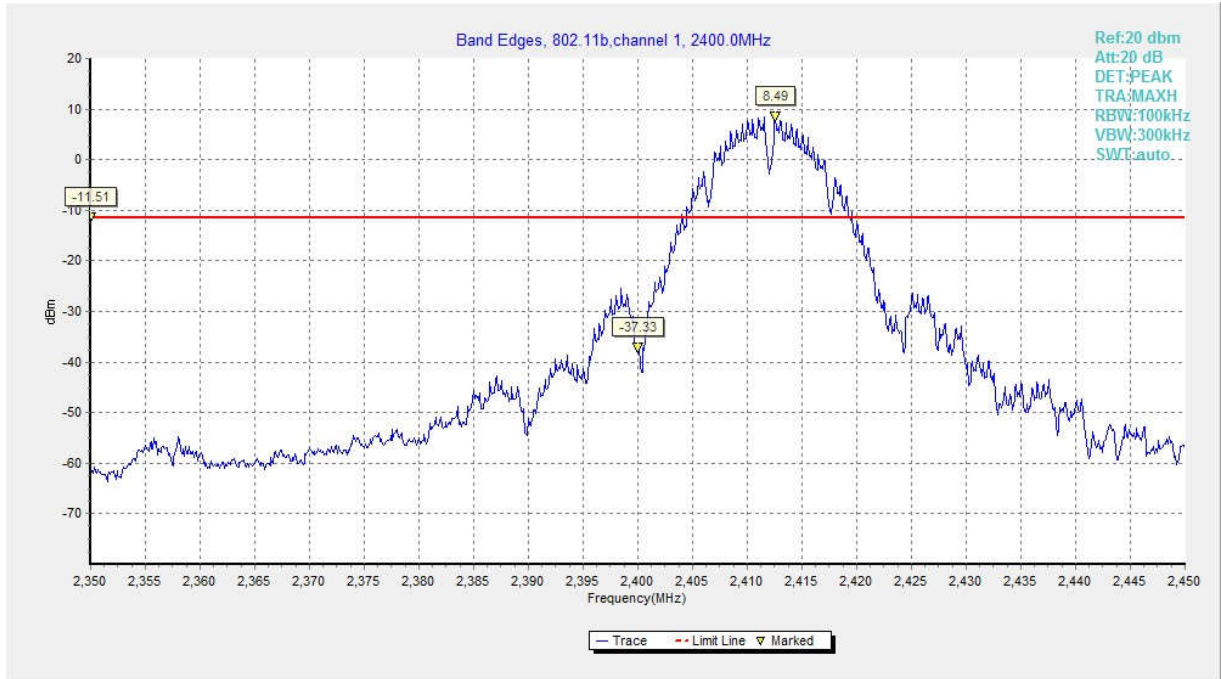


Fig.19 Band Edges (802.11b, CH 1)

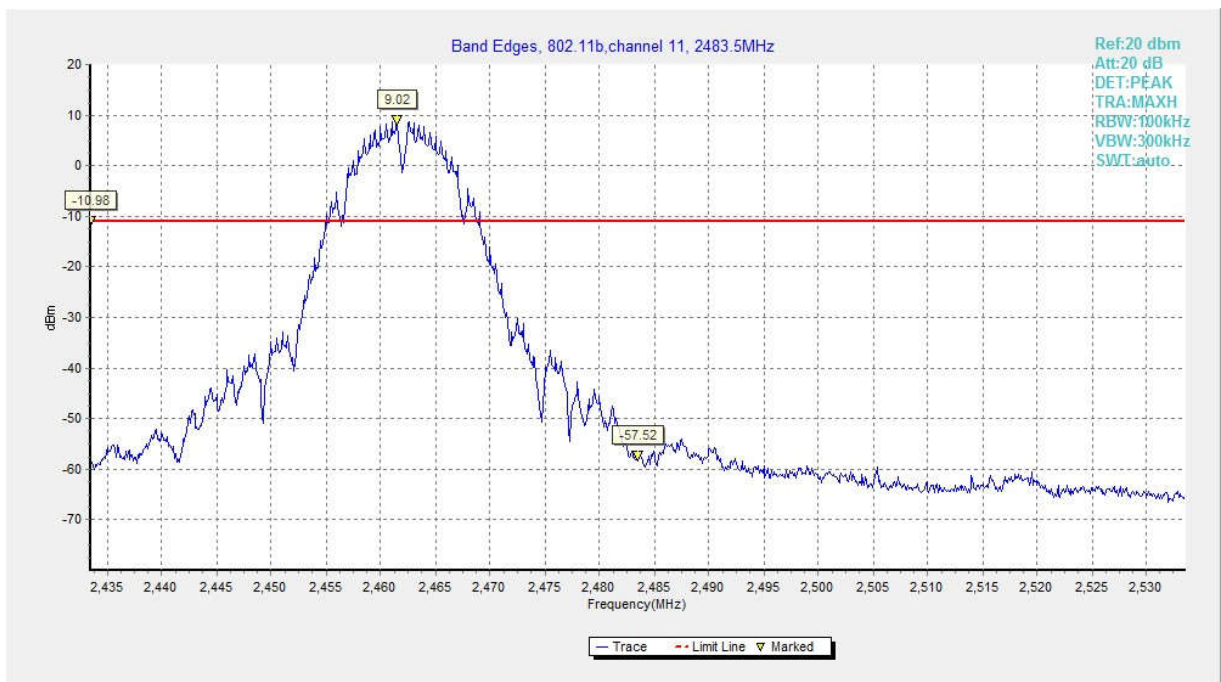


Fig.20 Band Edges (802.11b, CH 11)

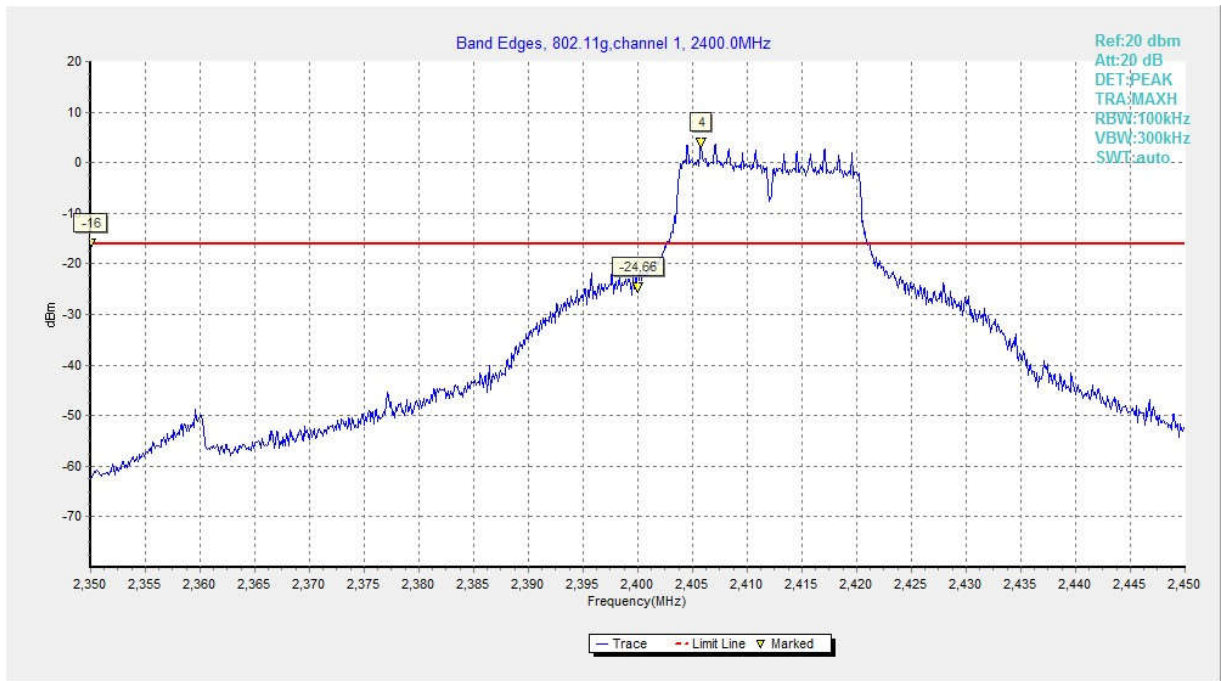


Fig.21 Band Edges (802.11g, CH 1)

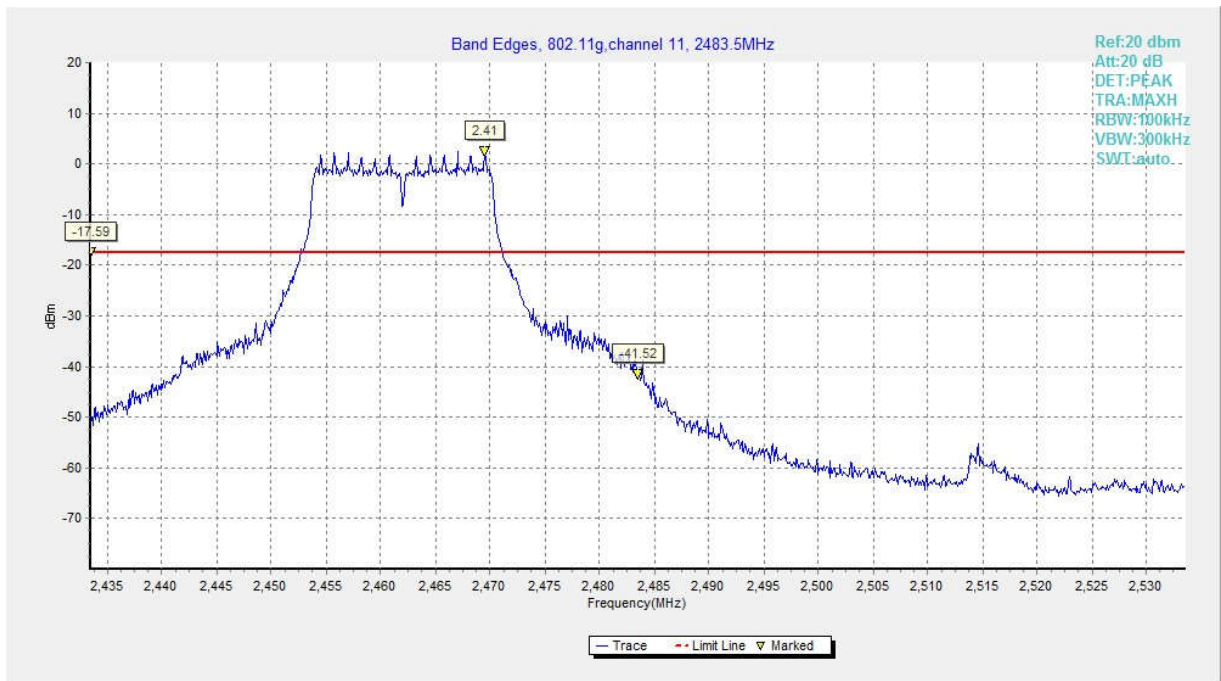


Fig.22 Band Edges (802.11g, CH 11)

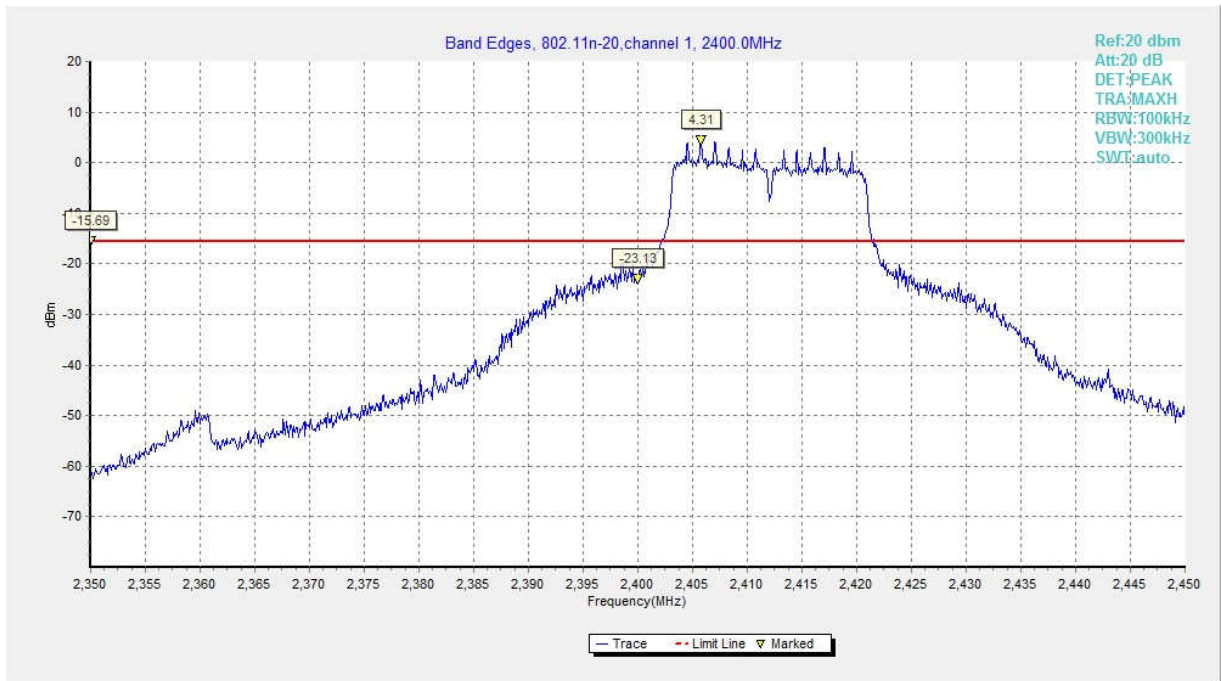


Fig.23 Band Edges (802.11n HT20, CH 1)

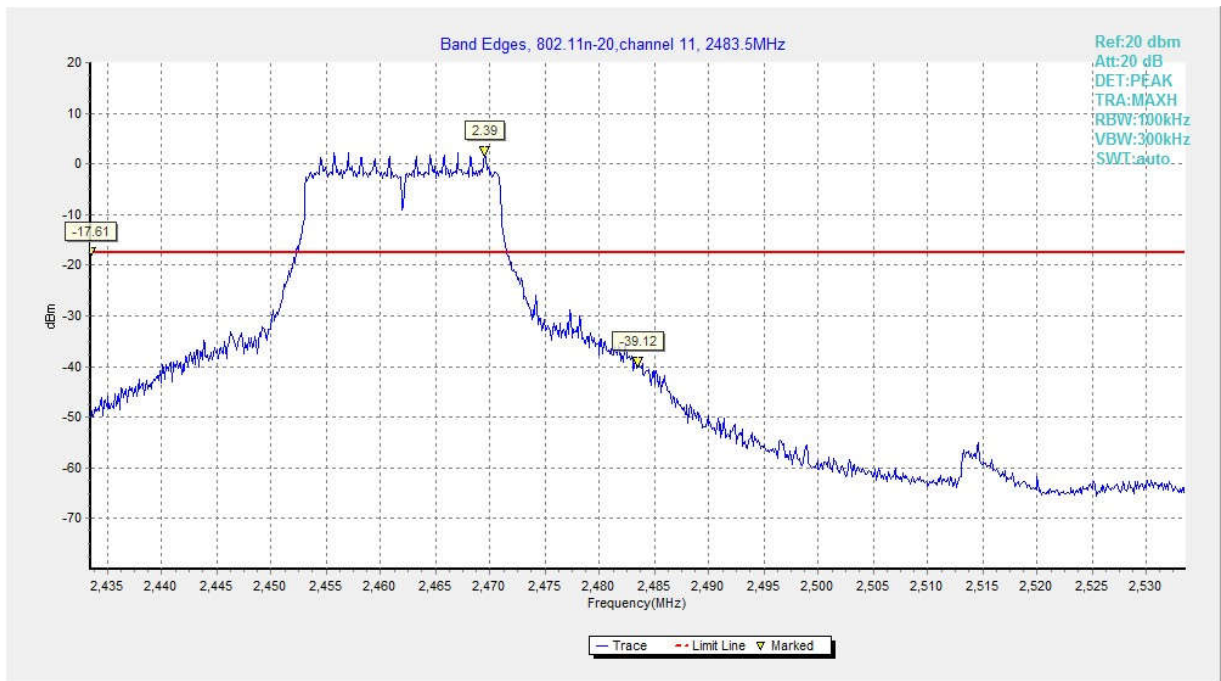


Fig.24 Band Edges (802.11n HT20, CH 11)

A.5 Conducted Emission

Measurement Limit:

| Standard | Limit |
|---|---|
| FCC 47 CFR Part 15.247 (d) & RSS-247 Section 5.5/RSS-Gen 6.13 | 20dB below peak output power in 100 kHz bandwidth |

Measurement Results:

| Mode | Channel | Frequency (MHz) | Frequency Range | Test Results | Conclusion |
|--------------|---------|-----------------|-----------------|--------------|------------|
| 802.11b | CH 1 | 2412 | 30MHz-26GHz | Fig.25 | P |
| | CH 6 | 2437 | 30MHz-26GHz | Fig.26 | P |
| | CH 11 | 2462 | 30MHz-26GHz | Fig.27 | P |
| 802.11g | CH 1 | 2412 | 30MHz-26GHz | Fig.28 | P |
| | CH 6 | 2437 | 30MHz-26GHz | Fig.29 | P |
| | CH 11 | 2462 | 30MHz-26GHz | Fig.30 | P |
| 802.11n HT20 | CH 1 | 2412 | 30MHz-26GHz | Fig.31 | P |
| | CH 6 | 2437 | 30MHz-26GHz | Fig.32 | P |
| | CH 11 | 2462 | 30MHz-26GHz | Fig.33 | P |

See below for test graphs.

Conclusion: **PASS**

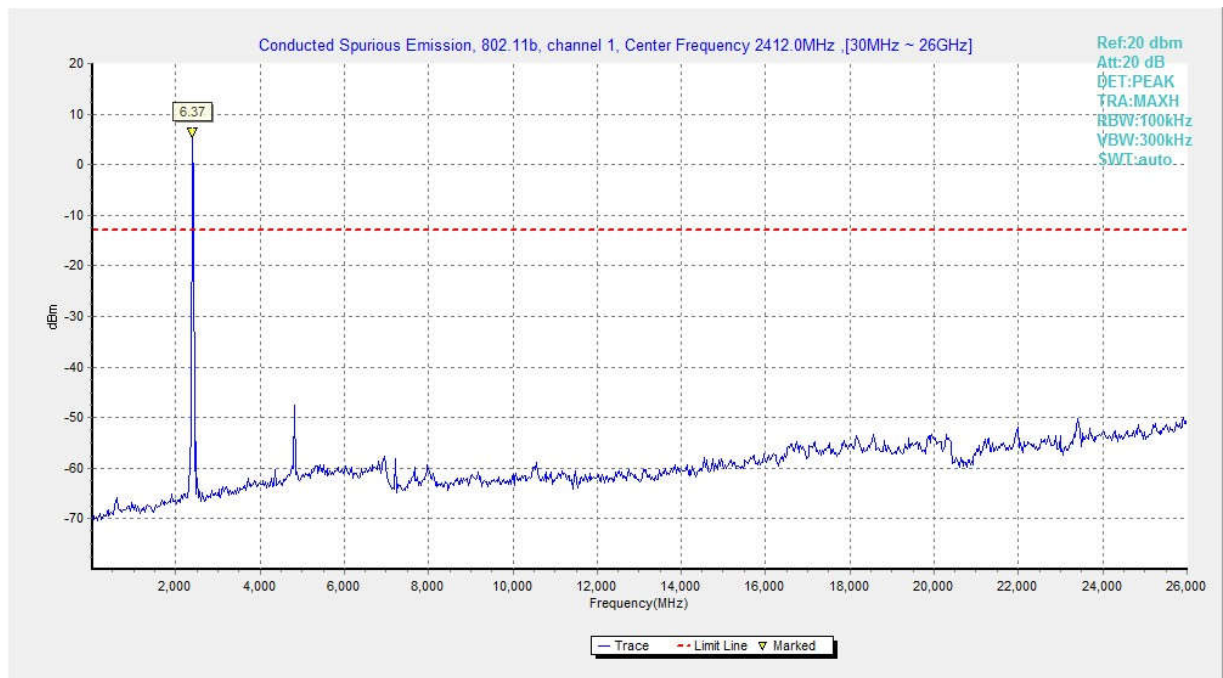


Fig.25 Conducted Spurious Emission (802.11b, CH1)

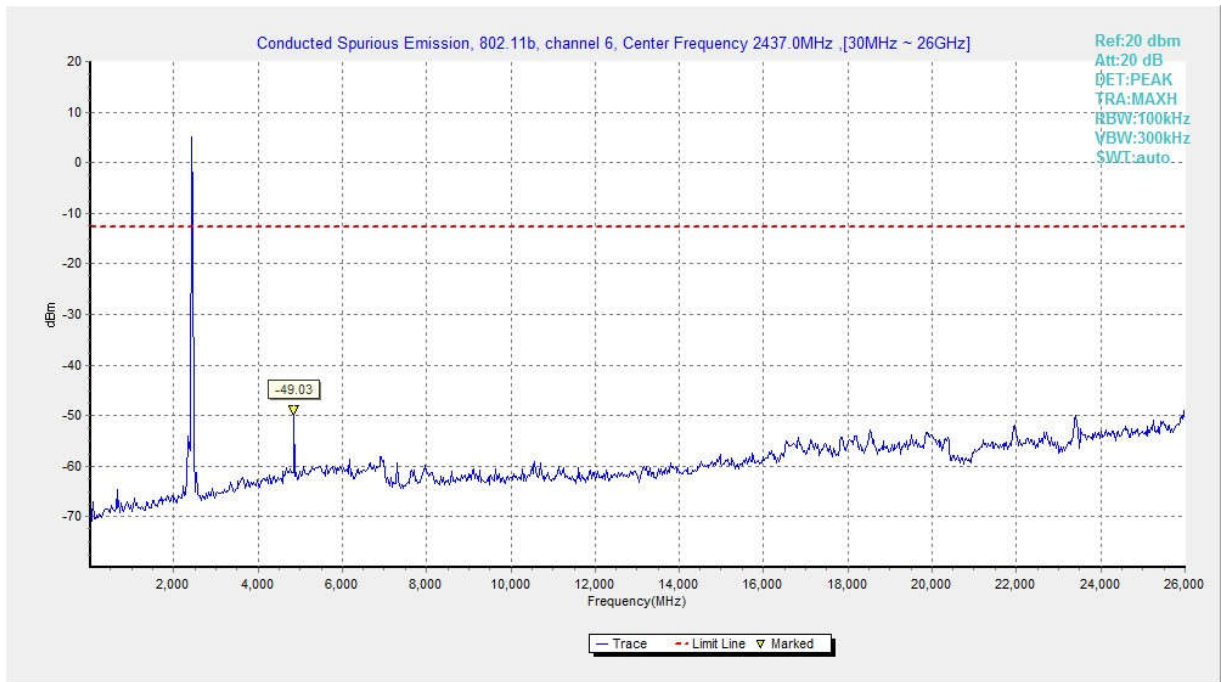


Fig.26 Conducted Spurious Emission (802.11b, CH6)

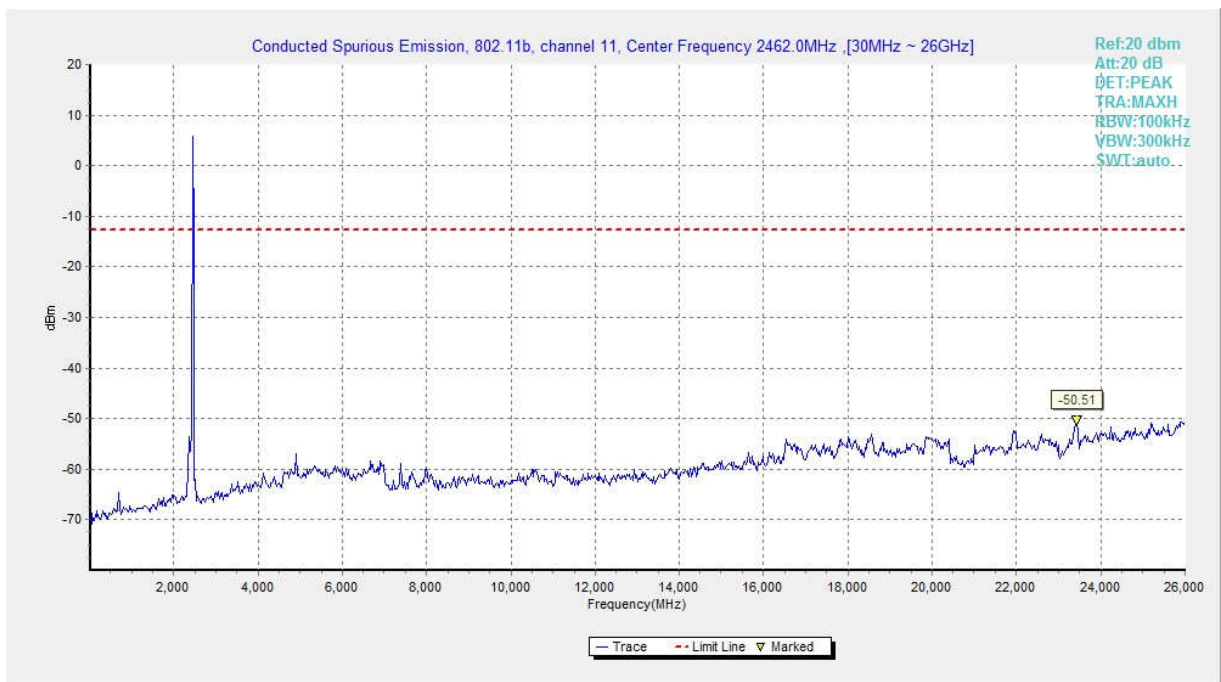


Fig.27 Conducted Spurious Emission (802.11b, CH11)

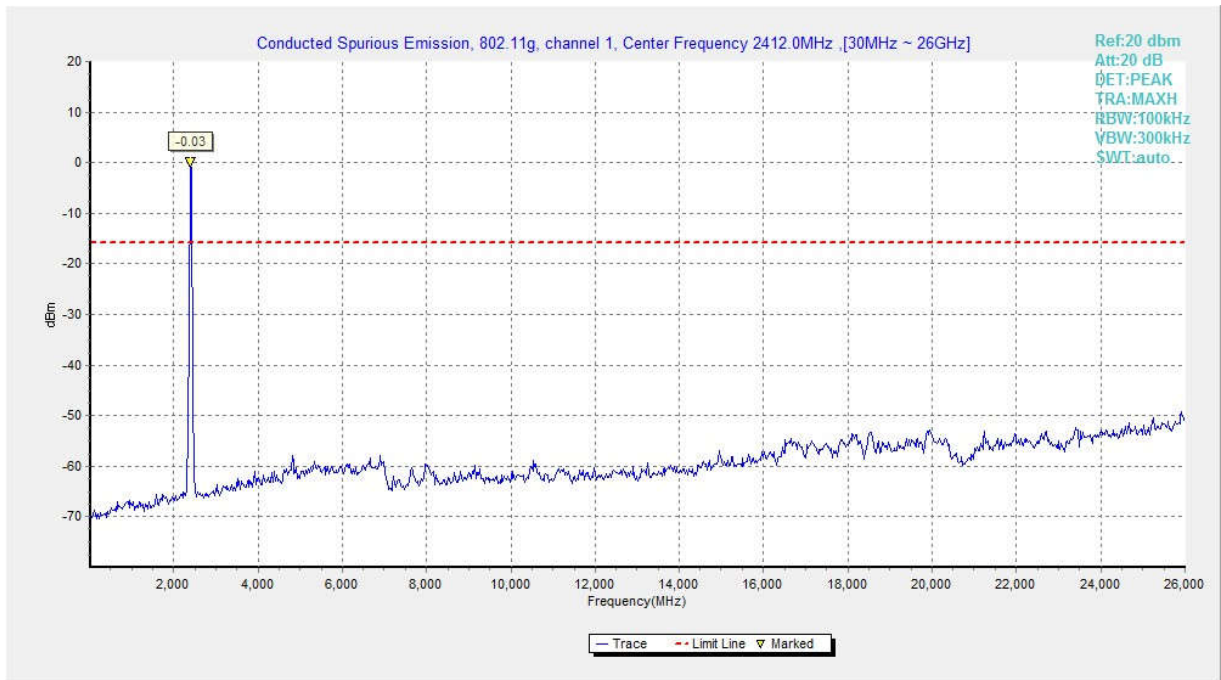


Fig.28 Conducted Spurious Emission (802.11g, CH1)

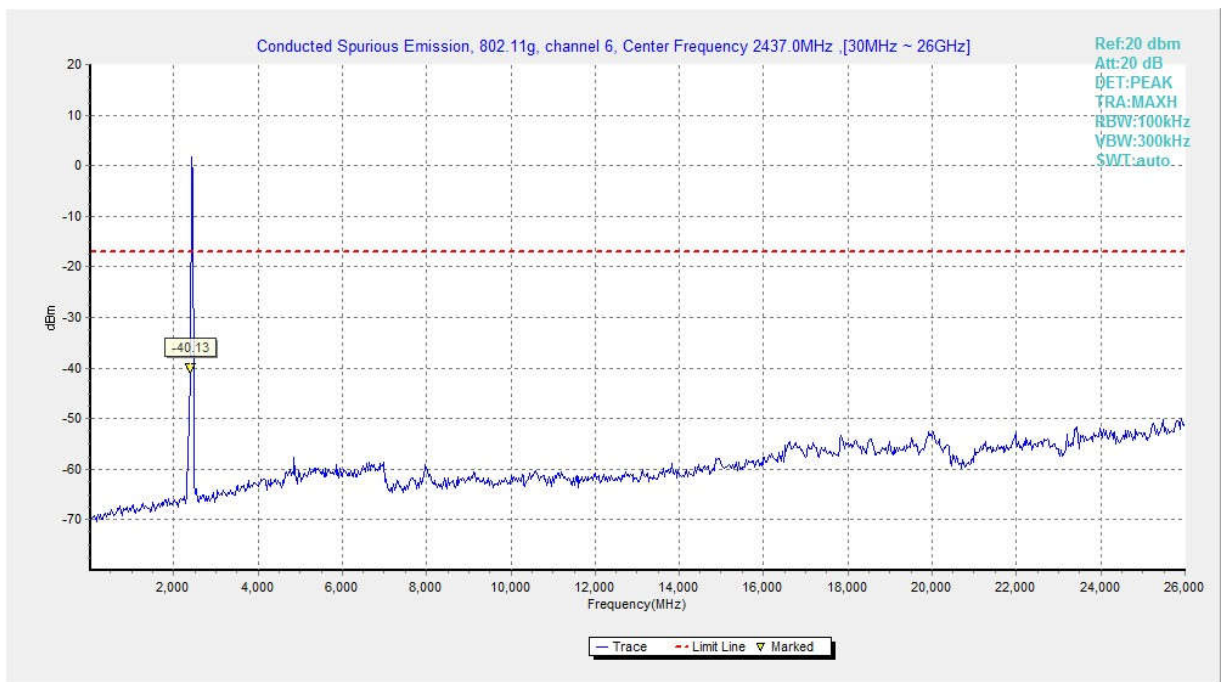


Fig.29 Conducted Spurious Emission (802.11g, CH6)

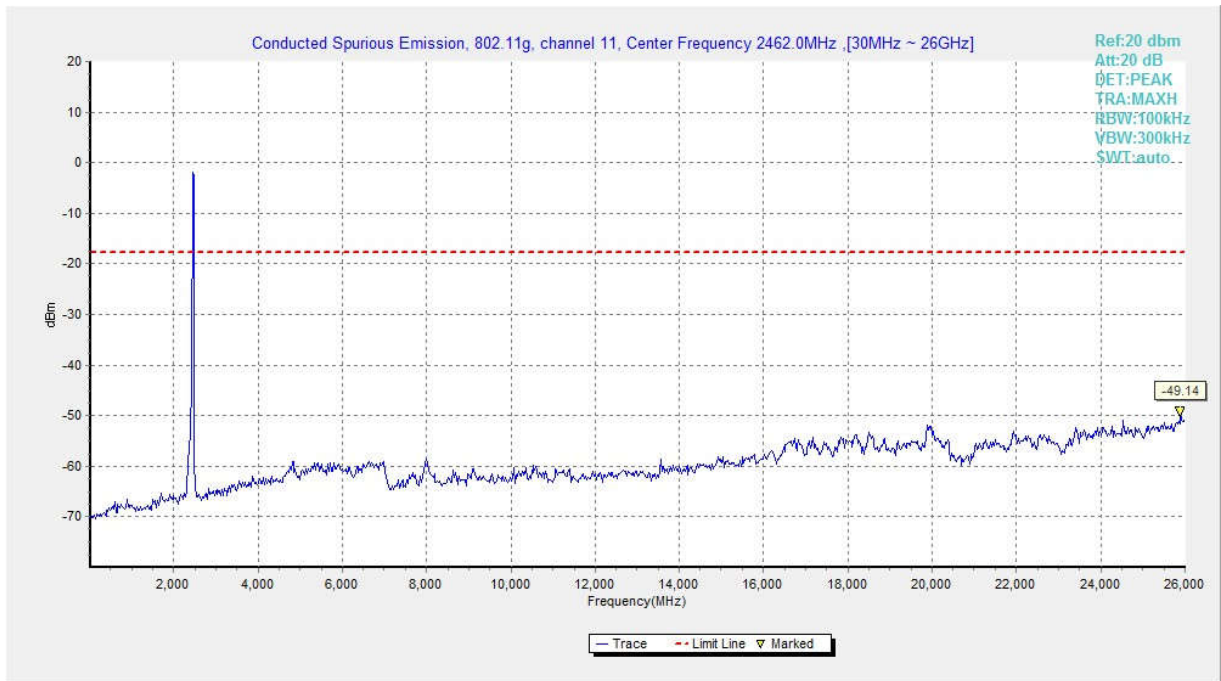


Fig.30 Conducted Spurious Emission (802.11g, CH11)

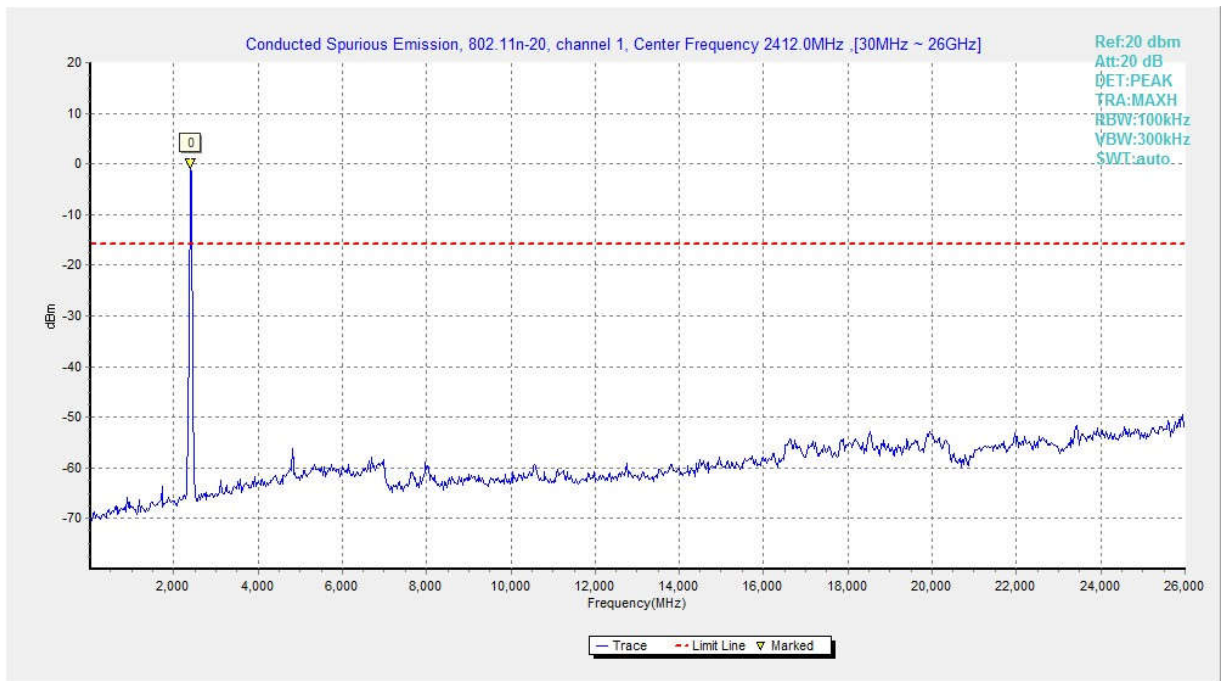


Fig.31 Conducted Spurious Emission (802.11n HT20, CH1)

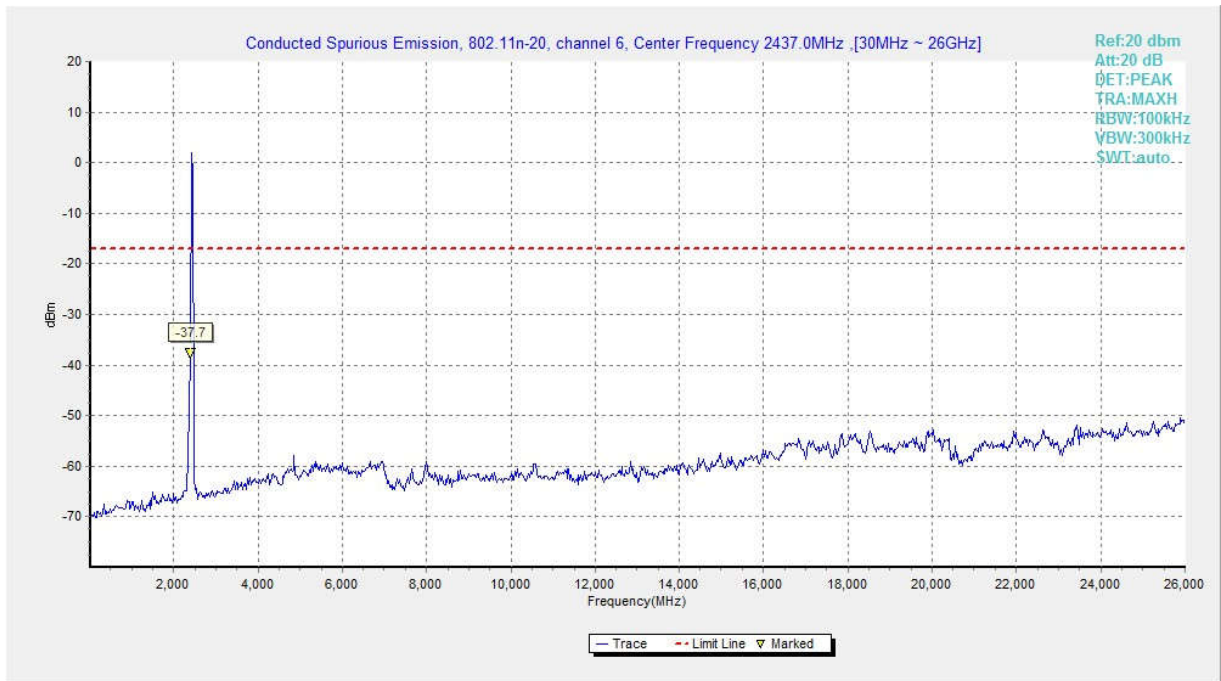


Fig.32 Conducted Spurious Emission (802.11n HT20, CH6)

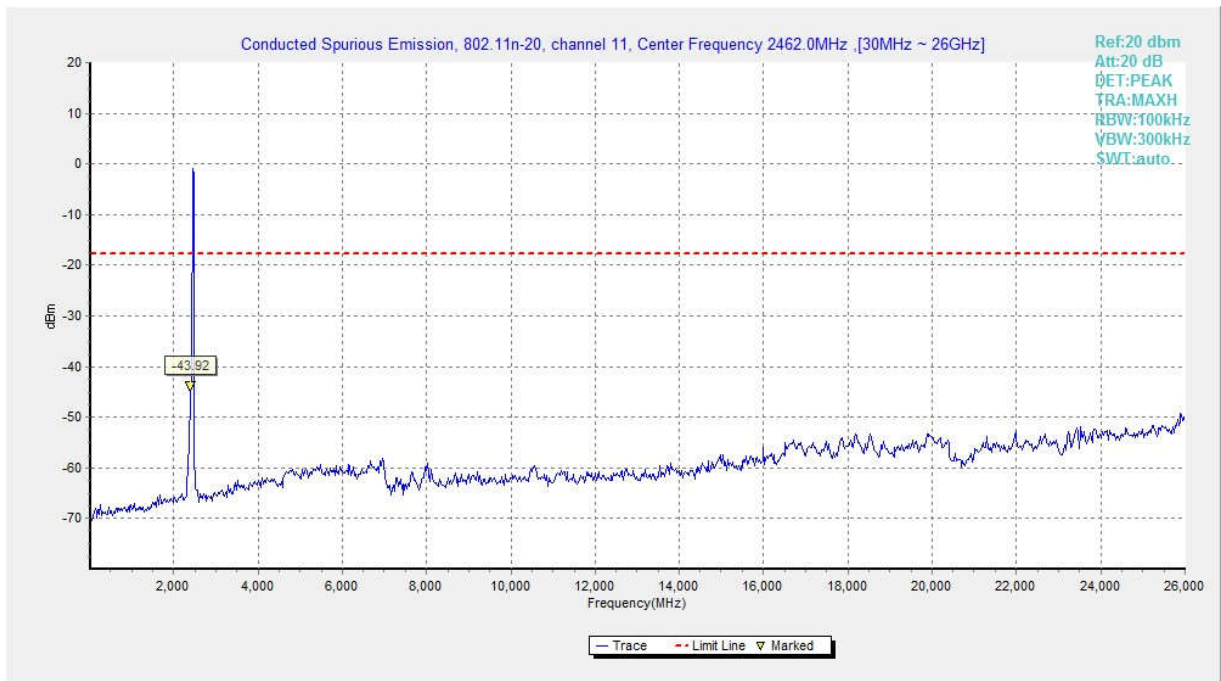


Fig.33 Conducted Spurious Emission (802.11n HT20, CH11)

A.6 Radiated Emission

Measurement Limit:

| Standard | Limit |
|--|------------------------------|
| FCC 47 CFR Part 15.247, 15.205, 15.209 & RSS-247 Section 5.5/RSS-Gen 6.13 | 20dB below peak output power |

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

| Frequency of emission (MHz) | Field strength($\mu\text{V}/\text{m}$) | Measurement distance(meters) |
|-----------------------------|--|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

| Frequency of emission (MHz) | RBW/VBW | Sweep Time(s) |
|-----------------------------|---------------|---------------|
| 30-1000 | 120kHz/300kHz | 5 |
| 1000-4000 | 1MHz/3MHz | 15 |
| 4000-18000 | 1MHz/3MHz | 40 |
| 18000-26500 | 1MHz/3MHz | 20 |

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

| Mode | Channel | Frequency Range | Test Results | Conclusion |
|-----------------|------------------------|---------------------|--------------|------------|
| 802.11b | CH 1 | 1 GHz ~18 GHz | Fig.34 | P |
| | CH 6 | 1 GHz ~18 GHz | Fig.35 | P |
| | CH 11 | 1 GHz ~18 GHz | Fig.36 | P |
| | Restricted Band (CH1) | 2.38 GHz ~ 2.45 GHz | Fig.37 | P |
| | Restricted Band (CH11) | 2.45 GHz ~ 2.5 GHz | Fig.38 | P |
| 802.11g | CH 1 | 1 GHz ~18 GHz | Fig.39 | P |
| | CH 6 | 1 GHz ~18 GHz | Fig.40 | P |
| | CH 11 | 1 GHz ~18 GHz | Fig.41 | P |
| | Restricted Band (CH1) | 2.38 GHz ~ 2.45 GHz | Fig.42 | P |
| | Restricted Band (CH11) | 2.45 GHz ~ 2.5 GHz | Fig.43 | P |
| 802.11n HT20 | CH 1 | 1 GHz ~18 GHz | Fig.44 | P |
| | CH 6 | 1 GHz ~18 GHz | Fig.45 | P |
| | CH 11 | 1 GHz ~18 GHz | Fig.46 | P |
| | Restricted Band (CH1) | 2.38 GHz ~ 2.45 GHz | Fig.47 | P |
| | Restricted Band (CH11) | 2.45 GHz ~ 2.5 GHz | Fig.48 | P |
| / | All Channels | 9 kHz ~30 MHz | Fig.49 | P |
| | | 30 MHz ~1 GHz | Fig.50 | P |
| | | 18 GHz ~26.5 GHz | Fig.51 | P |

Worst-Case Result:

802.11b CH6 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----|------------|
| 13901.000000 | 55.90 | 74.00 | 18.10 | V | 20.6 |
| 14681.500000 | 56.41 | 74.00 | 17.59 | H | 21.5 |
| 15575.500000 | 60.83 | 74.00 | 13.17 | V | 23.8 |
| 15909.500000 | 62.20 | 74.00 | 11.80 | V | 24.2 |
| 17103.500000 | 62.60 | 74.00 | 11.40 | V | 25.7 |
| 18000.000000 | 62.37 | 74.00 | 11.63 | V | 27.4 |

| Frequency (MHz) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----|------------|
| 13911.000000 | 44.37 | 54.00 | 9.63 | V | 21.1 |
| 14681.000000 | 45.14 | 54.00 | 8.86 | H | 21.5 |
| 15571.000000 | 48.96 | 54.00 | 5.04 | H | 23.6 |
| 15939.500000 | 50.31 | 54.00 | 3.69 | H | 24.9 |
| 16593.500000 | 51.10 | 54.00 | 2.90 | V | 26.3 |
| 17708.000000 | 50.81 | 54.00 | 3.19 | V | 27.6 |

802.11g CH1 (1GHz-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----|------------|
| 13844.000000 | 56.13 | 74.00 | 17.87 | H | 19.9 |
| 14633.500000 | 57.47 | 74.00 | 16.53 | H | 21.4 |
| 15199.000000 | 61.19 | 74.00 | 12.81 | H | 23.0 |
| 16252.000000 | 63.07 | 74.00 | 10.93 | V | 25.1 |
| 17096.000000 | 63.24 | 74.00 | 10.76 | V | 25.3 |
| 17164.500000 | 63.01 | 74.00 | 10.99 | H | 26.0 |

| Frequency (MHz) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----|------------|
| 13911.000000 | 44.72 | 54.00 | 9.28 | V | 21.1 |
| 14677.500000 | 45.22 | 54.00 | 8.78 | H | 21.4 |
| 15571.000000 | 49.25 | 54.00 | 4.75 | H | 23.6 |
| 15940.000000 | 50.59 | 54.00 | 3.41 | V | 24.9 |
| 16584.500000 | 51.51 | 54.00 | 2.49 | V | 26.4 |
| 17707.500000 | 51.14 | 54.00 | 2.86 | V | 27.6 |

802.11n HT20 CH1 (1GHz-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----|------------|
| 13908.000000 | 56.69 | 74.00 | 17.31 | V | 21.0 |
| 14688.000000 | 57.75 | 74.00 | 16.25 | H | 21.6 |
| 15474.500000 | 60.33 | 74.00 | 13.67 | V | 23.1 |
| 16233.000000 | 62.34 | 74.00 | 11.66 | V | 25.4 |
| 16588.000000 | 62.95 | 74.00 | 11.05 | V | 26.3 |
| 17717.000000 | 62.74 | 74.00 | 11.26 | V | 27.7 |

| Frequency (MHz) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----|------------|
| 13907.500000 | 45.23 | 54.00 | 8.77 | V | 21.0 |
| 14681.000000 | 45.70 | 54.00 | 8.30 | H | 21.5 |
| 15571.000000 | 49.18 | 54.00 | 4.82 | V | 23.6 |
| 15942.000000 | 50.63 | 54.00 | 3.37 | H | 24.9 |
| 16586.000000 | 51.40 | 54.00 | 2.60 | H | 26.3 |
| 17714.000000 | 51.15 | 54.00 | 2.85 | V | 27.7 |

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= P_{Mea} +Cable Loss +Antenna Factor-Gain of the preamplifier.

See below for test graphs.

Conclusion: PASS

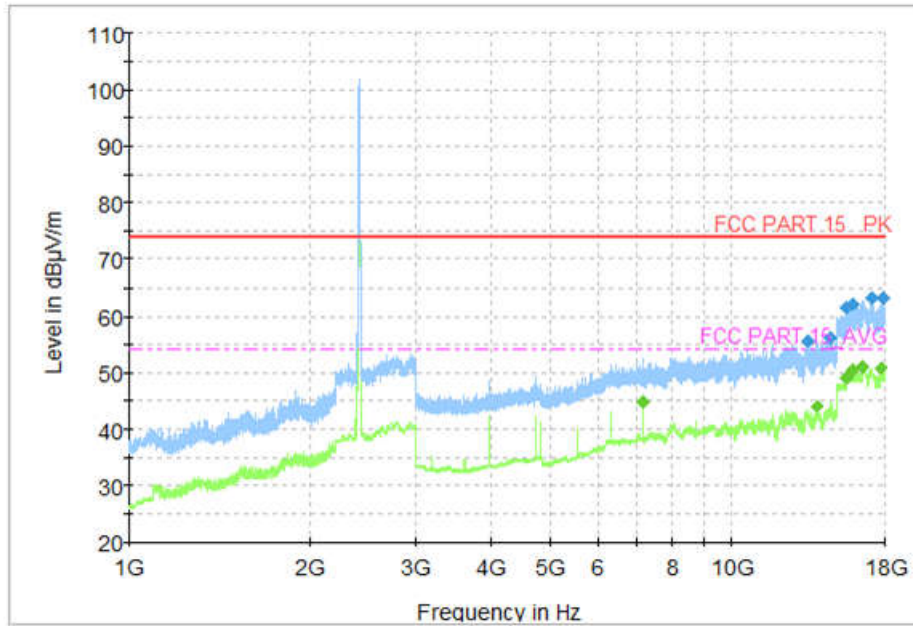


Fig.34 Radiated Spurious Emission (802.11b, CH1, 1 GHz-18GHz)

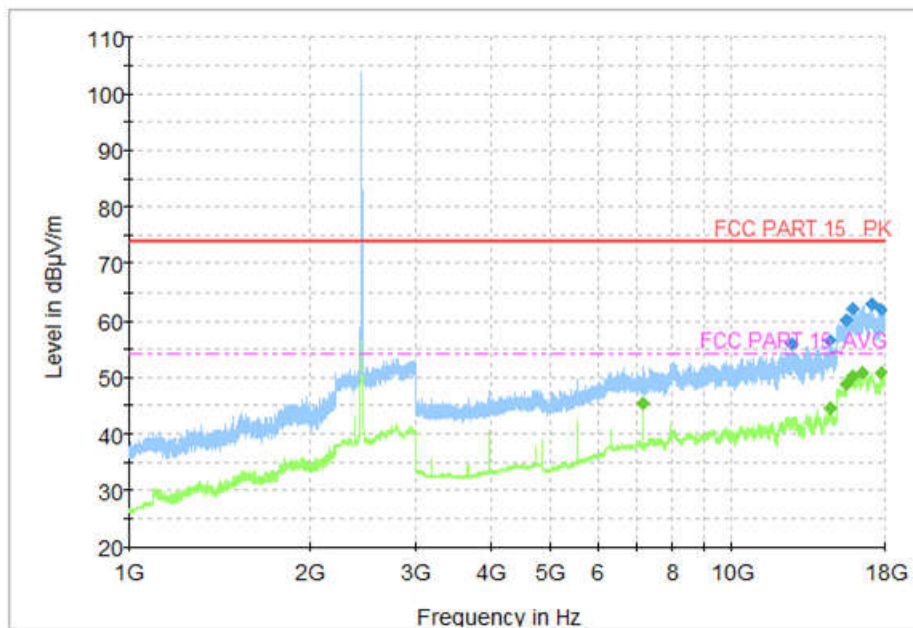


Fig.35 Radiated Spurious Emission (802.11b, CH6, 1 GHz-18GHz)

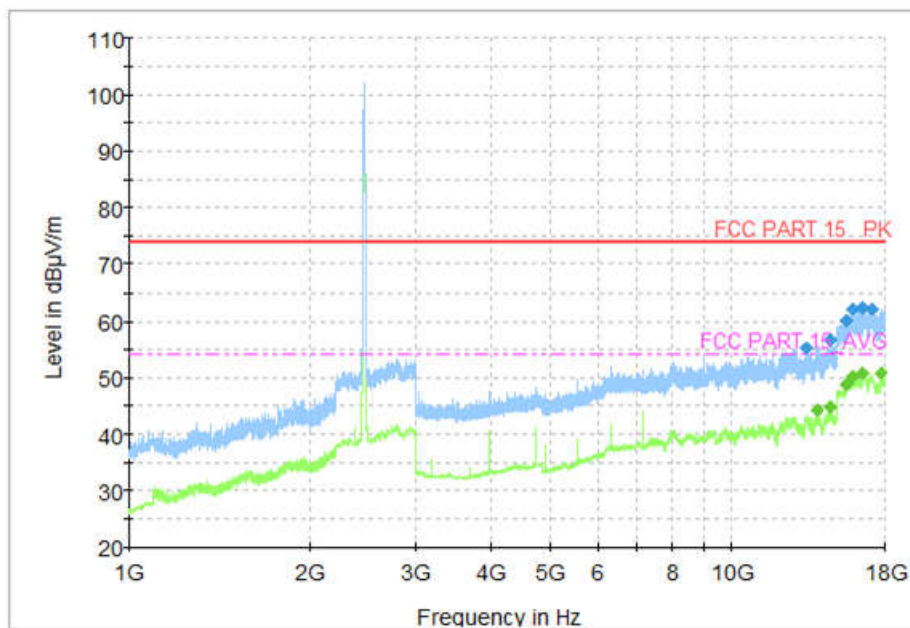


Fig.36 Radiated Spurious Emission (802.11b, CH11, 1 GHz-18GHz)

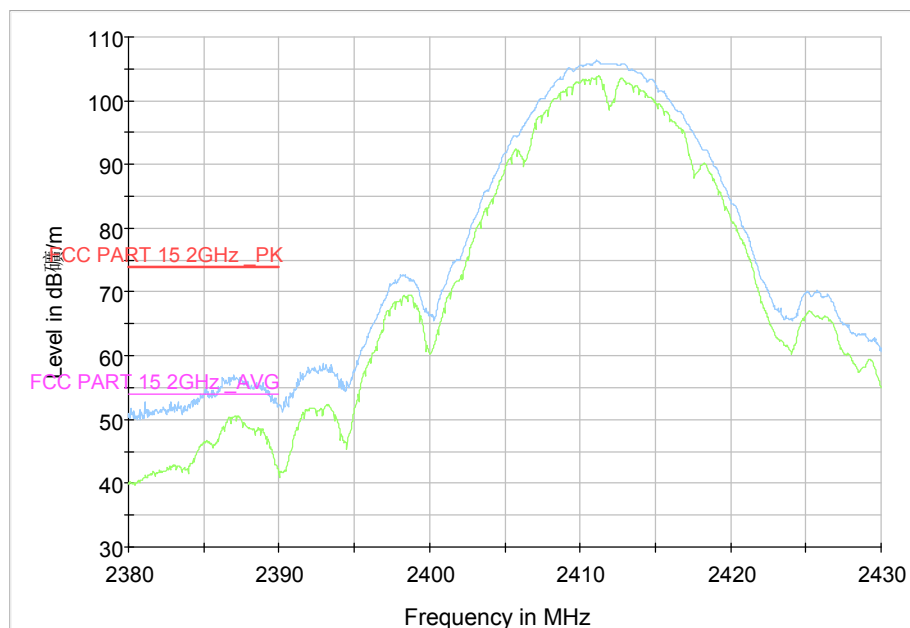


Fig.37 Radiated Restricted Band (802.11b, CH1, 2.38GHz~2.45GHz)

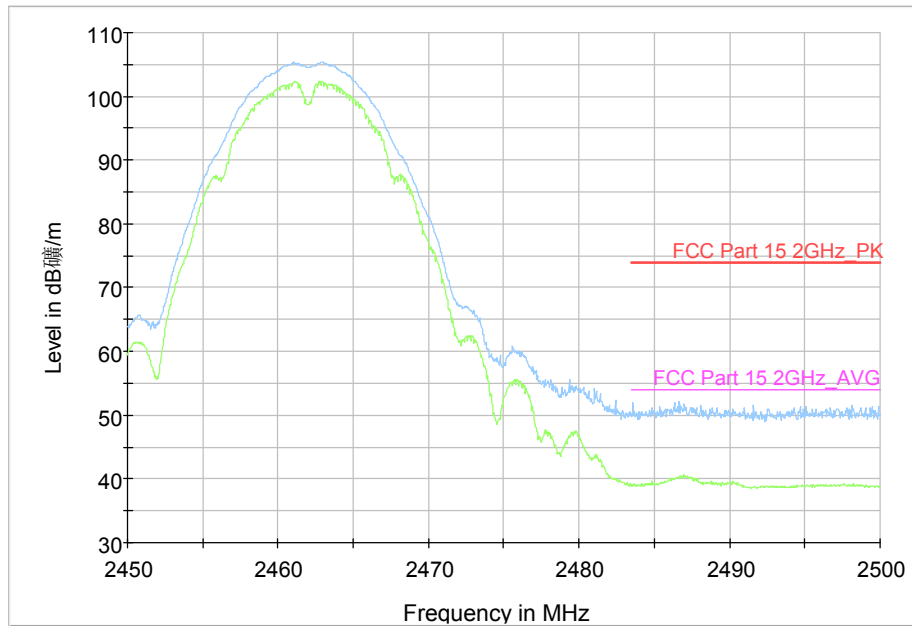


Fig.38 Radiated Restricted Band (802.11b, CH11, 2.45GHz~2.5GHz)

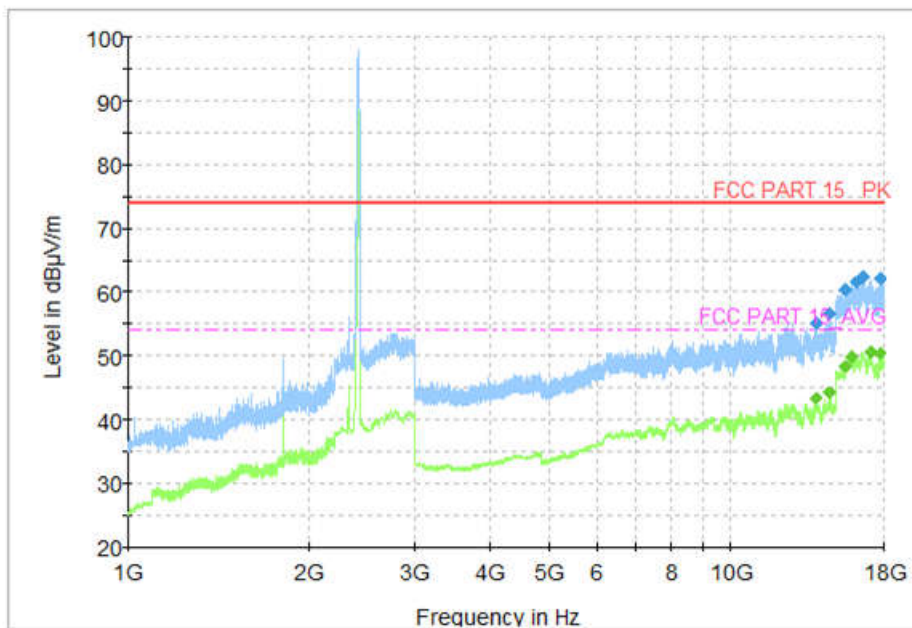


Fig.39 Radiated Spurious Emission (802.11g, CH1, 1 GHz-18 GHz)

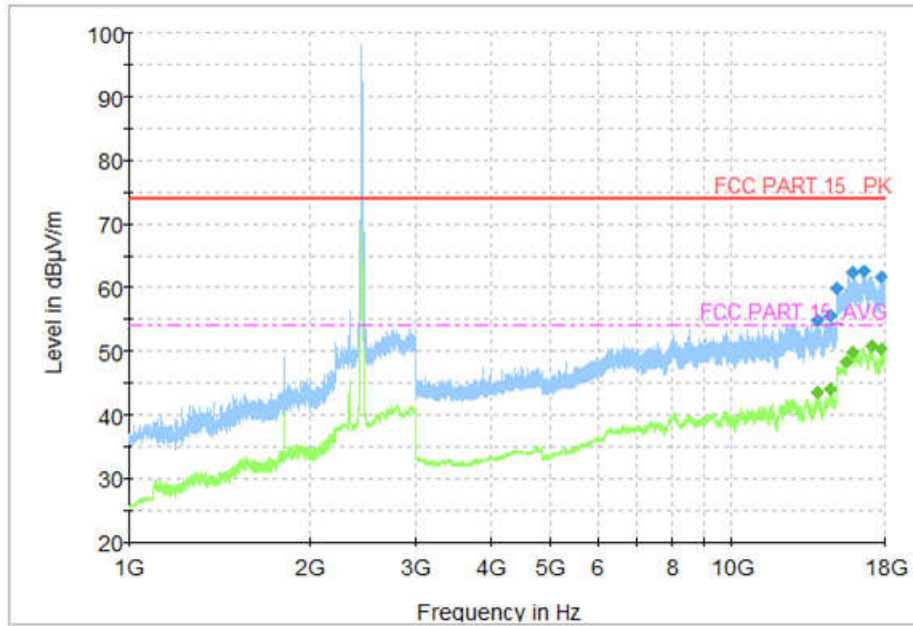


Fig.40 Radiated Spurious Emission (802.11g, CH6, 1 GHz-18 GHz)

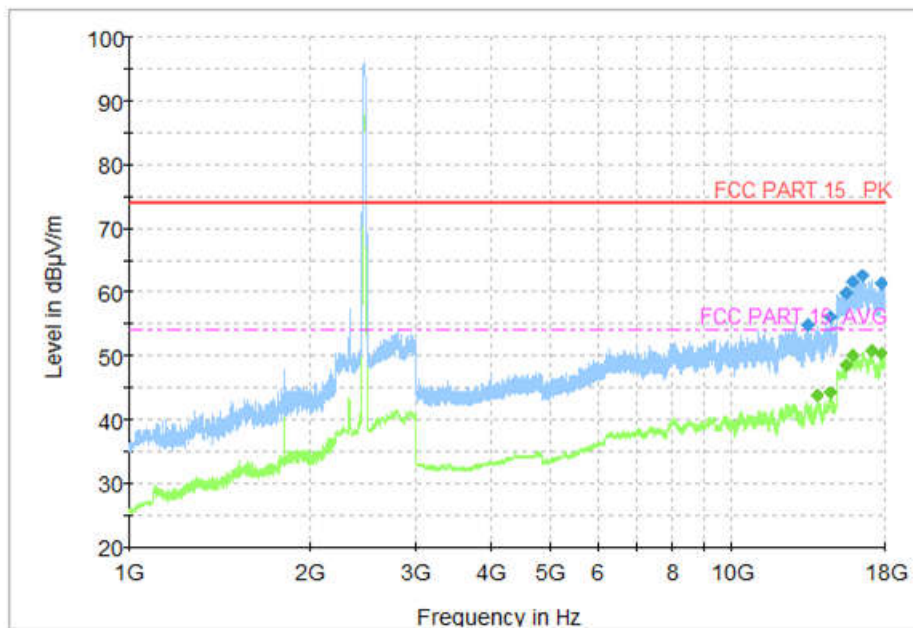


Fig.41 Radiated Spurious Emission (802.11g, CH11, 1 GHz-18 GHz)

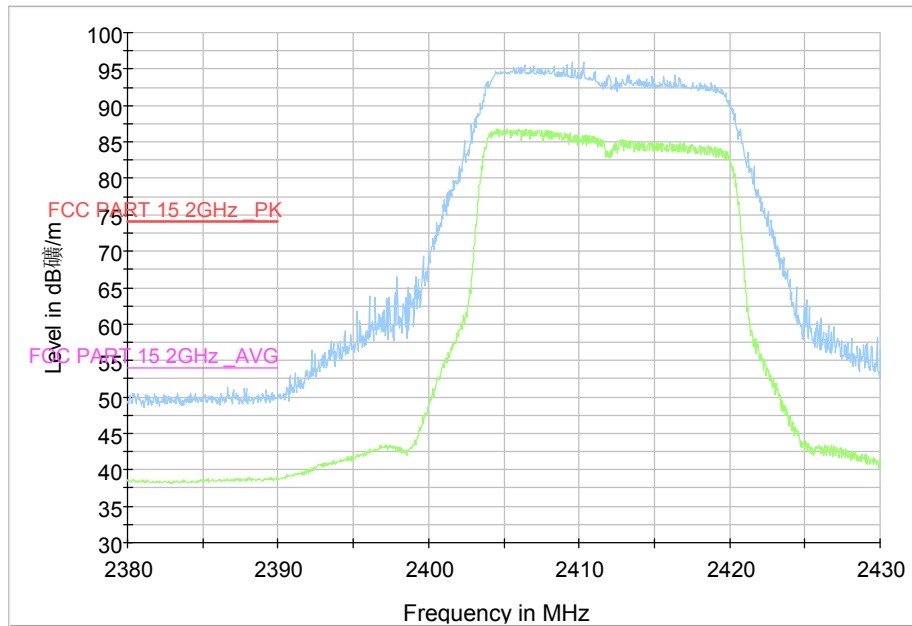


Fig.42 Radiated Restricted Band (802.11g, CH1, 2.38GHz~2.45GHz)

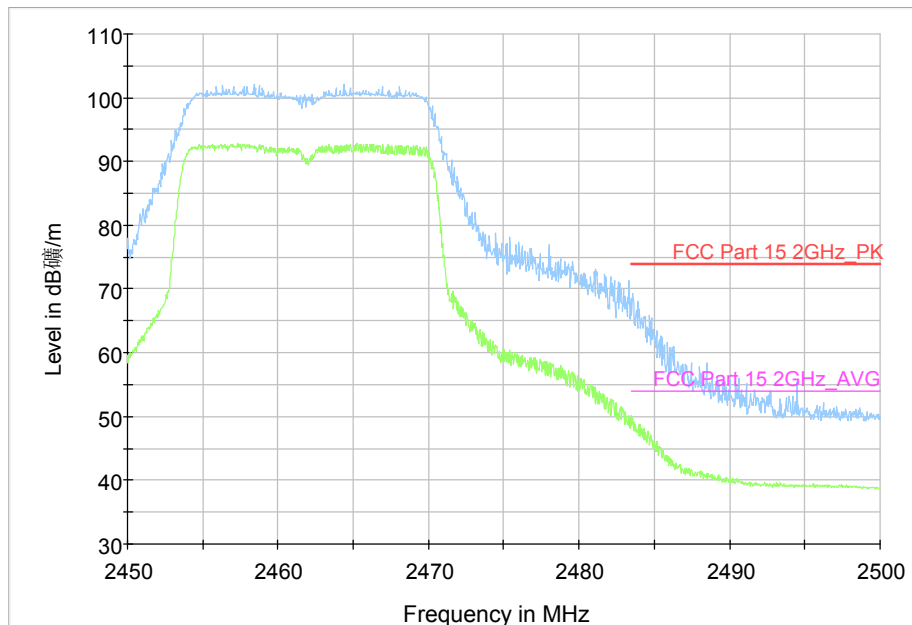


Fig.43 Radiated Restricted Band (802.11g, CH11, 2.45GHz~2.5GHz)

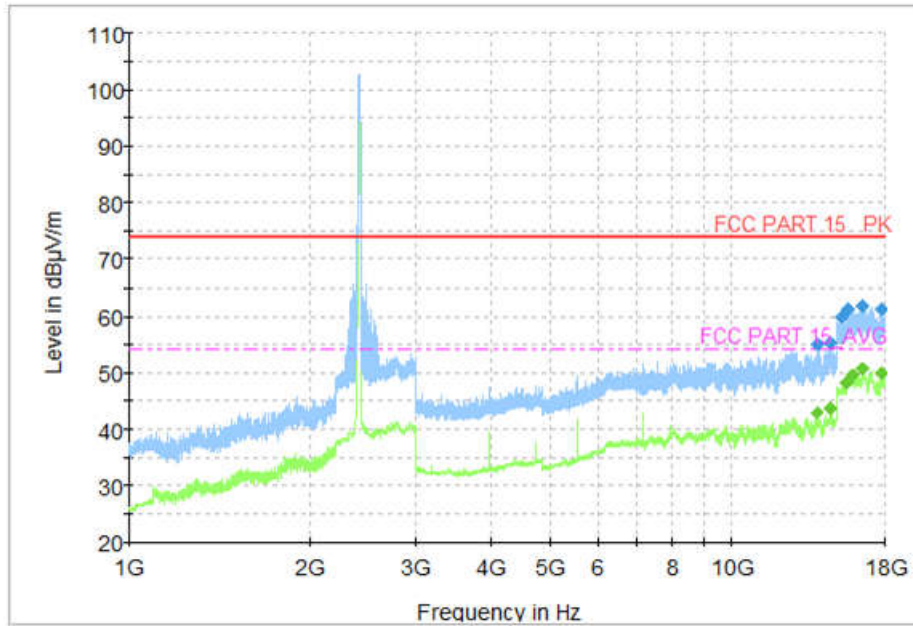


Fig.44 Radiated Spurious Emission (802.11n HT20, CH1, 1 GHz-18 GHz)

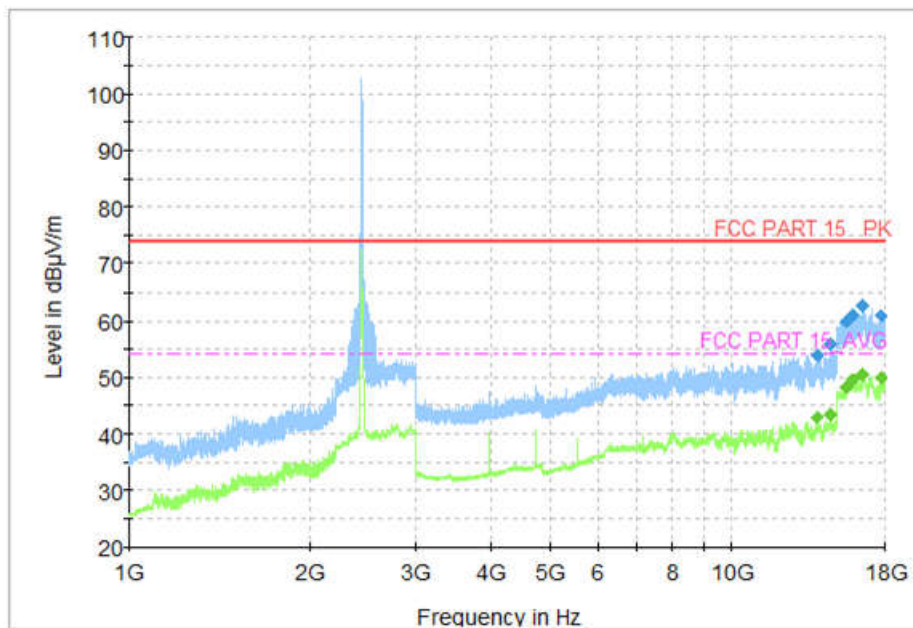


Fig.45 Radiated Spurious Emission (802.11n HT20, CH6, 1 GHz-18 GHz)

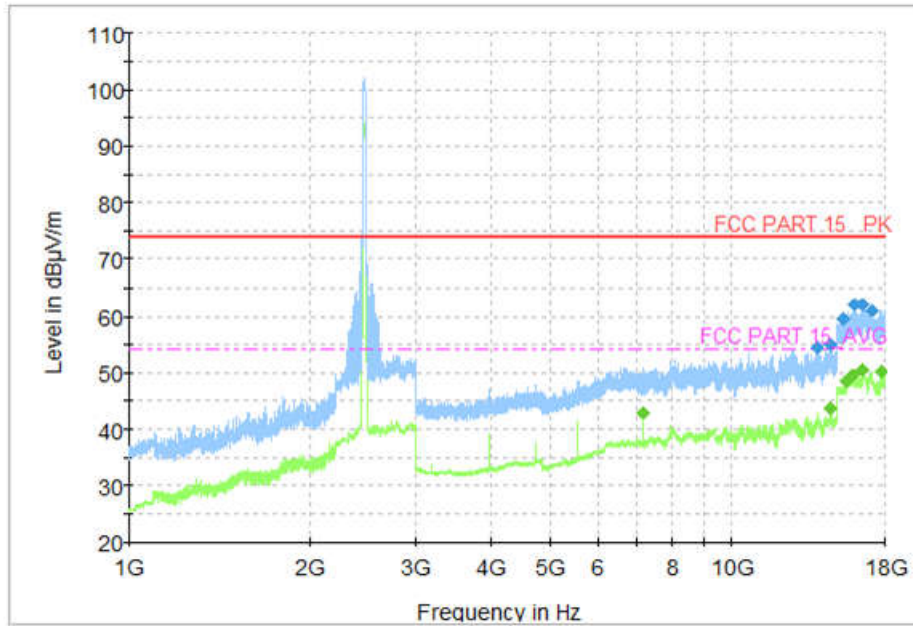


Fig.46 Radiated Spurious Emission (802.11n HT20, CH11, 1 GHz-18 GHz)

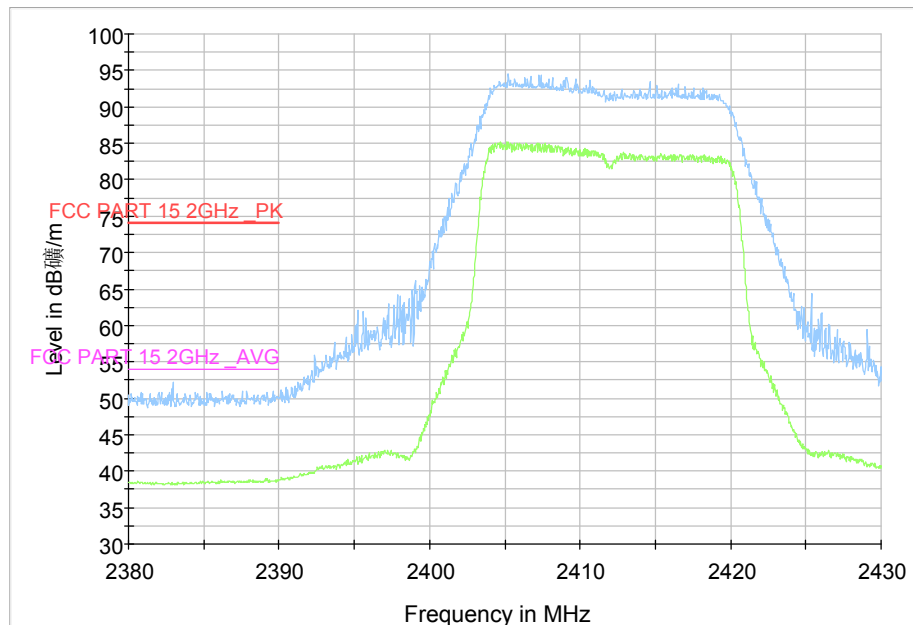


Fig.47 Radiated Restricted Band (802.11n HT20, CH1, 2.38GHz~2.45GHz)

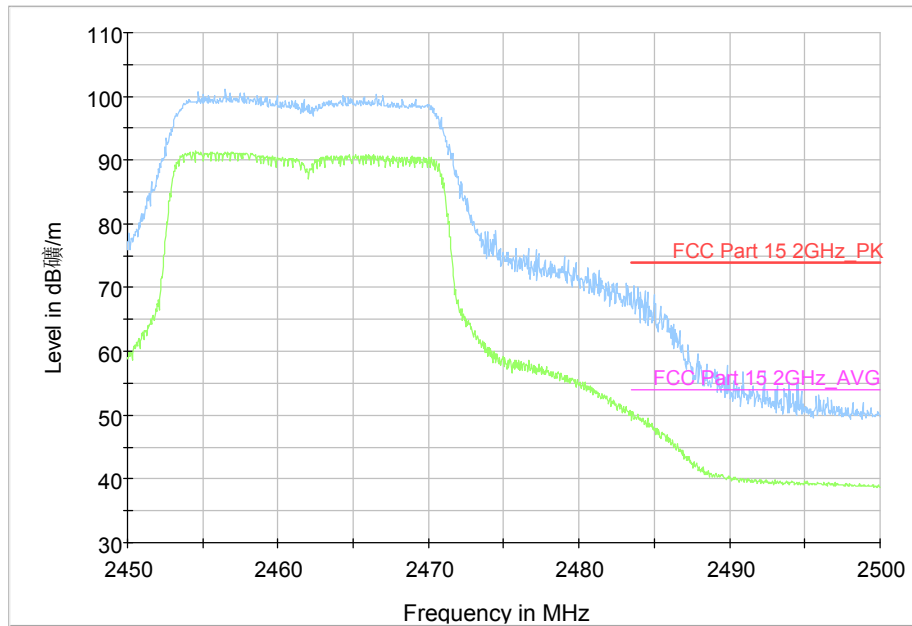


Fig.48 Radiated Restricted Band (802.11n HT20, CH11, 2.45GHz~2.5GHz)

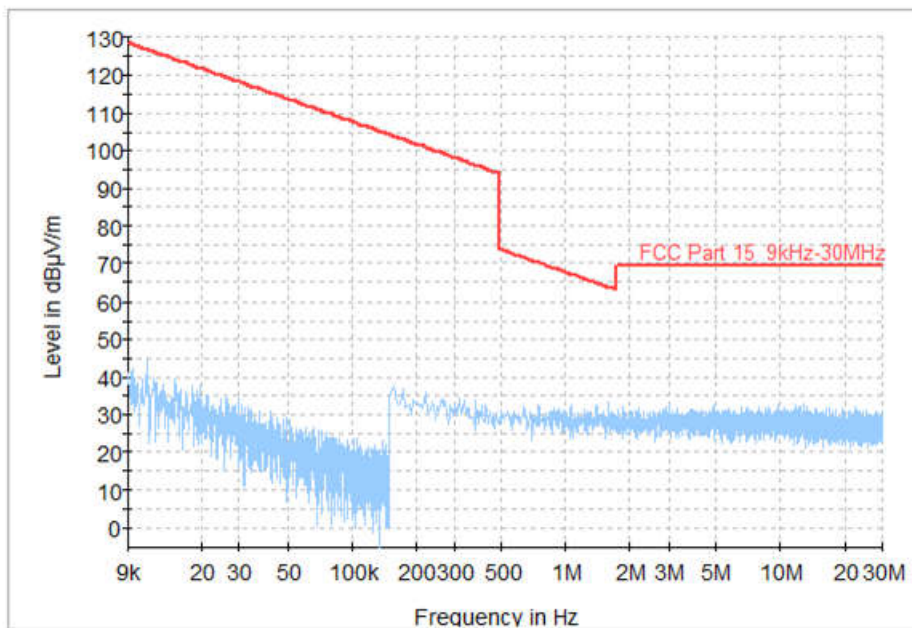


Fig.49 Radiated Spurious Emission (All Channels, 9KHz-30 MHz)

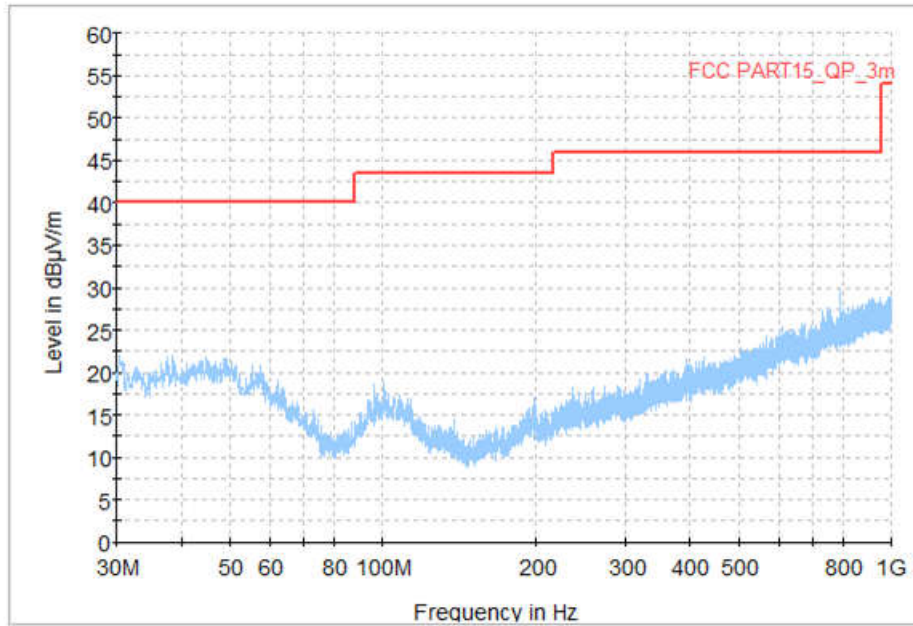


Fig.50 Radiated Spurious Emission (All Channels, 30MHz-1 GHz)

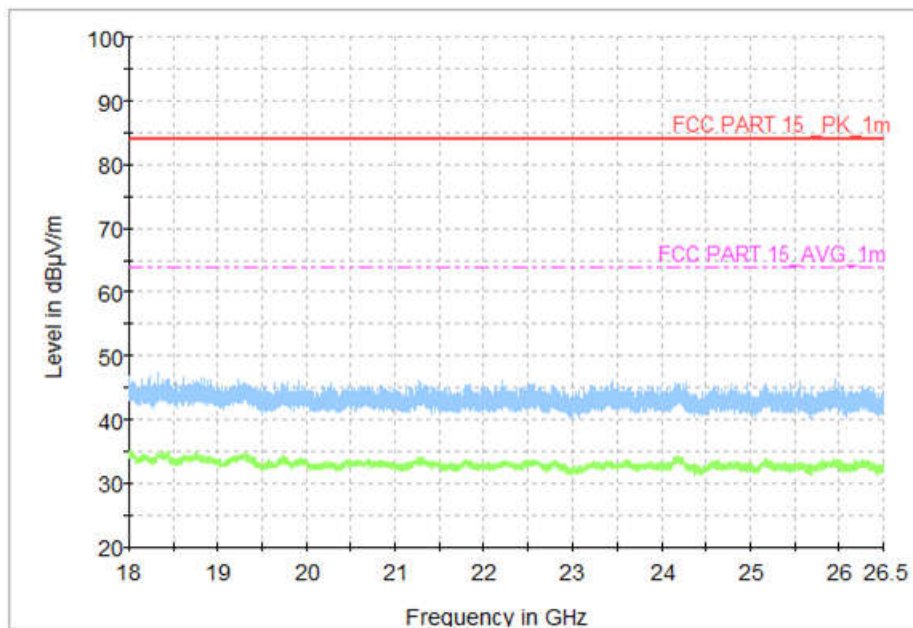


Fig.51 Radiated Spurious Emission (All Channels, 18 GHz-26.5 GHz)

A.7 99% Occupied Bandwidth

Measurement Limit:

| Standard | Limit |
|--------------------|-------|
| RSS-Gen Issue4 6.6 | / |

Measurement Result:

| Mode | Channel | Frequency (MHz) | Test Results (MHz) | | Conclusion |
|-----------------|---------|-----------------|---------------------|-------|------------|
| 802.11b | CH1 | 2412 | Fig.52 | 13.68 | P |
| | CH6 | 2437 | Fig.53 | 12.68 | P |
| | CH11 | 2462 | Fig.54 | 12.36 | P |
| 802.11g | CH1 | 2412 | Fig.55 | 20.64 | P |
| | CH6 | 2437 | Fig.56 | 17.16 | P |
| | CH11 | 2462 | Fig.57 | 16.91 | P |
| 802.11n HT20 | CH1 | 2412 | Fig.58 | 19.56 | P |
| | CH6 | 2437 | Fig.59 | 18.00 | P |
| | CH11 | 2462 | Fig.60 | 17.88 | P |

See ANNEX B for test graphs.

Conclusion: **PASS**

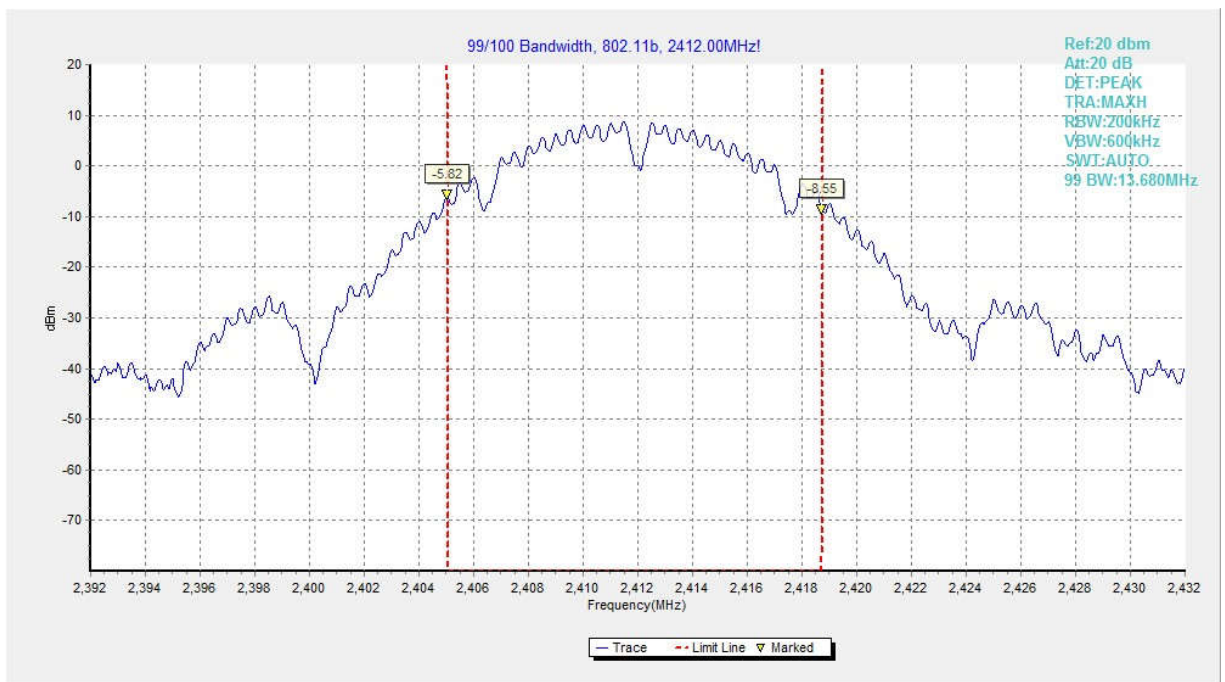


Fig.52 99% Occupied Bandwidth (802.11b, Ch 1)

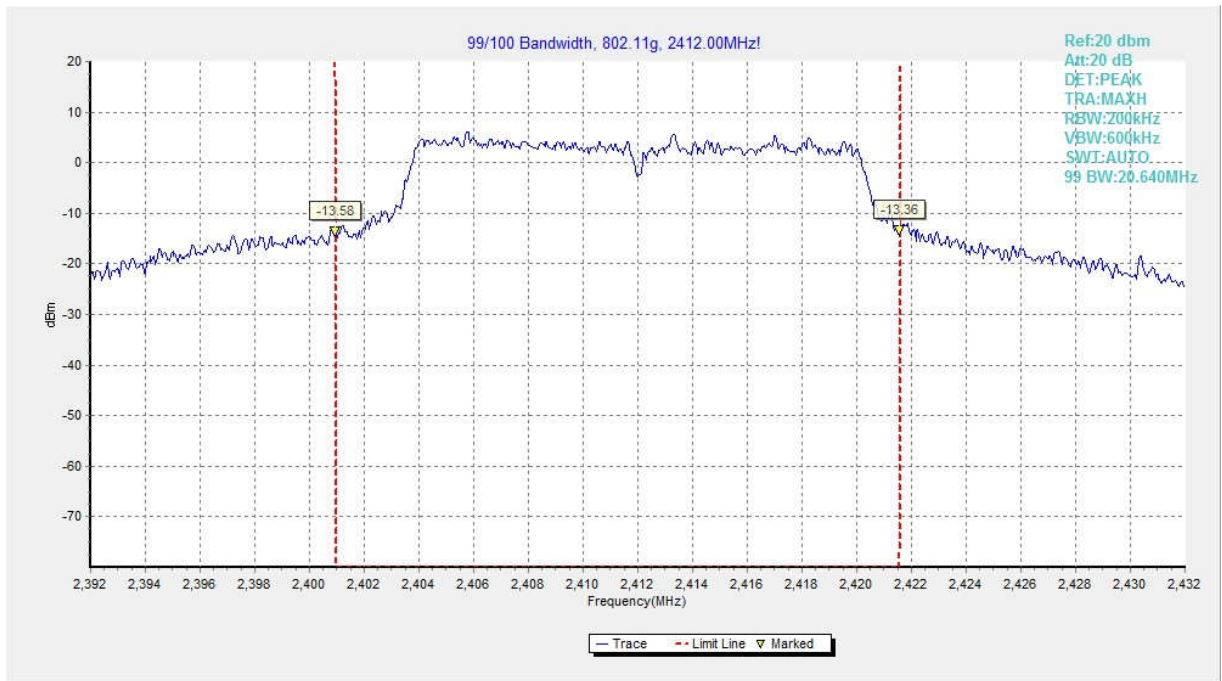


Fig.53 99% Occupied Bandwidth (802.11b, Ch 6)

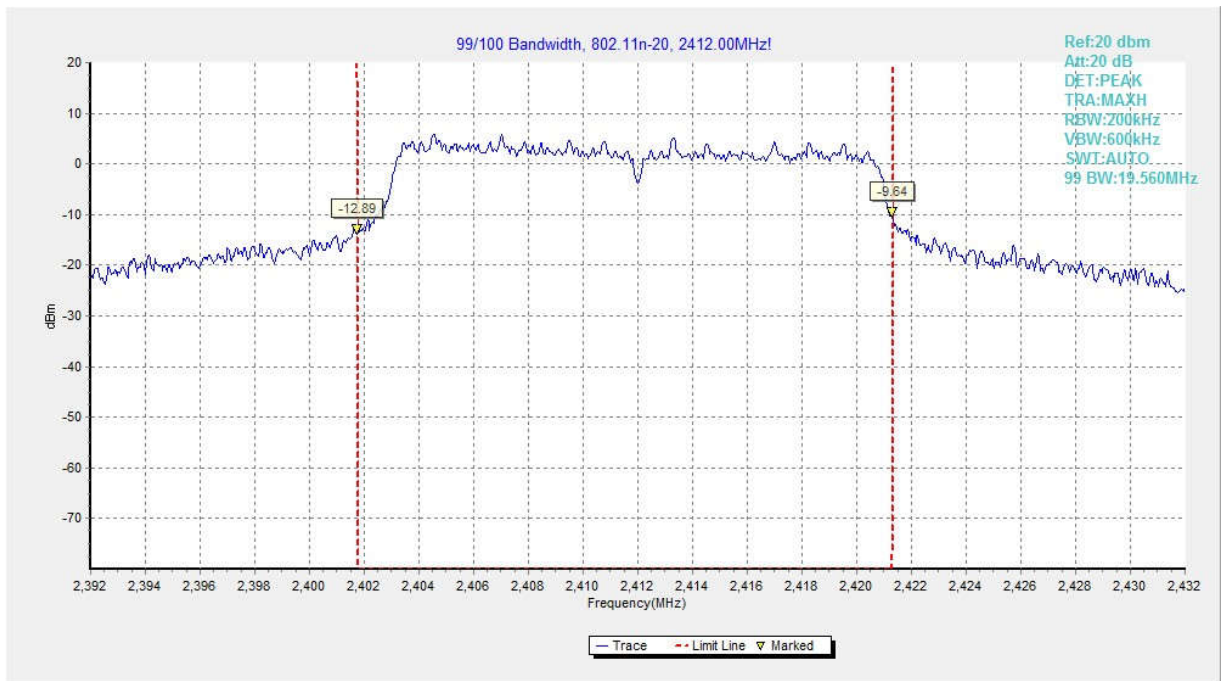


Fig.54 99% Occupied Bandwidth (802.11b, Ch 11)

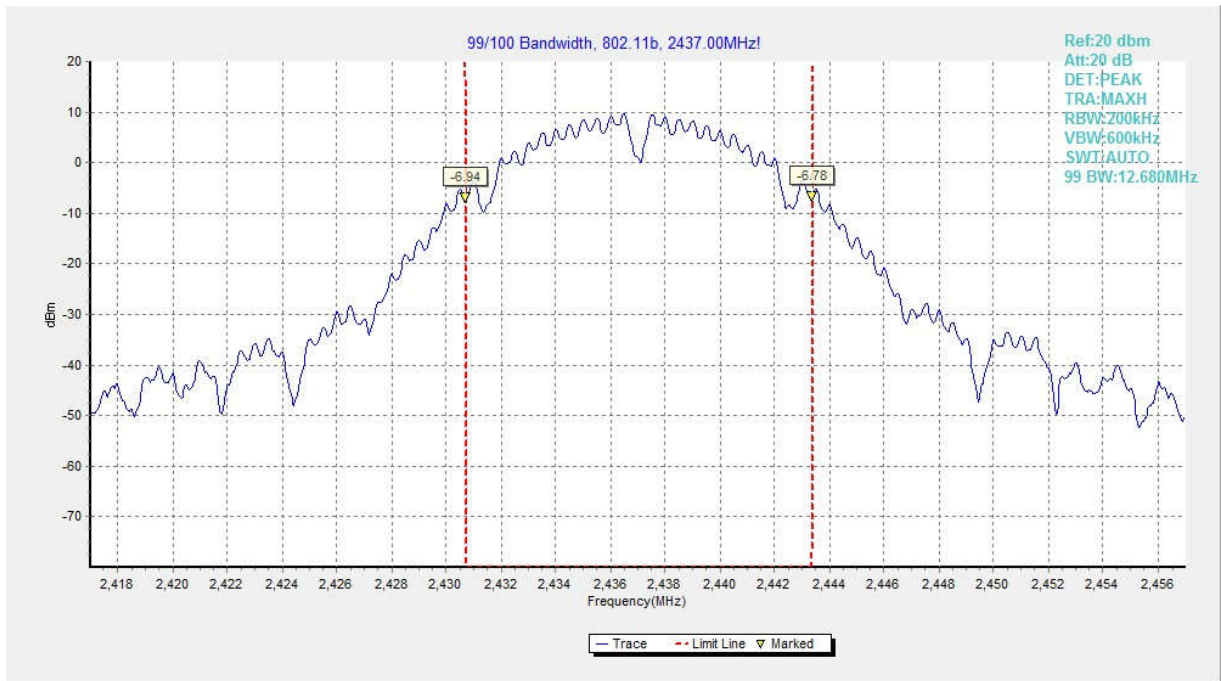


Fig.55 99% Occupied Bandwidth (802.11g, Ch 1)

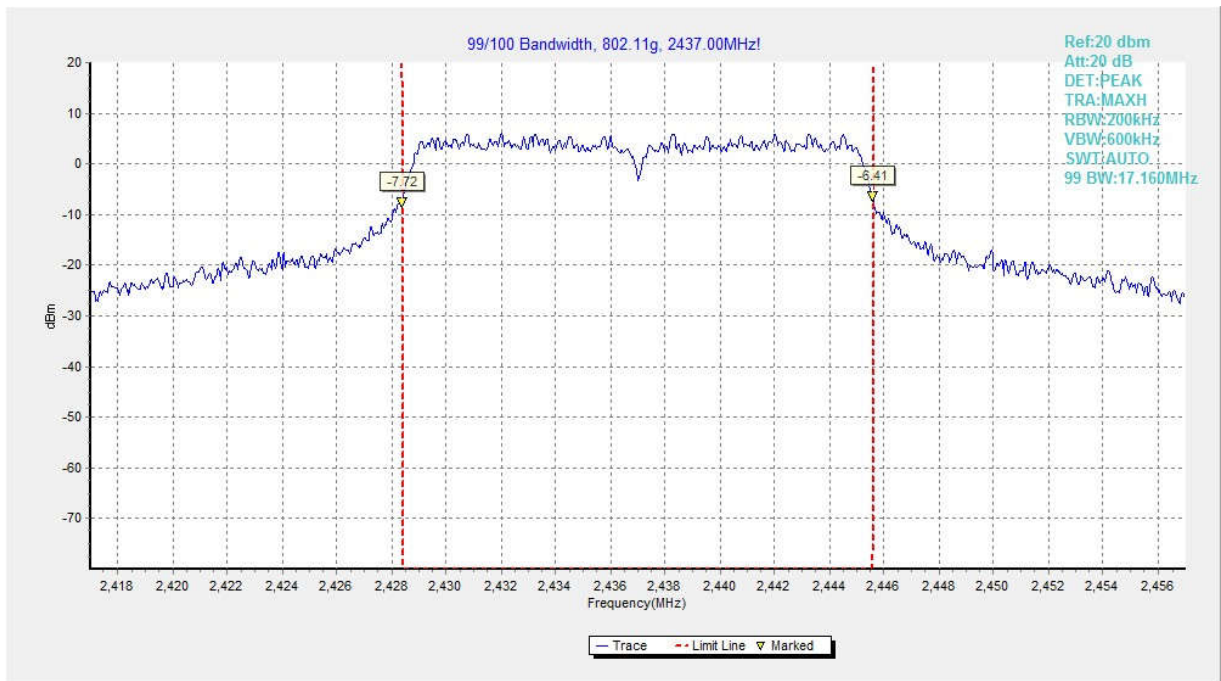


Fig.56 99% Occupied Bandwidth (802.11g, Ch 6)

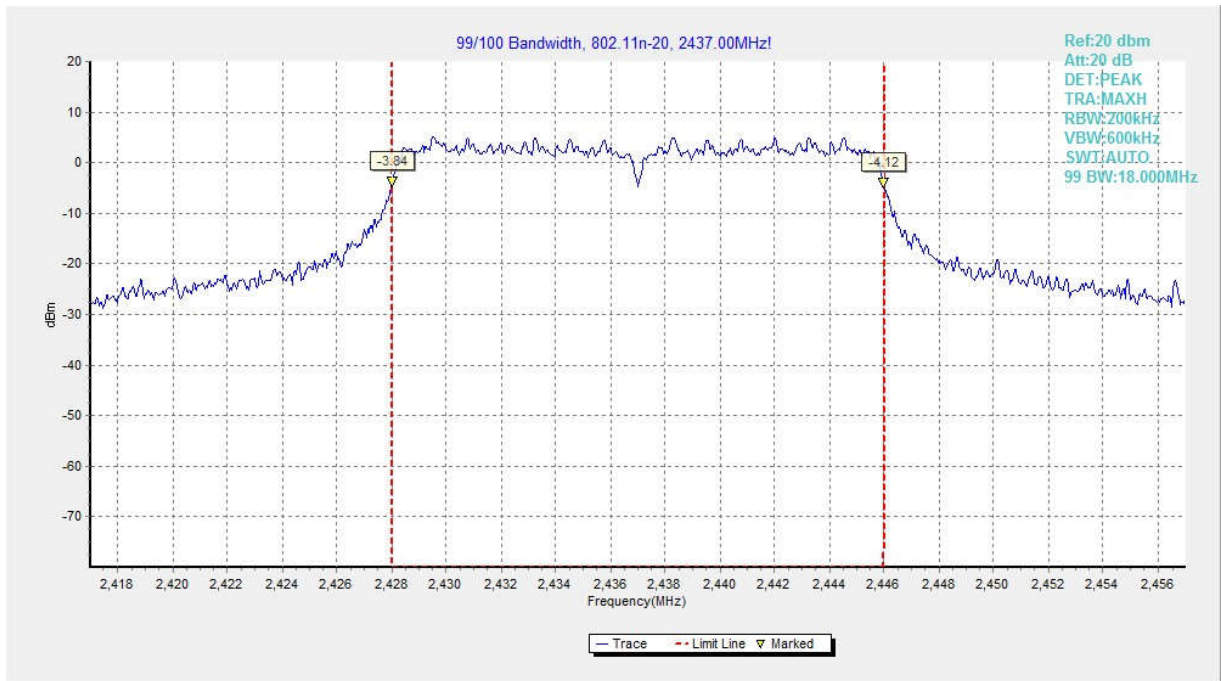


Fig.57 99% Occupied Bandwidth (802.11g, Ch 11)

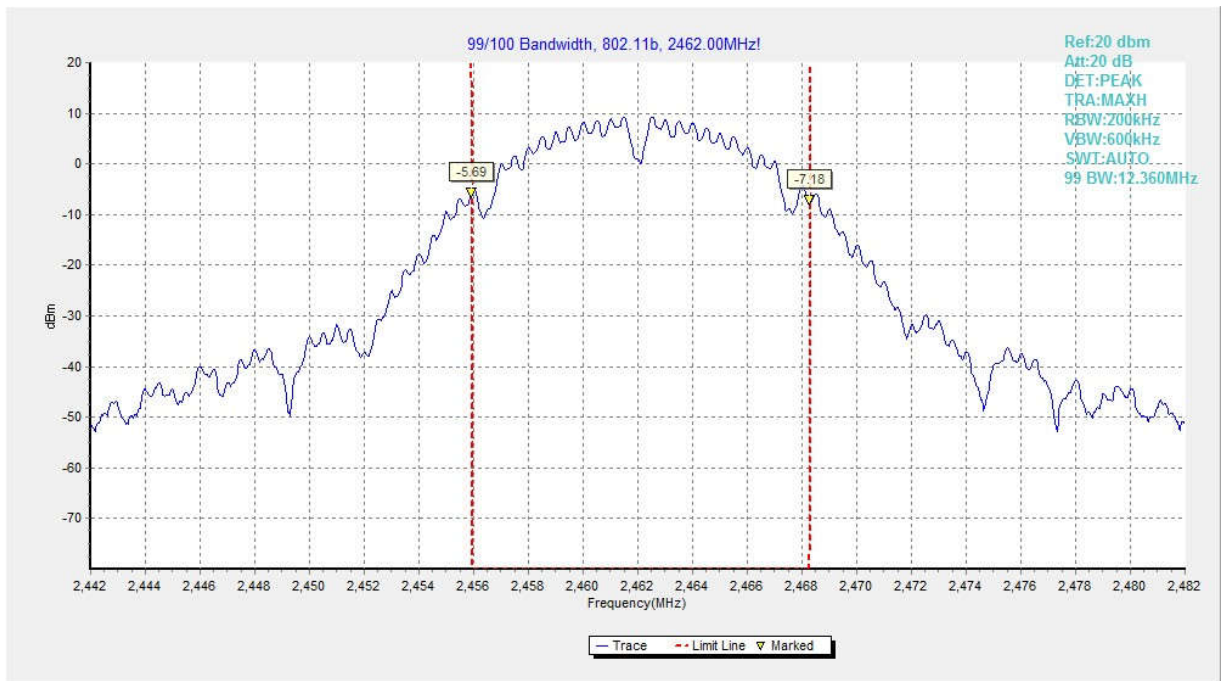


Fig.58 99% Occupied Bandwidth (802.11n-20MHz, Ch 1)

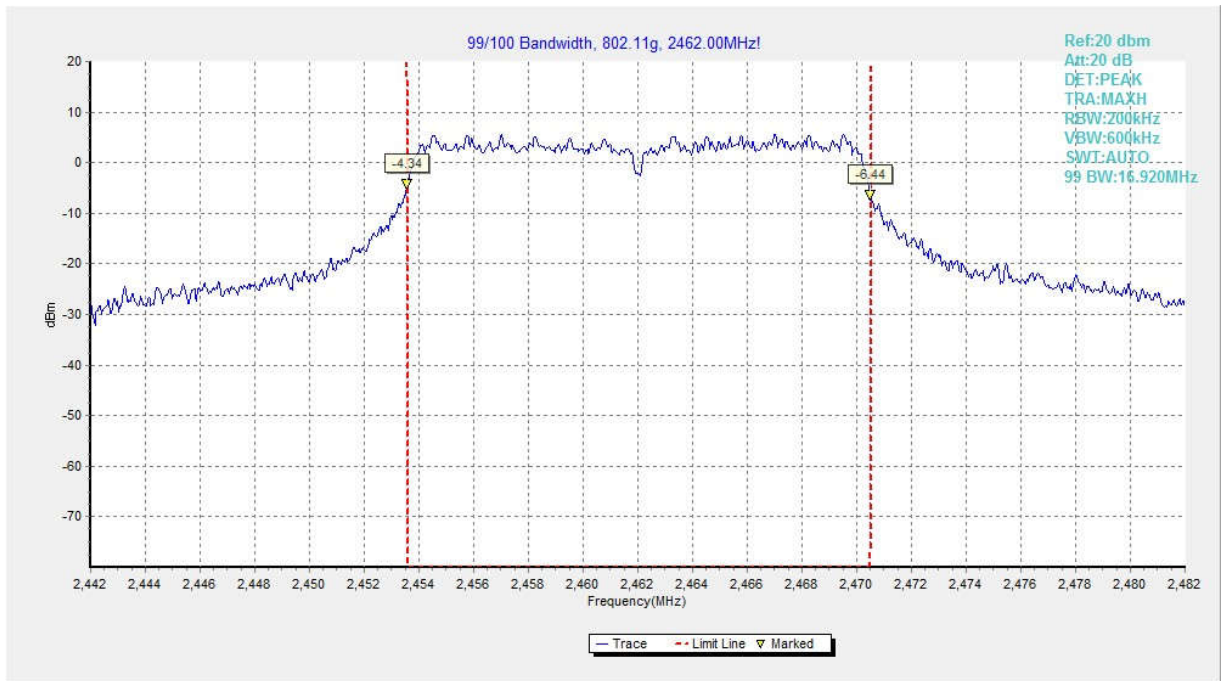


Fig.59 99% Occupied Bandwidth (802.11n-20MHz, Ch 6)

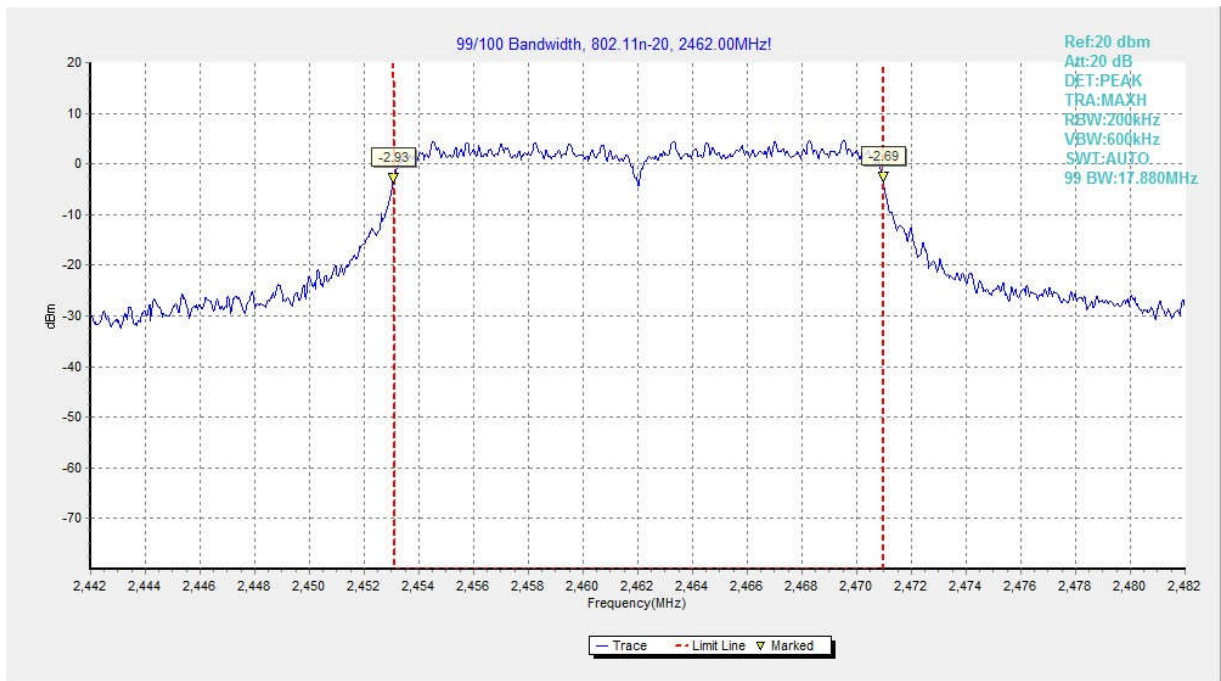


Fig.60 99% Occupied Bandwidth (802.11n-20MHz, Ch 11)

A.8 AC Powerline Conducted Emission

Test Condition:

| Voltage (V) | Frequency (Hz) |
|-------------|----------------|
| 120 | 60 |

Measurement Result and limit:

WLAN (Quasi-peak Limit)

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | | Conclusion |
|-----------------------|-------------------------------|---------------------|--------|------------|
| | | Traffic | Idle | |
| 0.15 to 0.5 | 66 to 56 | Fig.61 | Fig.62 | P |
| 0.5 to 5 | 56 | | | |
| 5 to 30 | 60 | | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

| Frequency range (MHz) | Average-peak Limit (dB μ V) | Result (dB μ V) | | Conclusion |
|-----------------------|---------------------------------|---------------------|--------|------------|
| | | Traffic | Idle | |
| 0.15 to 0.5 | 56 to 46 | Fig 61 | Fig 62 | P |
| 0.5 to 5 | 46 | | | |
| 5 to 30 | 50 | | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: PASS

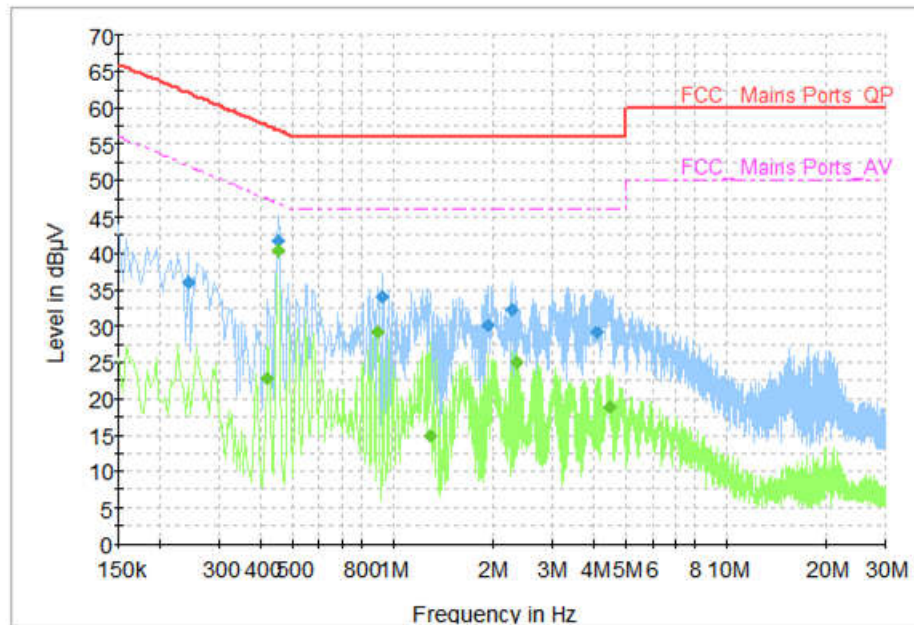


Fig.61 AC Powerline Conducted Emission (Traffic)

Measurement Results: Quasi Peak

| Frequency (MHz) | QuasiPeak (dBµV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|-------|-------|------------|-------------|--------------|
| 0.242000 | 35.93 | 62.03 | 26.09 | L1 | ON | 9.7 |
| 0.450000 | 41.86 | 56.88 | 15.01 | N | ON | 9.6 |
| 0.934000 | 33.98 | 56.00 | 22.02 | L1 | ON | 9.7 |
| 1.926000 | 30.24 | 56.00 | 25.76 | L1 | ON | 9.7 |
| 2.282000 | 32.22 | 56.00 | 23.78 | L1 | ON | 9.7 |
| 4.082000 | 29.04 | 56.00 | 26.96 | L1 | ON | 9.7 |

Measurement Results: Average

| Frequency (MHz) | Average (dBµV) | PE | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|-------|-------|------------|-------------|--------------|
| 0.418000 | 22.69 | 47.49 | 24.80 | N | ON | 9.7 |
| 0.450000 | 40.34 | 46.88 | 6.53 | N | ON | 9.6 |
| 0.902000 | 29.30 | 46.00 | 16.70 | N | ON | 9.7 |
| 1.286000 | 14.86 | 46.00 | 31.14 | N | ON | 9.7 |
| 2.342000 | 24.97 | 46.00 | 21.03 | N | ON | 9.7 |
| 4.466000 | 18.81 | 46.00 | 27.19 | N | ON | 9.7 |

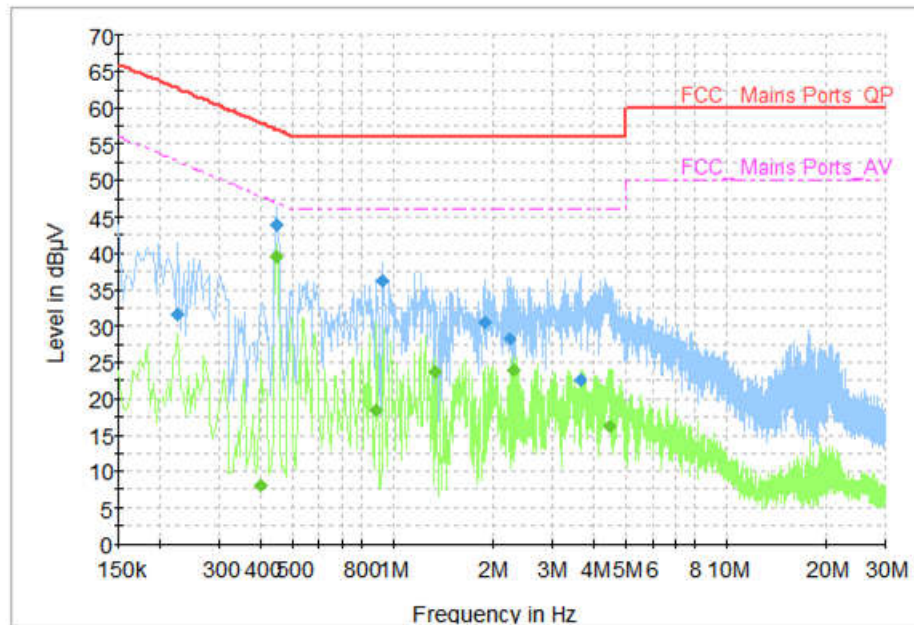


Fig.62 AC Power line Conducted Emission (Idle)

Measurement Results: Quasi Peak

| Frequency (MHz) | Quasi Peak (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|-------------------|--------------|-------------|------|--------|------------|
| 0.226000 | 31.61 | 62.60 | 30.99 | N | ON | 9.6 |
| 0.446000 | 43.90 | 56.95 | 13.05 | L1 | ON | 9.7 |
| 0.930000 | 36.19 | 56.00 | 19.81 | L1 | ON | 9.7 |
| 1.894000 | 30.55 | 56.00 | 25.45 | L1 | ON | 9.7 |
| 2.230000 | 28.24 | 56.00 | 27.76 | L1 | ON | 9.7 |
| 3.638000 | 22.65 | 56.00 | 33.35 | N | ON | 9.7 |

Measurement Results: Average

| Frequency (MHz) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|----------------|--------------|-------------|------|--------|------------|
| 0.402000 | 8.09 | 47.81 | 39.72 | N | ON | 9.6 |
| 0.446000 | 39.58 | 46.95 | 7.37 | N | ON | 9.6 |
| 0.890000 | 18.32 | 46.00 | 27.68 | N | ON | 9.7 |
| 1.342000 | 23.57 | 46.00 | 22.43 | N | ON | 9.7 |
| 2.306000 | 23.98 | 46.00 | 22.02 | N | ON | 9.7 |
| 4.470000 | 16.23 | 46.00 | 29.77 | N | ON | 9.7 |

*****END OF REPORT*****