

## FCC Test Report

### (PART 90S)

**Report No.:** RF171017C11-1

**FCC ID:** WYPPC4000

**Test Model:** XP8800

**Type Number:** PC4011/PT4000

**Received Date:** Oct. 17, 2017

**Test Date:** Oct. 21, 2017 ~ Nov. 29, 2017

**Issued Date:** Dec. 04, 2017

**Applicant:** Sonim Technologies, Inc.

**Address:** 1825 S. Grant St., Suite 200., San Mateo, CA, 94402

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan  
Hsien 333, Taiwan, R.O.C.

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information</b> .....	<b>8</b>
3.1 General Description of EUT .....	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units .....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	13
3.5 General Description of Applied Standards.....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Output Power Measurement .....	14
4.1.1 Limits of Output Power Measurement .....	14
4.1.2 Test Procedures.....	14
4.1.3 Test Setup .....	15
4.1.4 Test Results .....	16
4.2 Frequency Stability Measurement .....	22
4.2.1 Limits of Frequency Stability Measurement.....	22
4.2.2 Test Procedure .....	22
4.2.3 Test Setup .....	22
4.2.4 Test Results .....	23
4.3 Occupied Bandwidth Measurement.....	30
4.3.1 Test Procedure .....	30
4.3.2 Test Setup .....	30
4.3.3 Test Result .....	31
4.4 Emission Mask Measurement.....	35
4.4.1 Limits of Band Edge Measurement .....	35
4.4.2 Test Setup .....	35
4.4.3 Test Procedures.....	35
4.4.4 Test Results .....	36
4.5 Conducted Spurious Emissions .....	42
4.5.1 Limits of Conducted Spurious Emissions Measurement.....	42
4.5.2 Test Setup .....	42
4.5.3 Test Procedure .....	42
4.5.4 Test Results .....	43
4.6 Radiated Emission Measurement.....	48
4.6.1 Limits of Radiated Emission Measurement .....	48
4.6.2 Test Procedure .....	48
4.6.3 Deviation from Test Standard .....	48
4.6.4 Test Setup .....	49
4.6.5 Test Results .....	50
<b>5 Pictures of Test Arrangements</b> .....	<b>60</b>
<b>Appendix – Information on the Testing Laboratories</b> .....	<b>61</b>

### Release Control Record

Issue No.	Description	Date Issued
RF171017C11-1	Original Release	Dec. 04, 2017

## 1 Certificate of Conformity

**Product:** Mobile Phone  
**Brand:** Sonim  
**Test Model:** XP8800  
**Sample Status:** Production Unit  
**Applicant:** Sonim Technologies, Inc.  
**Test Date:** Oct. 21, 2017 ~ Nov. 29, 2017  
**Standards:** FCC Part 90, Subpart S

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Evonne Liu, **Date:** Dec. 04, 2017  
Evonne Liu / Specialist

**Approved by :** Dylan Chiou, **Date:** Dec. 04, 2017  
Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth (*)	Pass	Meet the requirement of limit.
2.1051 90.209	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -0.63 dB at 1586 MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Feb. 17, 2017	Feb. 16, 2018
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 16, 2016	Dec. 15, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 26, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2016	Dec. 13, 2017
Double Ridge Guide Horn Antenna EMCO	3115	5619	Dec. 26, 2016	Dec. 27, 2017
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 12, 2016	Dec. 13, 2017
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 17, 2017	Apr. 16, 2018
MXG Vector signal generator Agilent	N5182B	MY53052282	Dec. 23, 2016	Dec. 22, 2017
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 20, 2017	Oct. 19, 2018
Power Meter Anritsu	ML2495A	1145013	Mar. 07, 2017	Mar. 06, 2018
Power Sensor Anritsu	MA2411B	1126085	Mar. 07, 2017	Mar. 06, 2018
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 20, 2017	Oct. 19, 2018
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-A R	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 10.
  3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
  4. The IC Site Registration No. is IC7450F-10.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Mobile Phone	
<b>Brand</b>	Sonim	
<b>Test Model</b>	XP8800	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	5.0 Vdc or 9.0 Vdc or 12.0 Vdc (adapter) 3.85 Vdc (Li-ion battery)	
<b>Modulation Type</b>	CDMA	QPSK, OQPSK, HPSK
	LTE	QPSK, 16QAM, 64QAM
<b>Frequency Range</b>	CDMA BC10	817.9 ~ 823.1 MHz
	LTE Band 14 (Channel Bandwidth: 5 MHz)	790.5 ~ 795.5 MHz
	LTE Band 14 (Channel Bandwidth: 10 MHz)	793 MHz
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
<b>Emission Designator</b>	CDMA BC10	1M28F9W
	LTE Band 14 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 14 (Channel Bandwidth: 10 MHz)	8M99W7D
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 26 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 26 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	8M97W7D
<b>Max. ERP Power</b>	CDMA BC10	62.09 mW
	LTE Band 14 (Channel Bandwidth: 5 MHz)	41.98 mW
	LTE Band 14 (Channel Bandwidth: 10 MHz)	41.30 mW
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	51.29 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	50.70 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	51.52 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	52.00 mW
<b>Antenna Type</b>	Fixed Internal Antenna	
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

1. The EUT contains following accessory devices.


Product	Brand	Model	Description
Adapter	Sonim	S42A02	I/P: 100-240 Vac, 50/60 Hz, 500 mA O/P: 5 Vdc, 1500 mA or 9 Vdc, 1500 mA or 12 Vdc, 1100 mA
Battery	Sonim	BAT-04900-01S	3.85 Vdc, 4900 mAh
USB Cable 1	N/A	N/A	1.5 m shielded cable w/o core
USB Cable 2	N/A	N/A	1 m non-shielded cable w/o core




2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

#### <Radiated Emission Test>

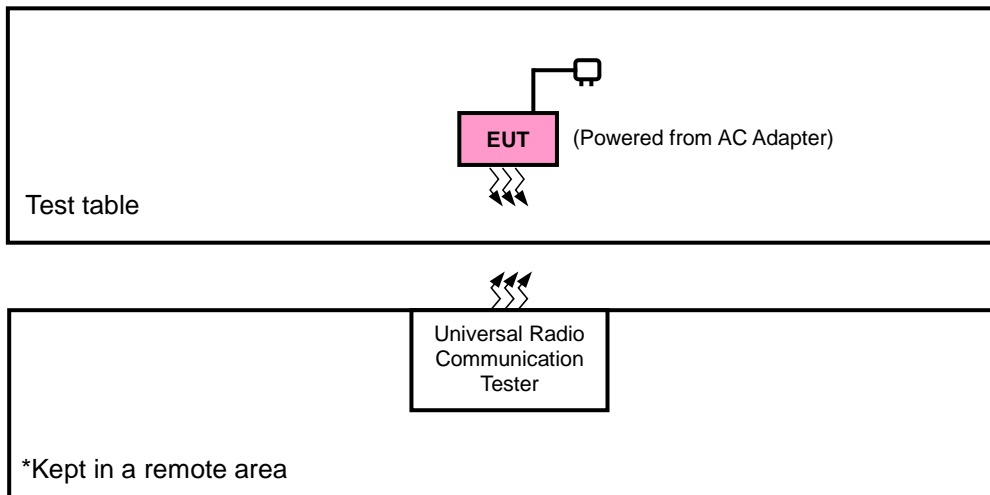

#### <E.R.P. Test>

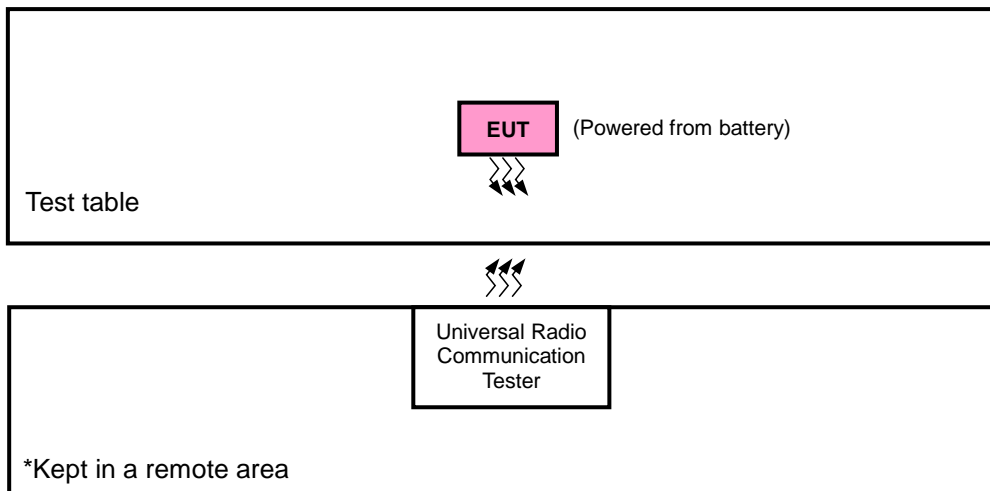

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
CDMA	X-plane	X-axis
LTE Band 14	X-plane	X-axis
LTE Band 26	X-plane	X-axis

#### CDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	476 to 684	476, 580, 684	1xRTT
-	Frequency Stability	476 to 684	476, 684	1xRTT
-	Occupied Bandwidth	476 to 684	476, 580, 684	1xRTT
-	Emission Mask	476 to 684	476, 580, 684	1xRTT
-	Conducted Emission	476 to 684	476, 580, 684	1xRTT
-	Radiated Emission	476 to 684	476, 580, 684	1xRTT

### LTE Band 14

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	ERP	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset		
-	Frequency Stability	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 0 RB Offset		
		23330	23330	10 MHz	QPSK	1 RB / 24 RB Offset		
-	Occupied Bandwidth	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset		
-	Peak to Average Ratio	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23330	23330	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
-	Band Edge	23305 to 23355	23305	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			23355	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			23330	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		-	Conducted Emission	23305 to 23355	23305, 23330, 23355	5 MHz	QPSK	1 RB / 0 RB Offset
				23330	23330	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23330	23330	10 MHz	QPSK	1 RB / 24 RB Offset		
						1 RB / 50 RB Offset		

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

### LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 2 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 7 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 7 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.85 Vdc	Getaz Yang
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Emission Mask	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Condcudeted Emission	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 90**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**Note:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 100 watts e.r.p.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for CDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$ .


##### **Conducted Power Measurement:**

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

**EIRP / ERP Measurement:**

**<Radiated Emission below or equal 1 GHz>**

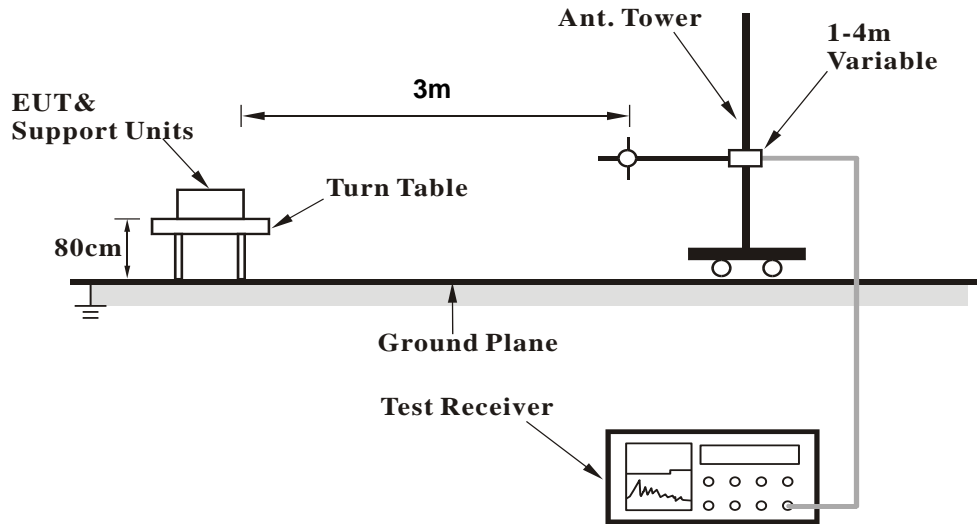


**<Radiated Emission above 1 GHz>**

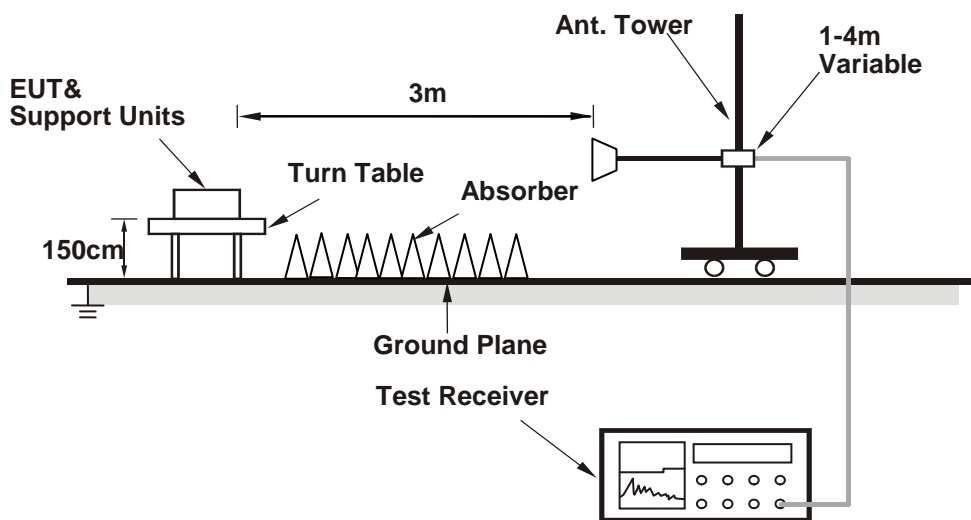

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Conducted Power Measurement:**



4.1.4 Test Results

**Conducted Output Power (dBm)**

Band	CDMA		
	476	580	684
Channel	817.9	820.5	823.1
Frequency (MHz)	817.9	820.5	823.1
RC1+SO55	24.88	24.76	24.73
RC3+SO55	24.95	24.83	24.80
RC3+SO32(+ F-SCH)	24.98	24.86	24.83
RC3+SO32(+SCH)	24.93	24.81	24.78
RTAP 153.6	24.90	24.78	24.75
RETAP 4096	24.75	24.63	24.60
RC1+SO3	24.97	24.96	24.83
RC3+SO3	24.79	24.78	24.67

LTE Band 14														
BW (MHz)	RB Size	RB Offset	QPSK				16QAM				64QAM			
			Mid Ch 23330	793.0 MHz	3GPP MPR (dB)	Mid Ch 23330	793.0 MHz	3GPP MPR (dB)	Mid Ch 23330	793.0 MHz	3GPP MPR (dB)			
10	1	0	23.31		0	22.39		1	21.41		2			
	1	24	23.28		0	22.35		1	21.36		2			
	1	49	23.24		0	22.32		1	21.31		2			
	25	0	22.44		1	21.38		2	20.42		3			
	25	12	22.41		1	21.35		2	20.38		3			
	25	25	22.37		1	21.31		2	20.35		3			
	50	0	22.41		1	21.38		2	20.44		3			
BW (MHz)	RB Size	RB Offset	QPSK				16QAM				64QAM			
			Low Ch 23305	Mid Ch 23330	High Ch 23355	3GPP MPR (dB)	Low Ch 23305	Mid Ch 23330	High Ch 23355	3GPP MPR (dB)	Low Ch 23305	Mid Ch 23330	High Ch 23355	3GPP MPR (dB)
5	1	0	23.21	23.26	23.32	0	22.29	22.34	22.40	1	21.32	21.37	21.43	2
	1	12	23.18	23.23	23.29	0	22.25	22.30	22.36	1	21.27	21.32	21.38	2
	1	24	23.14	23.19	23.25	0	22.22	22.27	22.33	1	21.22	21.27	21.33	2
	12	0	22.34	22.39	22.45	1	21.28	21.33	21.39	2	21.31	21.36	21.42	3
	12	6	22.31	22.36	22.42	1	21.25	21.30	21.36	2	21.26	21.31	21.37	3
	12	13	22.27	22.32	22.38	1	21.21	21.26	21.32	2	21.21	21.26	21.32	3
	25	0	22.31	22.36	22.42	1	21.28	21.33	21.39	2	20.35	20.40	20.46	3



LTE Band 26																	
BW (MHz)	RB Size	RB Offset	QPSK				16QAM				64QAM						
			Mid Ch 26740			3GPP MPR (dB)	Mid Ch 26740			3GPP MPR (dB)	Mid Ch 26740			3GPP MPR (dB)			
819.0 MHz			819.0 MHz				819.0 MHz										
10	1	0	23.84			0	22.82			1	21.95			2			
	1	24	23.80			0	22.77			1	21.91			2			
	1	49	23.76			0	22.73			1	21.88			2			
	25	0	22.83			1	21.84			2	21.94			3			
	25	12	22.78			1	21.79			2	21.90			3			
	25	25	22.72			1	21.76			2	21.87			3			
50	0	22.80			1	21.86			2	20.93			3				
BW (MHz)	RB Size	RB Offset	QPSK				16QAM				64QAM						
			Low Ch 26715	Mid Ch 26740	High Ch 26765	3GPP MPR (dB)	Low Ch 26715	Mid Ch 26740	High Ch 26765	3GPP MPR (dB)	Low Ch 26715	Mid Ch 26740	High Ch 26765	3GPP MPR (dB)			
816.5 MHz			819.0 MHz				821.5 MHz				816.5 MHz				819.0 MHz		
5	1	0	23.81	23.93	23.84	0	22.79	22.91	22.82	1	21.91	22.03	21.94	2			
	1	12	23.77	23.89	23.80	0	22.74	22.86	22.77	1	21.87	21.99	21.90	2			
	1	24	23.73	23.85	23.76	0	22.70	22.82	22.73	1	21.84	21.96	21.87	2			
	12	0	22.80	22.92	22.83	1	21.81	21.93	21.84	2	21.90	22.02	21.93	3			
	12	6	22.75	22.87	22.78	1	21.76	21.88	21.79	2	21.86	21.98	21.89	3			
	12	13	22.69	22.81	22.72	1	21.73	21.85	21.76	2	21.83	21.95	21.86	3			
25	0	22.77	22.89	22.80	1	21.83	21.95	21.86	2	20.89	21.01	20.92	3				
BW (MHz)	RB Size	RB Offset	QPSK				16QAM				64QAM						
			Low Ch 26705	Mid Ch 26740	High Ch 26775	3GPP MPR (dB)	Low Ch 26705	Mid Ch 26740	High Ch 26775	3GPP MPR (dB)	Low Ch 26705	Mid Ch 26740	High Ch 26775	3GPP MPR (dB)			
815.5 MHz			819.0 MHz				822.5 MHz				815.5 MHz				819.0 MHz		
3	1	0	23.78	23.90	23.81	0	22.76	22.88	22.79	1	21.87	21.99	21.90	2			
	1	7	23.74	23.86	23.77	0	22.71	22.83	22.74	1	21.83	21.95	21.86	2			
	1	14	23.70	23.82	23.73	0	22.67	22.79	22.70	1	21.80	21.92	21.83	2			
	8	0	22.77	22.89	22.80	1	21.78	21.90	21.81	2	21.86	21.98	21.89	3			
	8	3	22.72	22.84	22.75	1	21.73	21.85	21.76	2	21.82	21.94	21.85	3			
	8	7	22.66	22.78	22.69	1	21.70	21.82	21.73	2	21.79	21.91	21.82	3			
15	0	22.74	22.86	22.77	1	21.80	21.92	21.83	2	20.85	20.97	20.88	3				
BW (MHz)	RB Size	RB Offset	QPSK				16QAM				64QAM						
			Low Ch 26697	Mid Ch 26740	High Ch 26783	3GPP MPR (dB)	Low Ch 26697	Mid Ch 26740	High Ch 26783	3GPP MPR (dB)	Low Ch 26697	Mid Ch 26740	High Ch 26783	3GPP MPR (dB)			
814.7 MHz			819.0 MHz				823.3 MHz				814.7 MHz				819.0 MHz		
1.4	1	0	23.74	23.86	23.77	0	22.72	22.84	22.75	1	21.83	21.95	21.86	2			
	1	2	23.70	23.82	23.73	0	22.67	22.79	22.70	1	21.79	21.91	21.82	2			
	1	5	23.66	23.78	23.69	0	22.63	22.75	22.66	1	21.76	21.88	21.79	2			
	3	0	23.72	23.84	23.75	0	22.71	22.83	22.74	1	21.82	21.94	21.85	2			
	3	1	23.68	23.80	23.71	0	22.66	22.78	22.69	1	21.78	21.90	21.81	2			
	3	3	23.64	23.76	23.67	0	22.62	22.74	22.65	1	21.75	21.87	21.78	2			
6	0	22.70	22.82	22.73	1	21.76	21.88	21.79	2	20.81	20.93	20.84	3				

**ERP Power (dBm)**

CDMA							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	476	817.9	-12.43	31.208	16.63	46.00	H
	580	820.5	-11.22	31.3	17.93	62.09	
	684	823.1	-12.01	31.222	17.06	50.84	
V	476	817.9	-15.26	31.504	14.09	25.67	V
	580	820.5	-15.10	31.117	13.87	24.36	
	684	823.1	-14.92	31.922	14.85	30.56	

LTE Band 14							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23305	790.5	-14.02	32.18	16.01	39.90	H
	23330	793.0	-13.98	32.17	16.04	40.18	
	23355	795.5	-13.88	32.26	16.23	41.98	
	V	23305	790.5	-16.60	32.69	13.94	24.77
		23330	793.0	-16.52	32.72	14.05	25.41
		23355	795.5	-16.59	32.85	14.11	25.76
Channel Bandwidth: 5 MHz / 16QAM							
X	23305	790.5	-14.08	32.18	15.95	39.36	H
	23330	793.0	-14.11	32.17	15.91	38.99	
	23355	795.5	-14.13	32.26	15.98	39.63	
	V	23305	790.5	-16.92	32.69	13.62	23.01
		23330	793.0	-16.88	32.72	13.69	23.39
		23355	795.5	-17.02	32.85	13.68	23.33
Channel Bandwidth: 5 MHz / 64QAM							
X	23305	790.5	-14.38	32.18	15.65	36.73	H
	23330	793.0	-14.41	32.17	15.61	36.39	
	23355	795.5	-14.43	32.26	15.68	36.98	
	V	23305	790.5	-17.22	32.69	13.32	21.48
		23330	793.0	-17.18	32.72	13.39	21.83
		23355	795.5	-17.32	32.85	13.38	21.78

LTE Band 14							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23330	793.0	-13.86	32.17	16.16	41.30	H
	23330	793.0	-16.59	32.72	13.98	25.00	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23330	793.0	-13.96	32.17	16.06	40.36	H
	23330	793.0	-16.66	32.72	13.91	24.60	V
Channel Bandwidth: 10 MHz / 64QAM							
X	23330	793.0	-14.26	32.17	15.76	37.67	H
	23330	793.0	-16.96	32.72	13.61	22.96	V

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26697	814.7	-13.11	32.01	16.75	47.32	H
	26740	819.0	-13.00	32.11	16.96	49.66	
	26783	823.3	-13.07	32.32	17.10	51.29	
	26697	814.7	-17.14	32.54	13.25	21.13	V
	26740	819.0	-17.06	32.51	13.30	21.38	
	26783	823.3	-17.15	32.51	13.21	20.94	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	26697	814.7	-13.92	32.01	15.94	39.26	H
	26740	819.0	-13.77	32.11	16.19	41.59	
	26783	823.3	-13.86	32.32	16.31	42.76	
	26697	814.7	-17.55	32.54	12.84	19.23	V
	26740	819.0	-17.20	32.51	13.16	20.70	
	26783	823.3	-17.26	32.51	13.10	20.42	
Channel Bandwidth: 1.4 MHz / 64QAM							
X	26697	814.7	-14.22	32.01	15.64	36.64	H
	26740	819.0	-14.07	32.11	15.89	38.82	
	26783	823.3	-14.06	32.32	16.11	40.83	
	26697	814.7	-17.75	32.54	12.64	18.37	V
	26740	819.0	-17.50	32.51	12.86	19.32	
	26783	823.3	-17.56	32.51	12.80	19.05	

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26705	815.5	-12.98	32.02	16.89	48.87	H
	26740	819.0	-12.91	32.11	17.05	50.70	
	26775	822.5	-13.00	32.18	17.03	50.47	
	26705	815.5	-17.10	32.5	13.25	21.13	V
	26740	819.0	-16.97	32.51	13.39	21.83	
	26775	822.5	-17.06	32.47	13.26	21.18	
Channel Bandwidth: 3 MHz / 16QAM							
X	26705	815.5	-13.72	32.02	16.15	41.21	H
	26740	819.0	-13.54	32.11	16.42	43.85	
	26775	822.5	-13.69	32.18	16.34	43.05	
	26705	815.5	-17.11	32.5	13.24	21.09	V
	26740	819.0	-17.02	32.51	13.34	21.58	
	26775	822.5	-17.05	32.47	13.27	21.23	
Channel Bandwidth: 3 MHz / 64QAM							
X	26705	815.5	-14.02	32.02	15.85	38.46	H
	26740	819.0	-13.74	32.11	16.22	41.88	
	26775	822.5	-13.99	32.18	16.04	40.18	
	26705	815.5	-17.41	32.5	12.94	19.68	V
	26740	819.0	-17.32	32.51	13.04	20.14	
	26775	822.5	-17.35	32.47	12.97	19.82	

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26715	816.5	-12.88	32.04	17.01	50.23	H
	26740	819.0	-12.84	32.11	17.12	51.52	
	26765	821.5	-12.89	31.79	16.75	47.32	
	V	26715	816.5	-16.91	32.52	13.46	22.18
		26740	819.0	-16.84	32.51	13.52	22.49
		26765	821.5	-16.33	32.17	13.69	23.39
Channel Bandwidth: 5 MHz / 16QAM							
X	26715	816.5	-13.11	32.04	16.78	47.64	H
	26740	819.0	-13.32	32.11	16.64	46.13	
	26765	821.5	-13.54	31.79	16.10	40.74	
	V	26715	816.5	-16.84	32.52	13.53	22.54
		26740	819.0	-16.94	32.51	13.42	21.98
		26765	821.5	-16.97	32.17	13.05	20.18
Channel Bandwidth: 5 MHz / 64QAM							
X	26715	816.5	-13.41	32.04	16.48	44.46	H
	26740	819.0	-13.62	32.11	16.34	43.05	
	26765	821.5	-13.74	31.79	15.90	38.90	
	V	26715	816.5	-17.14	32.52	13.23	21.04
		26740	819.0	-17.14	32.51	13.22	20.99
		26765	821.5	-17.27	32.17	12.75	18.84

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26740	819.0	-12.80	32.11	17.16	52.00	H
	26740	819.0	-16.30	32.51	14.06	25.47	V
Channel Bandwidth: 10 MHz / 16QAM							
X	26740	819.0	-13.32	32.11	16.64	46.13	H
	26740	819.0	-16.86	32.51	13.50	22.39	V
Channel Bandwidth: 10 MHz / 64QAM							
X	26740	819.0	-13.62	32.11	16.34	43.05	H
	26740	819.0	-17.16	32.51	13.20	20.89	V

## 4.2 Frequency Stability Measurement

### 4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 4.2.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5$  °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 Test Setup

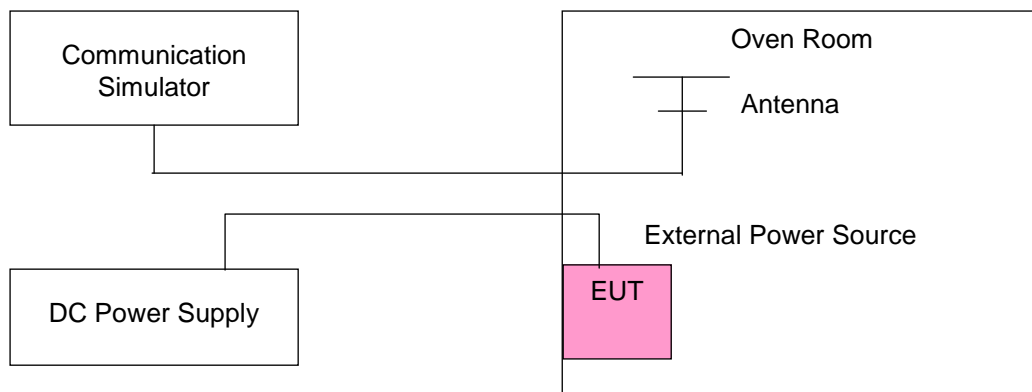

#### 4.2.4 Test Results

##### Frequency Error vs. Voltage

Voltage (Volts)	CDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	817.900003	0.004	822.750002	0.002	2.5
3.6	817.900003	0.004	822.750001	0.002	2.5
4.35	817.900003	0.004	822.750001	0.001	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

##### Frequency Error vs. Temperature

Temp. (°C)	CDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	817.900001	0.001	822.750002	0.002	2.5
-20	817.900002	0.003	822.750004	0.004	2.5
-10	817.900003	0.004	822.750003	0.004	2.5
0	817.900004	0.005	822.750003	0.004	2.5
10	817.900003	0.004	822.750001	0.002	2.5
20	817.899997	-0.004	822.749997	-0.004	2.5
30	817.899996	-0.005	822.749996	-0.005	2.5
40	817.899998	-0.002	822.749999	-0.002	2.5
50	817.899998	-0.002	822.749998	-0.003	2.5

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	790.500003	0.003	795.500004	0.005	2.5
3.6	790.500004	0.005	795.500003	0.004	2.5
4.35	790.500002	0.003	795.500003	0.004	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	790.500001	0.001	795.500002	0.003	2.5
-20	790.500002	0.003	795.500003	0.004	2.5
-10	790.500002	0.002	795.500002	0.003	2.5
0	790.500003	0.004	795.500003	0.004	2.5
10	790.500002	0.002	795.500004	0.005	2.5
20	790.499998	-0.003	795.499997	-0.004	2.5
30	790.499999	-0.002	795.499997	-0.004	2.5
40	790.499998	-0.002	795.499996	-0.005	2.5
50	790.499999	-0.001	795.499996	-0.005	2.5



## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 14		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
3.8	793.000001	0.001	2.5
3.6	793.000004	0.005	2.5
4.35	793.000001	0.001	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 14		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	793.000002	0.002	2.5
-20	793.000002	0.003	2.5
-10	793.000002	0.003	2.5
0	793.000002	0.003	2.5
10	793.000002	0.003	2.5
20	792.999997	-0.003	2.5
30	792.999999	-0.002	2.5
40	792.999999	-0.002	2.5
50	792.999996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	814.700001	0.001	823.300002	0.003	2.5
3.6	814.700001	0.001	823.300003	0.004	2.5
4.35	814.700002	0.002	823.300002	0.002	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.700003	0.003	823.300003	0.003	2.5
-20	814.700002	0.002	823.300004	0.004	2.5
-10	814.700002	0.002	823.300002	0.002	2.5
0	814.700003	0.004	823.300004	0.004	2.5
10	814.700002	0.002	823.300003	0.003	2.5
20	814.699996	-0.005	823.299999	-0.001	2.5
30	814.699997	-0.004	823.299997	-0.004	2.5
40	814.699998	-0.003	823.299996	-0.005	2.5
50	814.699998	-0.003	823.299997	-0.003	2.5

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	815.500003	0.004	822.500003	0.003	2.5
3.6	815.500002	0.003	822.500002	0.002	2.5
4.35	815.500002	0.003	822.500002	0.003	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	815.500003	0.004	822.500002	0.002	2.5
-20	815.500003	0.004	822.500003	0.004	2.5
-10	815.500004	0.004	822.500001	0.002	2.5
0	815.500002	0.003	822.500003	0.003	2.5
10	815.500004	0.004	822.500002	0.002	2.5
20	815.499996	-0.005	822.499999	-0.002	2.5
30	815.499999	-0.001	822.499996	-0.005	2.5
40	815.499996	-0.005	822.499998	-0.003	2.5
50	815.499999	-0.001	822.499996	-0.004	2.5

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	816.500004	0.005	821.500000	0.000	2.5
3.6	816.500003	0.003	821.500000	0.000	2.5
4.35	816.500003	0.004	821.500000	0.000	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

## Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	816.500003	0.004	821.500003	0.003	2.5
-20	816.500003	0.003	821.500001	0.002	2.5
-10	816.500002	0.003	821.500002	0.002	2.5
0	816.500002	0.003	821.500002	0.002	2.5
10	816.500003	0.004	821.500002	0.003	2.5
20	816.499996	-0.004	821.499996	-0.005	2.5
30	816.499997	-0.003	821.499999	-0.002	2.5
40	816.499997	-0.004	821.499999	-0.002	2.5
50	816.499997	-0.004	821.499997	-0.003	2.5

## Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
3.8	819.000003	0.003	2.5
3.6	819.000002	0.002	2.5
4.35	819.000004	0.005	2.5

**Note:** The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.35 Vdc.

## Frequency Error vs. Temperature


Temp. (°C)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	819.000002	0.002	2.5
-20	819.000003	0.003	2.5
-10	819.000001	0.002	2.5
0	819.000003	0.003	2.5
10	819.000003	0.004	2.5
20	818.999998	-0.003	2.5
30	818.999997	-0.004	2.5
40	818.999996	-0.005	2.5
50	818.999999	-0.001	2.5

### 4.3 Occupied Bandwidth Measurement

#### 4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 4.3.2 Test Setup

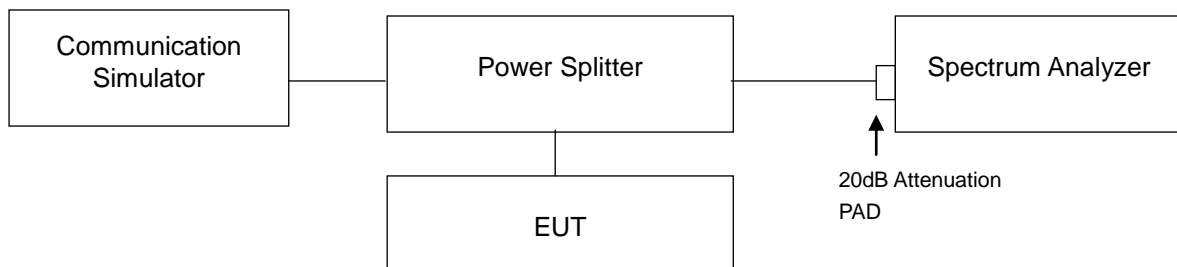


### 4.3.3 Test Result

CDMA		
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
476	817.9	1.2788
580	820.5	1.2773
684	823.1	1.2781

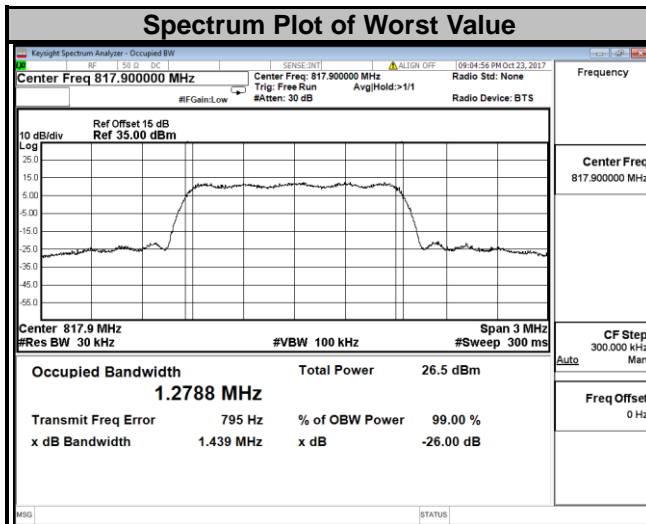


LTE Band 14									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23205	779.5	4.4906	4.4912	4.4941	23230	782.0	8.9838	8.9853	8.9861
23230	782.0	4.4939	4.4960	4.4982					
23255	784.5	4.4932	4.4959	4.4943					

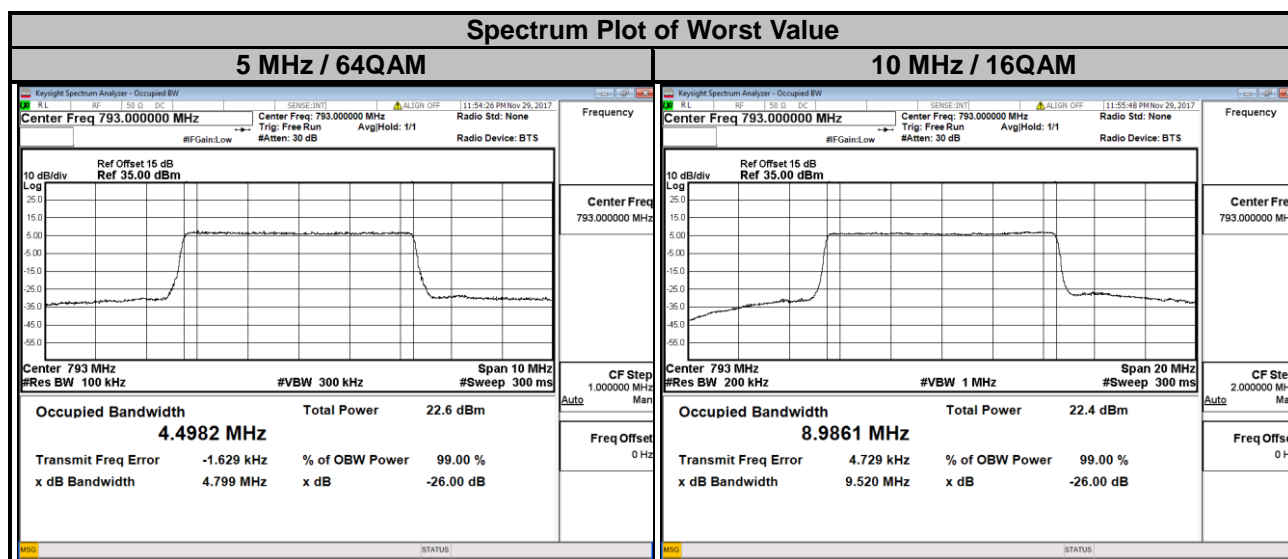




LTE Band 26									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26697	814.7	1.0865	1.0899	1.0894	26705	815.5	2.7034	2.6989	2.6995
26740	819.0	1.0864	1.0885	1.0897	26740	819.0	2.7026	2.6968	2.6965
26783	823.3	1.0866	1.0900	1.0897	26775	822.5	2.7022	2.6981	2.6978

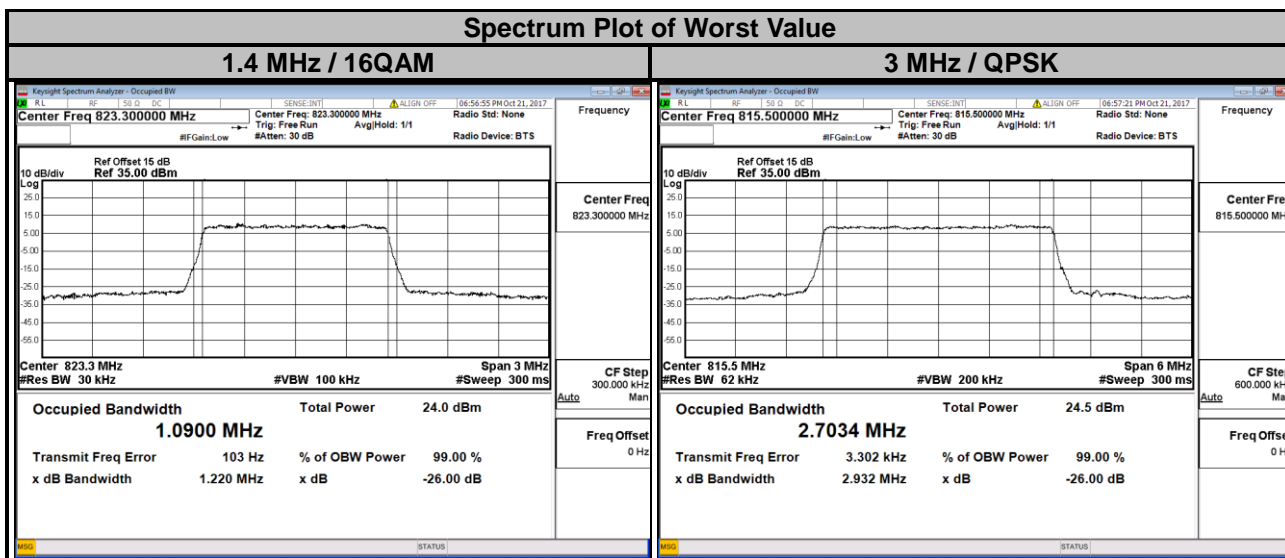

LTE Band 26									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
26715	816.5	4.4931	4.4976	4.4957	26740	819.0	8.9606	8.9639	8.9686
26740	819.0	4.4894	4.4939	4.4929					
26765	821.5	4.4904	4.4937	4.4913					

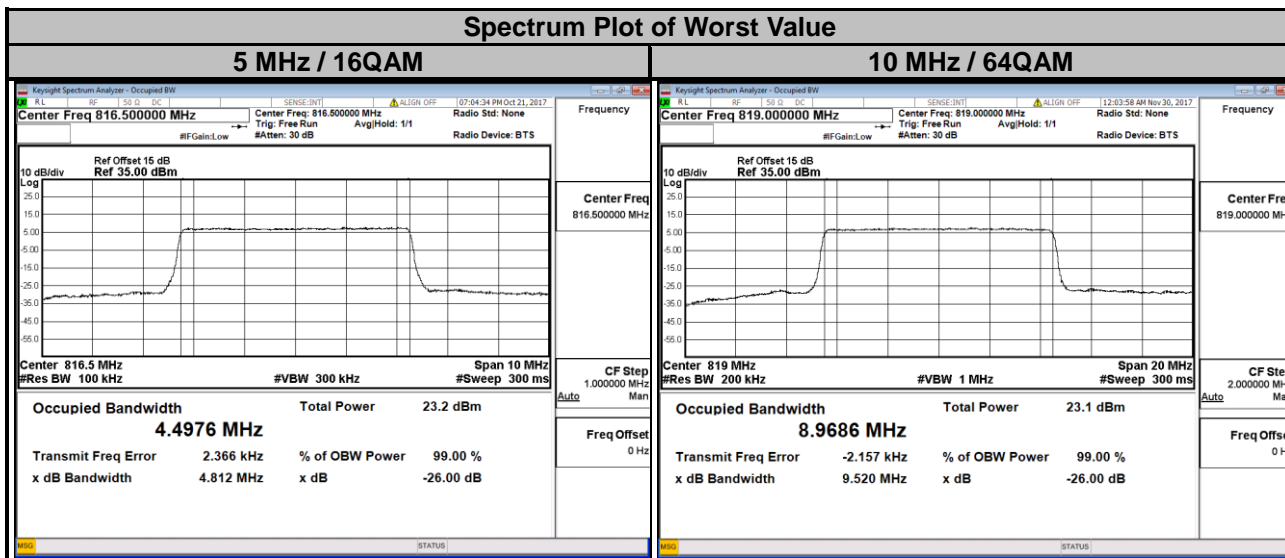


#### 4.4 Emission Mask Measurement

##### 4.4.1 Limits of Band Edge Measurement

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50+10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.




##### 4.4.2 Test Setup

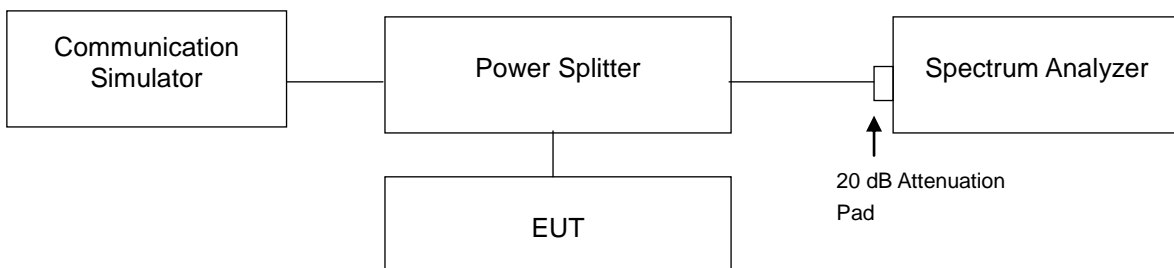



##### 4.4.3 Test Procedures


- a. The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Record the test plot.

### 4.4.4 Test Results

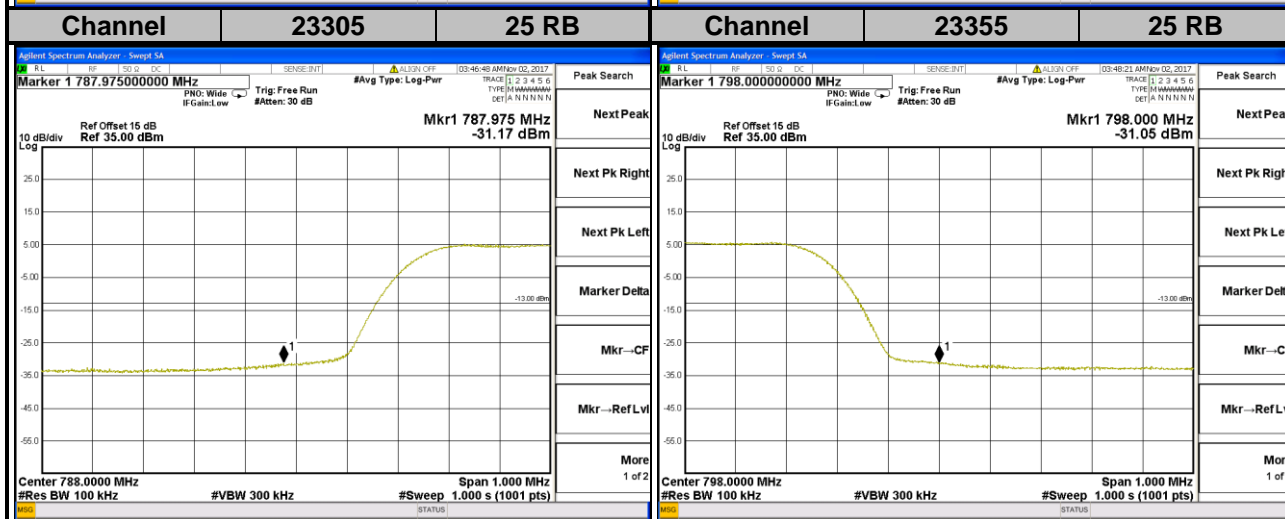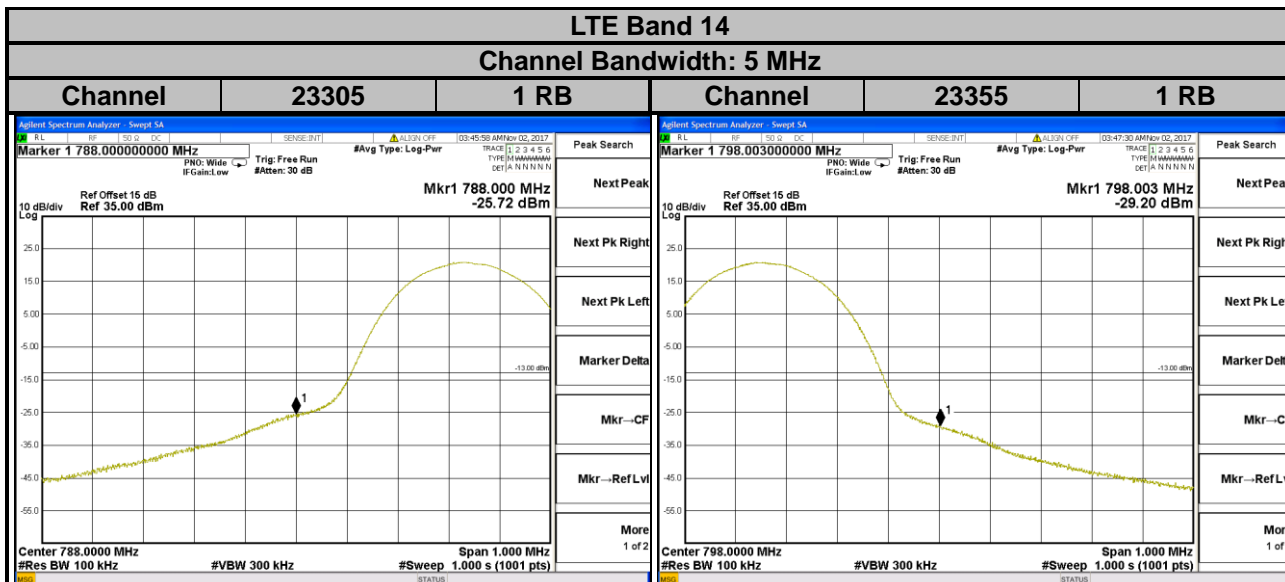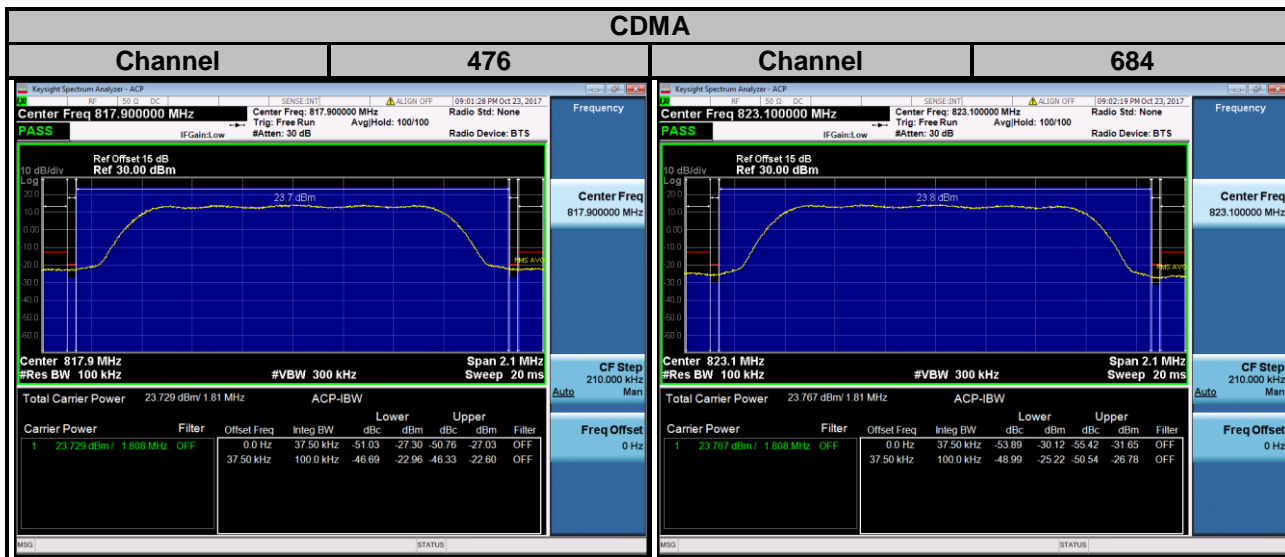


**LTE Band 14**  
**Channel Bandwidth: 10 MHz**

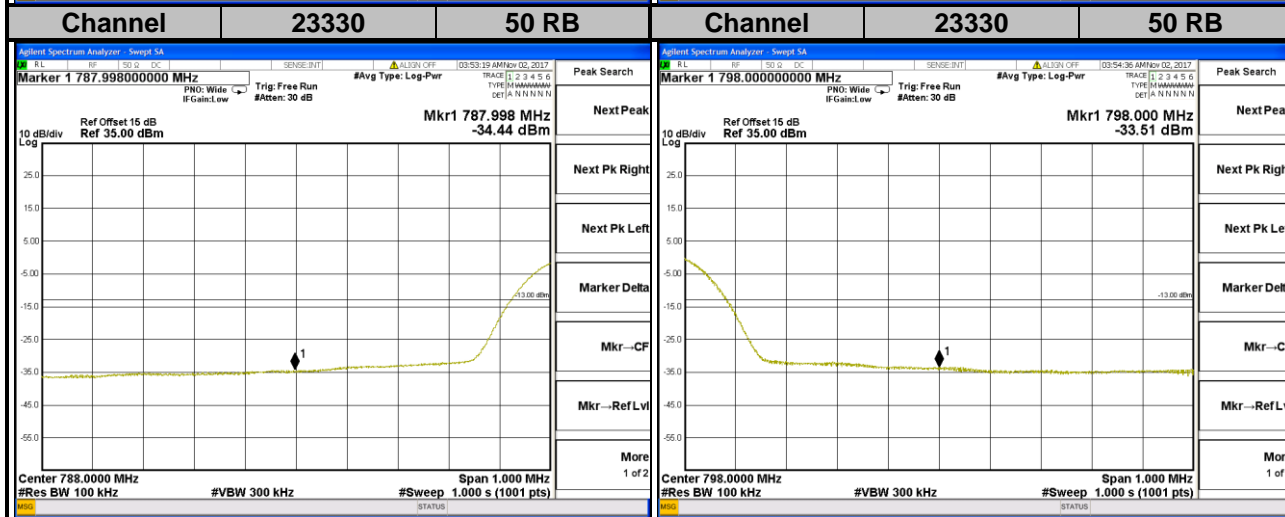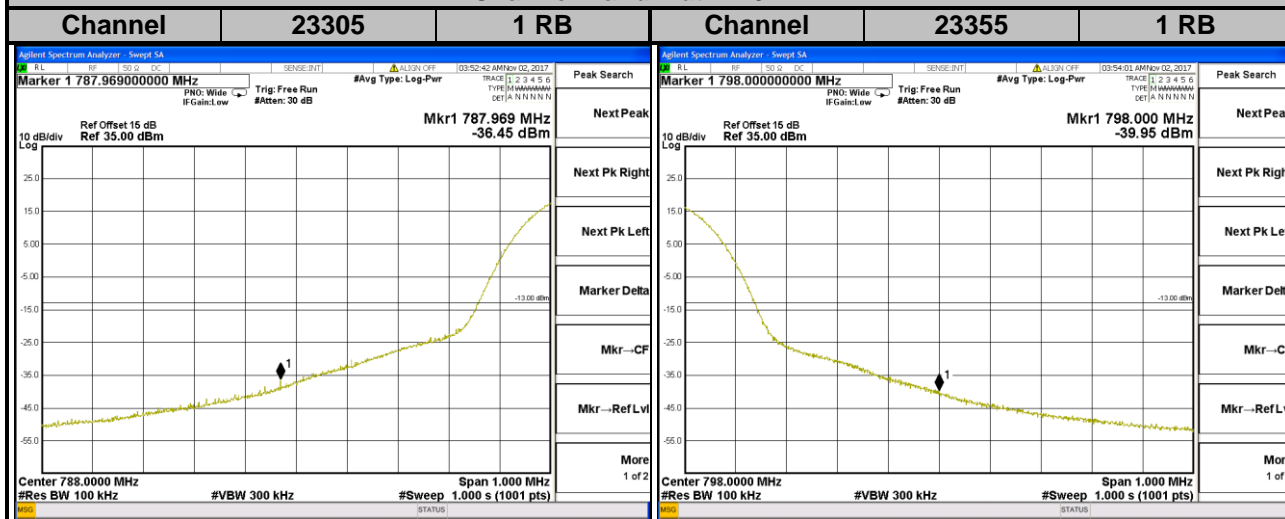

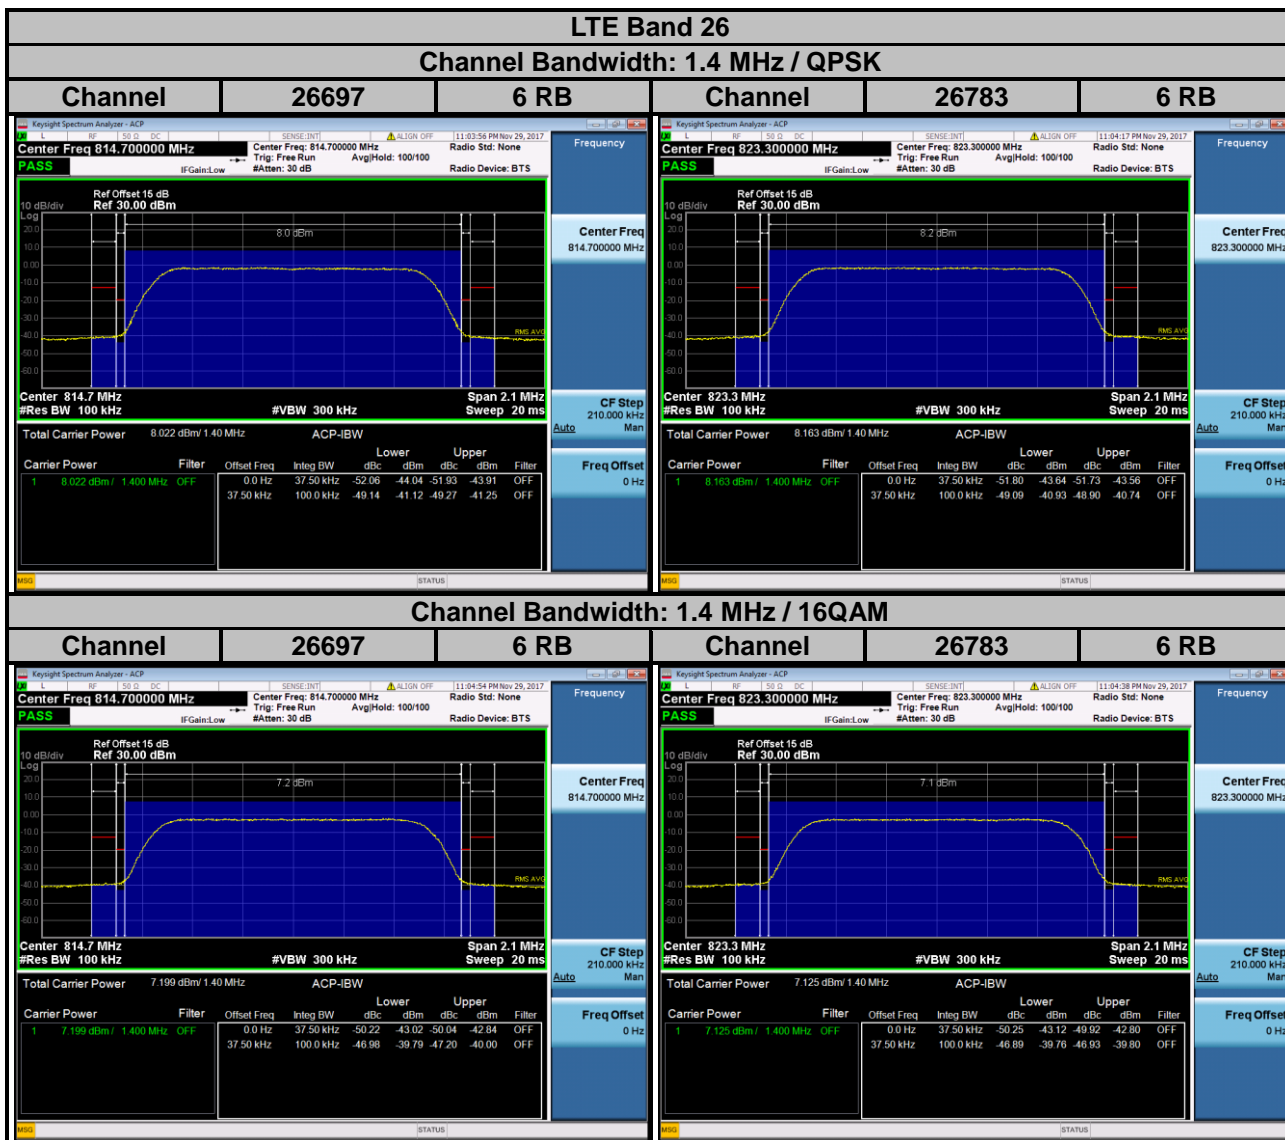



## LTE Band 26

### Channel Bandwidth: 3 MHz / QPSK

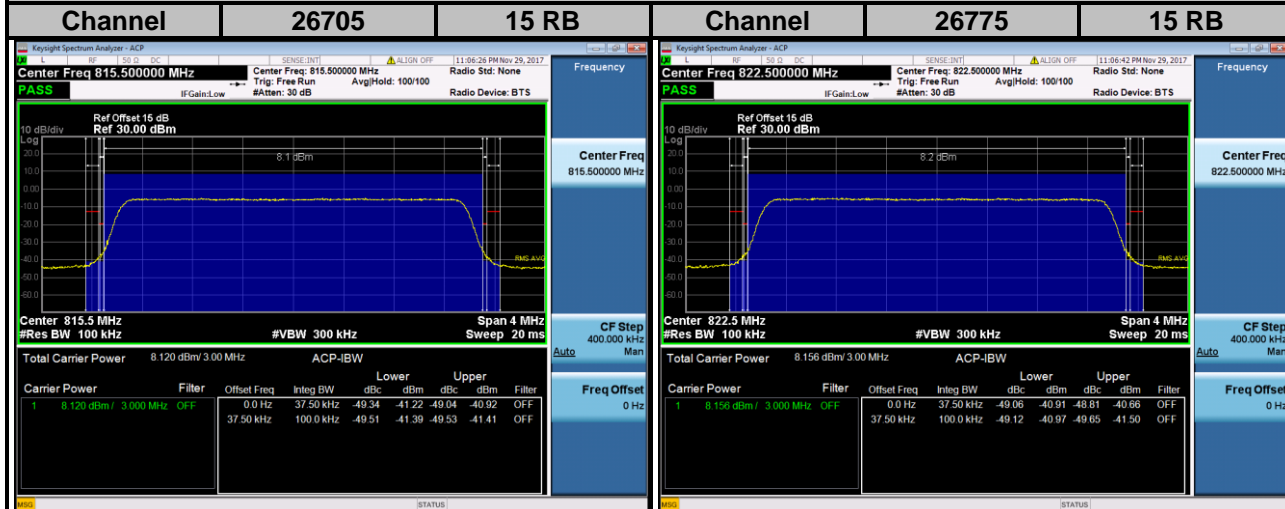


### Channel Bandwidth: 3 MHz / 16QAM

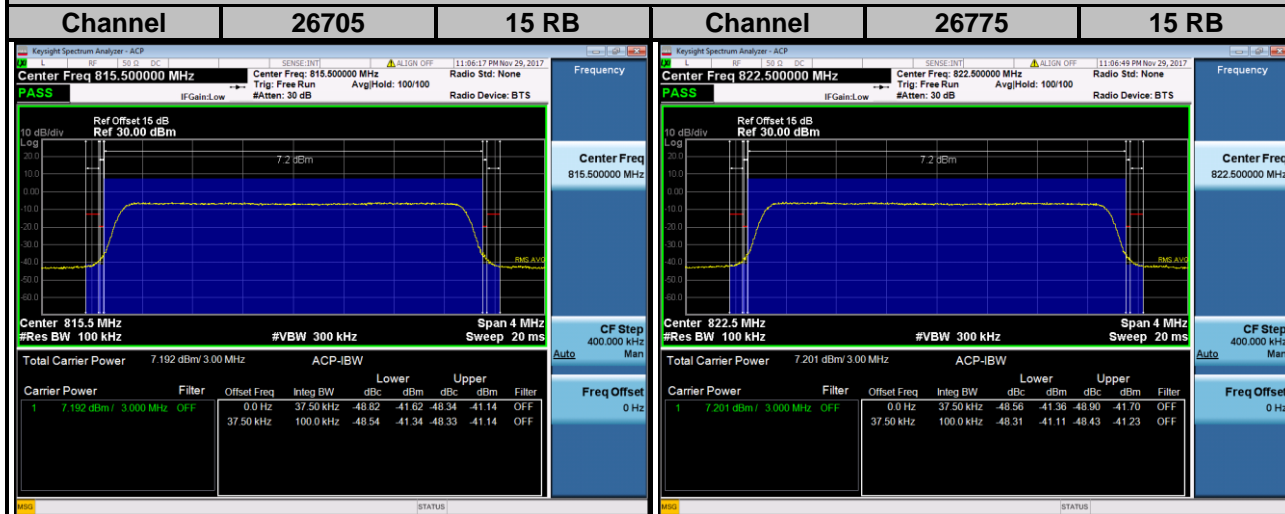

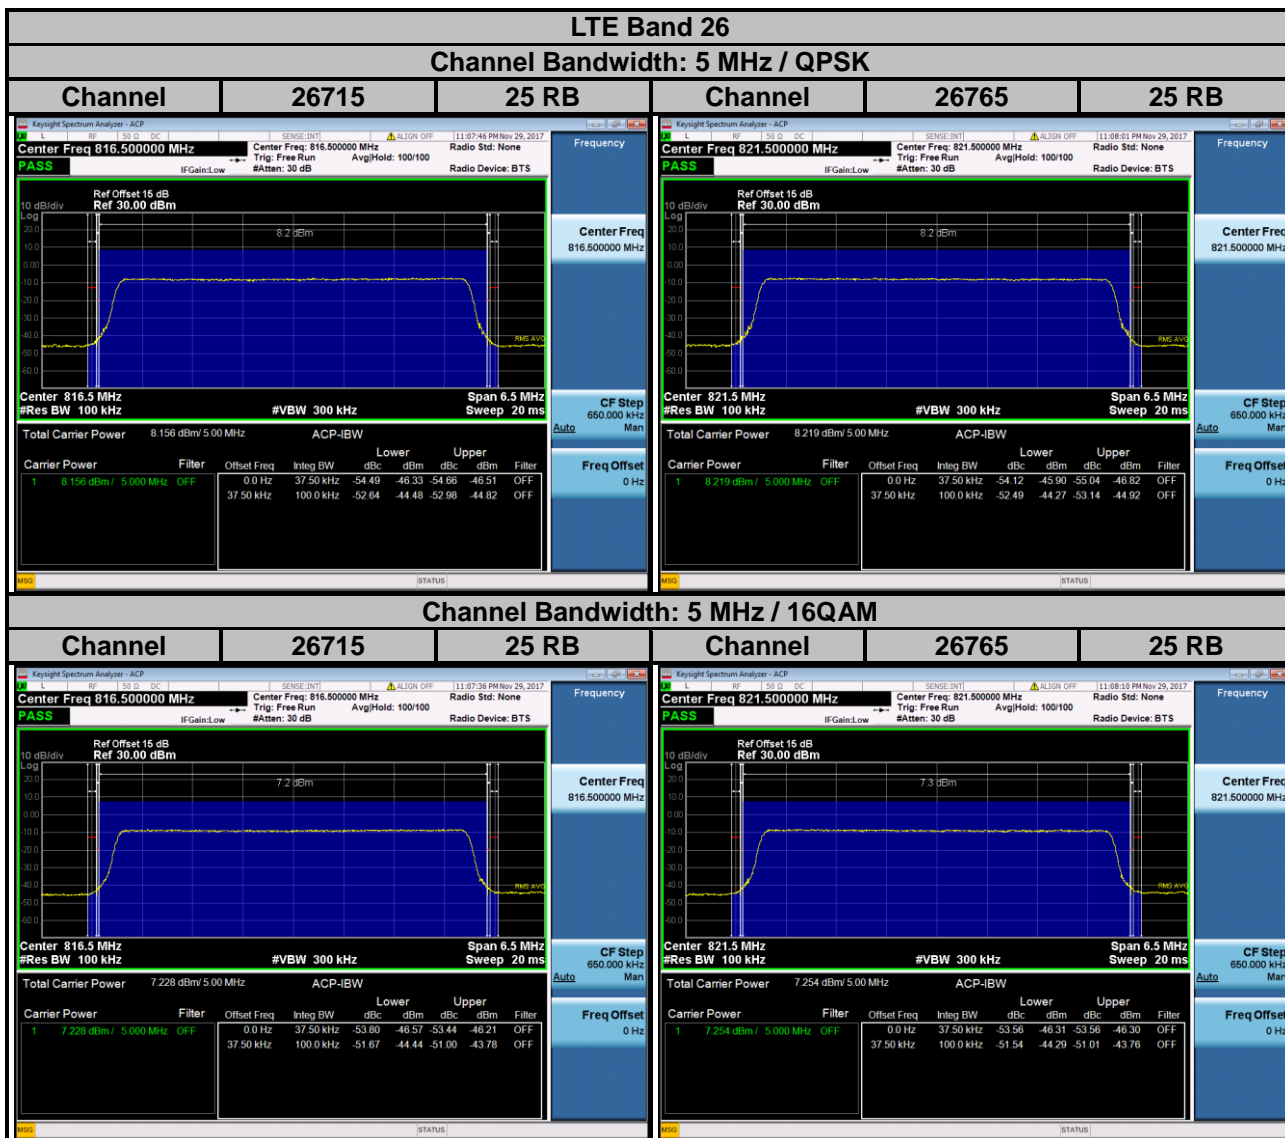



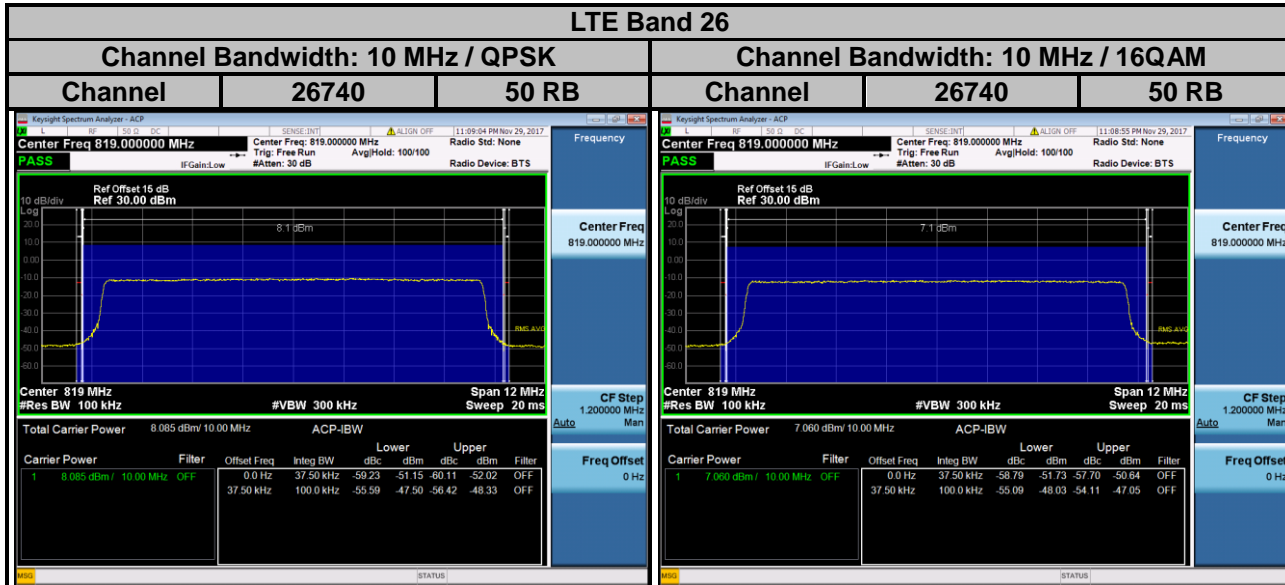


## 4.5 Conducted Spurious Emissions

### 4.5.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -13 dBm.


### 4.5.2 Test Setup

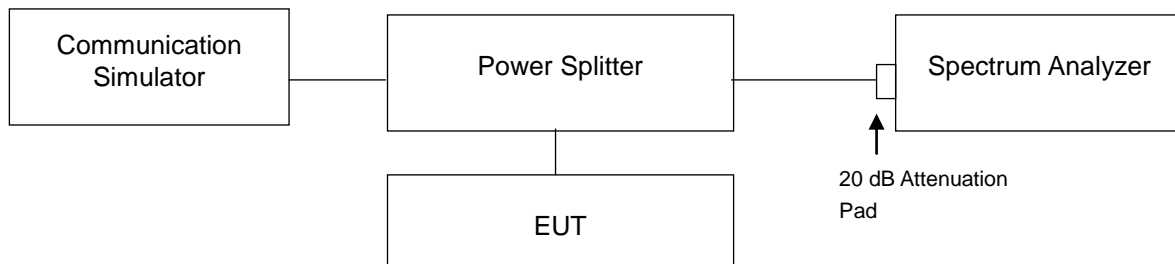



### 4.5.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.


### 4.5.4 Test Results

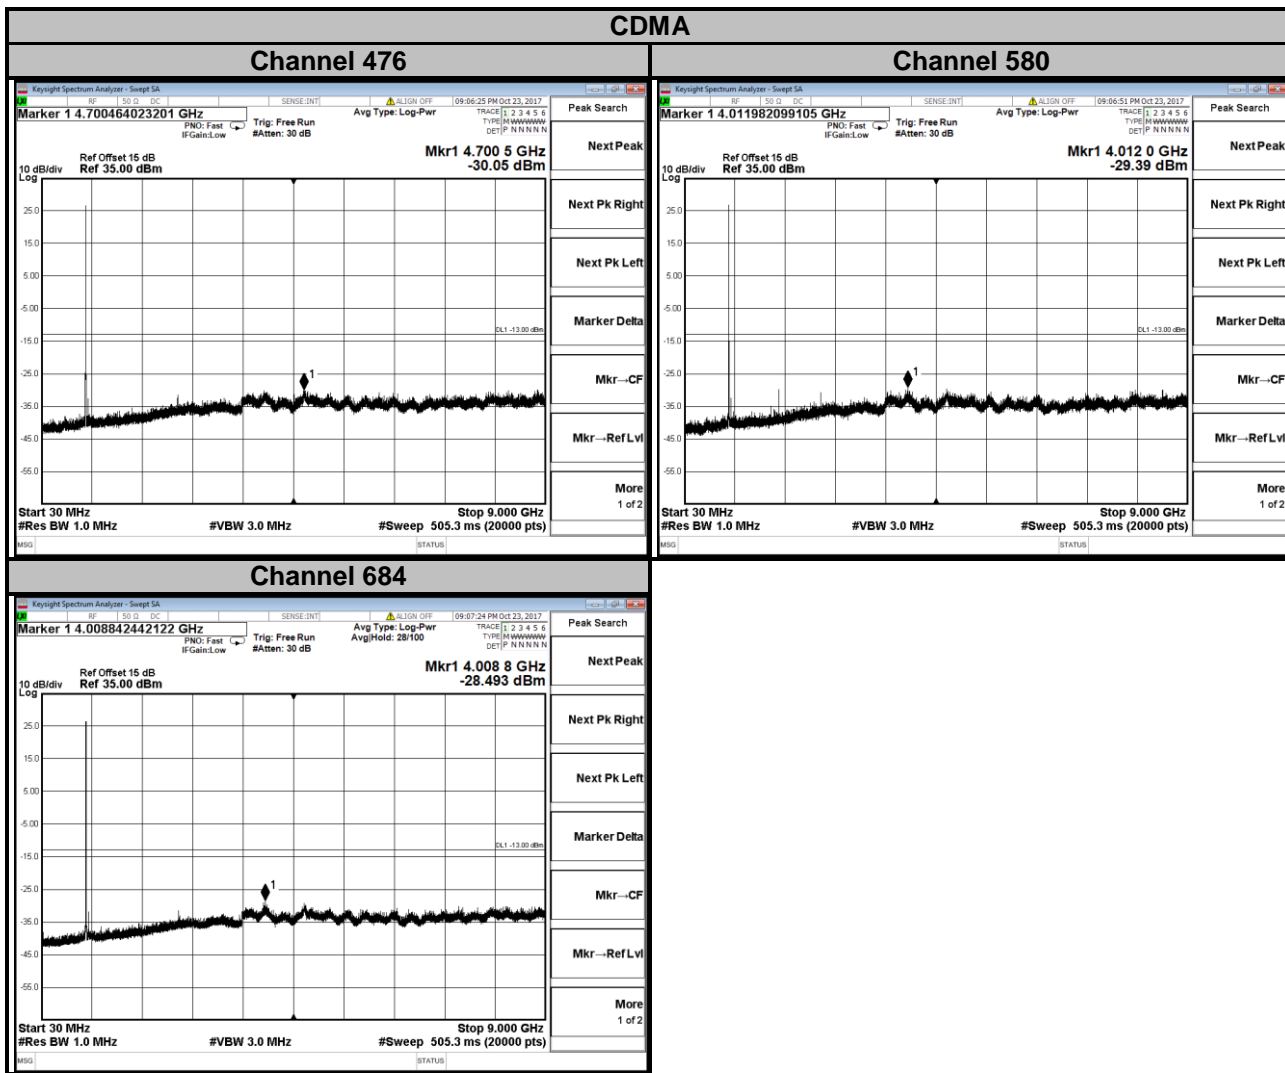

**LTE Band 14**  
**Channel Bandwidth: 5 MHz**

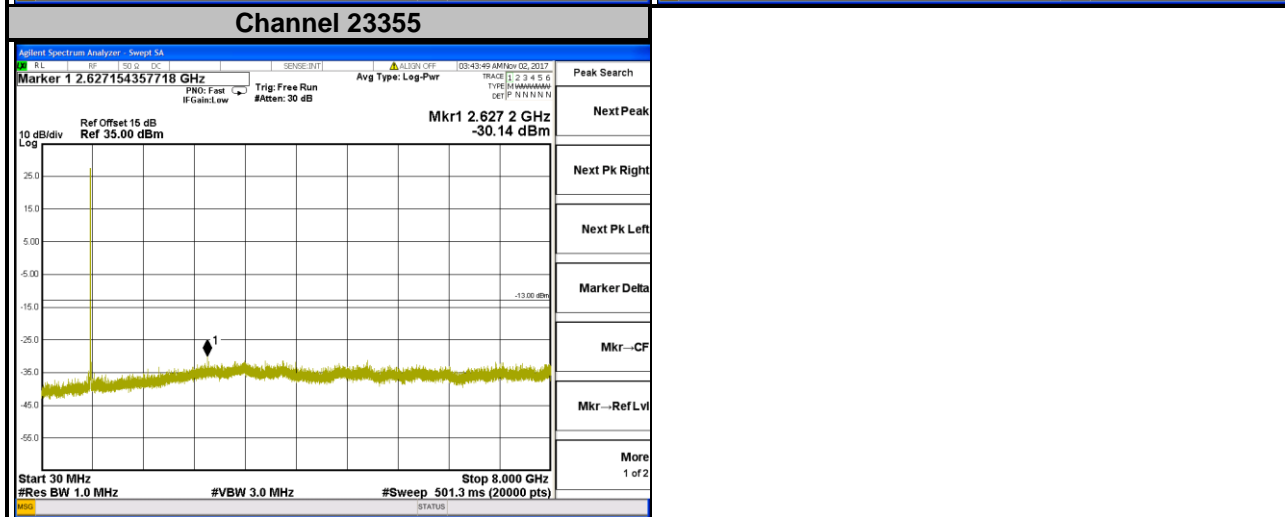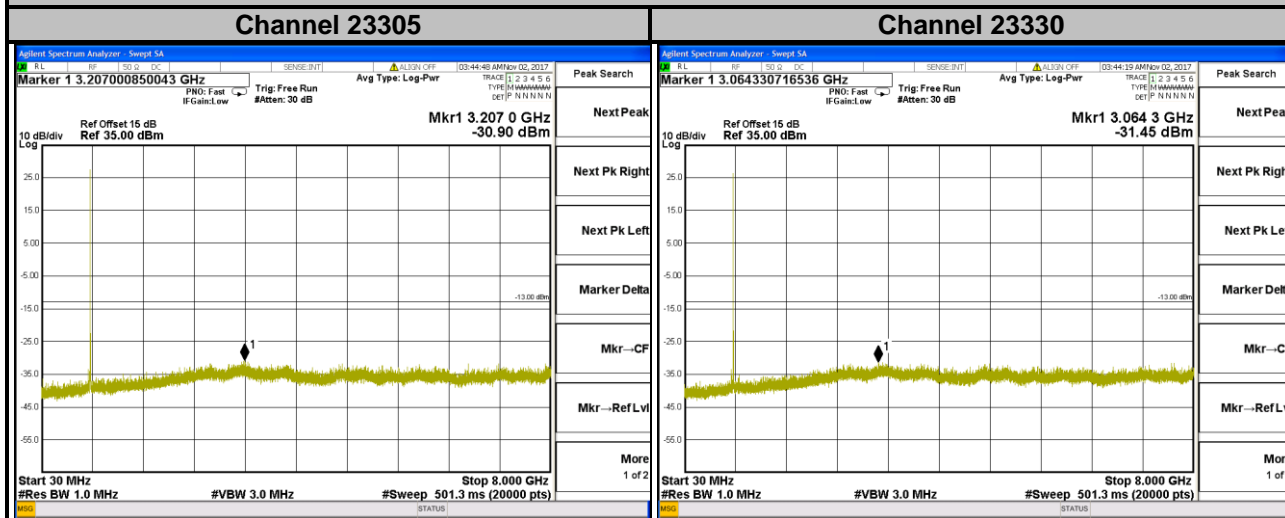



**LTE Band 14**  
**Channel Bandwidth: 10 MHz**  
**Channel 23330**

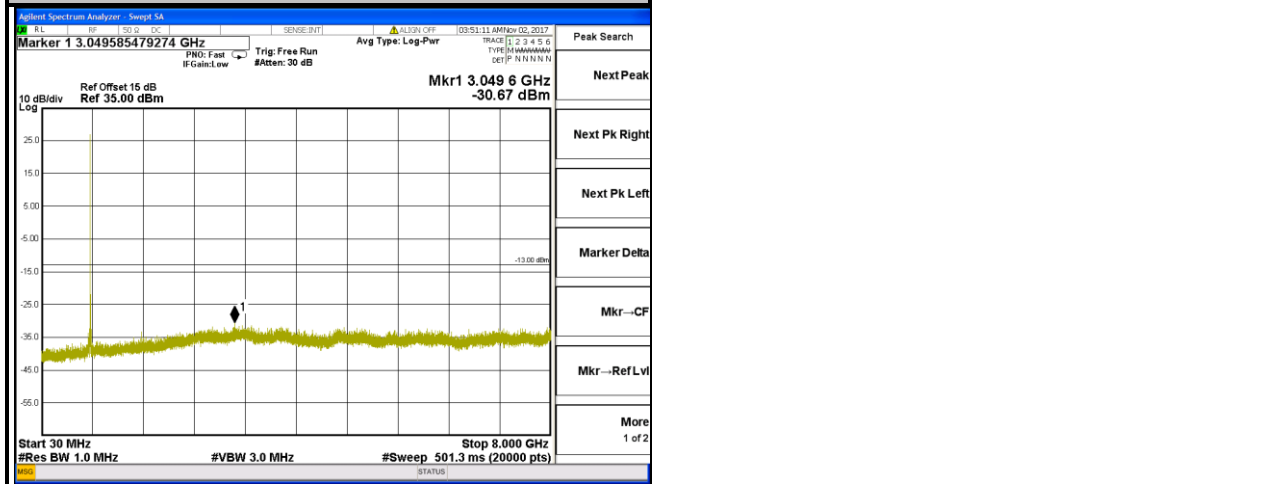


**LTE Band 26**  
**Channel Bandwidth: 1.4 MHz**

**Channel 26697**

**Channel 26740**

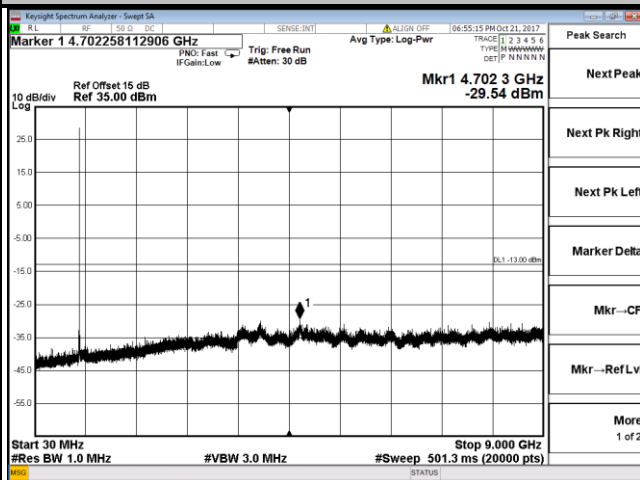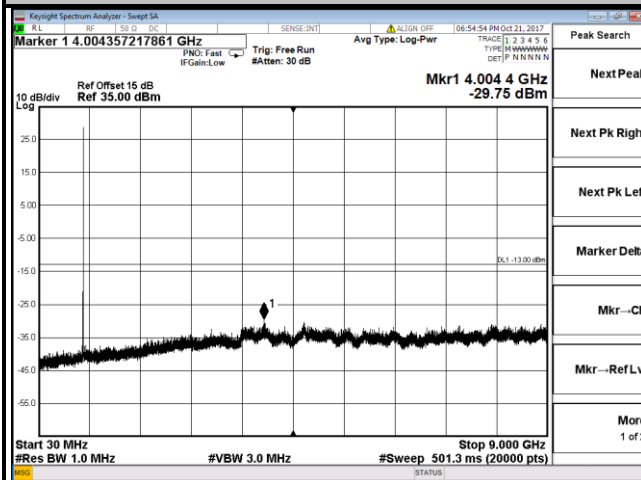



**Channel 26783**

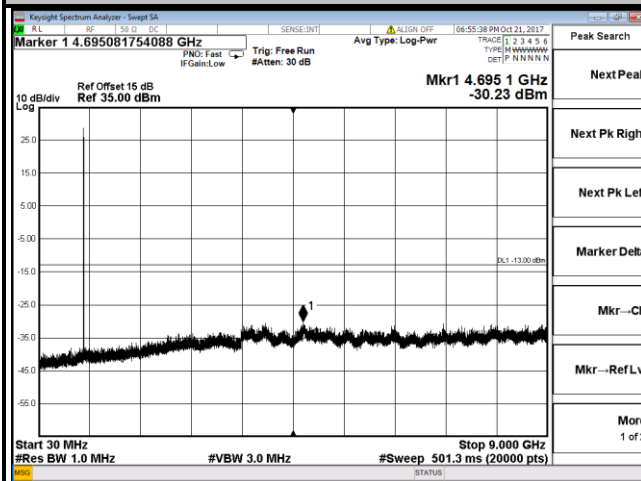


**LTE Band 26**  
**Channel Bandwidth: 3 MHz**

**Channel 26705**



**Channel 26740**

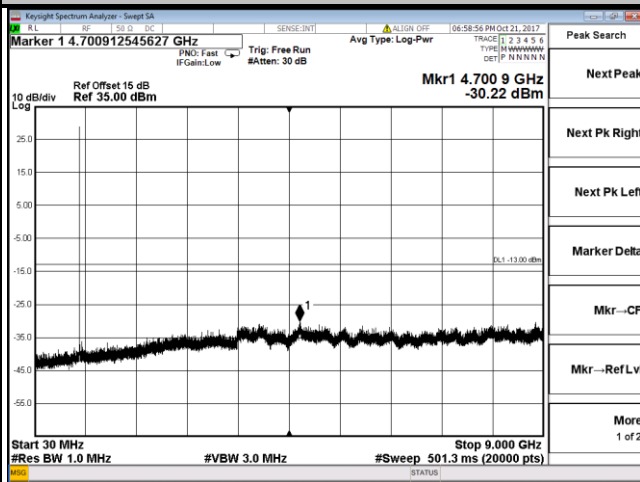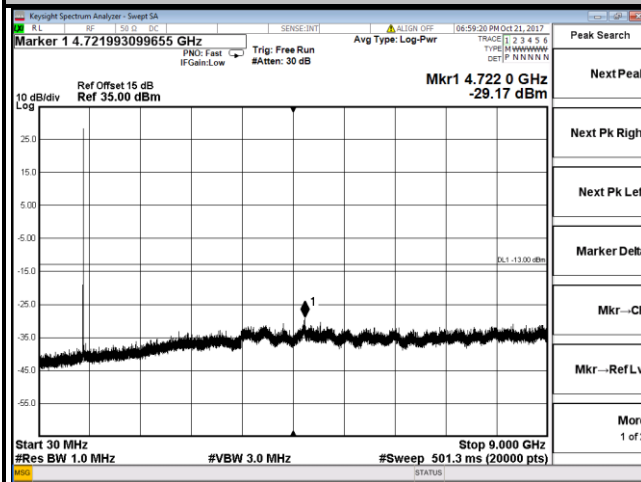


**Channel 26775**

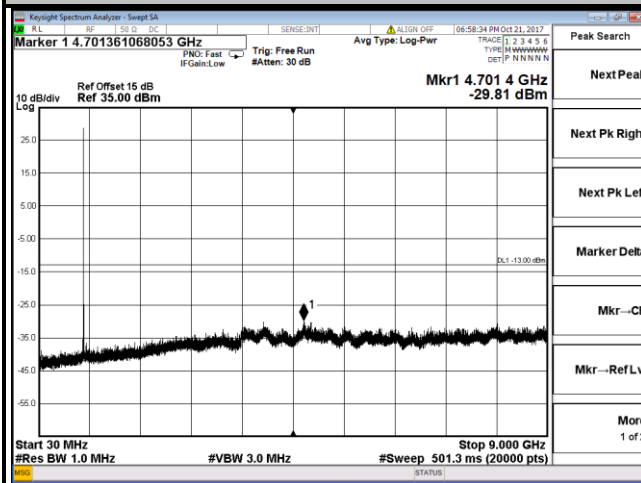

**LTE Band 26**  
**Channel Bandwidth: 5 MHz**

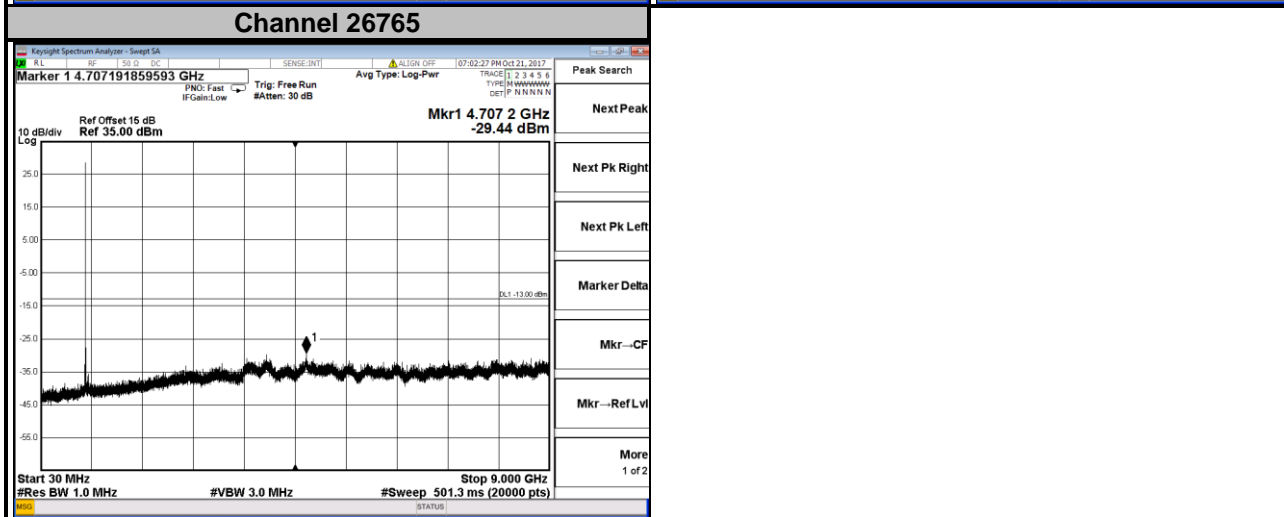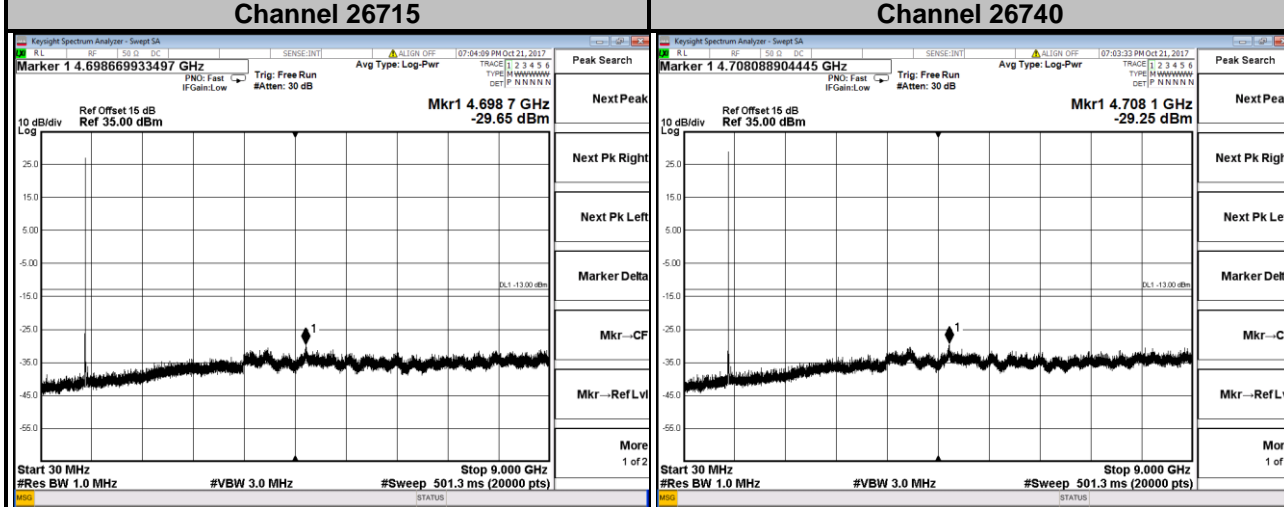

**LTE Band 26**  
**Channel Bandwidth: 10 MHz**  
**Channel 26740**

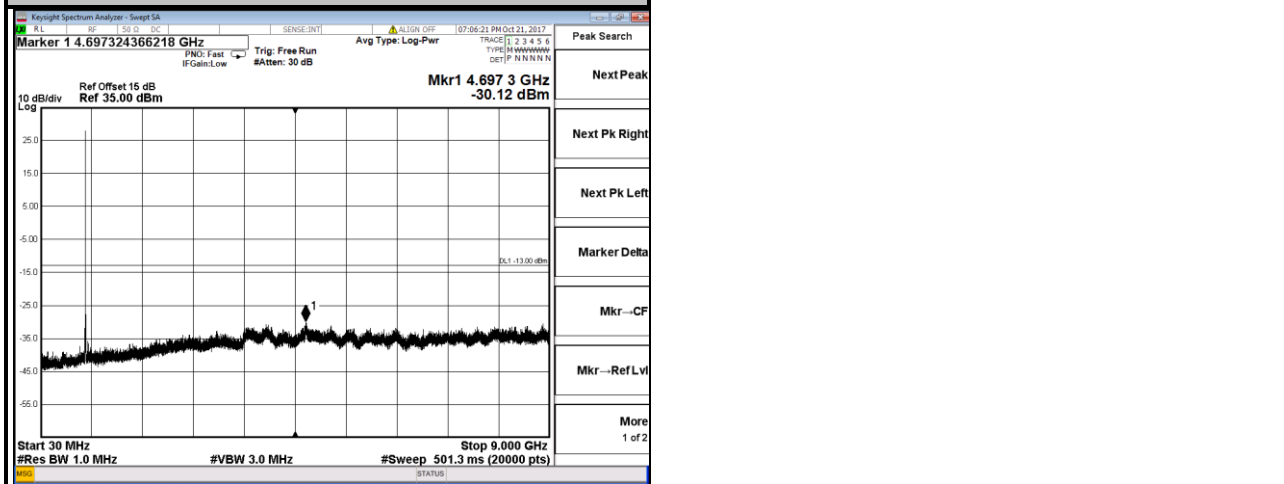

## 4.6 Radiated Emission Measurement

### 4.6.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission is equal to -13 dBm.

### 4.6.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$ .

**Note:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.


### 4.6.3 Deviation from Test Standard

No deviation.




4.6.4 Test Setup

<Radiated Emission below or equal 1 GHz>

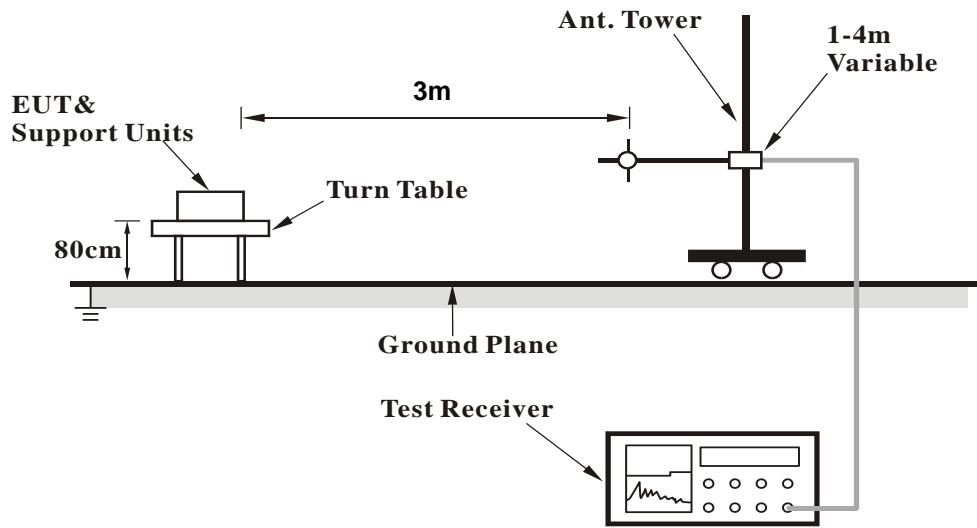

<Radiated Emission above 1 GHz>

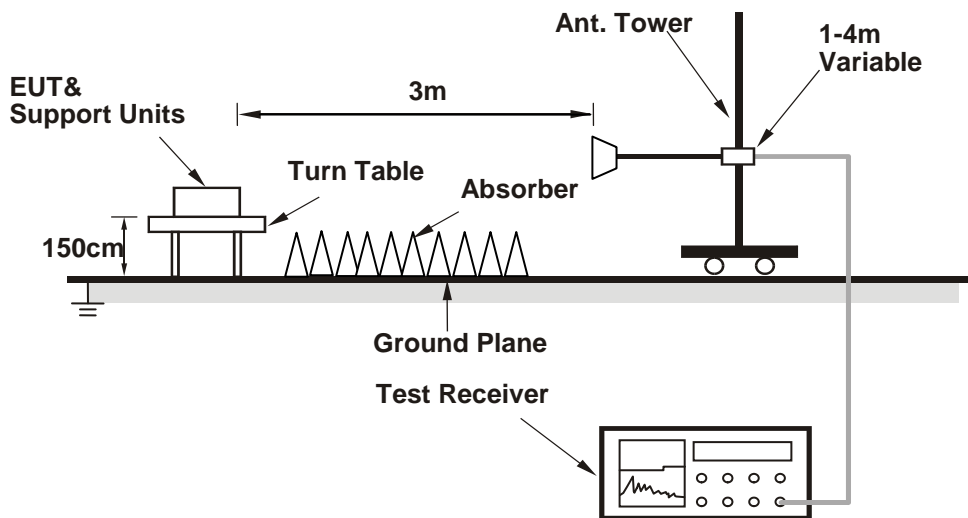

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.5 Test Results


CDMA:  
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

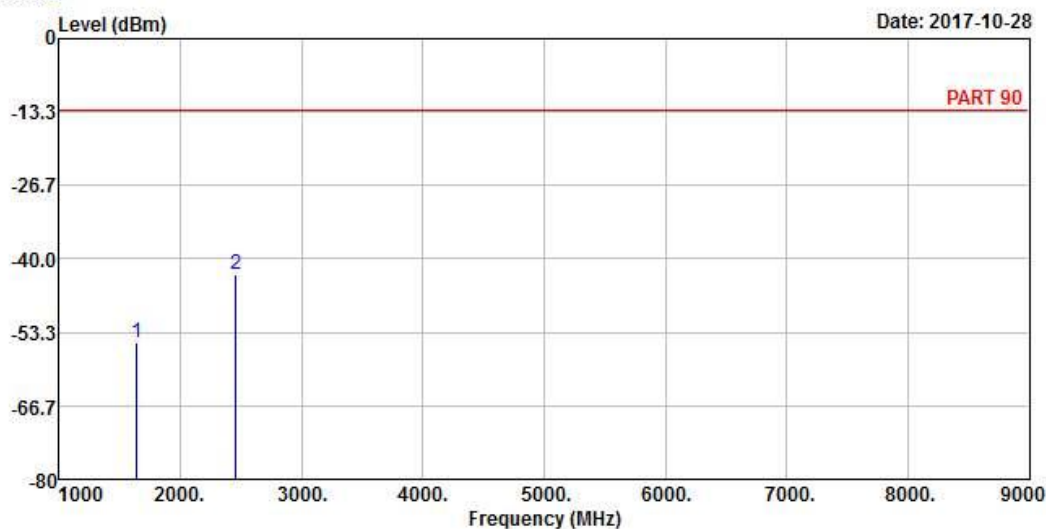

Site : 966 Chamber 5  
Condition: PART 90 HORIZONTAL  
Remak : CDMA BC10 Link\_L-CH  
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1635.80	-55.23	-40.44	-13.00	-42.23	-14.79	Peak
2 pp	2453.70	-42.83	-32.39	-13.00	-29.83	-10.44	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2017-10-28

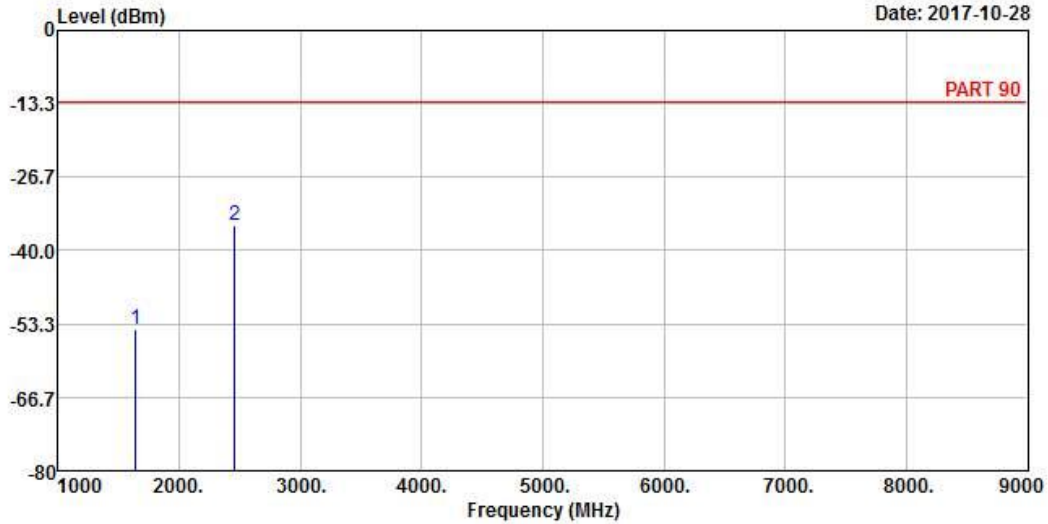

Site : 966 Chamber 5  
 Condition: PART 90 VERTICAL  
 Remak : CDMA BC10 Link\_L-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1635.80	-54.38	-39.59	-13.00	-41.38	-14.79	Peak
2 pp	2453.70	-35.35	-24.91	-13.00	-22.35	-10.44	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

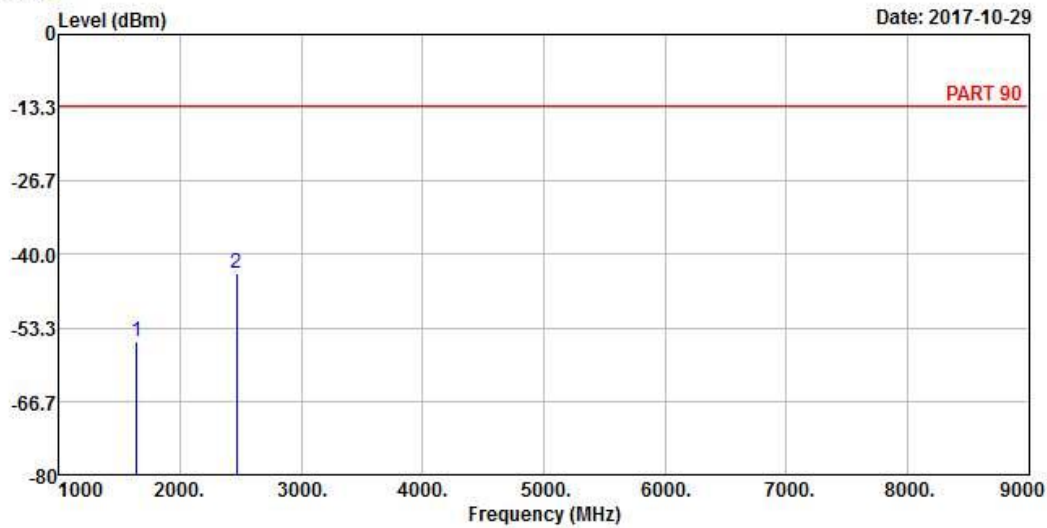

Site : 966 Chamber 5  
 Condition: PART 90 HORIZONTAL  
 Remak : CDMA BC10 Link\_M-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1641.00	-55.90	-41.17	-13.00	-42.90	-14.73	Peak
2 pp	2461.50	-43.42	-32.98	-13.00	-30.42	-10.44	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

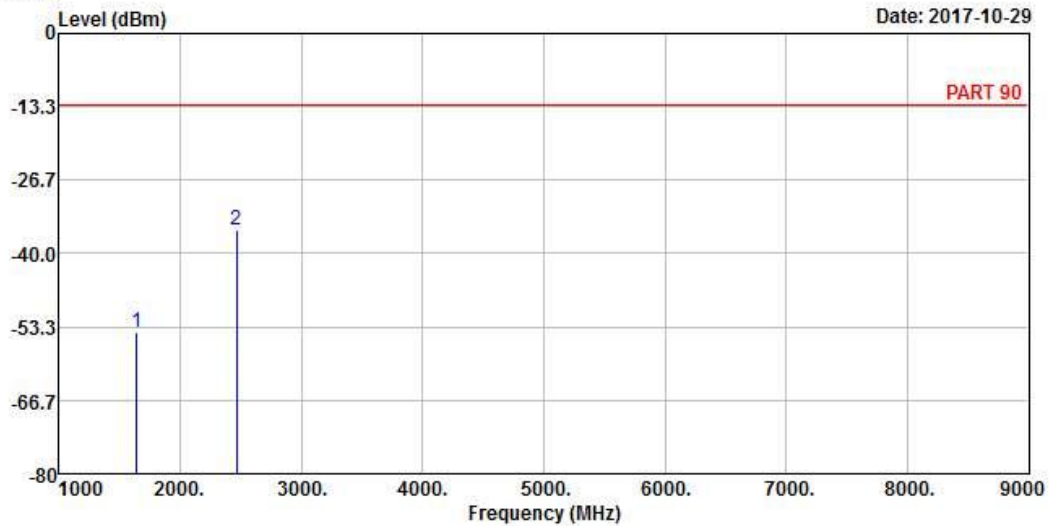

Site : 966 Chamber 5  
 Condition: PART 90 VERTICAL  
 Remak : CDMA BC10 Link\_M-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1641.00	-54.39	-39.66	-13.00	-41.39	-14.73	Peak
2 pp	2461.50	-35.72	-25.28	-13.00	-22.72	-10.44	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-10-29

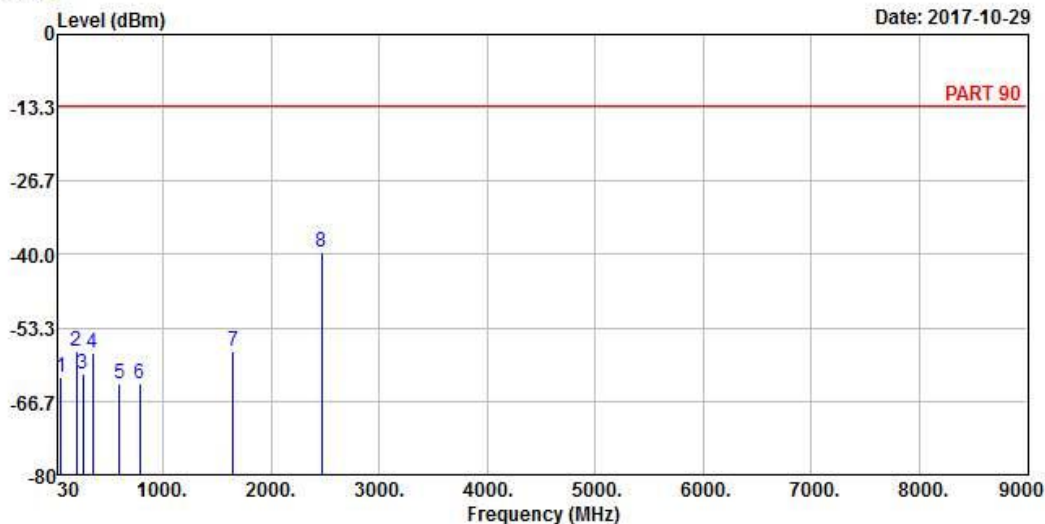

Site : 966 Chamber 5  
 Condition: PART 90 HORIZONTAL  
 Remak : CDMA BC10 Link\_H-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	54.25	-62.26	-56.19	-13.00	-49.26	-6.07	Peak
2	195.87	-57.68	-50.03	-13.00	-44.68	-7.65	Peak
3	257.95	-61.66	-55.51	-13.00	-48.66	-6.15	Peak
4	345.25	-57.87	-51.56	-13.00	-44.87	-6.31	Peak
5	599.39	-63.53	-62.74	-13.00	-50.53	-0.79	Peak
6	780.78	-63.40	-64.19	-13.00	-50.40	0.79	Peak
7	1646.20	-57.56	-42.83	-13.00	-44.56	-14.73	Peak
8 pp	2469.30	-39.61	-29.17	-13.00	-26.61	-10.44	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2017-10-29

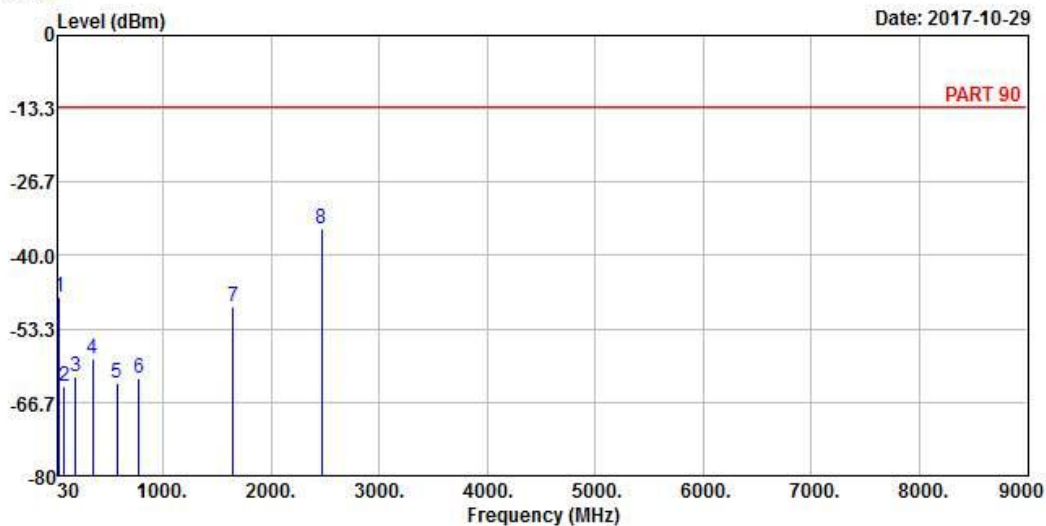

Site : 966 Chamber 5  
 Condition: PART 90 VERTICAL  
 Remak : CDMA BC10 Link\_H-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	39.70	-47.45	-48.09	-13.00	-34.45	0.64	Peak
2	87.23	-63.77	-52.73	-13.00	-50.77	-11.04	Peak
3	191.99	-61.85	-54.57	-13.00	-48.85	-7.28	Peak
4	346.22	-58.79	-52.49	-13.00	-45.79	-6.30	Peak
5	575.14	-63.14	-61.34	-13.00	-50.14	-1.80	Peak
6	777.87	-62.36	-63.16	-13.00	-49.36	0.80	Peak
7	1646.20	-49.33	-34.60	-13.00	-36.33	-14.73	Peak
8 pp	2469.30	-35.26	-24.82	-13.00	-22.26	-10.44	Peak



**LTE Band 14**  
**Channel Bandwidth: 10 MHz / QPSK**




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-28

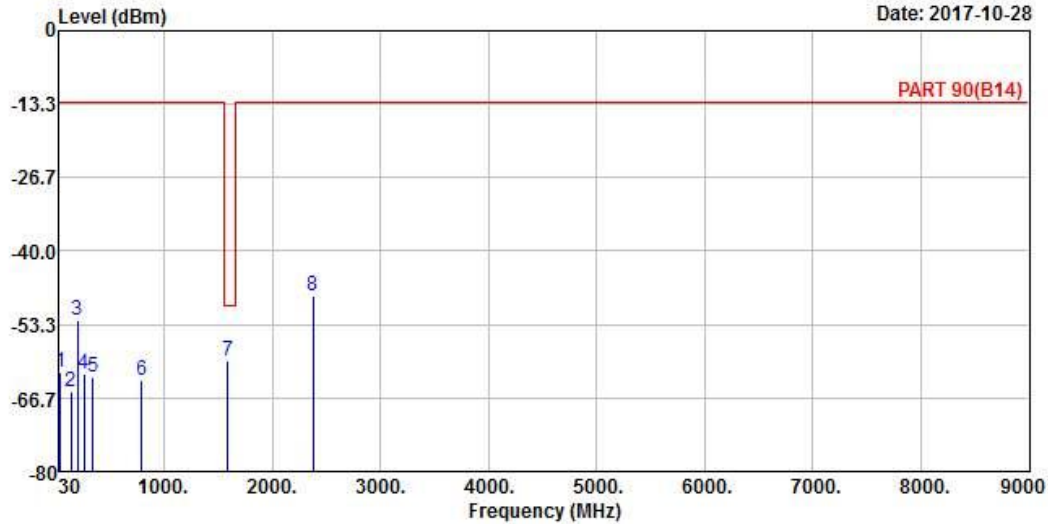

Site : 966 Chamber 5  
 Condition: PART 90(B14) HORIZONTAL  
 Remak : LTE Band 14 QPSK\_10M\_M-CH  
 Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	39.18	-61.88	-61.98	-13.00	-48.88	0.10	Peak
2	135.30	-65.40	-56.73	-13.00	-52.40	-8.67	Peak
3	195.51	-52.52	-44.87	-13.00	-39.52	-7.65	Peak
4	257.07	-62.29	-56.16	-13.00	-49.29	-6.13	Peak
5	337.10	-62.88	-56.45	-13.00	-49.88	-6.43	Peak
6	792.80	-63.60	-64.36	-13.00	-50.60	0.76	Peak
7 pp	1586.00	-59.97	-45.07	-50.02	-9.95	-14.90	Peak
8	2379.00	-48.15	-37.71	-13.00	-35.15	-10.44	Peak





A D T

Data: 10

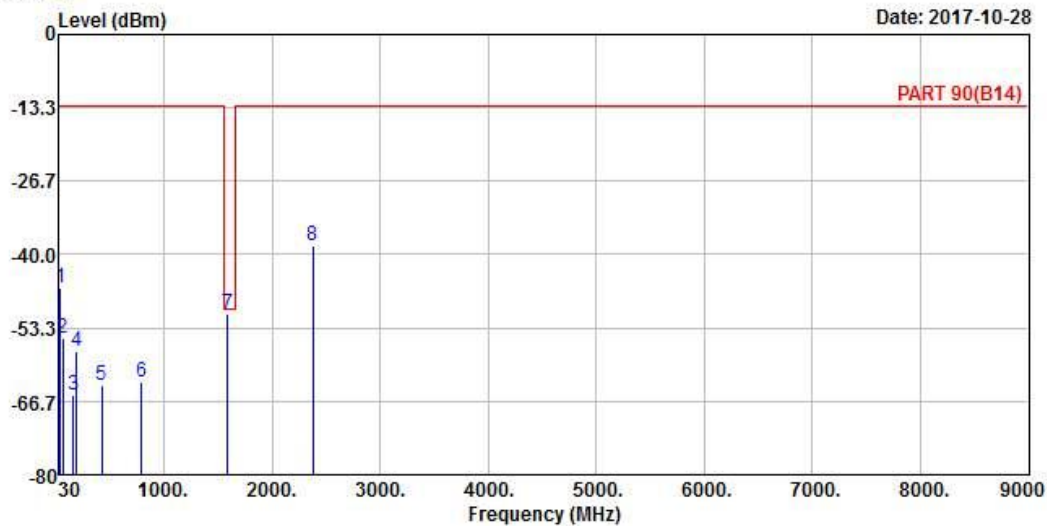

Site : 966 Chamber 5  
 Condition: PART 90(B14) VERTICAL  
 Remak : LTE Band 14 QPSK\_10M\_M-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	39.45	-46.06	-46.70	-13.00	-33.06	0.64	Peak
2	64.83	-55.12	-47.09	-13.00	-42.12	-8.03	Peak
3	156.63	-65.64	-59.98	-13.00	-52.64	-5.66	Peak
4	190.38	-57.49	-50.40	-13.00	-44.49	-7.09	Peak
5	423.90	-63.67	-57.91	-13.00	-50.67	-5.76	Peak
6	787.90	-63.25	-64.02	-13.00	-50.25	0.77	Peak
7 pp	1586.00	-50.65	-35.75	-50.02	-0.63	-14.90	Peak
8	2379.00	-38.32	-27.88	-13.00	-25.32	-10.44	Peak

LTE Band 26  
Channel Bandwidth: 10 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-10-28

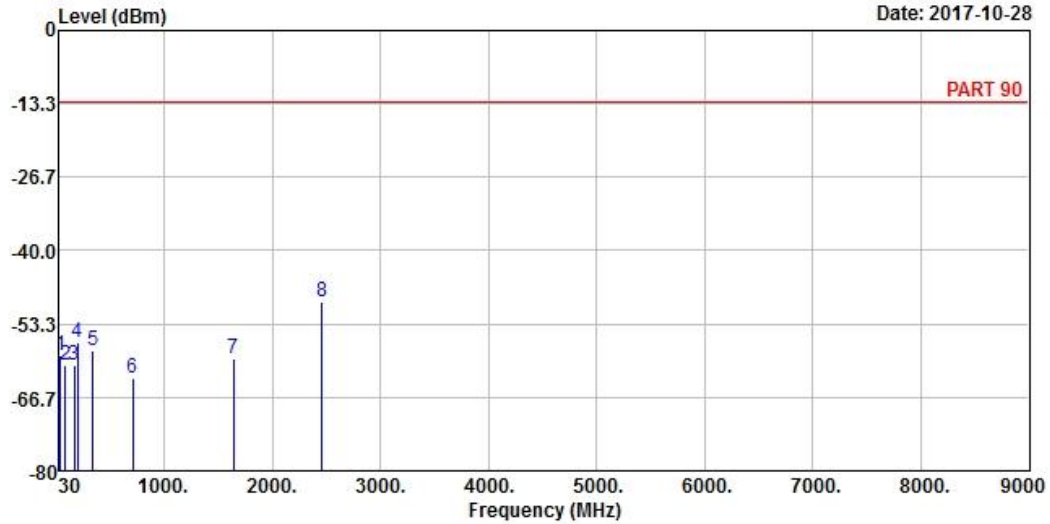

Site : 966 Chamber 5  
Condition: PART 90 HORIZONTAL  
Remak : LTE Band 26 QPSK\_10M\_M-CH  
Tested by: Getaz Yang


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	39.18	-59.16	-59.26	-13.00	-46.16	0.10	Peak
2	87.24	-60.94	-49.90	-13.00	-47.94	-11.04	Peak
3	170.94	-60.91	-55.21	-13.00	-47.91	-5.70	Peak
4	196.59	-56.66	-48.92	-13.00	-43.66	-7.74	Peak
5	342.00	-58.19	-51.83	-13.00	-45.19	-6.36	Peak
6	710.20	-63.28	-63.37	-13.00	-50.28	0.09	Peak
7	1638.00	-59.65	-44.86	-13.00	-46.65	-14.79	Peak
8 pp	2457.00	-49.23	-38.79	-13.00	-36.23	-10.44	Peak



A D T

Data: 10

Date: 2017-10-28

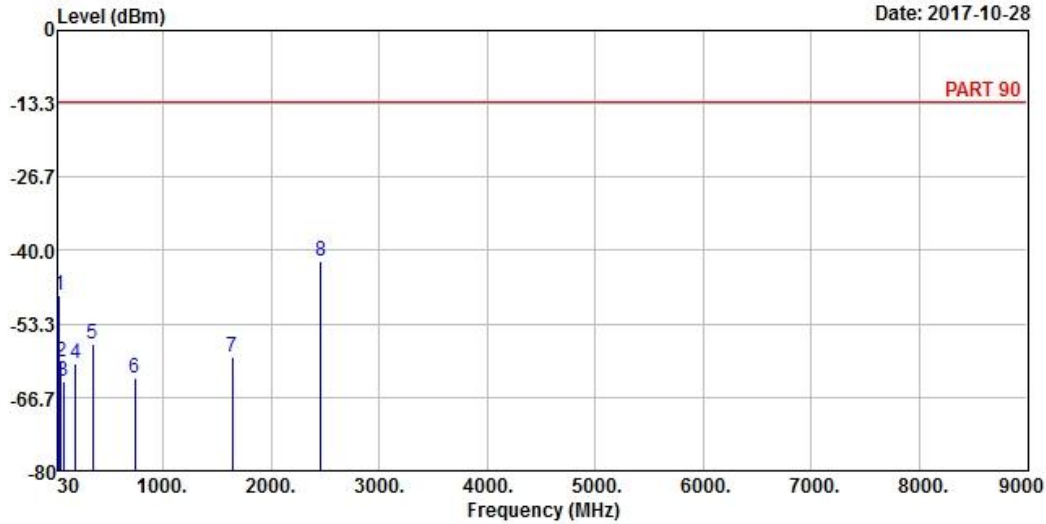

Site : 966 Chamber 5  
 Condition: PART 90 VERTICAL  
 Remak : LTE Band 26 QPSK\_10M\_M-CH  
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	39.45	-48.26	-48.90	-13.00	-35.26	0.64	Peak
2	55.38	-60.14	-53.80	-13.00	-47.14	-6.34	Peak
3	81.03	-63.75	-52.84	-13.00	-50.75	-10.91	Peak
4	192.81	-60.45	-53.08	-13.00	-47.45	-7.37	Peak
5	348.30	-57.04	-50.77	-13.00	-44.04	-6.27	Peak
6	735.40	-63.21	-63.80	-13.00	-50.21	0.59	Peak
7	1638.00	-59.45	-44.66	-13.00	-46.45	-14.79	Peak
8 pp	2457.00	-42.01	-31.57	-13.00	-29.01	-10.44	Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---