



We help ideas meet the real world

DELTA Test Report



Radio parameter test of M70-80e according to FCC and IC requirements

Performed for GN Hearing A/S

DANAK-19/12210

Project no.: T202419-13

Page 1 of 44

Incl. 1 Annex

5 July 2012

DELTA

Venlighedsvej 4

2970 Hørsholm

Denmark

Tlf. +45 72 19 40 00

Fax +45 72 19 40 01

www.delta.dk

VAT No. 12275110

Title	Radio parameter test of M70-80e according to FCC and IC requirements
Test object	M70-80e
Report no.	DANAK-19/12210
Project no.	T202419-13
Test period	15 May - 25 May 2012
Client	GN Hearing A/S Lautrupbjerg 7 2750 Ballerup Denmark Tel.: +45 45 75 11 11
Contact person	Vinnie Nørager E-mail: vnoerager@gnresound.dk
Manufacturer	GN Hearing A/S
Specifications	FCC CFR 47 Part 15, Subpart C Specific rule part 15.249 IC Standard RSS-210, Issue 8:2010 IC Standard RSS-Gen, Issue 3:2010
Results	The test object was found to be in compliance with the specifications, as listed in Section 1
Test personnel	Henrik Egeberg Nielsen Claus Momme Thomsen Peter Wolf Frandsen
Test site(s)	DELTA, Venlighedsvej 4, 2970 Hørsholm

Date 5 July 2012

Project Manager 

Peter Wolf Frandsen
Specialist, EMC
DELTA

Responsible 

Claus Rømer Andersen
Business Manager
DELTA

Table of contents		Page
1.	Summary of tests	5
2.	Test objects and auxiliary equipment	6
2.1	Test objects	6
3.	General test conditions	8
3.1	Test setup during test	8
3.1.1	Description and intended use of test object	8
3.1.2	Test modes during tests	8
3.2	Test sequence	8
3.3	Radio specifications, receiver and transmitter	9
4.	Test results	10
4.1	Antenna requirement	10
4.2	Peak average correction factor (PACF)	11
4.3	Measurement of radiated emission below 1 GHz	13
4.4	Measurement of radiated emission above 1 GHz	17
4.5	Measurement of field strength of fundamental	24
4.6	Measurement of 20 dB bandwidth	25
4.7	Measurement of band edge compliance	28
4.8	Measurement of occupied bandwidth, IC	31
4.9	Measurement of radiated emission, Rx, IC below 1 GHz	34
4.10	Measurement of radiated emission, Rx, IC above 1 GHz	38
5.	National registrations and accreditations	41
5.1	DANAK Accreditation	41
5.2	FCC Registrations	41
5.3	VCCI Registrations	41
5.4	IC Registrations	41
6.	List of instruments	42
	Annex 1 Out of band emission table	43

1. Summary of tests

Tests	Test methods	Rule Section	Results
Antenna requirement	Visual inspection	15.203 RSS-Gen, 7.1.2	Passed
Measurement of radiated emission	ANSI C63.10:2009	15.209 RSS-210, 2.5 & A2.9	Passed
Measurement of 20 dB bandwidth	ANSI C63.10:2009	15.215(c)	Passed
Measurement of band edge compliance	ANSI C63.10:2009	15.209(a) & 15.249(d)(e) RSS-210, 2.5 & A2.9	Passed
Measurement of field strength of fundamental	ANSI C63.10:2009	15.249(a) RSS-210, 2.5 & A2.9	Passed
Measurement of occupied bandwidth	ANSI C63.10:2009	RSS-Gen, 4.6.1	Passed
Measurement of radiated emission, receiver	EN 300 440-1 V1.6.1:2010	RSS-Gen, 6 RSS-210, 2.5	Passed

The given result is based on a shared risk principle with respect to the measurement uncertainty.

Conclusion

The test objects mentioned in this report meet the requirements of the standards stated below.

- FCC CFR 47 Part 15
Subpart C, Specific rule part 15.249
- IC Standard RSS-210, Issue 8:2010
- IC Standard RSS-Gen, Issue 3:2010

The test results relate only to the objects tested.



2. Test objects and auxiliary equipment



Photo 2.1.1 Test object.

2.1 Test objects

Test object 2.1.1

Name of test object	M70-80e
Model / type	M70-80e
Part no.	M70-80e
Serial no.	V0988-DW 12 00806785
FCC ID	X26M7080e
IC ID	X6941C-M7080e
Manufacturer	GN Hearing A/S
Supply voltage	1.4 VDC (Zinc Air battery)
Software version	Spurious emission firmware: Tx and Rx Delta Test App 2.2 : 01.06.11
Cycle time	0.5 ms/1.0 ms
Comment	Supplied by external power supply or internal battery



Test object 2.1.2

Name of test object	M70-80e
Model / type	M70-80e
Part no.	M70-80e
Serial no.	V0988-DW 12 00806770
FCC ID	X26M7080e
IC ID	X6941C-M7080e
Manufacturer	GN Hearing A/S
Supply voltage	1.4 VDC (Zinc Air battery)
Software version	Spurious emission firmware: Tx and Rx Delta Test App 2.2 : 01.06.11
Cycle time	0.5 ms/1.0 ms
Comment	Supplied by external power supply or internal battery

Test object 2.1.3

Name of test object	M70-80e
Model / type	M70-80e
Part no.	M70-80e
Serial no.	VO988-DM12 00806761
FCC ID	X26M7080e
IC ID	X6941C-M7080e
Manufacturer	GN Hearing A/S
Supply voltage	1.4 VDC (Zinc Air battery)
Software version	Spurious emission firmware: Tx and Rx Delta Test App 2.2 : 01.06.11
Cycle time	0.5 ms/1.0 ms
Comment	Supplied by external power supply or internal battery. Antenna replaced by antenna connector.



3. General test conditions

3.1 Test setup during test

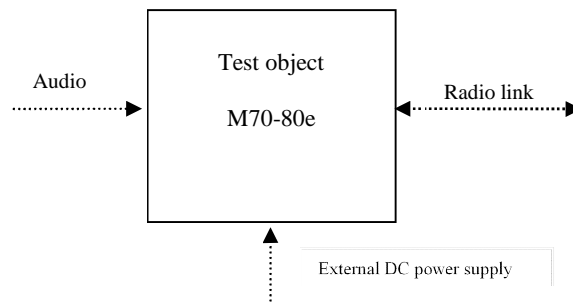


Figure 3.1.1 Block diagram of test object with external cables.

3.1.1 Description and intended use of test object

M70-80E is a hearing aid used for alleviation of hearing loss. It can receive audio signals and be configured via the radio link.

3.1.2 Test modes during tests

All test objects were running special test software.

During test, the test objects were in continuous Tx mode or continuous Rx mode.

(Normal modulation, normal data packets with optimized repetition rate.)

Tests were performed at three frequencies:

- Low frequency: 2404 MHz
- Middle frequency: 2440 MHz
- High frequency: 2478 MHz

During relevant tests, the battery was replaced by an external DC power supply.

External power supply is not used under intended use.

3.2 Test sequence

The tests described in this test report were performed in the following sequence:

1. Measurement of radiated emission, Rx, IC
2. Measurement of 20 dB bandwidth
3. Measurement of occupied bandwidth, IC
4. Measurement of field strength of fundamental
5. Measurement of radiated emission
6. Measurement of band edge compliance
7. Inspection of antenna requirement
8. Peak average correction factor (PACF)



3.3 Radio specifications, receiver and transmitter

Test object	M70-80e	Sheet	Radio-1
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	14 June 2012
Client	GN Hearing A/S	Initials	PWF
Specification	- FCC CFR 47 Part 15, Subpart C Specific rule part 15.249 - IC Standard RSS-210, Issue 8:2010 - IC Standard RSS-Gen, Issue 3:2010		

The radio of the test object has the following specified RF parameters. The below mentioned information regarding the receiver and the transmitter is declared by the manufacturer.

Type of equipment	:	Low power device (2400-2483.5 MHz)
Operating frequency range	:	2404 to 2478 MHz
Antenna	:	Permanently attached PCB antenna
Maximum gain	:	-3.38 dB
Transmit power, max peak	:	-7.43 dBm EIRP
Field Strength, max peak	:	87.8 dB μ V/m (20 mV/m) @ 3 meter
Power level	:	No
No of channels	:	20
Bandwidth	:	
Occupied bandwidths (99%)	:	2.464 MHz (Measured)
Channel separation	:	2 MHz
Modulation	:	GFSK
Data rate	:	2 Mbits
Duty cycle	:	10 % during normal mode
Transmit mode	:	Yes
Receive mode	:	Yes
Standby mode	:	Yes
Power supply	:	1.3 V Zinc Air battery
Specified min voltage	:	1.19 V
Specified max voltage	:	1.4 V
Temperature category	:	-20 to +55 °C.
Emission Designator	:	3M43F7E
Max. TX spurious emission, average	:	198 (μ V/m) @ 3 meter (Field Strength)
Max. RX spurious emission, peak	:	164 (μ V/m) @ 3 meter (Field Strength)



4. Test results

4.1 Antenna requirement

Test object	M70-80e	Sheet	ANT-2
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	15 May 2012
Client	GN Hearing A/S	Initials	PWF
Specification	FCC CFR 47 Part 15, Subpart C, Specific rule part 15.249 IC Standard RSS-Gen, Issue 3:2010		

Test method	Visual inspection
Evaluation criteria Section 15.203 of the FCC rules and 7.1.2 of RSS-Gen state that the subject device must meet at least one of the following criteria: <ul style="list-style-type: none">(a) Antenna must be permanently attached to the unit.(b) Antenna must use a unique type of connector to attach to the unit.(c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.	
Evaluation result The M70-80E has one permanently attached (PCB) antenna. The test object meets criteria (a).s	



4.2 Peak average correction factor (PACF)

Test object	M70-80e	Sheet	ANT-3
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	14 June 2012
Client	GN Hearing A/S	Initials	PWF
Specification	FCC CFR 47 Part 15, Subpart C, Specific rule part 15.249 IC Standard RSS-Gen, Issue 3:2010		

Characteristics	Temperature: 24 °C. Test voltage: 1.3 V
Test equipm.	49550 49183 49299 Uncertainty: 1•10-7 sec.
SA Settings	RBW: 2 MHz VBW: 5 MHz SPAN: Zero-1ms DET: Peak CF: 2440 MHz Trace: Max Hold

The measured value for the duty cycle (DC):

Max. Tx on time: 201.92 μ s – Delta 2 (T1)

Period: 501.60 μ s – Delta 3 (T1).

The calculated duty cycle is:

DC: $(201.92 \mu\text{s} / 501.60 \mu\text{s}) \cdot 100\% = 40.3 \%$.


This corresponds to a Peak to Average Correction Factor of:

PACF: $-20 \log (40.3/100) = 7.9 \text{ dB}$.

This is according to FCC CFR 47 Part 15, Subpart C, Section 15.35(c) for one complete pulse train, including blanking intervals and the pulse train do not exceed 0.1 seconds.

This PACF can be subtracted from the peak measurements to obtain the average values or the average limit line can be corrected with the PACF at 7.9 dB from 54 dB μ V/m to 61.9 dB μ V/m at the peak measurement plots.



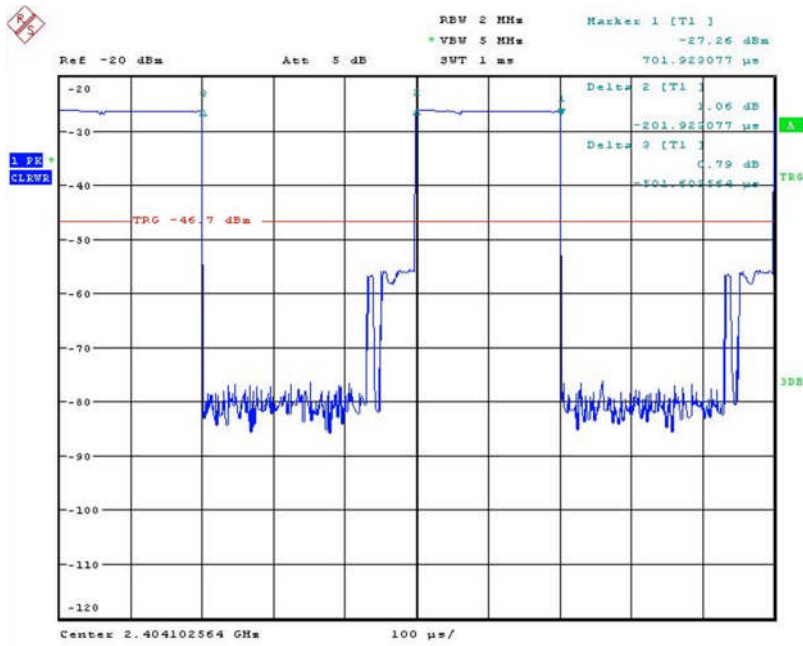

Date: 20.JUN.2012 10:37:07


Photo 4.2.1 Peak measurement plot.



4.3 Measurement of radiated emission below 1 GHz

Test object	M70-80e	Sheet	RE_Spur-1
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	15 May 2012
Client	GN Hearing A/S	Initials	HEN
Specification	FCC CFR 47 Part 15, Subpart C IC Standard RSS-210, Issue 8:2010 IC Standard RSS-Gen, Issue 3:2010	Frequency	30-1000 MHz

Test method	ANSI C63.10:2009	Temperature	22 °C
Characteristics	Pre-scan, Antenna at 3 m, 1 m height, vert. pol.	Humidity	38 % RH
Detector	Peak and quasi peak	Bandwidth	120 kHz
Test equipm.	EMI room Hørsholm 29861 49600 29797 < 1GHz	Uncertainty	4.9 dB

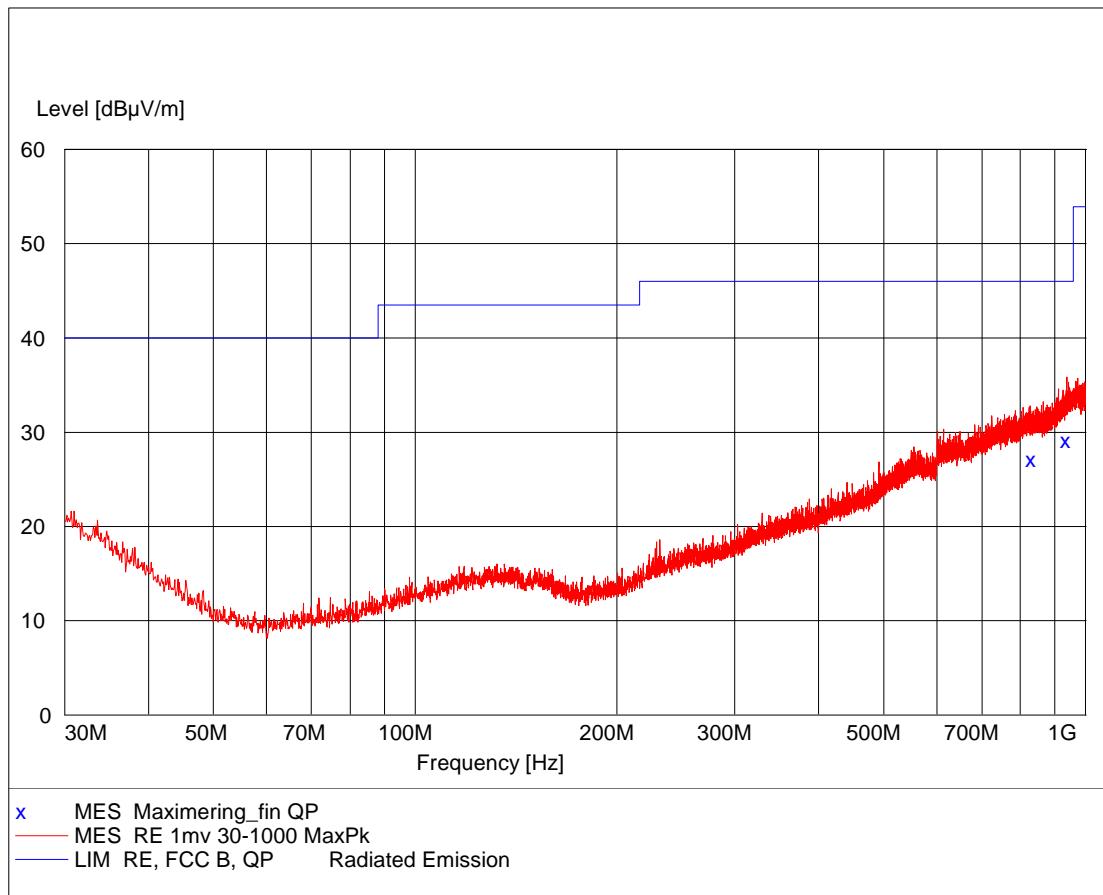


Comments

Continuous Tx - normal modulation
 Hopping low-middle-high channel



Test object	M70-80e	Sheet	RE_Spur-2
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	15 May 2012
Client	GN Hearing A/S	Initials	HEN
Specification	FCC CFR 47 Part 15, Subpart C IC Standard RSS-210, Issue 8:2010 IC Standard RSS-Gen, Issue 3:2010	Frequency	30-1000 MHz

Test method	ANSI C63.10:2009	Temperature	22 °C
Characteristics	Pre-scan, Antenna at 3 m, 4 m height, hor. pol.	Humidity	38 % RH
Detector	Peak and quasi peak	Bandwidth	120 kHz
Test equipm.	EMI room Hørsholm 29861 49600 29797	Uncertainty	4.9 dB

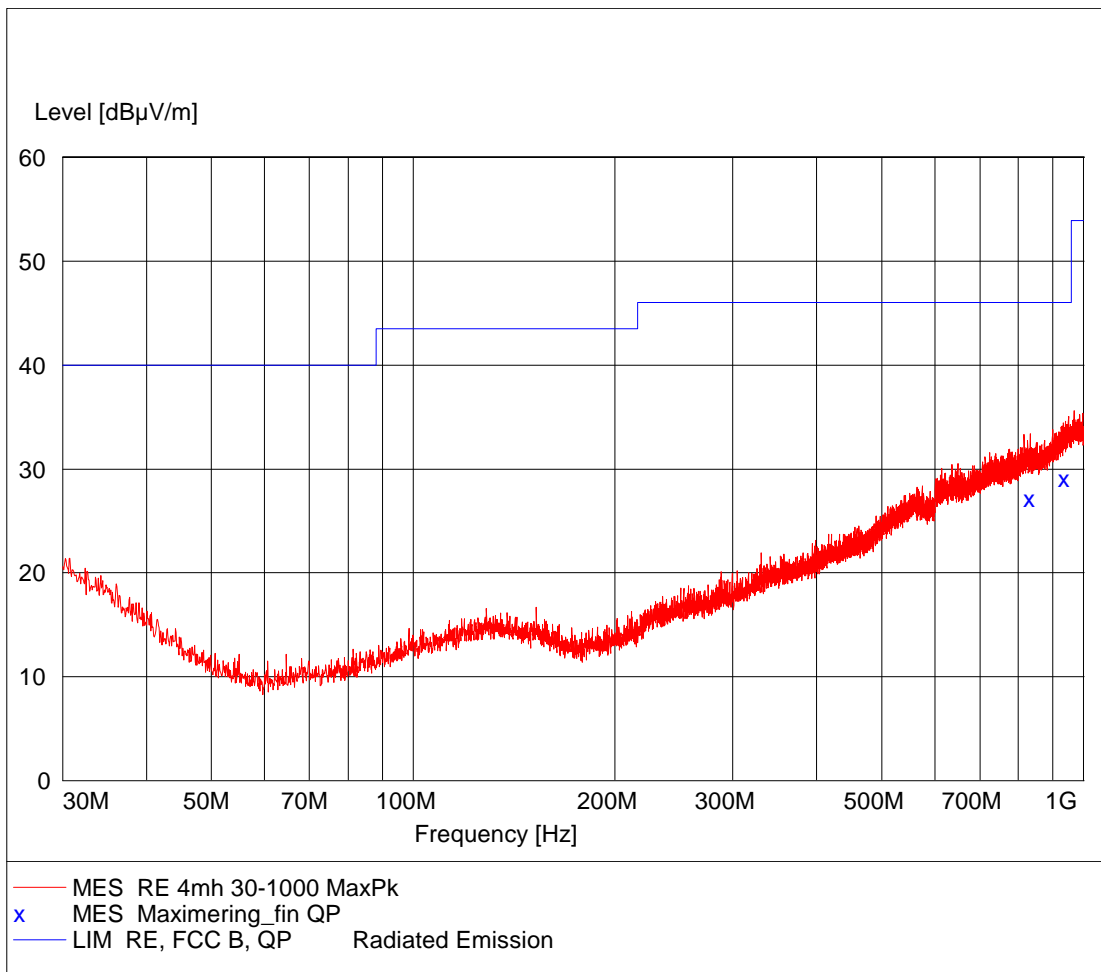

Comments

Continuous Tx - normal modulation
 Hopping low-middle-high channel





Photo 4.3.1 Test setup regarding measurement of radiated emission.

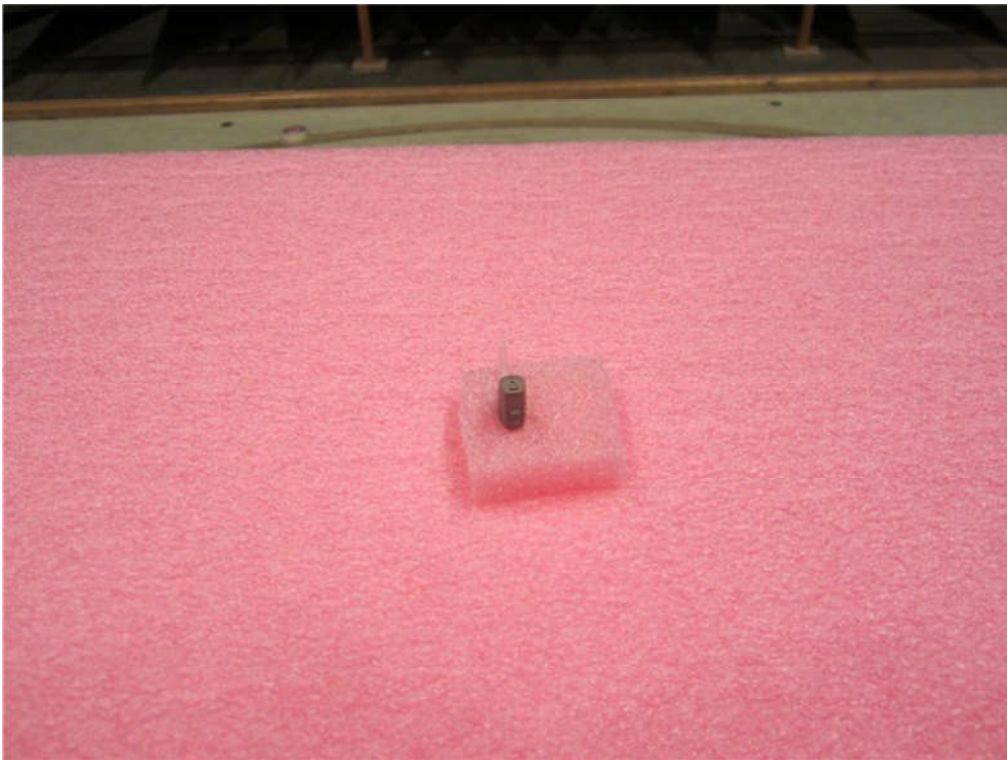



Photo 4.3.2 Test setup regarding measurement of radiated emission.



4.4 Measurement of radiated emission above 1 GHz

Test object	M70-80e	Sheet	RE_Spur-4
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	15 May 2012
Client	GN Hearing A/S	Initials	HEN
Specification	FCC CFR 47 Part 15, Subpart C IC Standard RSS-210, Issue 8:2010 IC Standard RSS-Gen, Issue 3:2010	Frequency	1-25 GHz

Test method	ANSI C63.10:2009	Temperature	22 °C
Characteristics	Complete search, Antenna distance 3 m.	Humidity	38 % RH
Detector	Peak for 1 GHz to 25 GHz	Bandwidth	1 MHz
Test equipm.	EMI room Hørsholm 49086 49600 49624 49625	Uncertainty	4.9 dB

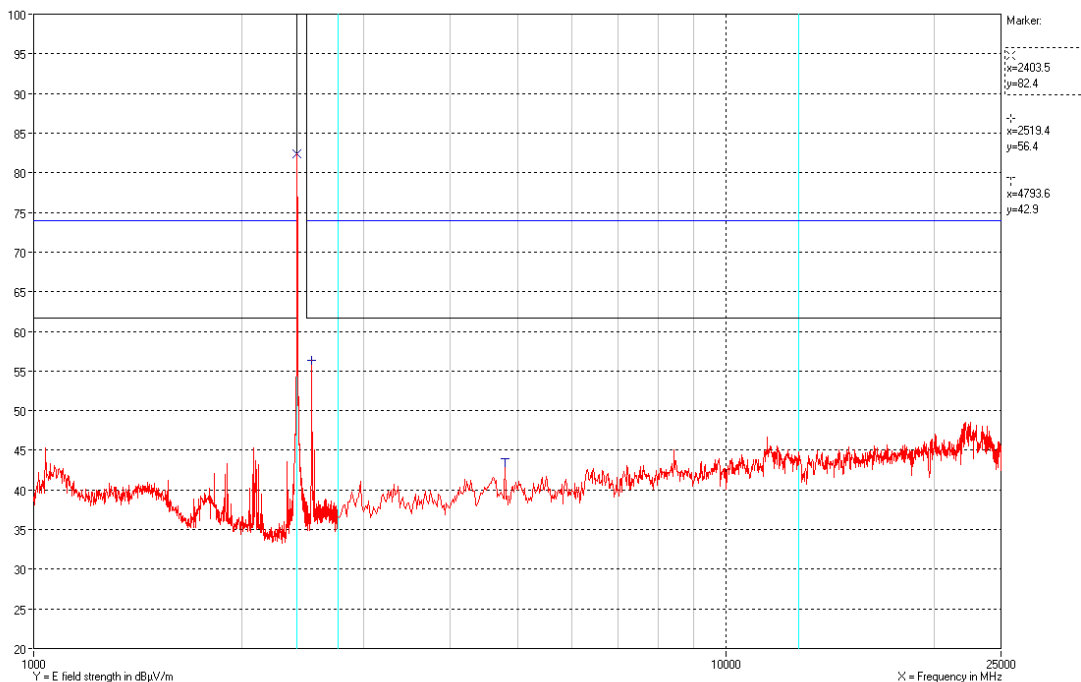

Polarization Vertical and horizontal peak measurements

Comments Continuous Tx - normal modulation - hopping off.


Average limit line (Black) is corrected with the PACF at 7.9 dB.



Test result	The measured peak field strengths are below the peak limit. The measured peak field strengths are below the corrected average limit. Average limit is corrected with the PACF.
Test Port	Enclosure
Test frequency	2404 MHz
Test mode	Continuous Tx - normal modulation - hopping off
Condition	Normal
Compliant	Yes
Comments	Final maximal measurements by variation of turntable azimuth, antenna height and antenna polarization. Test voltage: External power supply at 1.3 VDC. Average limit line (Black) is corrected with the PACF at 7.9 dB.

Test object	M70-80e	Sheet	RE_Spur-5
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	16 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	FCC CFR 47 Part 15, Subpart C IC Standard RSS-210, Issue 8:2010 IC Standard RSS-Gen, Issue 3:2010	Frequency	1-25 GHz

Test method	ANSI C63.10:2009	Temperature	24 °C
Characteristics	Complete search, Antenna distance 3 m.	Humidity	36 % RH
Detector	Peak for 1 GHz to 25 GHz	Bandwidth	1 MHz
Test equipm.	EMI room Hørsholm 49086 49600 49624 49625	Uncertainty	4.9 dB

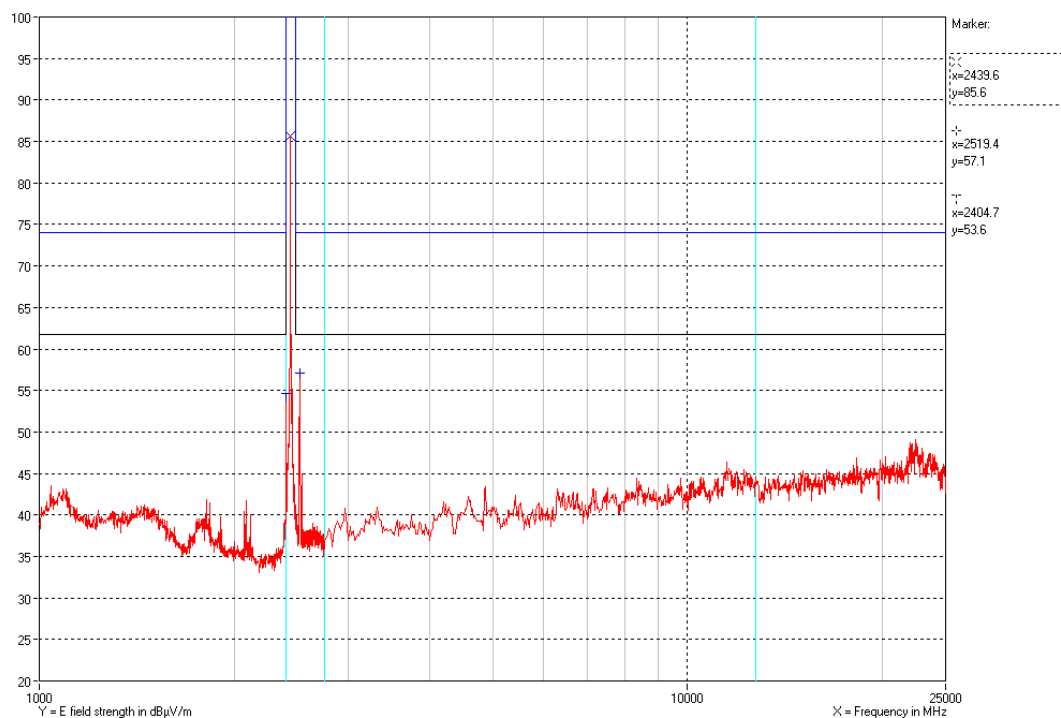

Polarization

Vertical and horizontal peak measurements

Comments

Continuous Tx - normal modulation - hopping off


Average limit line (Black) is corrected with the PACF at 7.9 dB.



Test result	The measured peak field strengths are below the peak limit. The measured peak field strengths are below the corrected average limit. Average limit is corrected with the PACF.
Test Port	Enclosure
Test frequency	2440 MHz
Test mode	Continuous Tx - normal modulation - hopping off
Condition	Normal
Compliant	Yes
Comments	Final maximal measurements by variation of turntable azimuth, antenna height and antenna polarization. Test voltage: External power supply at 1.3 VDC. Average limit line (Black) is corrected with the PACF at 7.9 dB.

Test object	M70-80e	Sheet	RE_Spur-6
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	16 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	FCC CFR 47 Part 15, Subpart C IC Standard RSS-210, Issue 8:2010 IC Standard RSS-Gen, Issue 3:2010	Frequency	1-25 GHz

Test method	ANSI C63.10:2009	Temperature	24 °C
Characteristics	Complete search, Antenna distance 3 m.	Humidity	38 % RH
Detector	Peak for 1 GHz to 25 GHz	Bandwidth	1 MHz
Test equipm.	EMI room Hørsholm 49086 49600 49624 49625	Uncertainty	4.9 dB

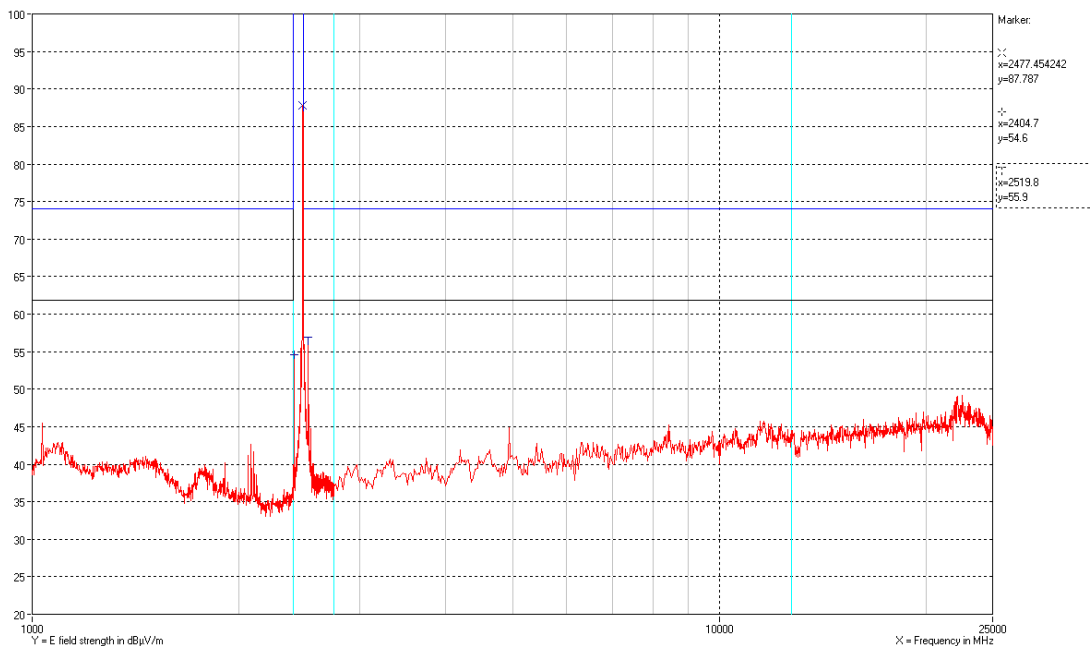

Polarization

Vertical and horizontal peak measurements

Comments

Continuous Tx - normal modulation - hopping off

Average limit line (Black) is corrected with the PACF at 7.9 dB.



Test result	The measured peak field strengths are below the peak limit. The measured peak field strengths are below the corrected average limit. Average limit is corrected with the PACF.
Test Port	Enclosure
Test frequency	2478 MHz
Test mode	Continuous Tx - normal modulation - hopping off
Condition	Normal
Compliant	Yes
Comments	Final maximal measurements by variation of turntable azimuth, antenna height and antenna polarization. Test voltage: External power supply at 1.3 VDC. Average limit line (Black) is corrected with the PACF at 7.9 dB.

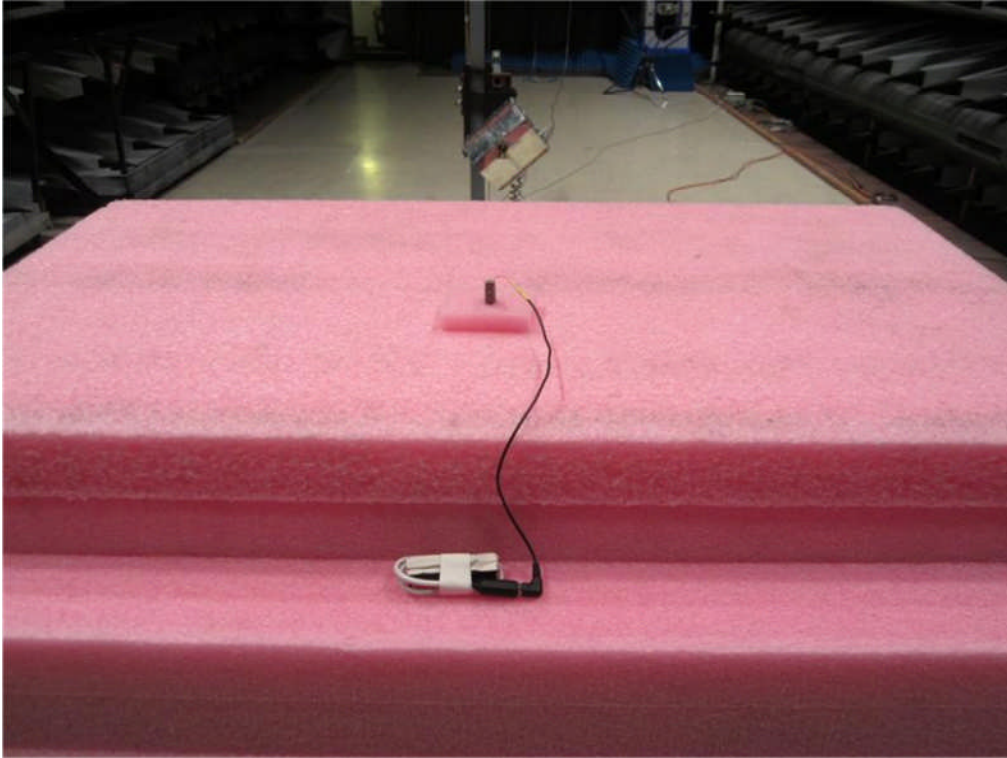


Photo 4.4.1 Test setup regarding measurement of radiated emission.

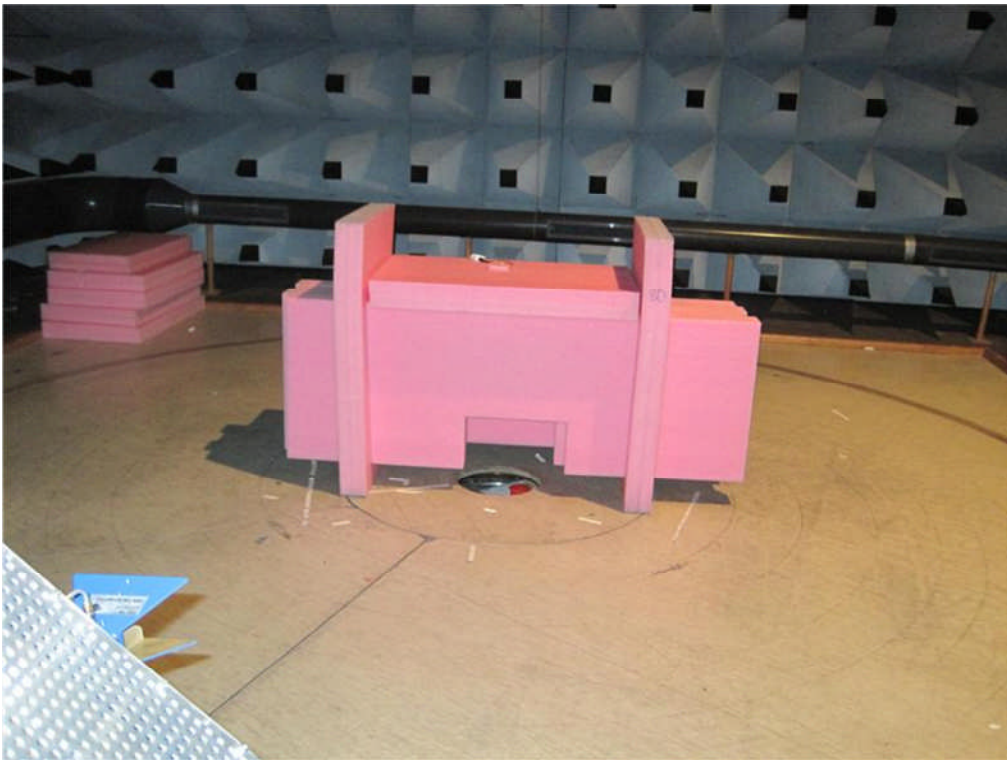


Photo 4.4.2 Test setup regarding measurement of radiated emission.



4.5 Measurement of field strength of fundamental

Test object	M70-80e	Sheet	RE_Spur-7
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	16 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	FCC CFR 47 Part 15, Subpart C, Specific rule part 15.249(a) IC Standard RSS-210, Issue 8:2010, section 2.5 & A2.9	Frequency	1-25 GHz

Test method	ANSI C63.10:2009	Temperature	24 °C
Characteristics	Complete search, Antenna distance 3 m.	Humidity	38 % RH
Detector	Peak for 1 GHz to 25 GHz	Bandwidth	1 MHz
Test equipm.	EMI room Hørsholm 49086 49600 49624 49625	Uncertainty	4.9 dB

Operating frequency [MHz]	Peak Measurement [dB μ V/m]	PACF [dB]	Corrected average [dB μ V/m]	Limit [dB μ V/m]	Comment
2404	82.4	7.9	74.5	94	Passed
2440	85.6	7.9	77.7	94	Passed
2478	87.8	7.9	79.9	94	Passed

Test result	The measured field strengths are below the limit
Test Port	Enclosure
Test mode	Continuous Tx - normal modulation - hopping off
Condition	Normal
Compliant	Yes
Comments	Full scan with final maximal measurements by variation of turntable azimuth, antenna height, and antenna polarisation. Test voltage: External power supply at 1.3 VDC.




4.6 Measurement of 20 dB bandwidth

Test object	M70-80e	Sheet	PROF-1
Type	M70-80e	Project no.	T202419-13
Serial no.	VO988-DM12 00806761	Date	22 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	FCC CFR 47 Part 15, Subpart C, Specific rule part 15.215 (c)		


Test method	ANSI C63.10:2009		
Characteristics	Temperature: 22 °C. Test voltage: External power supply at 1.3 VDC		
Test equipm.	Climatic chamber 49184 49550 49299	Uncertainty: 10 kHz	
SA Settings	RBW: 100 kHz VBW: 300 kHz SPAN: 26/40/26 MHz DET: Peak CF: Operating freq. Trace: Max. hold		
Operating frequency [MHz]	Low frequency [MHz]	High frequency [MHz]	Comment
2404	2403.451	2405.532	-
2440	2438.438	2441.500	-
2478	2477.338	2479.486	-
	Measured [MHz]	Limit [MHz]	Comment
Lowest frequency	2403.451	2400.00	Passed
Highest frequency	2479.486	2483.50	Passed

Band edge criteria	20 dB bandwidth
Test result	The measured 20 dB bandwidth was within limit designated in 15.215(c)
Compliant	Yes
Test port	Antenna connector
Test mode	Continuous Tx - normal modulation - hopping off
Comments	None




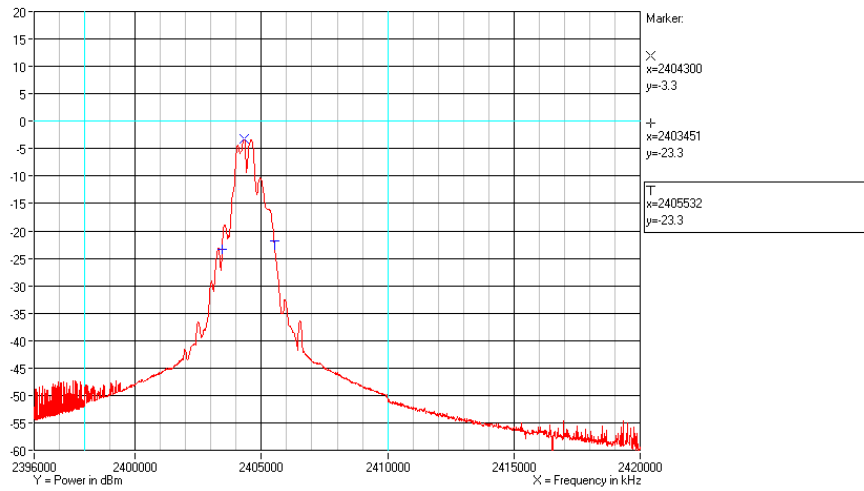

Comments Operating frequency: 2404 MHz

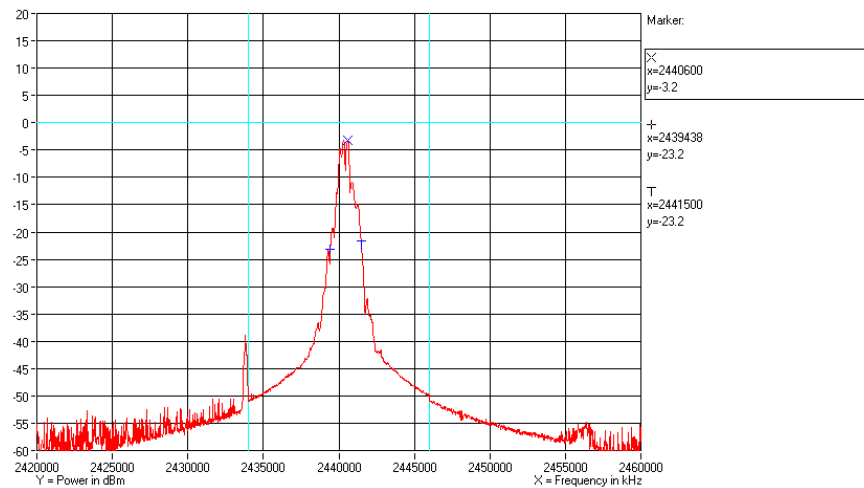

Comments Operating frequency: 2440 MHz

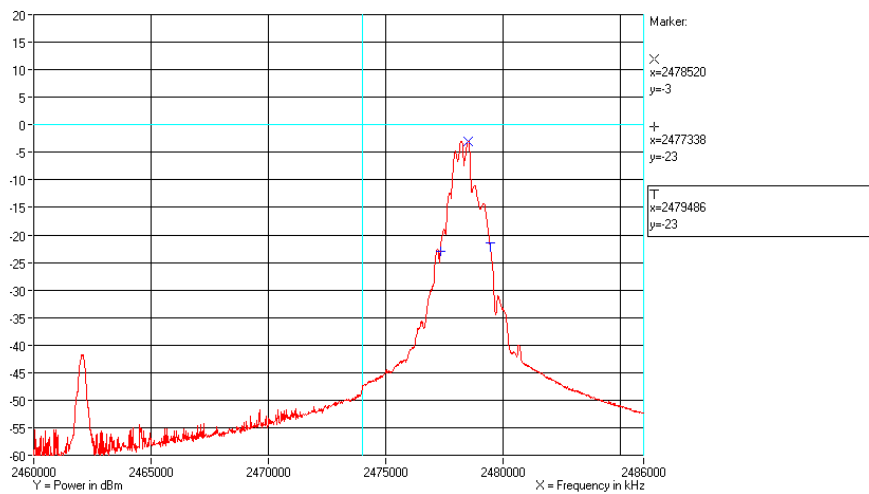

Comments Operating frequency: 2478 MHz



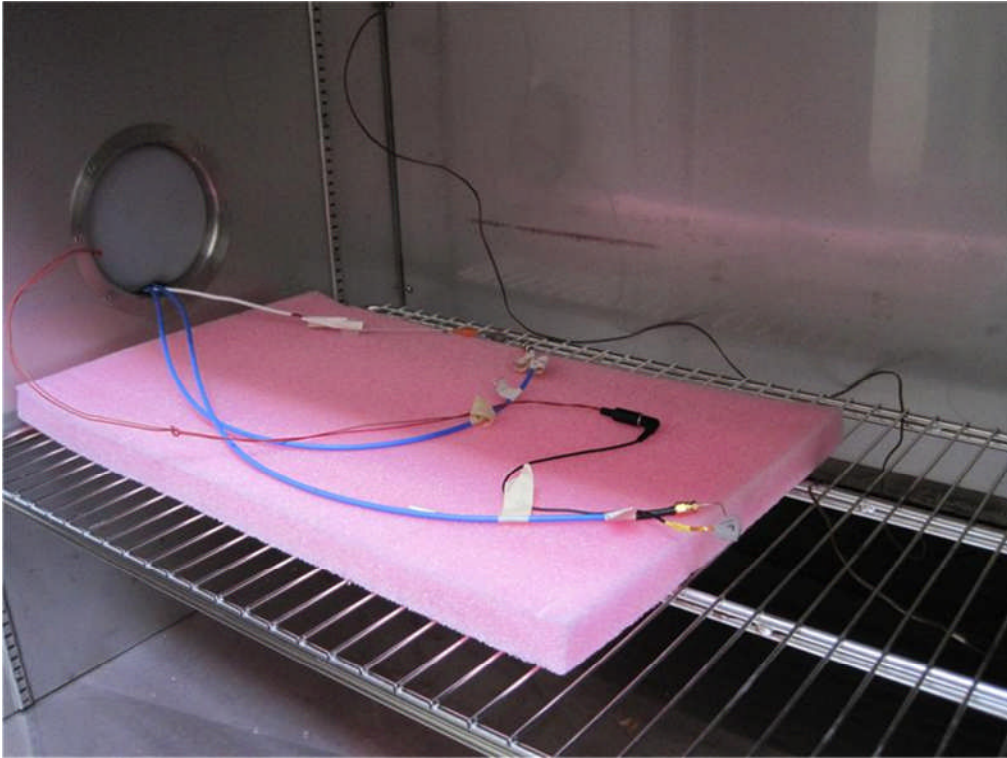


Photo 4.6.1 Test setup regarding measurement of 20 dB bandwidth.

4.7 Measurement of band edge compliance


Test object	M70-80e	Sheet	PROF-8
Type	M70-80e	Project no.	T202419-13
Serial no.	V0988-DW 12 00806785	Date	16 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	FCC CFR 47 Part 15, Subpart C, Specific rule part 15.249(d)(e) IC Standard RSS-210, Issue 8:2010, section 2.5 & A2.9	Frequency	2.4 GHz

Test method	ANSI C63.10:2009	Temperature	24 °C
Characteristics	Complete search, Antenna distance 3 m.	Humidity	36 % RH
Detector	Peak	Bandwidth	1 MHz
Test equipm.	EMI room Hørsholm 49086 49600 49624 49625	Uncertainty	4.9 dB

Band Edge frequency [MHz]	Operating frequency [MHz]	Average / Peak	Measured Band Edge peak field strengths [dB μ V/m]	PACF dB	Corrected average [dB μ V/m]	Limit at Band Edge [dB μ V/m]	Comment
2400	2404	Average	55.5	7.9	47.7	54	Passed
2400	2404	Peak	55.5	-	-	74	Passed
2483.5	2478	Average	57.6	7.9	49.7	54	Passed
2483.5	2478	Peak	57.6	-	-	74	Passed

Test result	The measured field strengths at band edge are below the limit
Test Port	Antenna
Test mode	Continuous Tx - normal modulation - hopping off
Condition	Normal
Compliant	Yes
Comments	Final maximal measurements by variation of turntable azimuth, antenna height, and antenna polarisation. Average limit line (black) is corrected with the PACF at 7.9 dB. Test voltage: External power supply at 1.3 VDC.



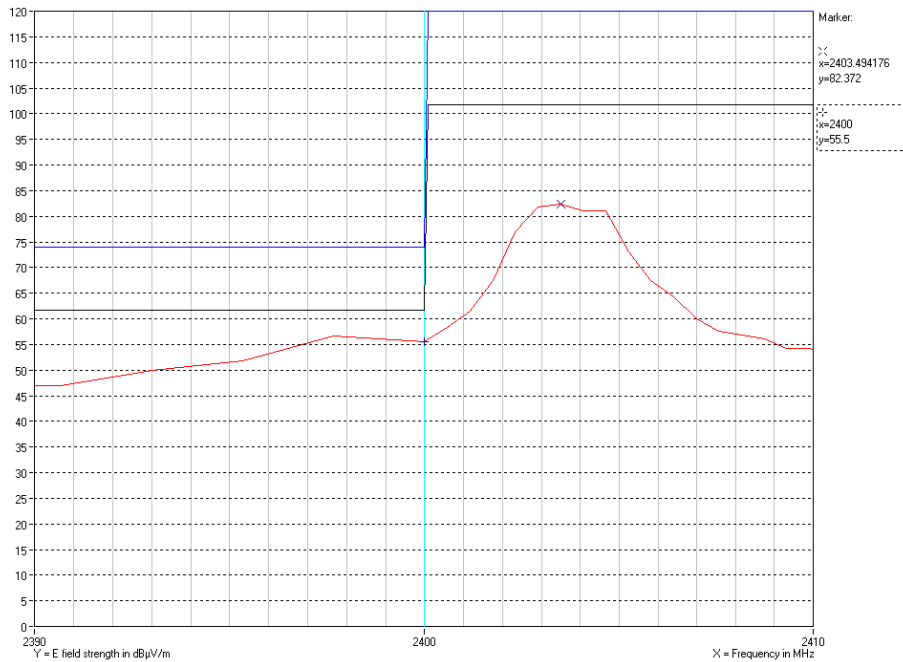

Comments

Operating frequency: 2404 MHz, Peak measurements

Average limit line (black) is corrected with the PACF at 7.9 dB.



Comments

Operating frequency: 2478 MHz, Peak measurements

Average limit line (black) is corrected with the PACF at 7.9 dB



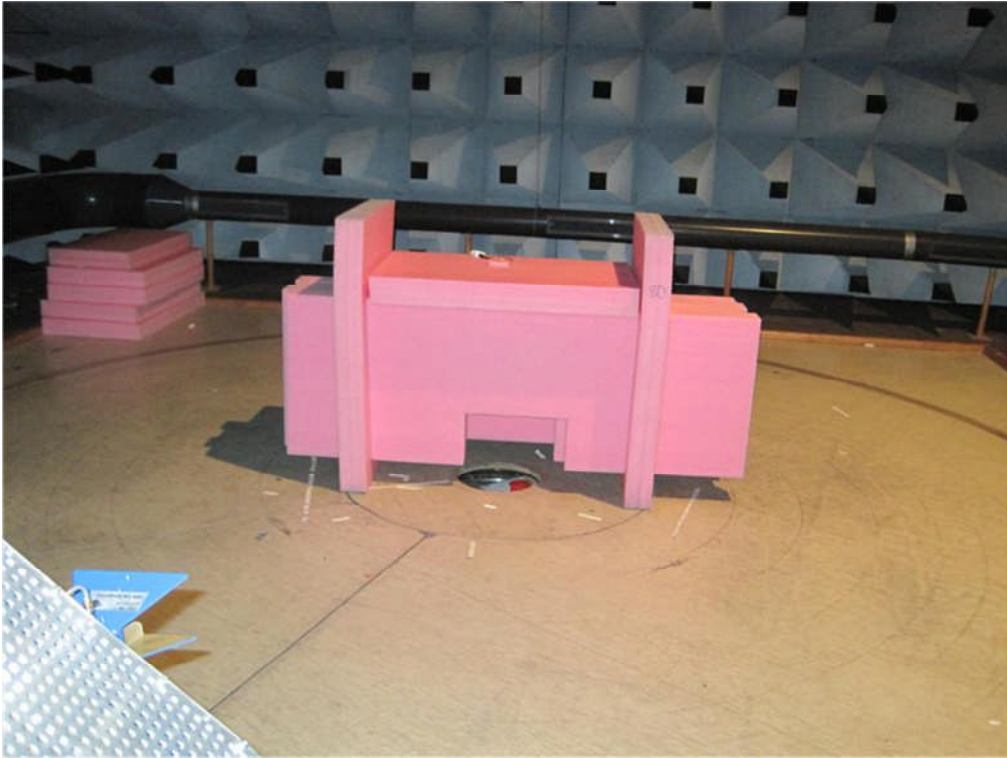


Photo 4.7.1 Test setup regarding measurement of band edge compliance.



4.8 Measurement of occupied bandwidth, IC

Test object	M70-80e	Sheet	PROF-2
Type	M70-80e	Project no.	T202419-13
Serial no.	VO988-DM12 00806761	Date	22 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	IC Standard RSS-Gen, Issue 3:2010, section 4.6.1		

Test method	IC Standard RSS-Gen, Issue 3:2010 - Section 4.6.1		
Characteristics	Temperature: 22 °C. Test voltage: External power supply at 1.4 VDC		
Test equipm.	Climatic chamber 49184 49550 49299	Uncertainty: 10 kHz	
SA Settings	RBW: 100 kHz VBW: 300 kHz SPAN: 4 MHz DET: Peak CF: Operating freq. Trace: Max. hold		
Operating frequency [MHz]	Low frequency [MHz]	High frequency [MHz]	Measured 99% emission bandwidth [MHz]
2404	2403.184	2405.609	2.425
2440	2439.192	2441.592	2.400
2478	2477.100	2479.564	2.464


Band edge criteria Measured 99 % emission bandwidth

Test port Antenna connector


Test mode Continuous Tx - normal modulation - hopping off

Comments None




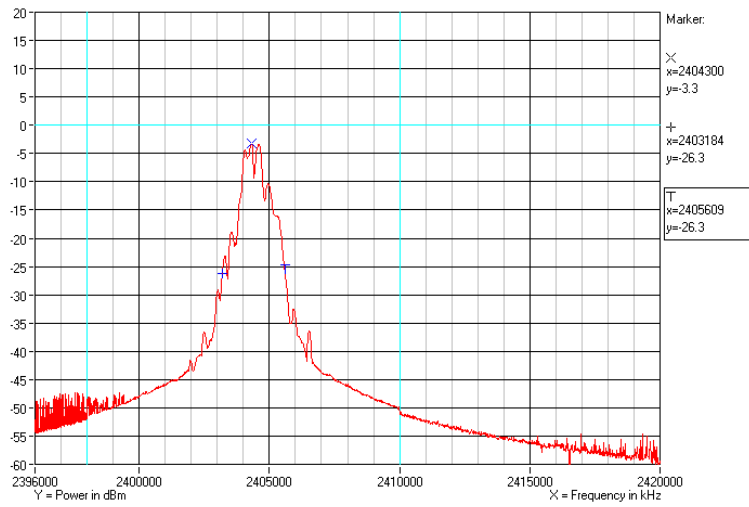

Comments Operating frequency: 2404 MHz

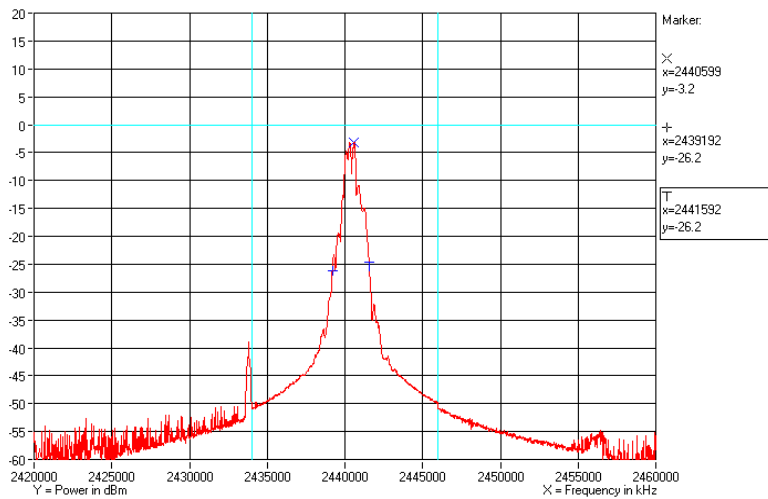

Comments Operating frequency: 2440 MHz

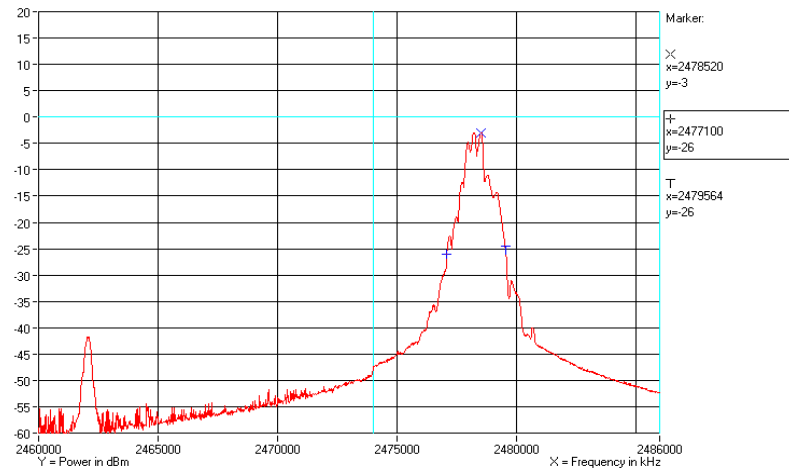

Comments Operating frequency: 2478 MHz




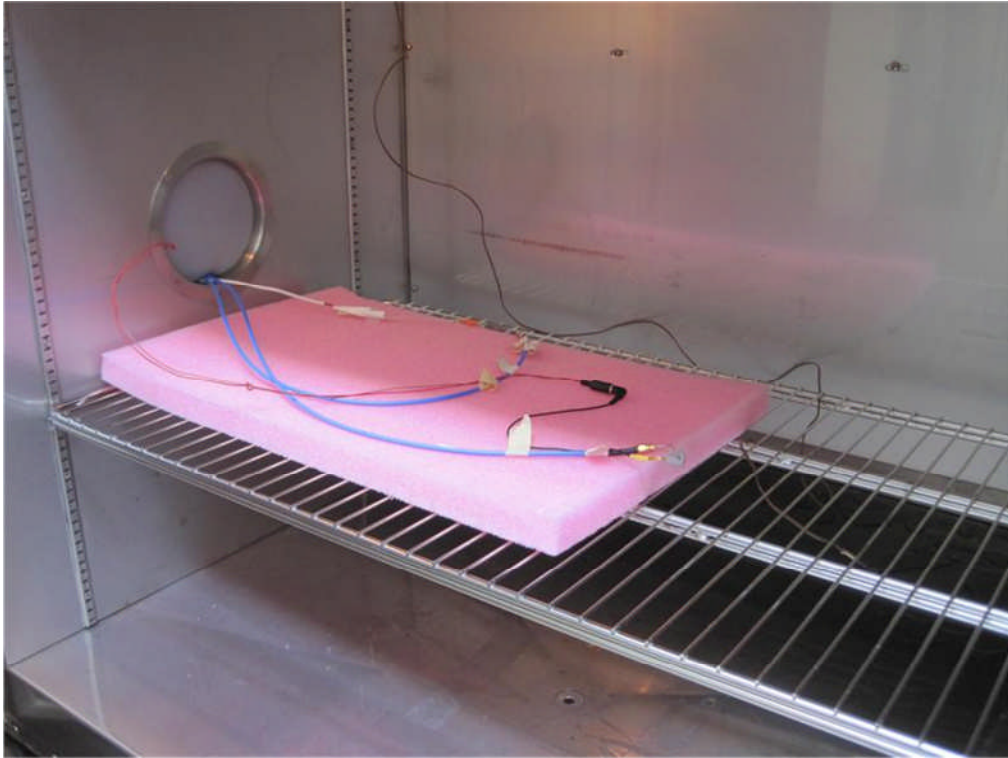


Photo 4.8.1 Test setup regarding measurement of occupied bandwidth, IC.

4.9 Measurement of radiated emission, Rx, IC below 1 GHz

Test object	Combination of 2.1.1: M70-80e 2.1.2: M70-80e	Sheet	RE_Spur-9
Type	See section 2	Project no.	T202419-13
Serial no.	See section 2	Date	15 May 2012
Client	GN Hearing A/S	Initials	HEN
Specification	IC Standard RSS-210, Issue 8:2010, section 2.5 IC Standard RSS-Gen, Issue 3:2010, section 6	Frequency	25 MHz– 1 GHz

Test method	EN 300 440-1 V1.6.1:2010	Temperature	22 °C
Characteristics	Pre-scan, Antenna at 10 m, 1 m height, vert. pol.	Humidity	38 % RH
Detector	Peak	Bandwidth	120 kHz
Test equipm.	EMI room Hørsholm 49600 29861 29797 29499	Uncertainty	4.9 dB

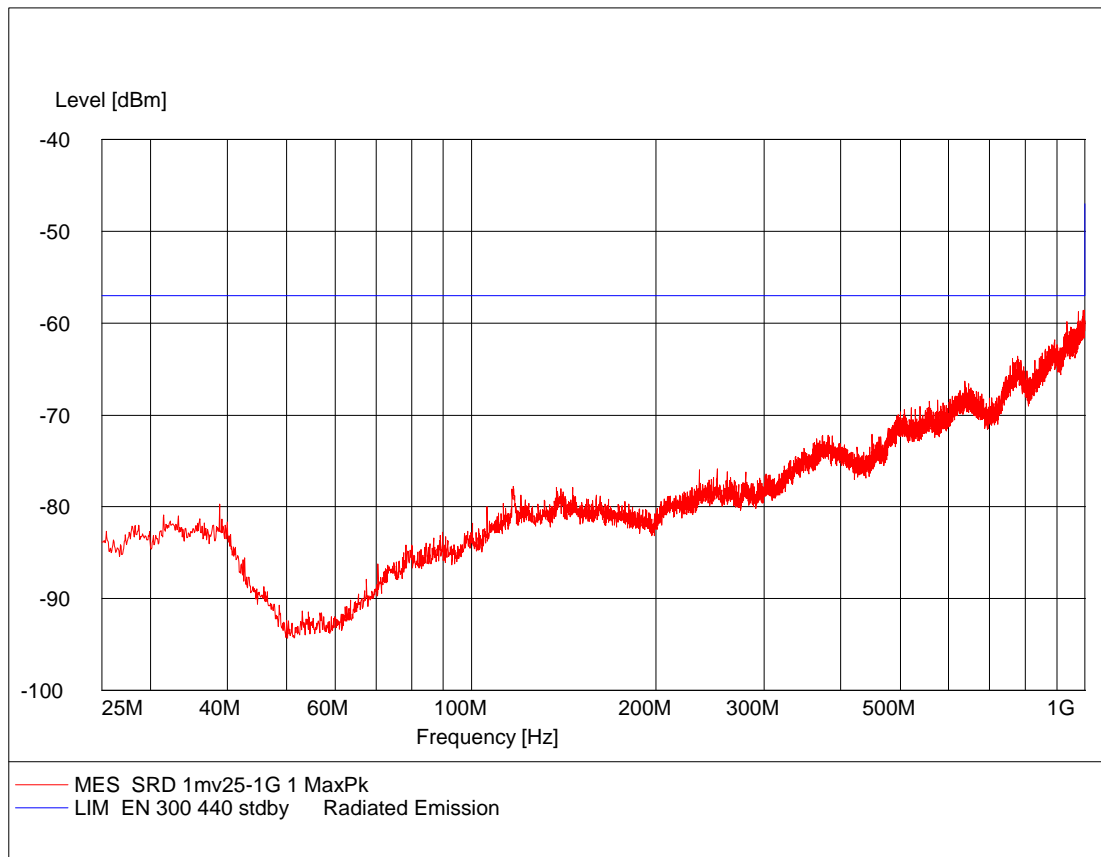


Comments

Continuous Rx & Tx standby - normal modulation -
 hopping between lowest and highest operating freq.



Test object	Combination of 2.1.1: M70-80e 2.1.2: M70-80e	Sheet	RE_Spur-10
Type	See section 2	Project no.	T202419-13
Serial no.	See section 2	Date	15 May 2012
Client	GN Hearing A/S	Initials	HEN
Specification	IC Standard RSS-210, Issue 8:2010, section 2.5 IC Standard RSS-Gen, Issue 3:2010, section 6	Frequency	25 MHz– 1 GHz

Test method	EN 300 440-1 V1.6.1:2010	Temperature	22 °C
Characteristics	Pre-scan, Antenna at 10 m, 4 m height, hor. pol.	Humidity	38 % RH
Detector	Peak and quasi peak	Bandwidth	120 kHz
Test equipm.	EMI room Hørsholm 49600 29861 29797 29499	Uncertainty	4.9 dB

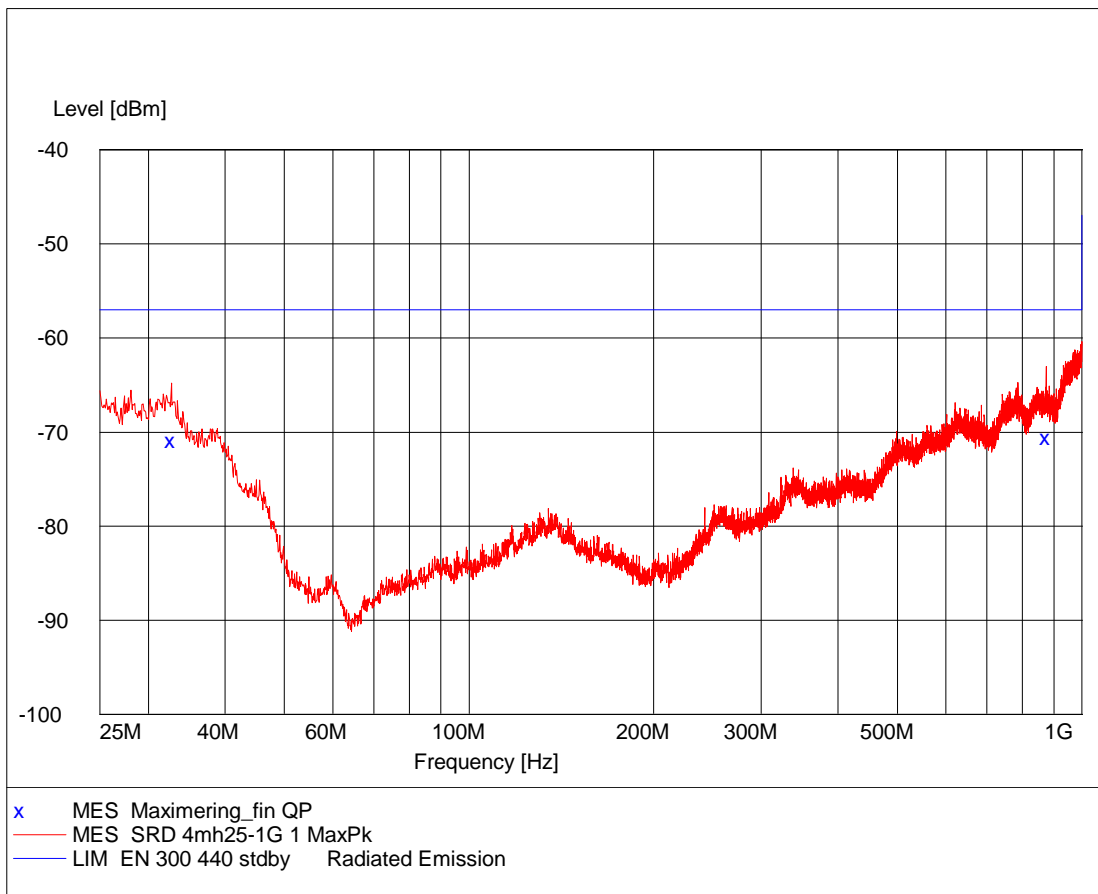

Comments

Continuous Rx & Tx standby - normal modulation -
 hopping between lowest and highest operating freq.



Test object	Combination of 2.1.1: M70-80e 2.1.2: M70-80e	Sheet	RE_Spur-11
Type	See section 2	Project no.	T202419-13
Serial no.	See section 2	Date	15 May 2012
Client	GN Hearing A/S	Initials	HEN
Specification	IC Standard RSS-210, Issue 8:2010, section 2.5 IC Standard RSS-Gen, Issue 3:2010, section 6	Frequency	25 MHz– 1 GHz

Test method	EN 300 440-1 V1.6.1:2010	Temperature	22 °C
Characteristics	Peak search ant. at 3 m, height: 1-4 m, v/h pol.	Humidity	38 % RH
Detector	Quasi peak	Bandwidth	120 kHz
Test equipm.	EMI room Hørsholm 49600 29861 29797 29499	Uncertainty	4.9 dB

Frequency MHz	Level dBm	Transd dB	Limit dBm	Margin dB	Height cm	Azimuth deg	Polarisation
32.700000	-70.90	-81.6	-57.0	13.9	256.0	163.00	Horizontal
875.100000	-70.60	-82.5	-57.0	13.6	380.0	215.00	Horizontal

Test result	The measured field strengths are below the limit
Polarization	Horizontal and vertical
Test Port	Enclosure
Test frequency	2404 MHz and 2478 MHz
Test mode	Continuous Tx - normal modulation - hopping between lowest and highest operating freq.
Condition	Normal
Compliant	Yes
Comments	<p>Final maximal measurements by variation of turntable azimuth, antenna height, and antenna polarisation.</p> <p>The radiated substitution test method of EN 300 440 was used to demonstrate compliance with the limits for RSS-Gen, Section 6.</p> <p>Limit line is at -57 dBm at 10 meter (38.23 dBμV/m at 3 meter). RSS-Gen most stringent limit is 40 dBμV/m at 3 meter.</p>





Photo 4.9.1 Test setup regarding measurement of radiated emission, Rx, IC below 1 GHz.

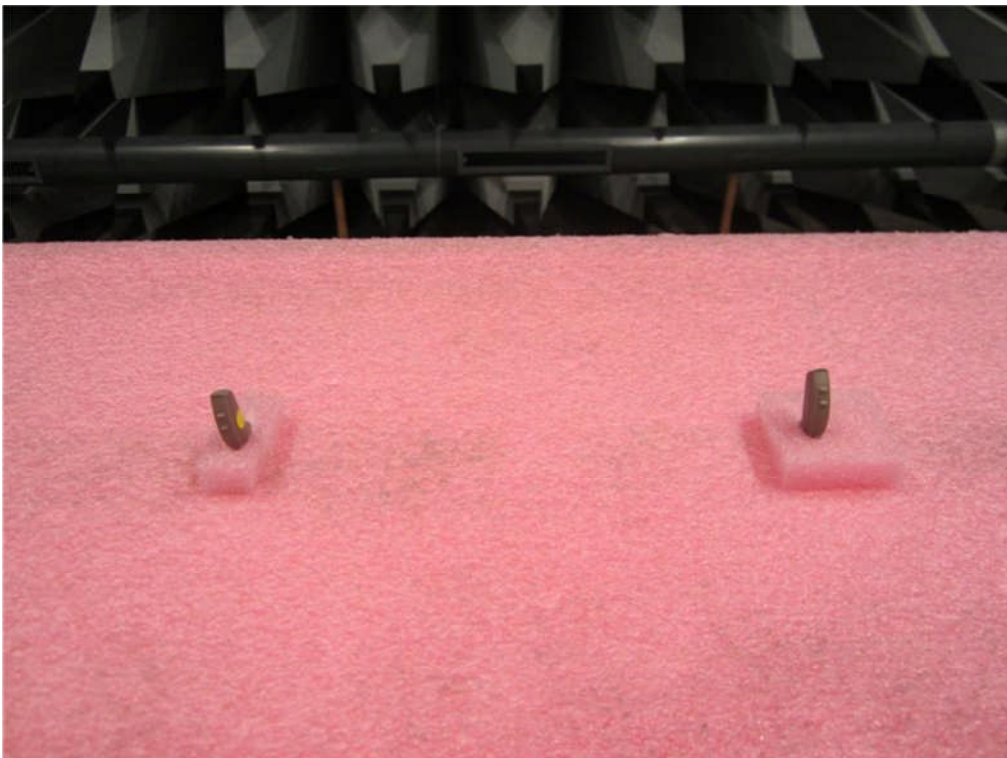



Photo 4.9.2 Test setup regarding measurement of radiated emission, Rx, IC below 1 GHz.



4.10 Measurement of radiated emission, Rx, IC above 1 GHz

Test object	Combination of 2.1.1: M70-80e 2.1.2: M70-80e	Sheet	RE_Spur-12
Type	See section 2	Project no.	T202419-13
Serial no.	See section 2	Date	16 May 2012
Client	GN Hearing A/S	Initials	CMT
Specification	IC Standard RSS-210, Issue 8:2010, section 2.5 IC Standard RSS-Gen, Issue 3:2010, section 6	Frequency	1-25 GHz

Test method	EN 300 440-1 V1.6.1:2010	Temperature	24 °C
Characteristics	Complete search, Antenna distance 3 m.	Humidity	36 % RH
Detector	Peak for 1 GHz to 12.75 GHz	Bandwidth	1 MHz
Detector	Peak for 12.75 GHz to 18 GHz	Bandwidth	300 kHz
Detector	Peak for 18 GHz to 25 GHz	Bandwidth	100 kHz
Test equipm.	EMI room Hørsholm 49086 49600 49624 49625	Uncertainty	4.9 dB

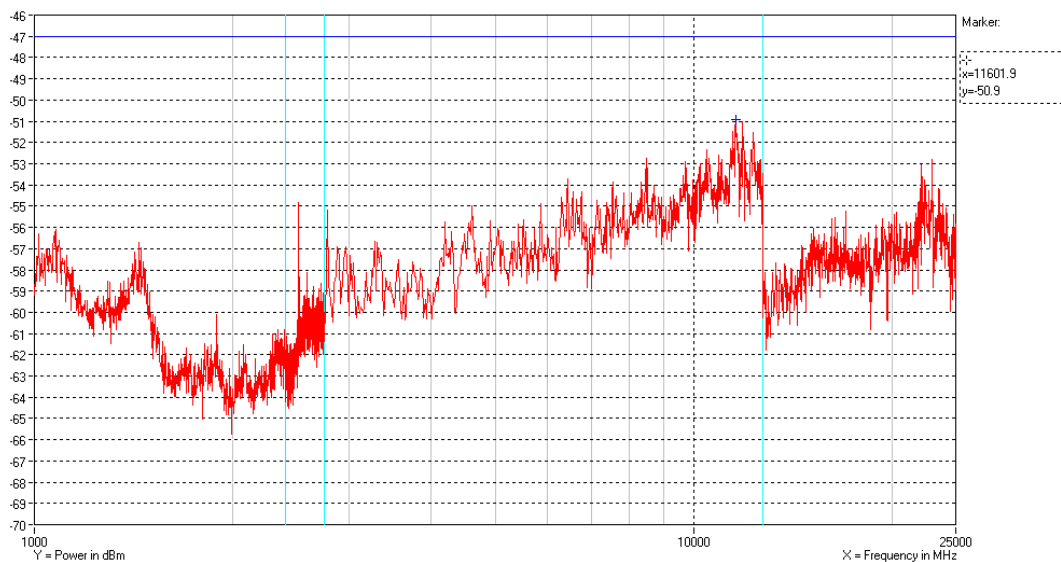


Polarization

Vertical peak measurements

Comments

Continuous Rx & Tx standby - normal modulation -
 hopping between lowest and highest operating freq.



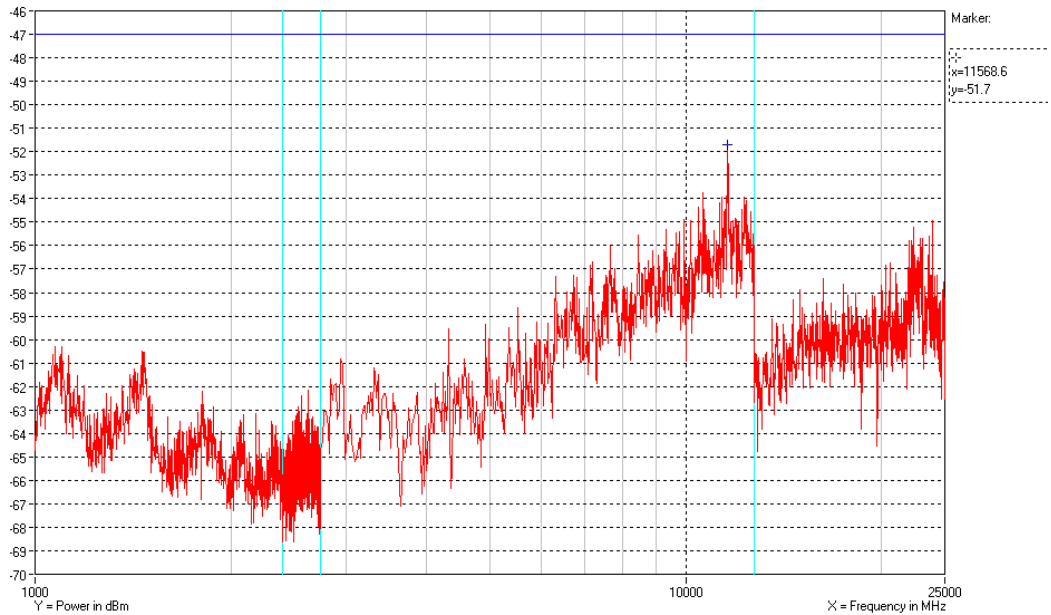

Polarization	Horizontal peak measurements
Comments	Continuous Rx & Tx standby - normal modulation - hopping between lowest and highest operating freq.
Test result	The measured field strengths are below the limit
Test Port	Enclosure
Test frequency	2404 MHz and 2478 MHz
Test mode	Continuous Tx - normal modulation - hopping between lowest and highest operating freq.
Condition	Normal
Compliant	Yes
Comments	<p>Final maximal measurements by variation of turntable azimuth, antenna height and antenna polarization.</p> <p>The radiated substitution test method of EN 300 440 was used to demonstrate compliance with the limits for RSS-Gen, Section 6.</p> <p>EN 300 440 limit is -47 dBm (48.23 dBμV/m at 3 meter peak).</p> <p>RSS-Gen limit is 54 dBμV/m at 3 meter average.</p>





Photo 4.10.1 Test setup regarding measurement of radiated emission, Rx, IC above 1 GHz.

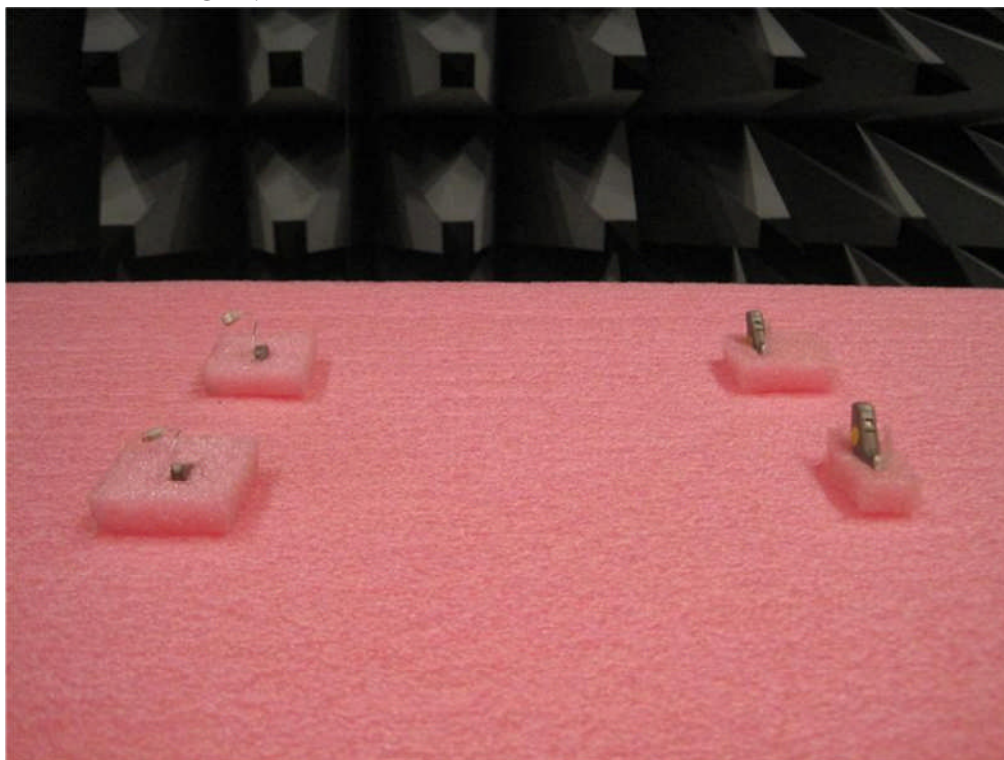


Photo 4.10.2 Test setup regarding measurement of radiated emission, Rx, IC above 1 GHz.



5. National registrations and accreditations

5.1 DANAK Accreditation

Organization: Danish Accreditation and Metrology Fund - DANAK, see www.danak.dk and www.ilac.org

Registration Number: 19

Area Number: C

DANAK is part of ILAC (International Laboratory Accreditation Cooperation) including its MRA (Mutual Recognition Arrangement). The MRA includes the Australian NATA and Canadian SCC.

CISPR 22 is equivalent to AS/NZS CISPR 22, and therefore this report can be used for applying the **Australian C-Tick mark** for IT equipment, when this test has been passed.

CISPR 22:2002 is equivalent to ICES-003:2004, and therefore this report can be used for approval in Canada for IT equipment, when this test has been passed.

5.2 FCC Registrations

Organization: Federal Communications Commission, USA

Registration Number: 90529

Facilities: EMC room 2 Hørsholm (EMC-2)
EMC room 3 Hørsholm (EMC-3)
EMC room 4 Hørsholm (EMC-4)
EMI room Hørsholm (EMC-5)

5.3 VCCI Registrations

Organization: Voluntary Control Council for Interference by Information Technology, Japan

Member Number: 910

Facilities: EMC room 2 Hørsholm (EMC-2): C-707, T-246 and T-1547
EMC room 3 Hørsholm (EMC-3): C-2532, T-247 and T-1548
EMC room 4 Hørsholm (EMC-4): C-2533, T-248 and T1549
EMI room Hørsholm (EMC-5): R-1180, C-706, T-249 and T-1550, G-470

5.4 IC Registrations

Organization: Industry Canada, Certification and Engineering Bureau

Registration Number: IC4187A-5

Facilities: EMI room Hørsholm (EMC-5)



6. List of instruments

No.	Description	Manufacturer	Type/model No.	Cal. Date	Cal. Due
29499	BROADBAND RF PREAMPLIFIER	EC/MTS TELEMETER	TVV 711	Dec. 11	Dec. 12
29797	BILOG ANTENNA, 30-2000 MHz	CHASE ELECTRICS LTD	CBL 6111A	Oct.10	Oct. 12
29861	EMI-SOFTWARE Ver. 1.60	ROHDE & SCHWARZ	ES-K1, PART: 1026.6790.02	N.A.	N.A.
49086	REMI EMISSION SOFTWARE PACKAGE v. 2.133, ROOM 5	NeWeTec	REMI	N.A.	N.A.
49183	POWER SUPPLY	TTI	PL 320	N.A.	N.A.
49184	POWER SUPPLY	TTI	CPX200	N.A.	N.A.
49299	DIGITAL MULTIMETER	Fluke	87-4	Aug. 11	Aug. 12
49550	SIGNAL ANALYZER	ROHDE & SCHWARZ	FSQ8	Feb. 12	Feb 13
49600	SPECTRUM ANALYZER / MEASUREMENT RECEIVER	ROHDE & SCHWARZ	ESU40	Dec. 11	Dec. 12
49624	DUAL RIDGE HORN ANTENNA – 1GHZ-26GHZ (2GHZ-32GHZ)	SATIMO	SH2000	Sep. 11	Sep. 12
49625	SRD COAX SWITCH MATRIX USED IN 1GHZ TO 26GHZ SRD ANTENNASYSTEM	DELTA	COAX SWITCH MATRIX	May 12	May 13



Annex 1

Out of band emission table



Transmitter out-of-band Emission Table

Project No.	T202419-13											
Client	GN Hearing											
Product	M70-80e											
Specification:	FCC CFR 47 Part 15, Subpart C, §15.249 RSS-210, Issue 8:2010, A8.5											
Requirement:	All out-of-band emission shall be below the general limit (54 dBuV/m)											
The table below lists all out-of-band emissions exceeding the general emission limit of 500 uV/m (54 dBuV/m) as well as the measured in-band emissions for reference. The data is an extract of the measurement results reported in chapter 4 of the main report.												
Meas. Ref. No.	Frequency [MHz]	Reading [dBuV, Av] (BW: 1 MHz)	Transducer Factor [dB] (Cables and Amplifiers)	Antenna Correction Factor [dB]	Result [dBuV/m, AV] (Reading - TF + AF)	Limit [dBuV/m, AV] (Max. in-band emission - 30 dB)	Margin [dB] (Limit - Result)	Pass/Fail	Note			
56	2404	79.2	29.3	32.5	82.4	In-band	-	-	Tx @ 2404 MHz, Fundamental, Pk			
56	4807.8	75.0	68.2	37.0	43.8	54.0	10.2	PASS	Tx @ 2404 MHz, 2nd harmonic			
56	7212	*	*	*	*	*	*	PASS	Tx @ 2404 MHz, 3rd harmonic			
56	9616	*	*	*	*	*	*	PASS	Tx @ 2404 MHz, 4th harmonic			
54	2440	81.6	29.1	33.1	85.6	In-band	-	-	Tx @ 2440 MHz, Fundamental, Pk			
54	4880	74.4	68.2	37.0	43.2	54.0	10.8	PASS	Tx @ 2440 MHz, 2nd harmonic			
54	7320	*	*	*	*	*	*	PASS	Tx @ 2440 MHz, 3rd harmonic			
54	9760	*	*	*	*	*	*	PASS	Tx @ 2440 MHz, 4th harmonic			
52	2478	82.5	29.1	34.4	87.8	In-band	-	-	Tx @ 2478 MHz, Fundamental, Pk			
52	4956	76.0	68.2	37.0	44.8	54.0	9.2	PASS	Tx @ 2478 MHz, 2nd harmonic			
52	7434	*	*	*	*	*	*	PASS	Tx @ 2478 MHz, 3rd harmonic			
52	9912	*	*	*	*	*	*	PASS	Tx @ 2478 MHz, 4th harmonic			
* : The result is below the general limit (54 dBuV/m)												
Max. in-band emission:	87.8 dBuV/m, AV @ 3 m											
Test result:	All out-of-band emission is below the general limit (54 dBuV/m)											
Compliant:	Yes.											

