



Report No.: RZA2010-0111



# OET 65 TEST REPORT

Product Name	Mobile Phone
Model	X200
FCC ID	X56-X200
Client	Smart Communication Device Corporation Limited

**TA Technology (Shanghai) Co., Ltd.**



## GENERAL SUMMARY

<b>Product Name</b>	Mobile Phone	<b>Model</b>	X200
<b>FCC ID</b>	X56-X200	<b>Report No.</b>	RZA2010-0111
<b>Client</b>	Smart Communication Device Corporation Limited		
<b>Manufacturer</b>	Smart Communication Device Corporation Limited		
<b>Reference Standard(s)</b>	<p><b>ANSI/IEEE Std C95.1-1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>IEEE 1528-2003:</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.</p> <p><b>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p><b>IEC 62209-1:2006:</b> Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).</p> <p><b>IEC 62209-2:2008(106/162/CDV):</b> Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .( frequency rang of 30MHz to 6GHz )</p>		
<b>Conclusion</b>	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp) <b>Date of issue: February 3<sup>rd</sup>, 2010</b></p>		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 杨伟中  
Yang Weizhong

Revised by 凌敏宝  
Ling Minbao

Performed by 李进昌  
Li Jinchang

## TABLE OF CONTENT

1. General Information .....	5
1.1. Notes of the test report .....	5
1.2. Testing laboratory .....	5
1.3. Applicant Information .....	6
1.4. Manufacturer Information .....	6
1.5. Information of EUT .....	7
1.6. Test Date .....	8
2. Operational Conditions during Test .....	9
2.1. General description of test procedures .....	9
2.2. GSM Test Configuration .....	9
3. SAR Measurements System Configuration .....	10
3.1. SAR Measurement Set-up .....	10
3.2. DASY 4 E-field Probe System .....	11
3.2.1. EX3DV4 Probe Specification .....	11
3.2.2. E-field Probe Calibration .....	12
3.3. Other Test Equipment .....	12
3.3.1. Device Holder for Transmitters .....	12
3.3.2. Phantom .....	13
3.4. Scanning procedure .....	13
3.5. Data Storage and Evaluation .....	15
3.5.1. Data Storage .....	15
3.5.2. Data Evaluation by SEMCAD .....	15
3.6. System check .....	18
3.7. Equivalent Tissues .....	19
4. Laboratory Environment .....	20
5. Characteristics of the Test .....	20
5.1. Applicable Limit Regulations .....	20
5.2. Applicable Measurement Standards .....	20
6. Conducted Output Power Measurement .....	21
6.1. Summary .....	21
6.2. Conducted Power Results .....	21
7. Test Results .....	23
7.1. Dielectric Performance .....	23
7.2. System Check Results .....	24
7.3. Test Results .....	25
7.3.1. Summary of Measurement Results (GSM850/GPRS) .....	25
7.3.2. Summary of Measurement Results (GSM1900/GPRS) .....	26
7.3.3. Summary of Measurement Results (Bluetooth function) .....	27
7.4. Conclusion .....	27
8. Measurement Uncertainty .....	28

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0111

Page 4 of 109

---

9. Main Test Instruments .....	29
ANNEX A: Test Layout .....	30
ANNEX B: System Check Results .....	33
ANNEX C: Graph Results .....	41
ANNEX D: Probe Calibration Certificate .....	73
ANNEX E: D835V2 Dipole Calibration Certificate .....	82
ANNEX F: D1900V2 Dipole Calibration Certificate .....	91
ANNEX G: DAE4 Calibration Certificate.....	100
ANNEX H: The EUT Appearances and Test Configuration.....	105

## **1. General Information**

### **1.1. Notes of the test report**

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

### **1.2. Testing laboratory**

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Yang Weizhong  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 6 of 109

---

### 1.3. Applicant Information

Company: Smart Communication Device Corporation Limited  
Address: 10F, Building A, Guo Qi Plaza, Shang Bu Road, Fu Tian District, Shenzhen, GD, China  
City: Shenzhen  
Postal Code: /  
Country: P.R. China  
Telephone: /  
Fax: /

### 1.4. Manufacturer Information

Company: Smart Communication Device Corporation Limited  
Address: 10F, Building A, Guo Qi Plaza, Shang Bu Road, Fu Tian District, Shenzhen, GD, China  
City: Shenzhen  
Postal Code: /  
Country: P.R. China  
Telephone: /  
Fax: /

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 7 of 109

### 1.5. Information of EUT

#### General information

Device type :	portable device		
Exposure category:	uncontrolled environment / general population		
Product name:	Mobile Phone		
IMEI or SN:	135790246811220		
Device operating configurations :			
Operating mode(s):	GSM850; （tested） GSM1900; （tested）		
Test modulation:	GMSK		
GPRS multislot class:	12		
Operating frequency range(s):	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
Power class	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
Test channel (Low –Middle –High)	128 -190 -251 512 - 661-810	(GSM850) (GSM1900)	(tested) (tested)
Hardware version:	BSPX200-MB-V1.0-091120		
Software version:	BSPX200_SM0101_5563_V04		
Antenna type:	internal antenna		

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 8 of 109

---

### Auxiliary equipment details

#### AE1: Battery

Model:	X200
Manufacture:	BESTPOWER
IMEI or SN:	/

#### AE2: Travel Adaptor

Model:	X200
Manufacture:	BESTPOWER
IMEI or SN:	/

Equipment Under Test (EUT) is a model of Mobile Phone with internal antenna. The detail about Mobile phone, Lithium Battery and AC/DC Adapter is in chapter 1.5 in this report. SAR is tested for GSM850 and GSM 1900.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

### 1.6. Test Date

The test is performed from January 26, 2010 to January 28, 2010.



## **2. Operational Conditions during Test**

### **2.1. General description of test procedures**

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 in the case of GSM 850, allocated to 512, 661 and 810 in the case of GSM 1900. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

### **2.2. GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to "5" in head SAR and body SAR of GSM850, set to "0" in head SAR and body SAR of GSM1900. The test in the band of GSM850 and GSM1900 are performed in the mode of speech transfer function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

**Table 1: The allowed power reduction in the multi-slot configuration**


<b>Number of timeslots in uplink assignment</b>	<b>Permissible nominal reduction of maximum output power,(dB)</b>
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

### 3. SAR Measurements System Configuration

#### 3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

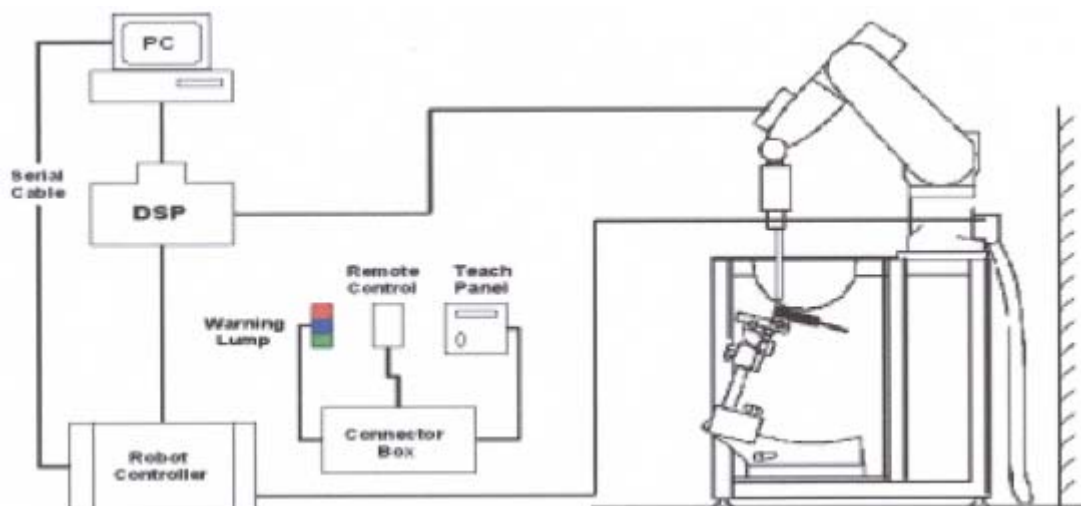

**Figure 1. SAR Lab Test Measurement Set-up**

### 3.2. DASY 4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density ( $\text{kg/m}^3$ ).

### 3.3. Other Test Equipment

#### 3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Figure 4. Device Holder**

### 3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



**Figure 5. Generic Twin Phantom**

### 3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5\%$ .
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- Area Scan  
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid

spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

### **3.5. Data Storage and Evaluation**

#### **3.5.1. Data Storage**

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **3.5.2. Data Evaluation by SEMCAD**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, $a_{i0}$ , $a_{i1}$ , $a_{i2}$
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal,

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 16 of 109

the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \dots) / (\dots \cdot 1000)$$



with **SAR** = local specific absorption rate in mW/g

**$E_{tot}$**  = total field strength in V/m

**$\sigma$**  = conductivity in [mho/m] or [Siemens/m]

**$\rho$**  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  **$P_{pwe}$**  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

### 3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 8 and table 9.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

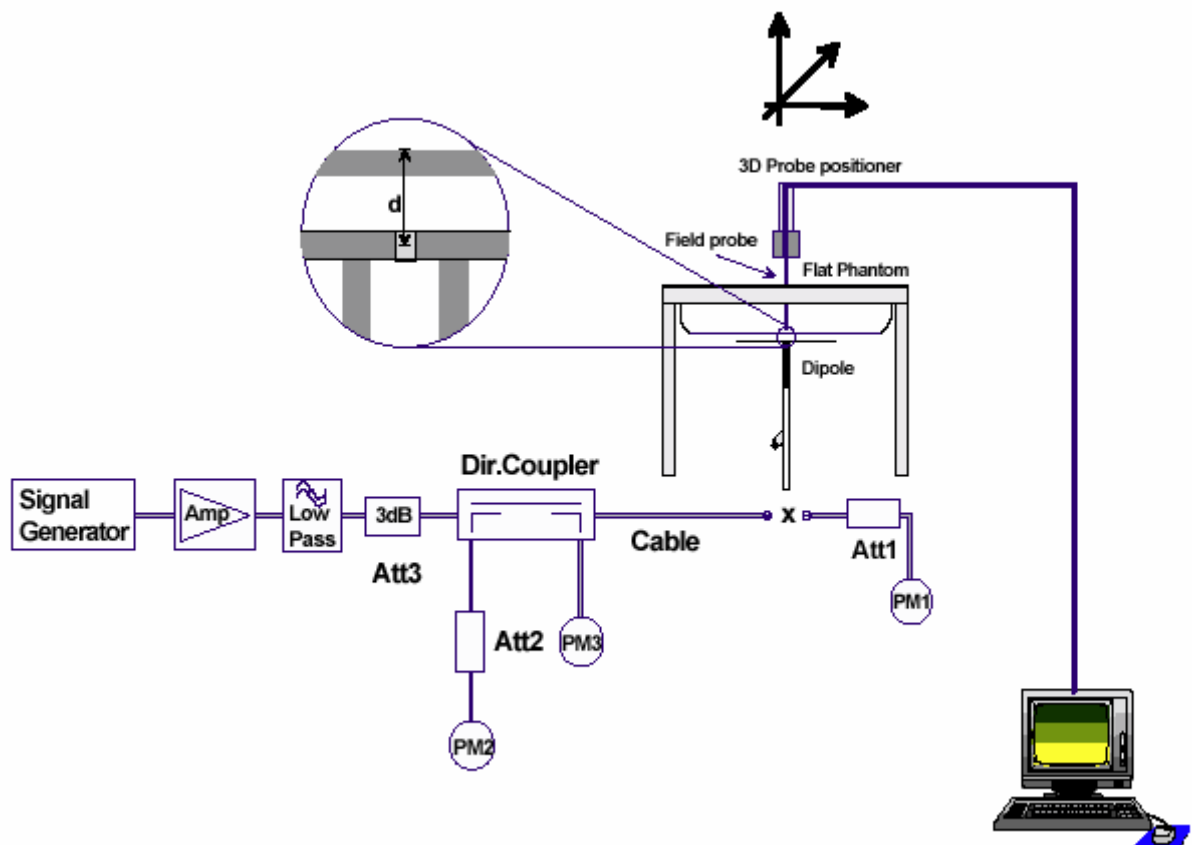


Figure 6. System Check Set-up

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 19 of 109

### 3.7. Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 2 and Table 3 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

**Table 2: Composition of the Head Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain)1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

**Table 3: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

## 4. Laboratory Environment

**Table 4: The Ambient Conditions during Test**

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 5. Characteristics of the Test

### 5.1. Applicable Limit Regulations

**ANSI/IEEE Std C95.1-1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2. Applicable Measurement Standards

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

**IEC 62209-1:2006:** Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).

**IEC 62209-2:2008(106/162/CDV):** Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body .( frequency rang of 30MHz to 6GHz )

## 6. Conducted Output Power Measurement

### 6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

### 6.2. Conducted Power Results

**Table 5: Conducted Power Measurement Results**

<b>GSM 850</b>	<b>Conducted Power</b>		
	Channel 128	Channel 190	Channel 251
	(824.2MHz)	(836.6MHz)	(848.8MHz)
Before Test (dBm)	31.64	32.36	32.27
After Test (dBm)	31.64	32.36	32.27
<b>GSM 1900</b>	<b>Conducted Power</b>		
	Channel 512	Channel 661	Channel 810
	(1850.2MHz)	(1880MHz)	(1909.8MHz)
Before Test (dBm)	30.66	30.24	30.04
After Test (dBm)	30.65	30.24	30.03

#### Average power

<b>GSM850 + GPRS</b>		<b>Conducted Power(dBm)</b>						
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
1TXslot	Before Test (dBm)	31.75	32.36	32.35	-9.03dB	22.72	23.33	23.23
	After Test (dBm)	31.75	32.37	32.35	-9.03dB	22.72	23.34	23.32
2TXslots	Before Test (dBm)	31.74	32.35	32.31	-6.02dB	25.72	26.33	<b>26.29</b>
	After Test (dBm)	31.74	32.34	32.30	-6.02dB	25.72	26.32	26.28
3TXslots	Before Test (dBm)	31.72	32.34	32.32	-4.26dB	27.46	28.08	28.06
	After Test (dBm)	31.71	32.32	32.31	-4.26dB	27.45	28.06	28.05
4TXslots	Before Test (dBm)	31.76	32.31	32.28	-3.01dB	28.75	29.30	29.27

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0111

Page 22 of 109

	After Test (dBm)	31.77	32.33	32.35	-3.01dB	28.76	29.32	29.34
<b>GSM1900 + GPRS</b>		<b>Conducted Power(dBm)</b>						
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
1TXslot	Before Test (dBm)	30.65	30.12	30.02	-9.03dB	21.62	21.09	20.99
	After Test (dBm)	30.64	30.12	30.03	-9.03dB	21.61	21.09	21.00
2TXslots	Before Test (dBm)	30.62	30.15	30.04	-6.02dB	24.60	24.13	24.02
	After Test (dBm)	30.61	30.14	30.04	-6.02dB	24.59	24.12	24.02
3TXslots	Before Test (dBm)	30.64	30.16	30.05	-4.26dB	26.38	25.90	25.79
	After Test (dBm)	30.63	30.15	30.06	-4.26dB	26.37	25.89	25.80
4TXslots	Before Test (dBm)	30.66	30.14	30.02	-3.01dB	<b>27.65</b>	<b>27.13</b>	<b>27.01</b>
	After Test (dBm)	30.65	30.14	30.01	-3.01dB	27.64	27.13	27.00

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0111

Page 23 of 109

## 7. Test Results

### 7.1. Dielectric Performance

**Table 6: Dielectric Performance of Head Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp ℃
		$\epsilon_r$	$\sigma(\text{s/m})$	
<b>835MHz (head)</b>	Target value $\pm 5\%$ window	41.5 39.43 — 43.58	0.90 0.86 — 0.95	/
	Measurement value 2010-1-28	42.19	0.91	21.8
<b>1900MHz (head)</b>	Target value 5% window	40.0 38 — 42	1.40 1.33 — 1.47	/
	Measurement value 2010-1-27	40.03	1.38	21.9

**Table 7: Dielectric Performance of Body Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp ℃
		$\epsilon_r$	$\sigma(\text{s/m})$	
<b>835MHz (body)</b>	Target value $\pm 5\%$ window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2010-1-26	54.87	0.98	21.8
<b>1900MHz (body)</b>	Target value $\pm 5\%$ window	53.3 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2010-1-27	52.75	1.52	21.9

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 24 of 109

### 7.2. System Check Results

**Table 8: System Check for Head tissue simulation liquid**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma$ (s/m)	°C
835MHz	Recommended result ±10% window	1.58 1.42 - 1.74	2.42 2.18 - 2.66	40.5	0.89	/
	Measurement value 2010-1-28	1.62	2.48	42.19	0.91	21.9
1900MHz	Recommended result 10% window	5.38 4.84 — 5.92	10.3 9.27 — 11.33	41	1.42	/
	Measurement value 2010-1-27	5.46	10.6	40.03	1.38	22.1

Note: 1. the graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

**Table 9: System Check for Body tissue simulation liquid**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma$ (s/m)	°C
835MHz	Recommended result ±10% window	1.68 1.51 - 1.85	2.56 2.30 - 2.82	53	0.99	/
	Measurement value 2010-1-26	1.68	2.56	54.87	0.98	21.9
1900 MHz	Recommended result ±10% window	5.52 4.97—6.07	10.50 9.45 — 11.55	54.00	1.55	/
	Measurement value 2010-1-27	5.17	9.73	52.75	1.52	21.7

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.



# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 25 of 109

### 7.3. Test Results

#### 7.3.1. Summary of Measurement Results (GSM850/GPRS)

**Table 10: SAR Values (GSM850/GPRS)**

Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Test position of Head (SIM1)					
Left hand, Touch cheek	Middle	0.097	0.127	0.128	Figure 11
Left hand, Tilt 15 Degree	Middle	0.062	0.082	0.016	Figure 12
Right hand, Touch cheek	High	0.179	0.243	0.112	Figure 13
	Middle	0.094	0.128	-0.025	Figure 14
	Low	0.059	0.080	-0.070	Figure 15
Right hand, Tilt 15 Degree	Middle	0.060	0.079	0.099	Figure 16
Worst case position of Head (SIM2)					
Right hand, Touch cheek	High	0.173	0.236	0.033	Figure 17
Test position of Body (SIM1, Distance 15mm)					
Towards Ground	High	0.552	0.761	0.053	Figure 18
	Middle	0.334	0.455	0.032	Figure 19
	Low	0.202	0.275	0.011	Figure 20
Towards phantom	Middle	0.074	0.100	0.098	Figure 21
Worst case position of Body (SIM2, Distance 15mm)					
Towards Ground	High	0.385	0.518	0.030	Figure 22
Worst case position of Body with Earphone (Distance 15mm)					
Towards Ground	High	0.570	0.794	-0.115	Figure 23
Test position of Body with GPRS (2 timeslots in uplink, Distance 15mm)					
Towards Ground	High	0.541	0.748	-0.075	Figure 24

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

- Upper and lower frequencies were measured at the worst position.
- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ( $< 0.8\text{W/kg}$ ), testing at the high and low channels is optional.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0111

Page 26 of 109

### 7.3.2. Summary of Measurement Results (GSM1900/GPRS)

**Table 11: SAR Values (GSM1900/GPRS)**

Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case		Measurement Result(W/kg)		Power Drift (dB)	
		10 g Average	1 g Average	Power Drift (dB)	
Different Test Position	Channel				
<b>Test position of Head (SIM1)</b>					
Left hand, Touch cheek	Middle	0.109	0.170	-0.164	Figure 25
Left hand, Tilt 15 Degree	Middle	0.078	0.130	0.048	Figure 26
Right hand, Touch cheek	High	0.100	0.171	0.067	Figure 27
	Middle	0.168	0.283	-0.071	Figure 28
	Low	0.300	0.504	-0.063	Figure 29
Right hand, Tilt 15 Degree	Middle	0.071	0.113	0.069	Figure 30
<b>Worst case position of Head (SIM2)</b>					
Right hand, Touch cheek	Low	0.302	0.503	-0.046	Figure 31
<b>Test position of Body (SIM1, Distance 15mm)</b>					
Towards Ground	High	0.136(max.cube)	0.222(max.cube)	0.018	Figure 32
	Middle	0.159(max.cube)	0.260(max.cube)	-0.004	Figure 33
	Low	0.227(max.cube)	0.371(max.cube)	0.065	Figure 34
Towards phantom	Middle	0.064	0.104	-0.009	Figure 35
<b>Worst case position of Body (SIM2, Distance 15mm)</b>					
Towards Ground	Low	0.187(max.cube)	0.304(max.cube)	0.077	Figure 36
<b>Worst case position of Body with Earphone (Distance 15mm)</b>					
Towards Ground	Low	0.215(max.cube)	0.353(max.cube)	-0.072	Figure 37
<b>Test position of Body with GPRS (4 timeslots uplink, Distance 15mm)</b>					
Towards Ground	Low	0.741(max.cube)	1.210(max.cube)	-0.162	Figure 38

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

- Upper and lower frequencies were measured at the worst position.
- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ( $< 0.8\text{W/kg}$ ), testing at the high and low channels is optional.
- The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

### 7.3.3. Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna  $\leq 2.5\text{cm}$ . The location of the antennas inside mobile phone is shown below:



The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	2.83	2.85	2.76

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR is not required for BT transmitter, because the output power of BT transmitter is  $\leq P_{\text{Ref}}$  and the distance between BT antenna and GSM antenna  $\leq 2.5\text{cm}$ . Because of the power and the distance, we didn't perform the standalone BT SAR tests.

### 7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR<sub>1g</sub> are **0.504 W/kg** (head) and **1.210 W/kg (body)** that are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

[illegible]

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0111

Page 29 of 109

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	$\infty$
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6 4	1.8	$\infty$
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	0.6 4	3.2	$\infty$
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	$\infty$
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0	


## 9. Main Test Instruments

**Table 12: List of Main Instruments**


No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	MY48360988	December 4, 2009	One year
08	E-field Probe	EX3DV4	3677	September 23, 2009	One year
09	DAE	DAE4	905	June 24, 2009	One year
10	Validation Kit 835MHz	D835V2	4d082	July 13, 2009	One year
11	Validation Kit 1900MHz	D1900V2	5d018	June 26, 2009	One year

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*


## ANNEX A: Test Layout

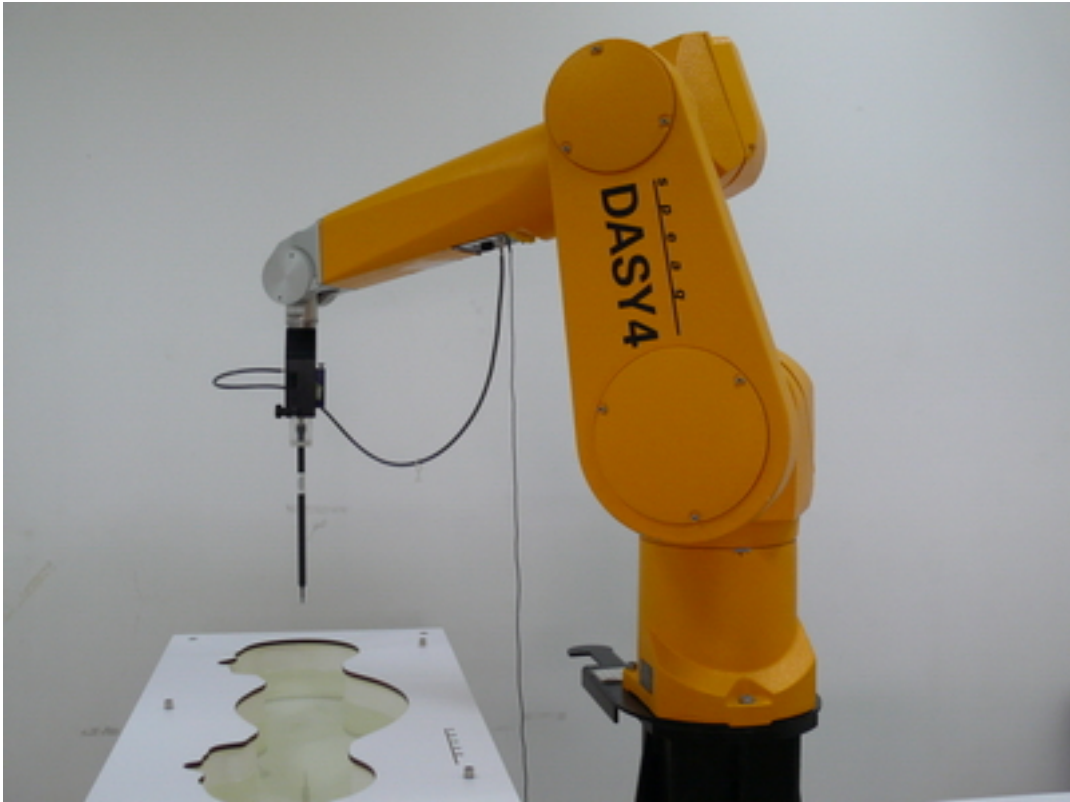


Picture 1: Specific Absorption Rate Test Layout

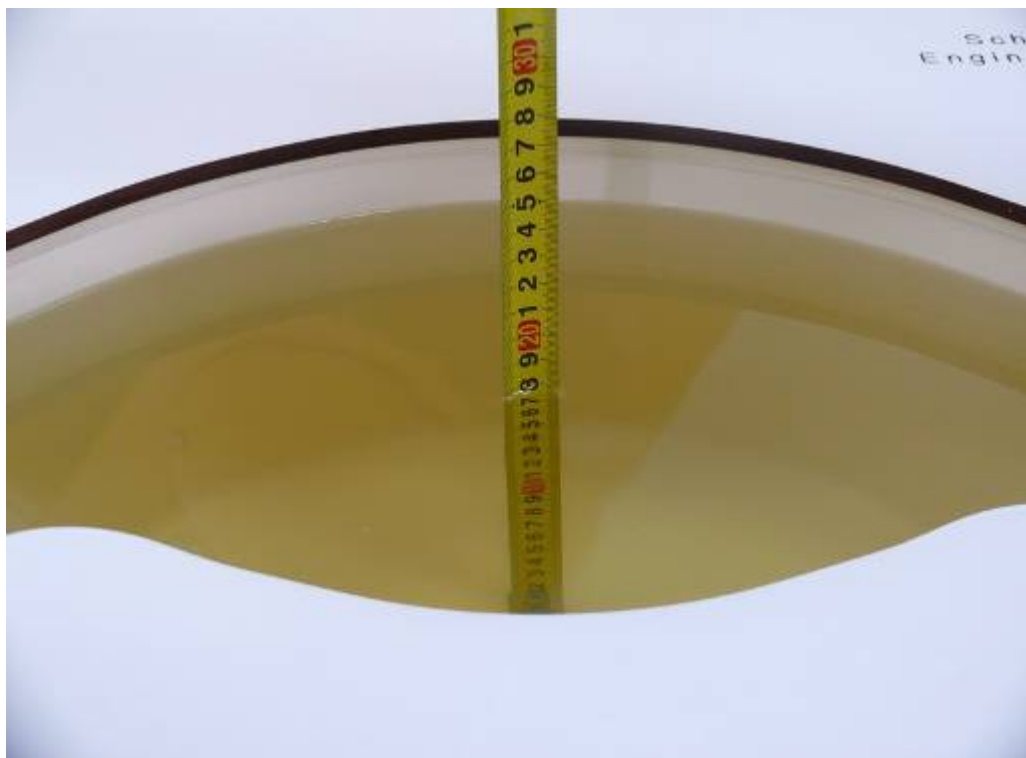

Picture 2: Liquid depth in the flat Phantom (835MHz)

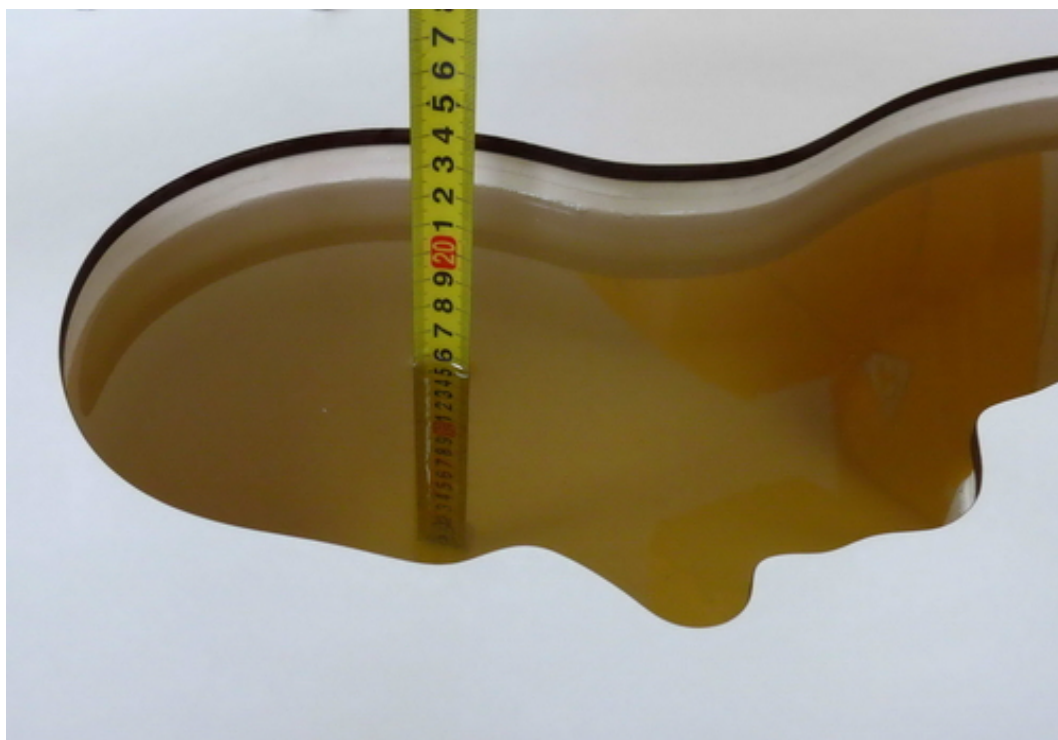

Picture 3: Liquid depth in the head Phantom (835MHz)

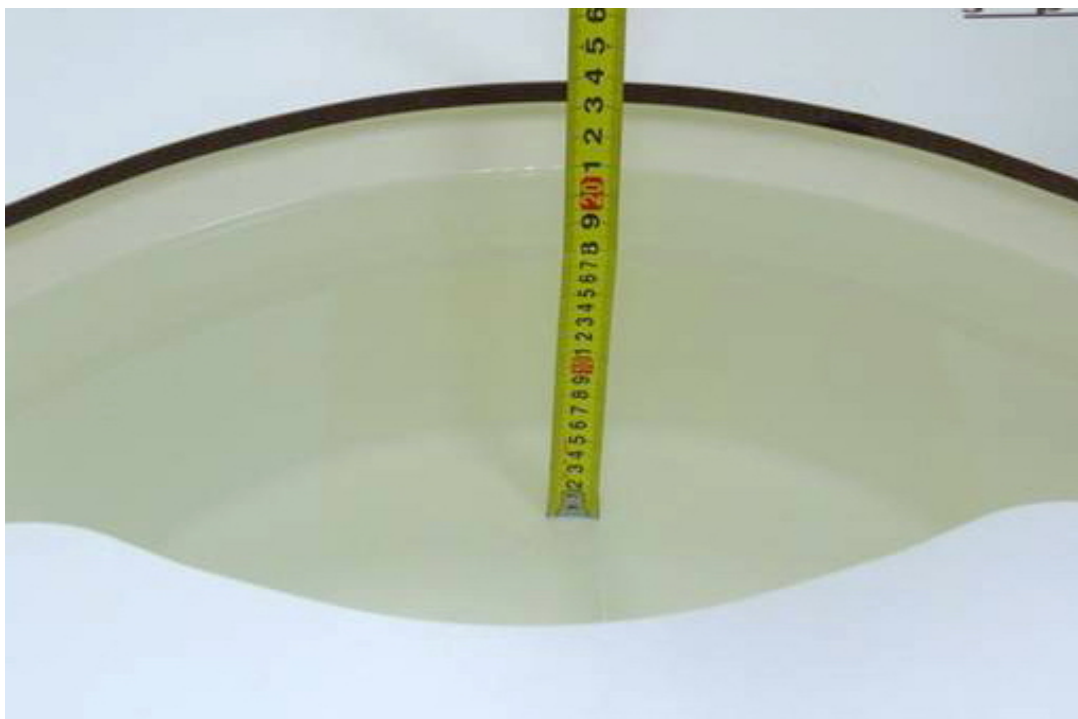

Picture 4: Liquid depth in the flat Phantom (1900 MHz)



Picture 5: liquid depth in the head Phantom (1900 MHz)



## ANNEX B: System Check Results

### System Performance Check at 835 MHz Head TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082**

Date/Time: 1/28/2010 11:13:02 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 42.19$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$       Liquid Temperature:  $21.5^\circ\text{C}$

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) =  $2.71 \text{ mW/g}$


**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =  $55.5 \text{ V/m}$ ; Power Drift =  $-0.092 \text{ dB}$

Peak SAR (extrapolated) =  $3.75 \text{ W/kg}$

**SAR(1 g) =  $2.48 \text{ mW/g}$ ; SAR(10 g) =  $1.62 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.67 \text{ mW/g}$

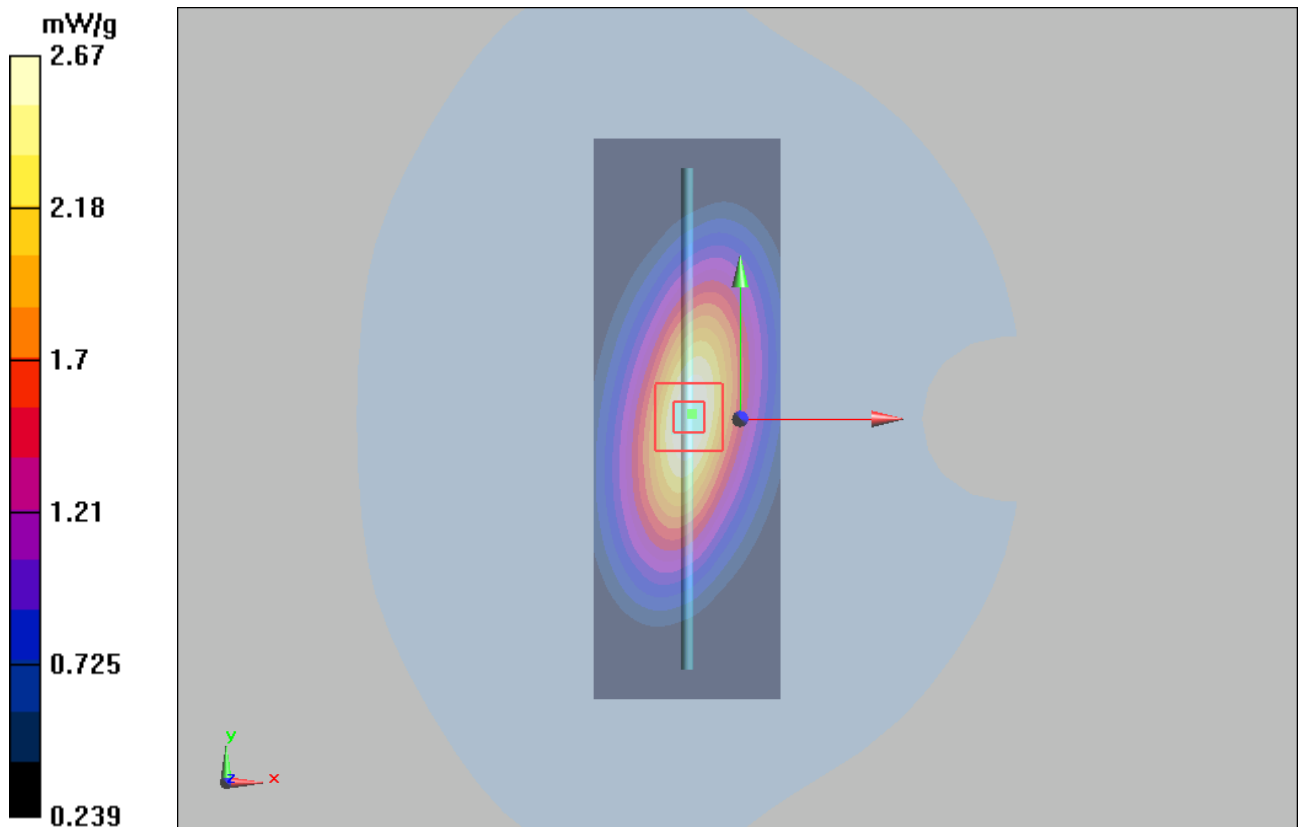

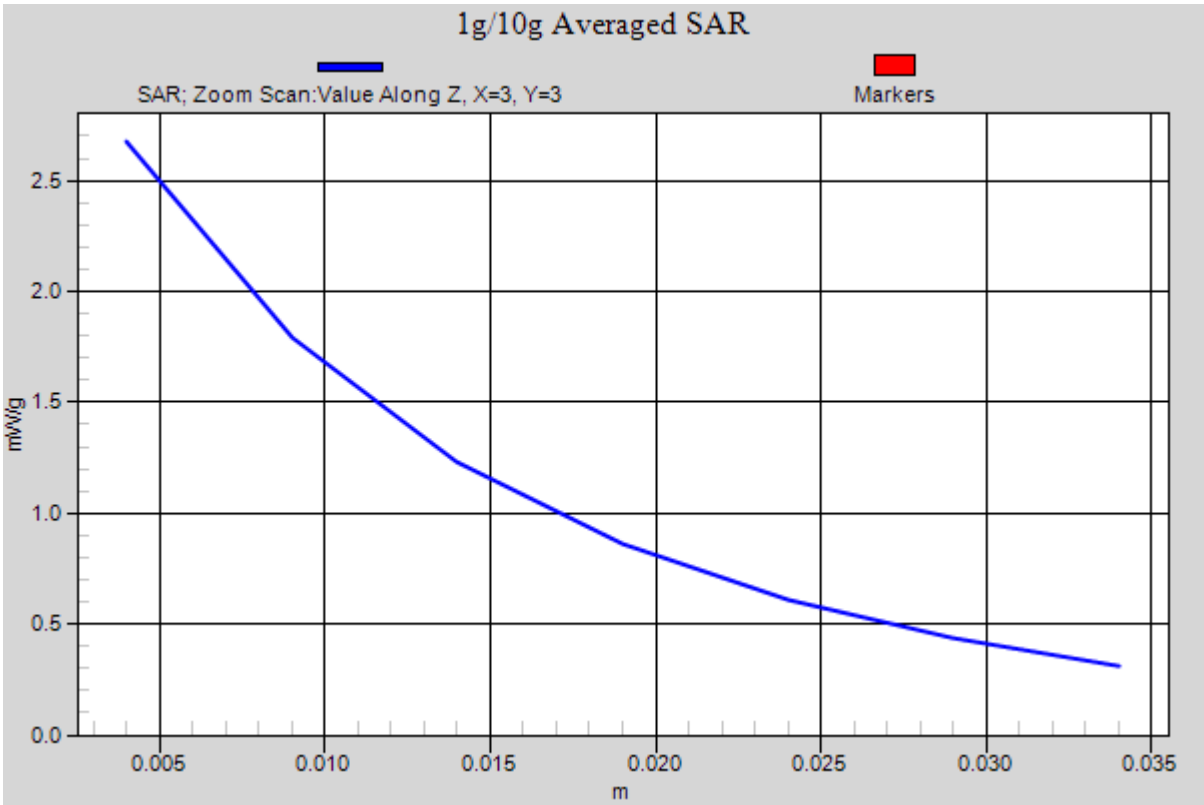


Figure 7 System Performance Check 835MHz 250mW

### System Performance Check at 835 MHz Body TSL

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082**

Date/Time: 1/26/2010 8:12:20 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.98 \text{ mho/m}$ ;  $\epsilon_r = 54.87$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$       Liquid Temperature:  $21.5^\circ\text{C}$

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=250mW/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) =  $2.77 \text{ mW/g}$


**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =  $50.9 \text{ V/m}$ ; Power Drift =  $0.023 \text{ dB}$

Peak SAR (extrapolated) =  $3.68 \text{ W/kg}$

**SAR(1 g) =  $2.56 \text{ mW/g}$ ; SAR(10 g) =  $1.68 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.77 \text{ mW/g}$

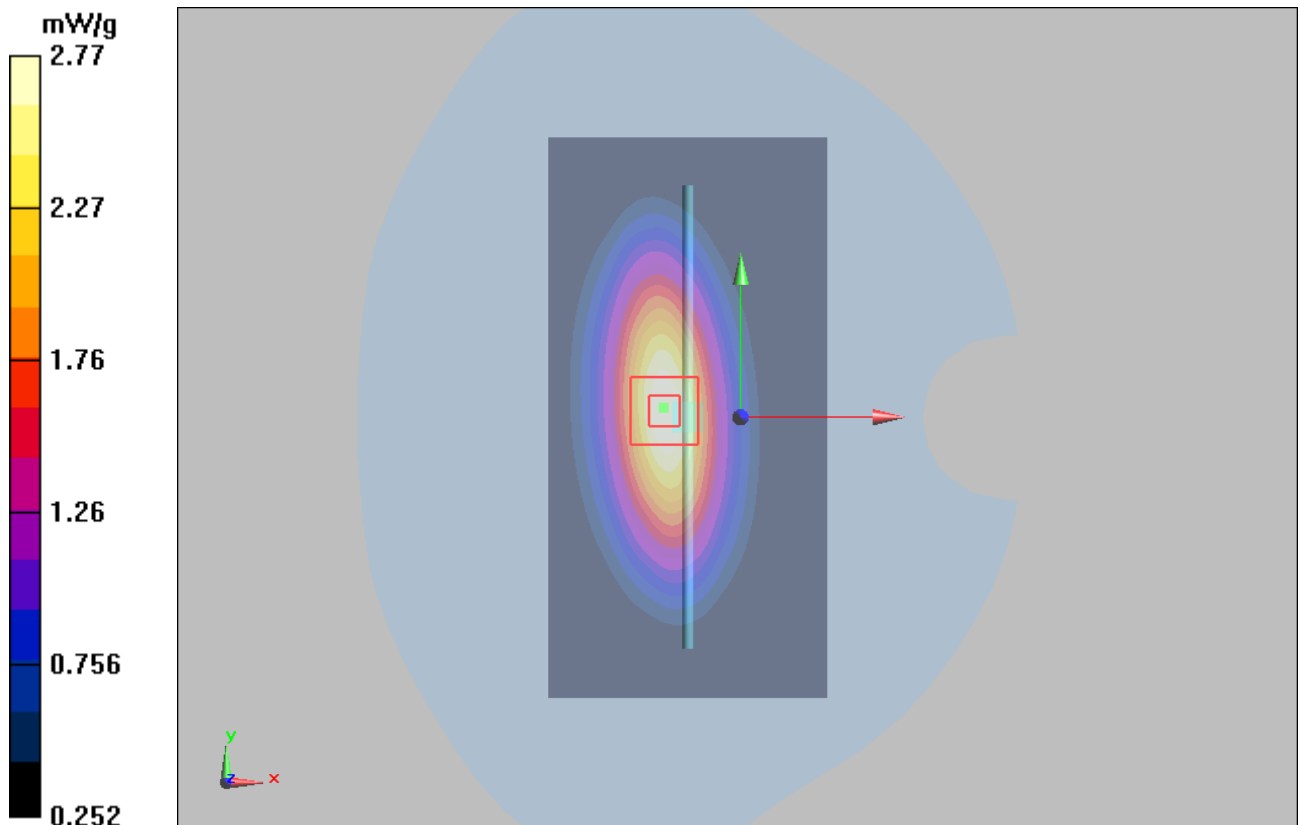

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0111

Page 36 of 109

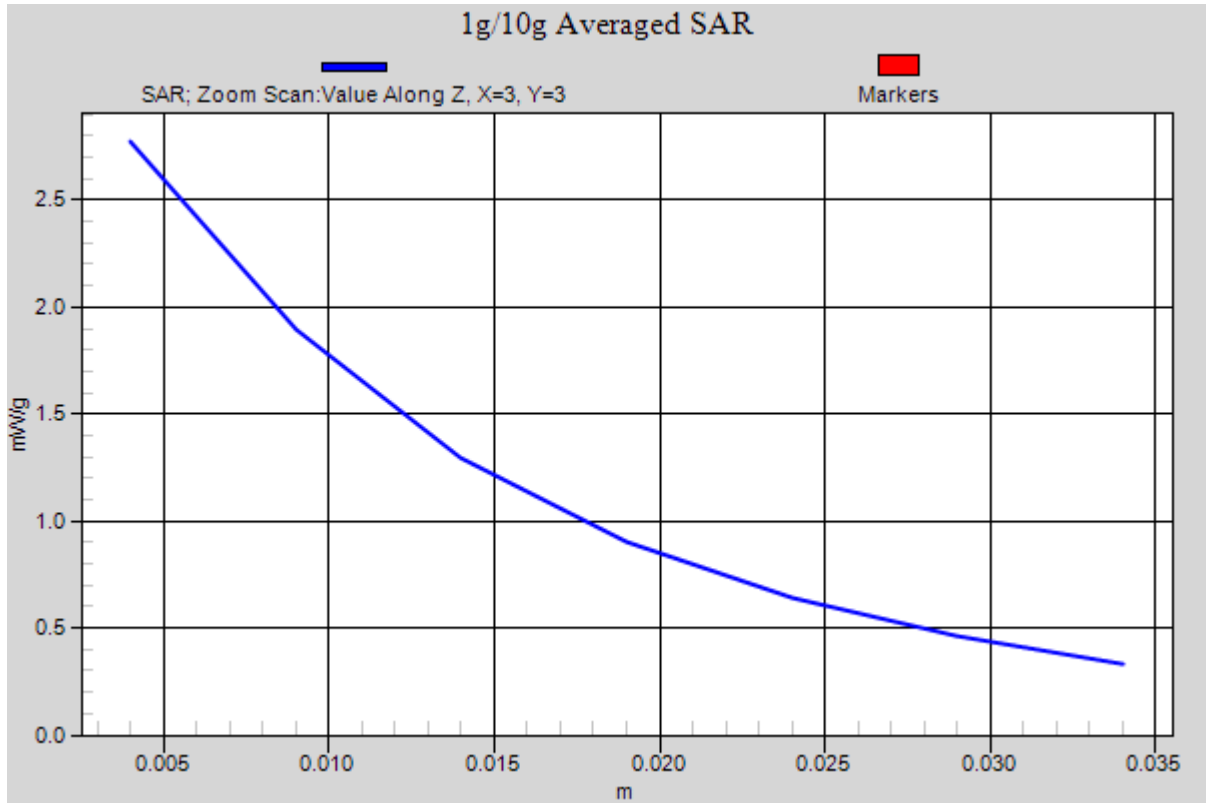


Figure 8 System Performance Check 835MHz 250mW

### System Performance Check at 1900 MHz Head TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018**

Date/Time: 1/27/2010 10:20:04 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 40.03$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.9 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.8 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 20.1 W/kg

**SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.46 mW/g**

Maximum value of SAR (measured) = 11.9 mW/g

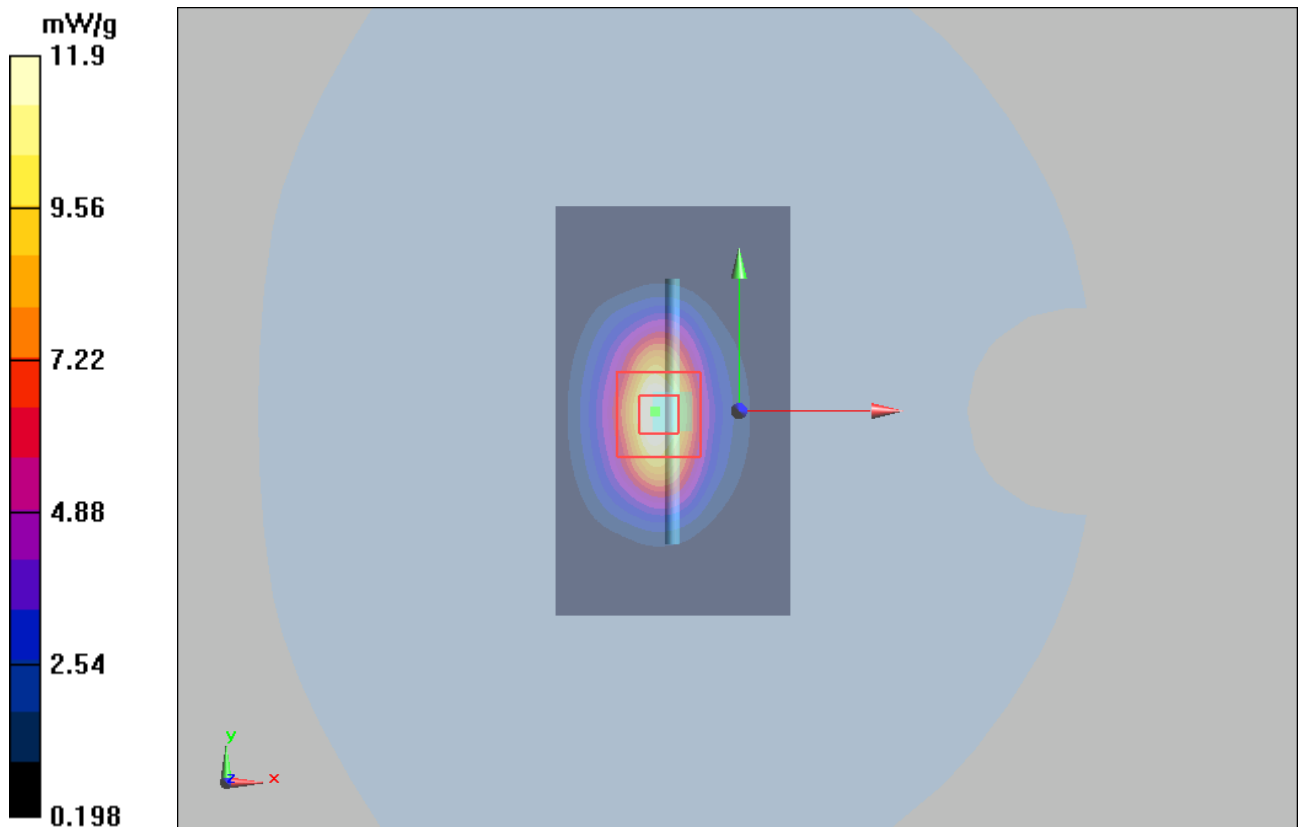

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0111

Page 38 of 109

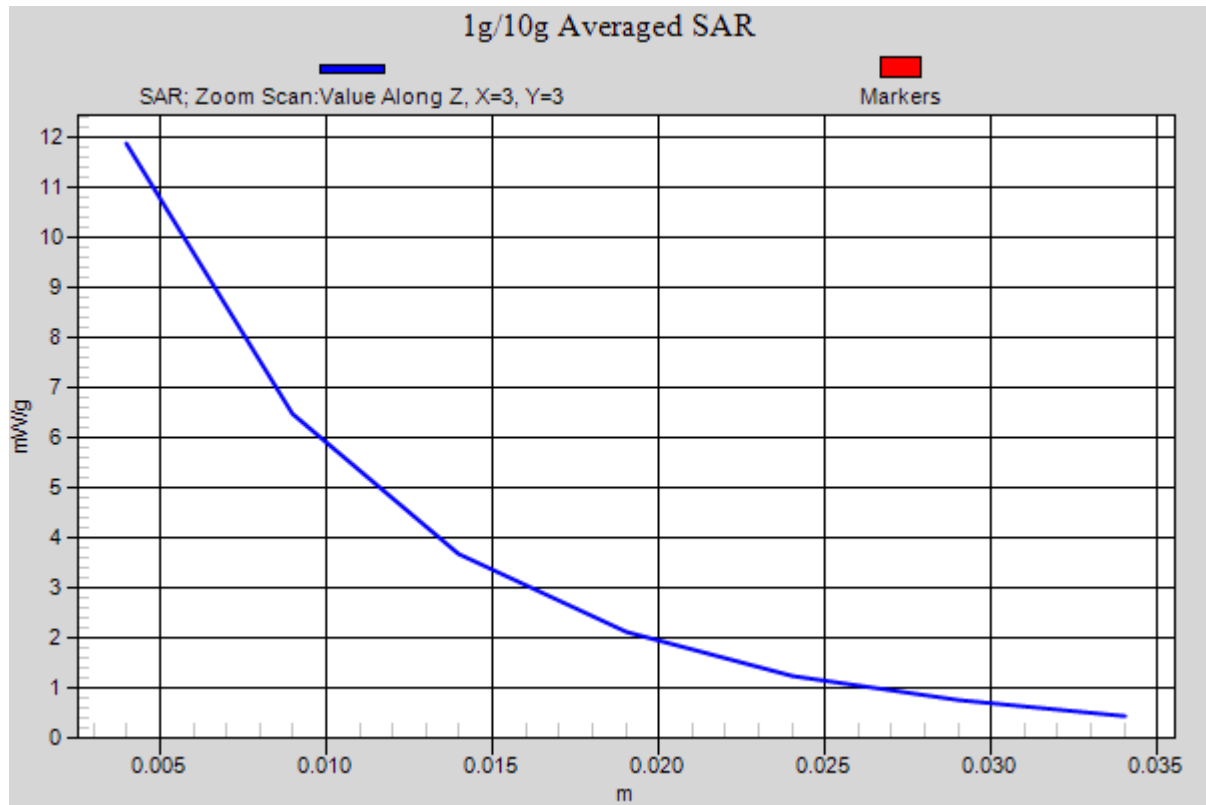


Figure 9 System Performance Check 1900MHz 250mW

### System Performance Check at 1900 MHz Body TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018**

Date/Time: 1/27/2009 2:16:19 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 75.9 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.17 mW/g**

Maximum value of SAR (measured) = 11 mW/g

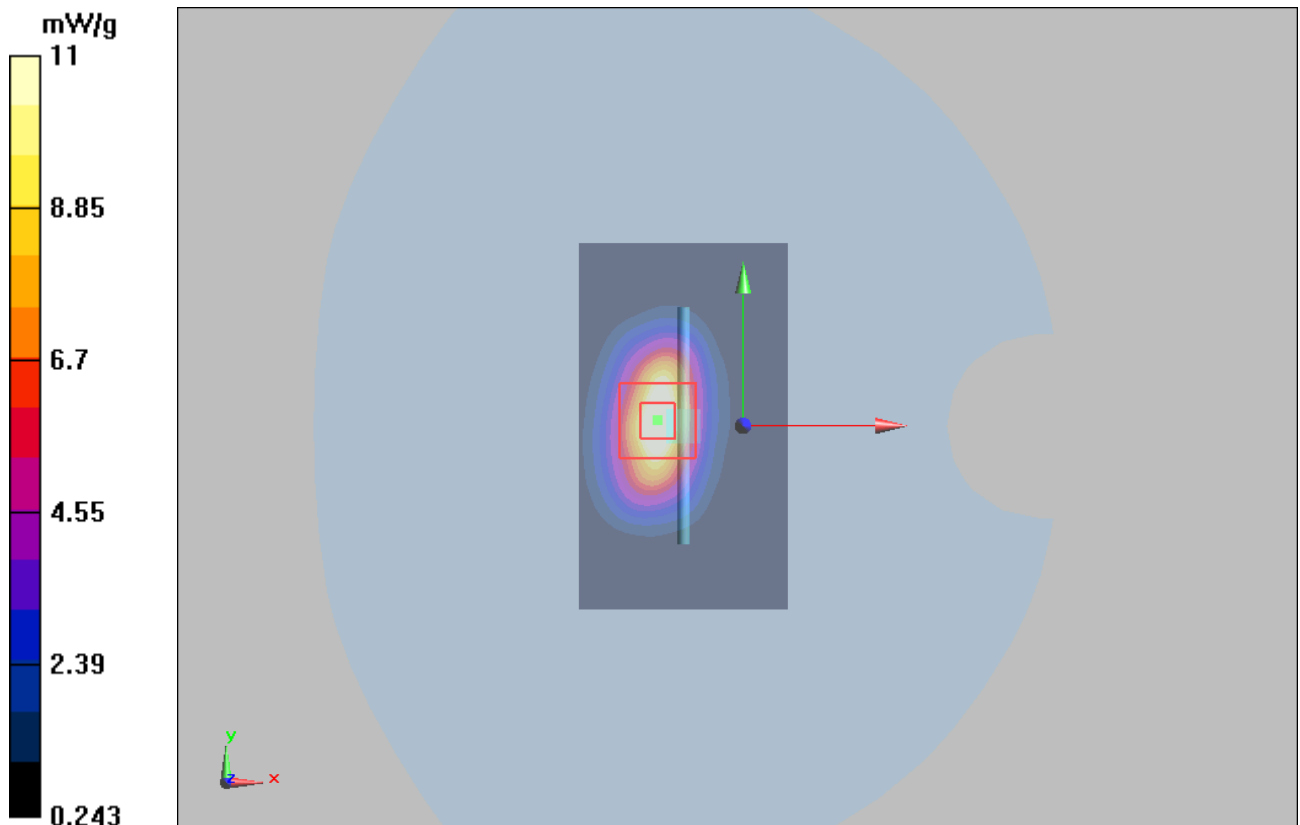

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0111

Page 40 of 109

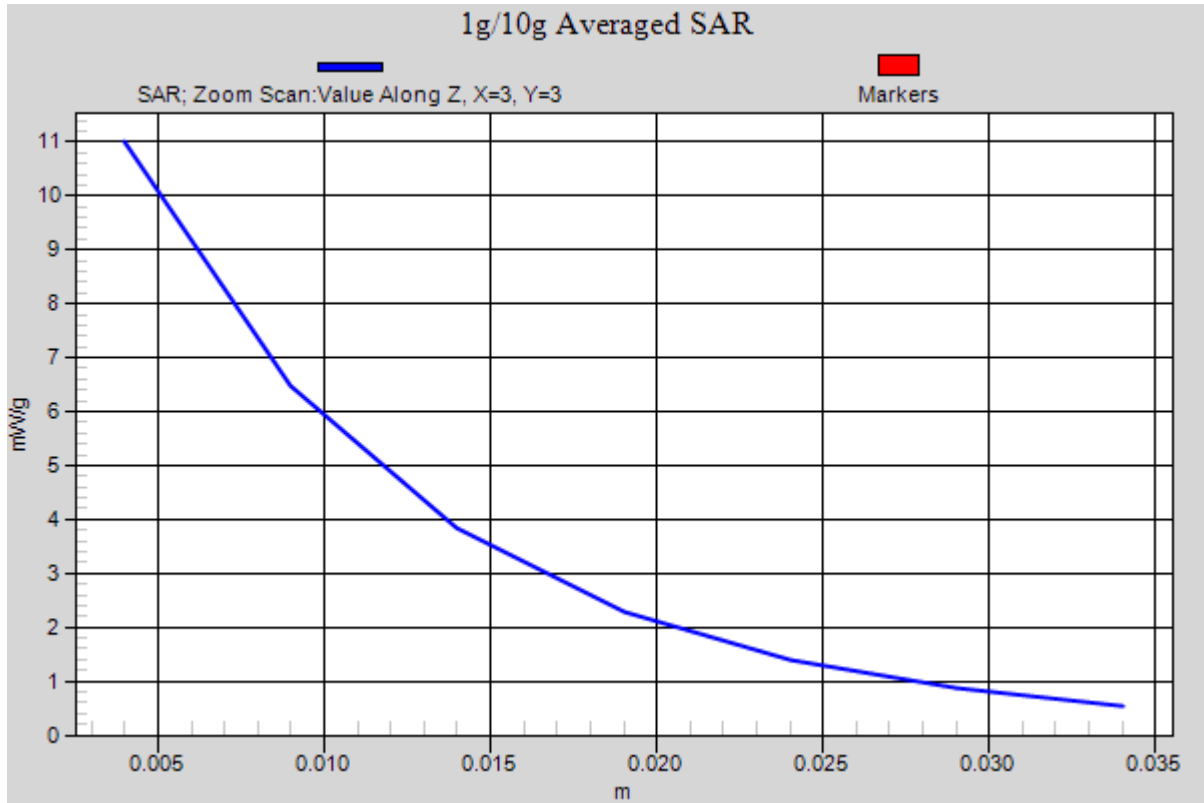


Figure 10 System Performance Check 1900MHz 250mW



## ANNEX C: Graph Results

### GSM 850 SIM1 Left Cheek Middle

Date/Time: 1/28/2010 12:40:38 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.138 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.68 V/m; Power Drift = 0.128 dB

Peak SAR (extrapolated) = 0.153 W/kg

**SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.097 mW/g**

Maximum value of SAR (measured) = 0.133 mW/g

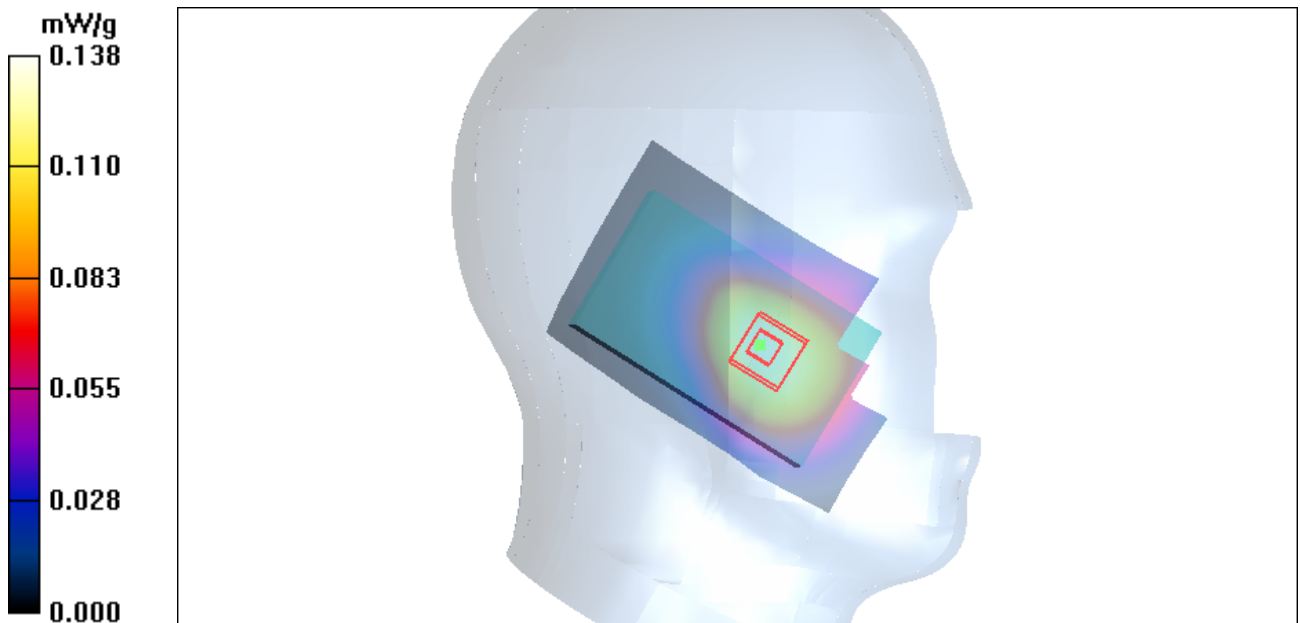


Figure 11 Left Hand Touch Cheek GSM 850 SIM1 Channel 190

### GSM 850 SIM1 Left Tilt Middle

Date/Time: 1/28/2010 1:01:02 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.088 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.062 mW/g**

Maximum value of SAR (measured) = 0.087 mW/g

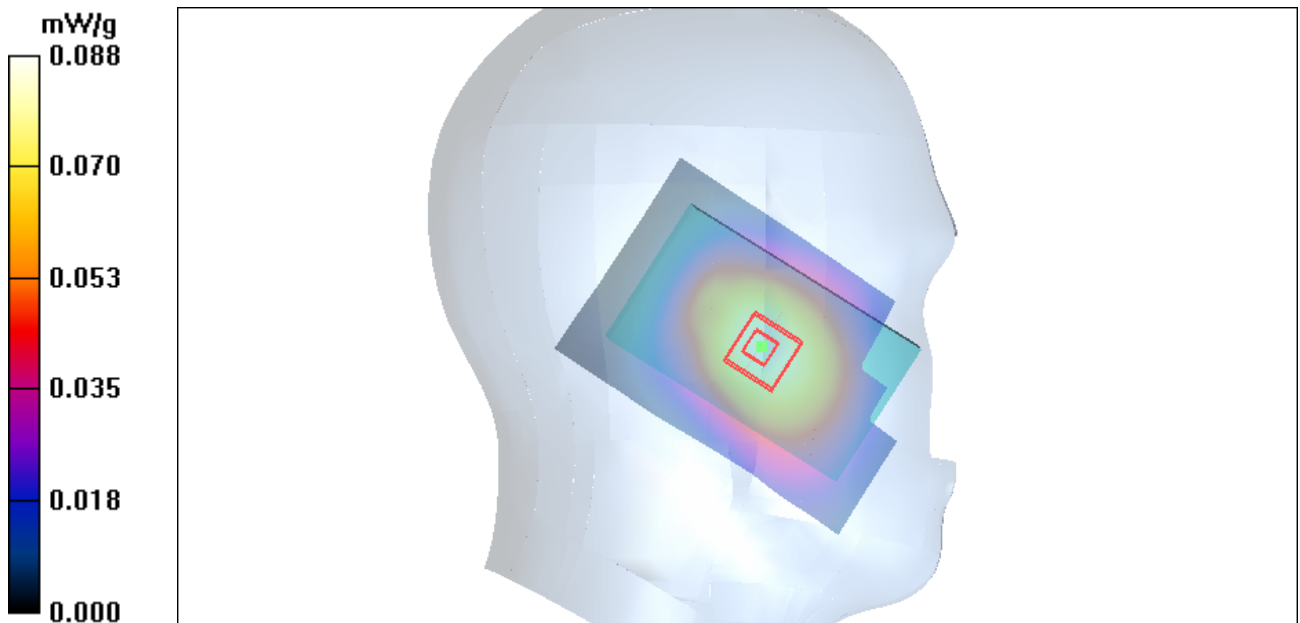


Figure 12 Left Hand Tilt 15° GSM 850 SIM1 Channel 190

### GSM 850 SIM1 Right Cheek High

Date/Time: 1/28/2010 3:58:56 PM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 0.922 \text{ mho/m}$ ;  $\epsilon_r = 42$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3^\circ\text{C}$       Liquid Temperature:  $21.5^\circ\text{C}$

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (61x91x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.258 \text{ mW/g}$


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.68 \text{ V/m}$ ; Power Drift =  $0.112 \text{ dB}$

Peak SAR (extrapolated) =  $0.306 \text{ W/kg}$

**SAR(1 g) =  $0.243 \text{ mW/g}$ ; SAR(10 g) =  $0.179 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.257 \text{ mW/g}$

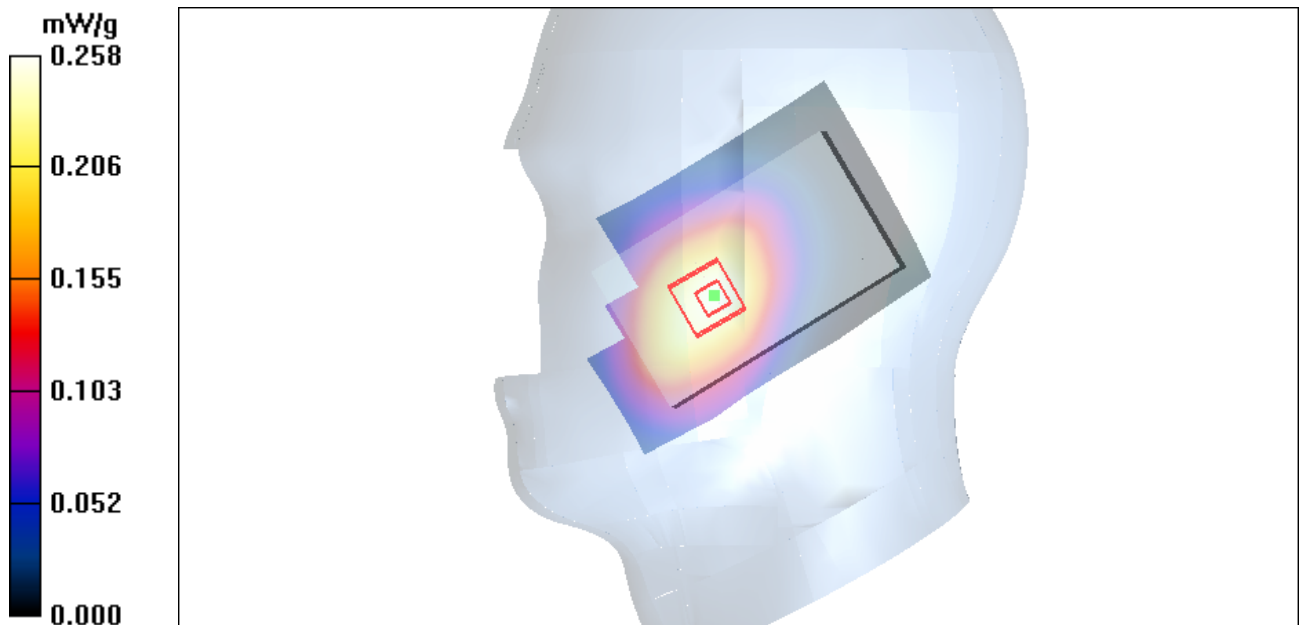

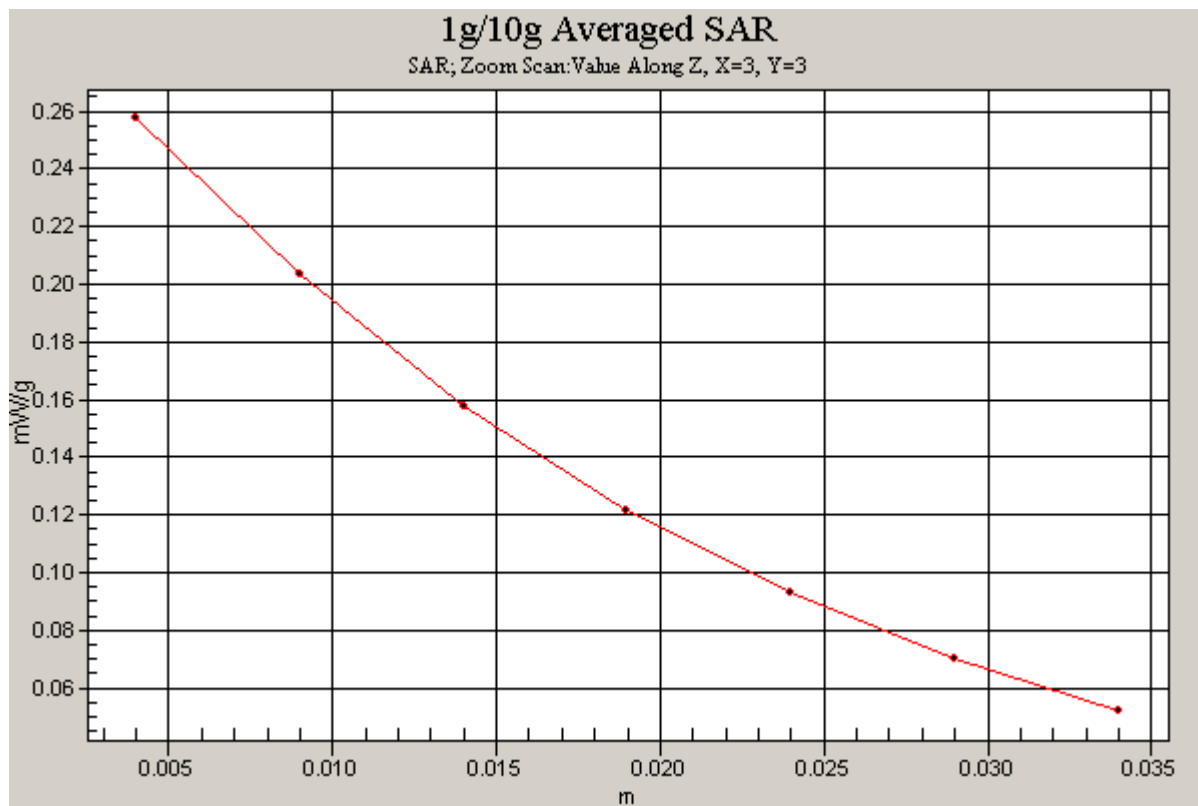


Figure 13 Right Hand Touch Cheek GSM 850 SIM1 Channel 251

### GSM 850 SIM1 Right Cheek Middle

Date/Time: 1/28/2010 1:22:33 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Middle/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.137 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.50 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.162 W/kg

**SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.136 mW/g

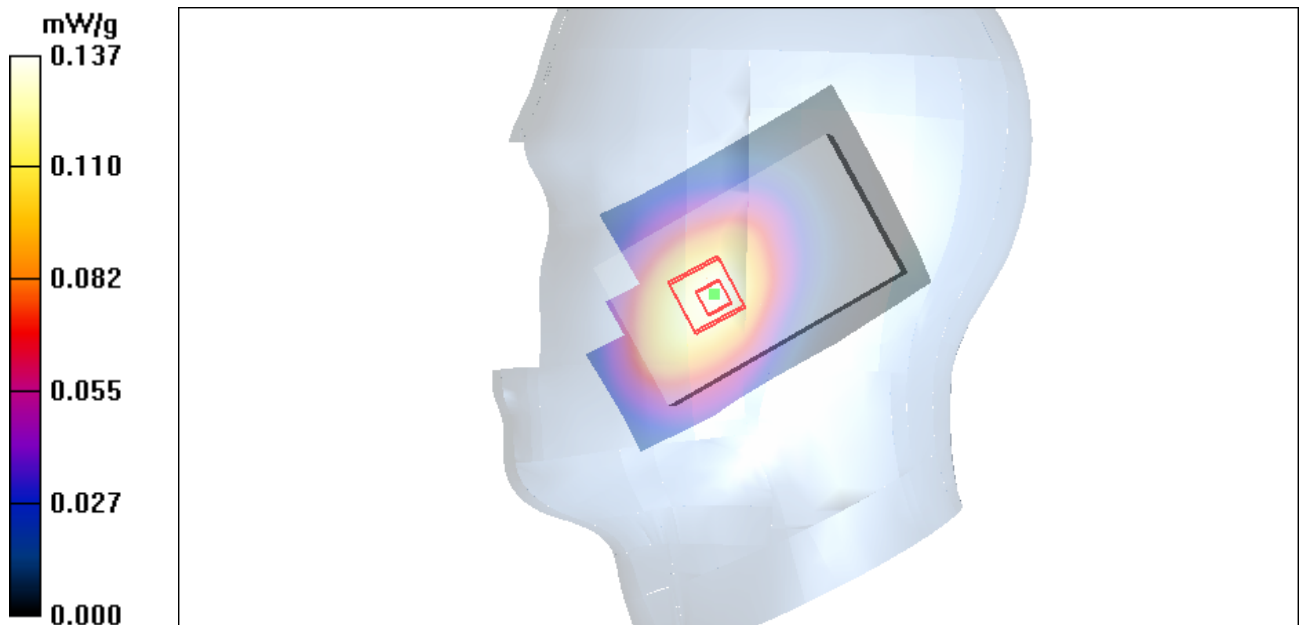


Figure 14 Right Hand Touch Cheek GSM 850 SIM1 Channel 190

### GSM 850 SIM1 Right Cheek Low

Date/Time: 1/28/2010 3:38:26 PM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.897$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek Low/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.084 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.61 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.059 mW/g**

Maximum value of SAR (measured) = 0.084 mW/g

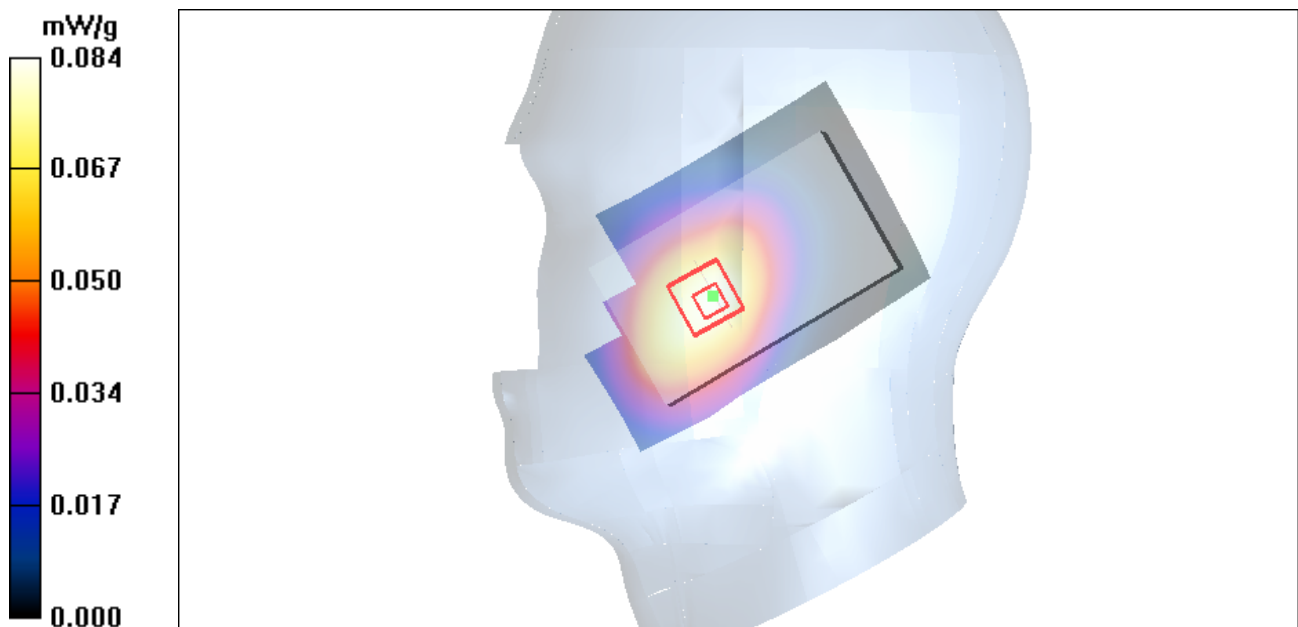


Figure 15 Right Hand Touch Cheek GSM 850 SIM1 Channel 128

### GSM 850 SIM1 Right Tilt Middle

Date/Time: 1/28/2010 2:53:47 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Tilt Middle/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.085 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.32 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.097 W/kg

**SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.060 mW/g**

Maximum value of SAR (measured) = 0.083 mW/g

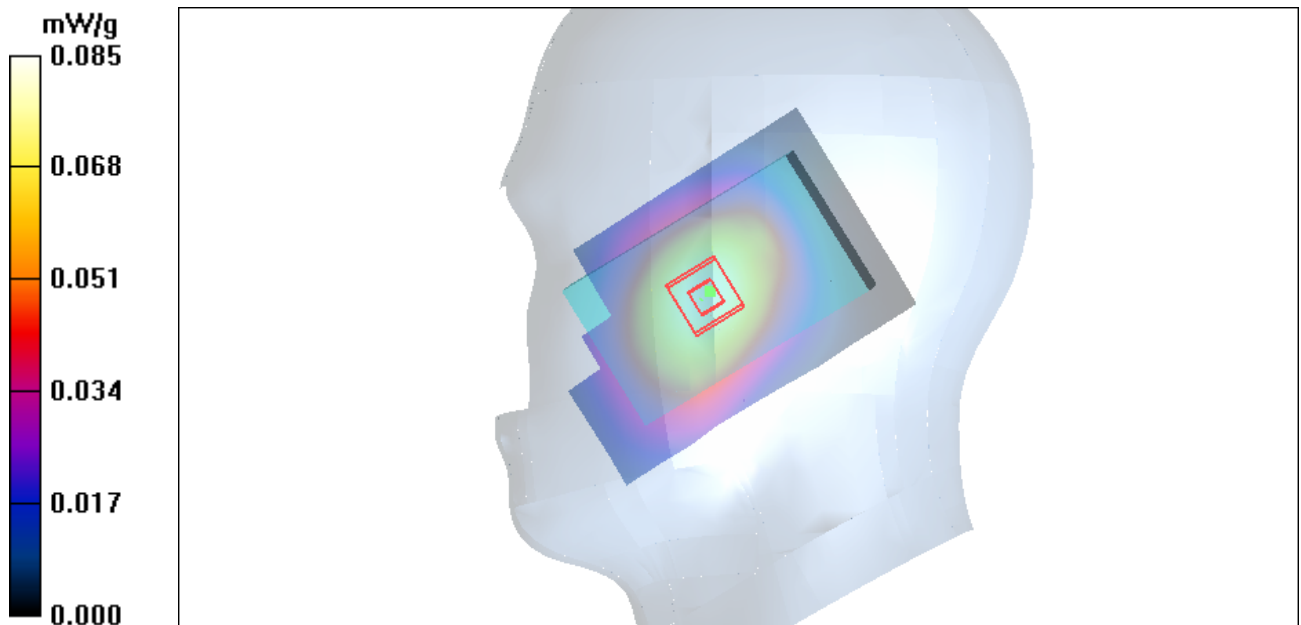


Figure 16 Right Hand Tilt 15° GSM 850 SIM1 Channel 190

### GSM 850 SIM2 Right Cheek High

Date/Time: 1/28/2010 4:26:05 PM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.922$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Cheek High/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.246 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.54 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.299 W/kg

**SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.173 mW/g**

Maximum value of SAR (measured) = 0.249 mW/g

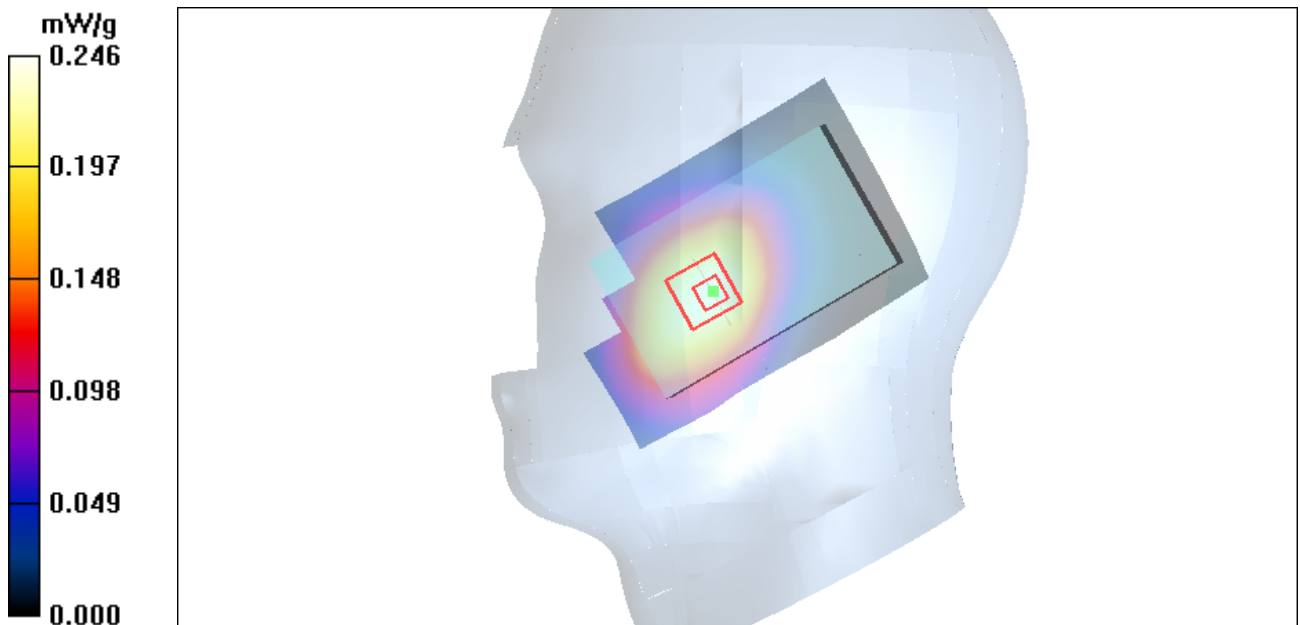


Figure 17 Right Hand Touch Cheek GSM 850 SIM2 Channel 251



### **GSM 850 SIM1 Towards Ground High**

Date/Time: 1/26/2010 10:19:49 PM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.850 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.552 mW/g**

Maximum value of SAR (measured) = 0.811 mW/g

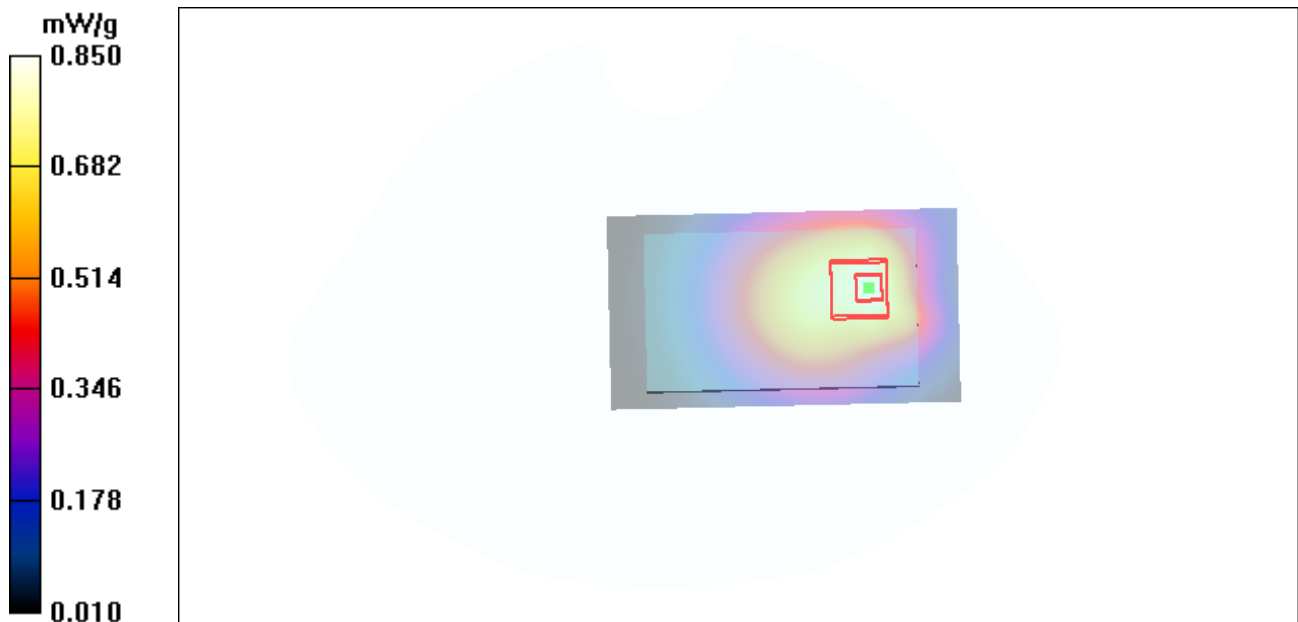


Figure 18 Body, Towards Ground, GSM 850 SIM1 Channel 251

### **GSM 850 SIM1 Towards Ground Middle**

Date/Time: 1/26/2010 9:44:28 PM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.516 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.14 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.604 W/kg

**SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.334 mW/g**

Maximum value of SAR (measured) = 0.483 mW/g

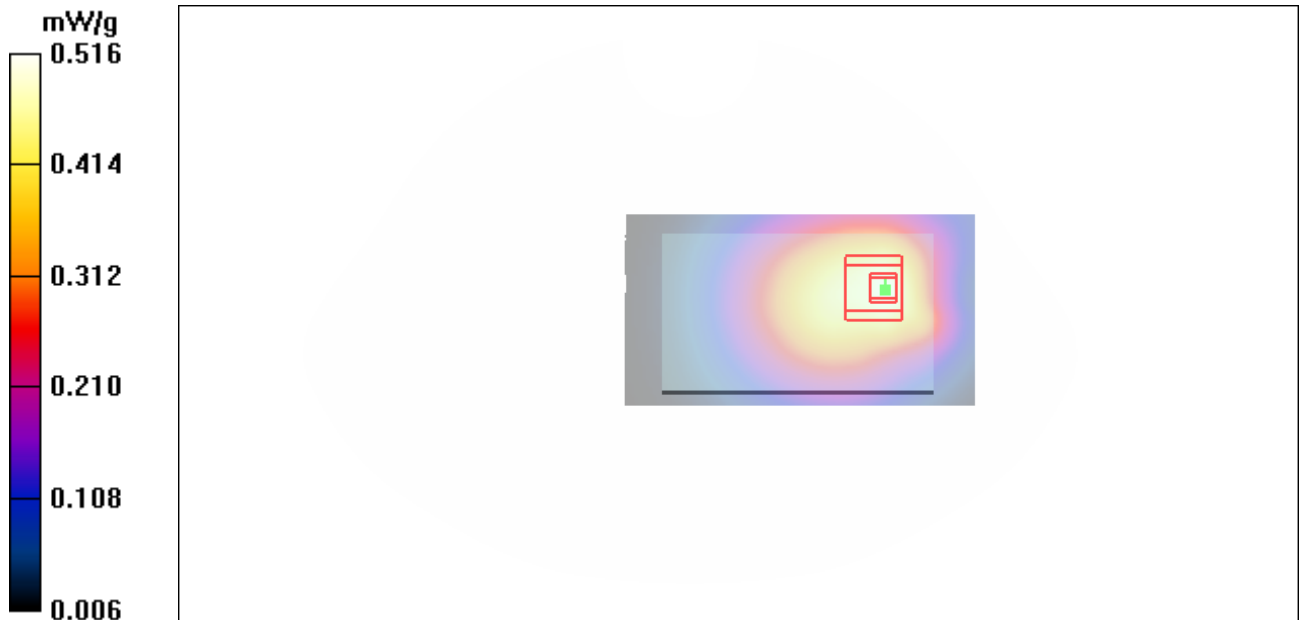


Figure 19 Body, Towards Ground, GSM 850 SIM1 Channel 190

### GSM 850 SIM1 Towards Ground Low

Date/Time: 1/26/2010 10:37:09 PM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Towards Ground Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.309 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.34 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.367 W/kg

**SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.202 mW/g**

Maximum value of SAR (measured) = 0.293 mW/g

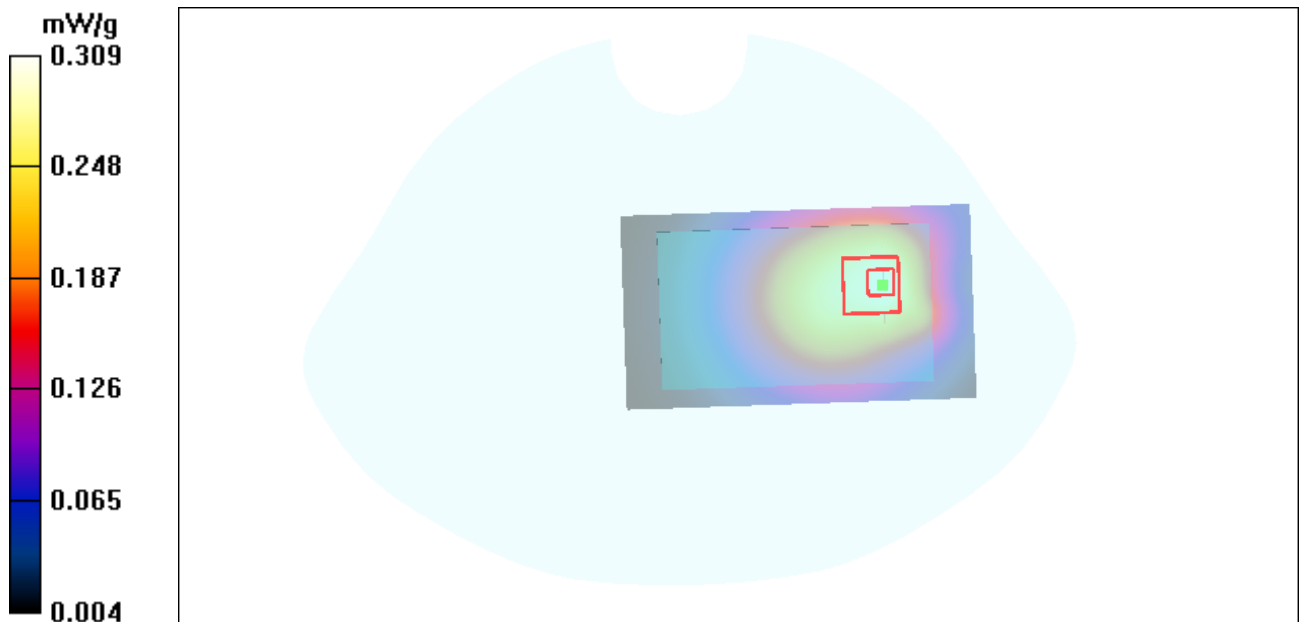


Figure 20 Body, Towards Ground, GSM 850 SIM1 Channel 128