



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM150300101401
Page: 1 of 30

FCC REPORT

Application No. :	SZEM1503001014CR
Applicant:	Pixel Enterprise Limited
Manufacturer/Factory:	Shenzhen Pixel Technology Limited
Product Name:	Speedlite
Model No.(EUT):	X800c
Trade Mark:	Pixel
FCC ID:	X5S-X800C
Standards:	47 CFR Part 15, Subpart C (2014)
Date of Receipt:	2015-03-11
Date of Test:	2015-04-14 to 2015-05-11
Date of Issue:	2015-05-26

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-05-26		Original

Authorized for issue by:				
Tested By		Chris Zhong		2015-05-11
		(Chris Zhong) /Project Engineer		Date
Prepared By		Jade Chen		2015-05-26
		(Jade Chen) /Clerk		Date
Checked By		Emen-Li		2015-05-26
		(Emen Li) /Reviewer		Date

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2009)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2009)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2009)	PASS

4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 TEST LOCATION.....	7
5.6 TEST FACILITY.....	8
5.7 DEVIATION FROM STANDARDS	8
5.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
5.10 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	11
6.1 ANTENNA REQUIREMENT.....	11
6.2 RADIATED SPURIOUS EMISSIONS.....	12
6.3 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	20
6.4 20dB BANDWIDTH	26
7 PHOTOGRAPHS - EUT TEST SETUP	29
7.1 RADIATED EMISSION	29
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	30

5 General Information

5.1 Client Information

Applicant:	Pixel Enterprise Limited
Address of Applicant:	Rm A07, 4/F, Hop Hing Industrial Building, 704 Castle Peak Road, Lai Chi Kok, Kowloon, HongKong
Manufacturer:	Shenzhen Pixel Technology Limited
Address of Manufacturer:	2nd, Building, Shiao Second Industrial Building, Dalang, Longhua Town, Baoan District, Shenzhen, China
Factory:	Shenzhen Pixel Technology Limited
Address of Factory:	2nd, Building, Shiao Second Industrial Building, Dalang, Longhua Town, Baoan District, Shenzhen, China

5.2 General Description of EUT

Name:	Speedlite	
Model No.:	X800c	
Trade Mark:	Pixel	
Frequency Range:	2411MHz~2471MHz	
Modulation Type:	FSK	
Number of Channels:	15	
Sample Type:	Portable production	
Test Power Grade:	Default setting	
Antenna Type:	Integral	
Antenna Gain:	1dBi	
Power Supply:	Battery:	DC 6.0V (4*1.5V "AA" Size battery)



Operation Frequency each of channel			
Channel	Frequency	Channel	Frequency
1	2411MHz	9	2420MHz
2	2419.5MHz	10	2428.5MHz
3	2428MHz	11	2437MHz
4	2436.5MHz	12	2445.5MHz
5	2462MHz	13	2454MHz
6	2453.5MHz	14	2462.5MHz
7	2445MHz	15	2471MHz
8	2411.5MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH1)	2411MHz
The middle channel (CH7)	2445MHz
The highest channel (CH15)	2471MHz

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

5.10 Equipment List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2016-05-13
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2016-05-13

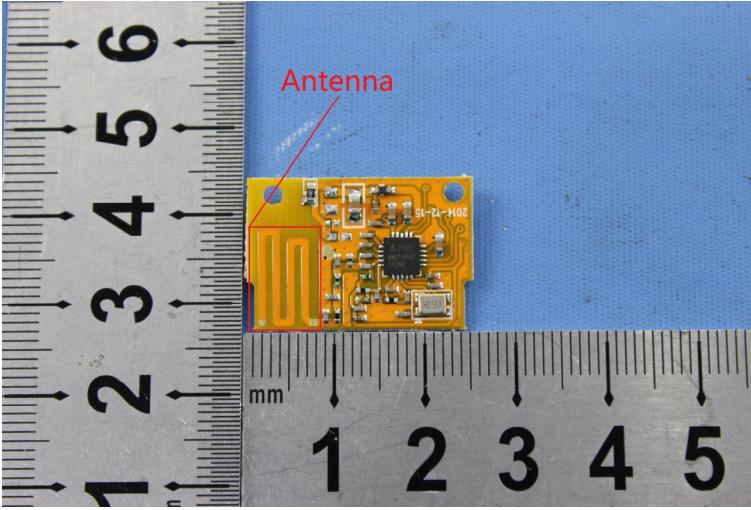
"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2016-04-25
8	Band filter	amideon	82346	SEL0094	2016-05-13
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.




6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1dBi.	

6.2 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209				
Test Method:	ANSI C63.10: 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	2400MHz-2483.5MHz	Frequency	Limit (dBuV/m @3m)	Remark	
			94.0	Average Value	
			114.0	Peak Value	

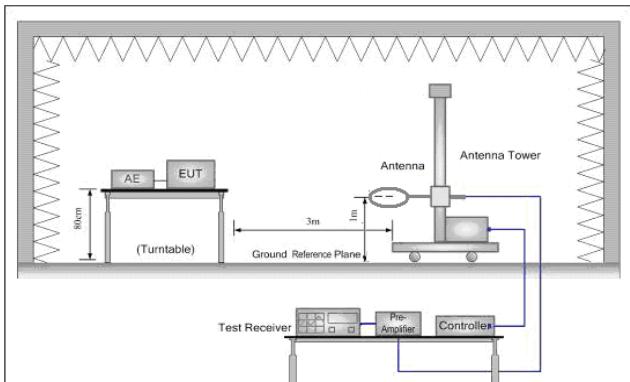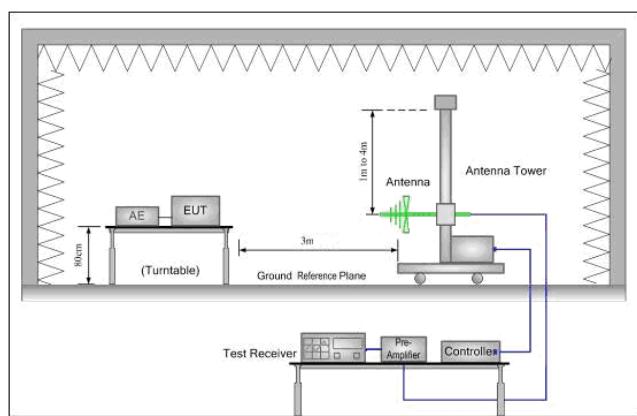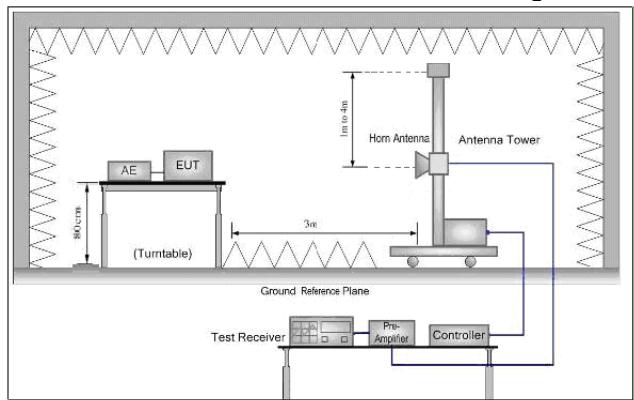Test Setup:

Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Figure 3. Above 1 GHz
Test Procedure:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the

	<p>limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data**6.2.1.1 Field Strength Of The Fundamental Signal**

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
2411	4.93	32.41	38.46	80.24	79.12	114	-34.88
2445	4.98	32.43	38.46	78.23	77.18	114	-36.82
2471	5.01	32.44	38.46	80.18	79.17	114	-34.83

Remark:


The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB. So, only the peak measurements were shown in the report.



6.2.1.2 Spurious Emissions
30MHz~1GHz

Test mode:	Transmitting	Horizontal
------------	--------------	------------

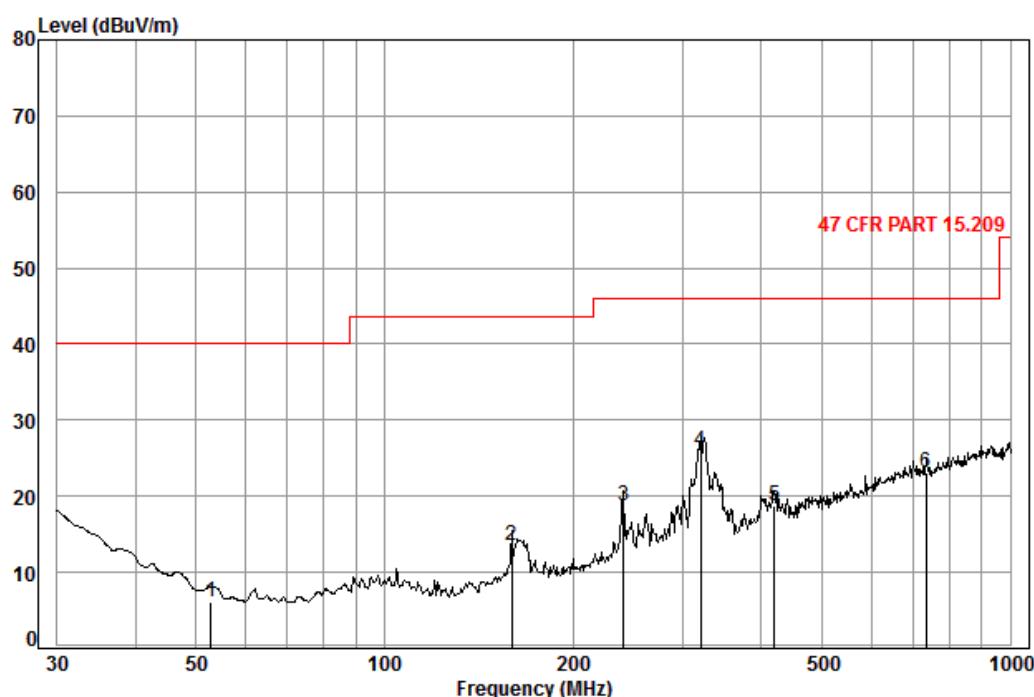QP value:




Condition: 47 CFR PART 15.209 3m 3142C Horizontal

Job No. : 1014CR

Test mode: TX mode

Freq	Cable Loss	Ant Factor	Preamp Factor	Read	Limit Line	Over Limit
				Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	52.76	0.80	8.29	27.28	24.20	6.01 40.00 -33.99
2	159.78	1.34	9.59	26.86	29.34	13.41 43.50 -30.09
3	240.83	1.63	12.01	26.56	31.69	18.77 46.00 -27.23
4	319.94	1.97	14.62	26.56	35.92	25.95 46.00 -20.05
5	420.58	2.29	16.38	27.25	27.29	18.71 46.00 -27.29
6	734.49	3.01	21.64	27.37	25.74	23.02 46.00 -22.98

Test mode:	Transmitting	Vertical
------------	--------------	----------

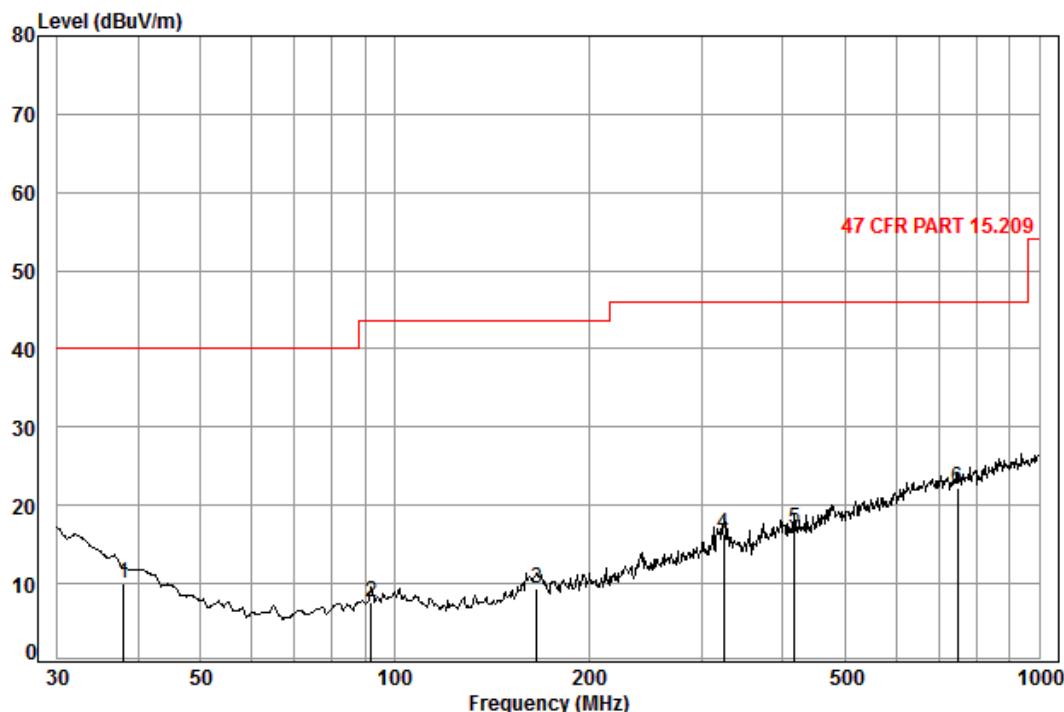

Condition: 47 CFR PART 15.209 3m 3142C Vertical

Job No. : 1014CR

Test mode: TX mode

Freq	Cable	Ant	Preamp	Read	Limit	Over		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	37.94	0.60	14.25	27.33	22.51	10.03	40.00	-29.97
2	92.14	1.12	8.79	27.21	24.97	7.67	43.50	-35.83
3	166.07	1.35	9.54	26.83	25.38	9.44	43.50	-34.06
4	324.46	1.98	14.78	26.58	26.18	16.36	46.00	-29.64
5	417.64	2.28	16.37	27.25	25.50	16.90	46.00	-29.10
6	747.48	3.05	21.69	27.35	24.87	22.26	46.00	-23.74



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM150300101401

Page : 18 of 30

Above 1GHz								
Test mode:	Transmitting	Test channel:		Lowest	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3419.491	5.89	32.80	38.70	46.26	46.25	74	-27.75	Vertical
4822.000	5.54	34.72	39.24	49.26	50.28	74	-23.72	Vertical
6063.190	7.46	36.23	39.18	48.15	52.66	74	-21.34	Vertical
7233.000	8.31	35.60	39.06	47.98	52.83	74	-21.17	Vertical
9644.000	9.24	37.44	37.91	44.19	52.96	74	-21.04	Vertical
10860.830	9.65	37.98	38.15	43.67	53.15	74	-20.85	Vertical
3561.636	5.87	32.96	38.77	47.11	47.17	74	-26.83	Horizontal
4822.000	5.54	34.72	39.24	47.16	48.18	74	-25.82	Horizontal
5895.771	7.28	36.10	39.19	47.32	51.51	74	-22.49	Horizontal
7233.000	8.31	35.60	39.06	46.79	51.64	74	-22.36	Horizontal
9644.000	9.24	37.44	37.91	43.41	52.18	74	-21.82	Horizontal
10944.090	9.64	38.05	38.19	44.12	53.62	74	-20.38	Horizontal

Test mode:	Transmitting	Test channel:		Middle	Remark:		Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3616.451	5.83	33.01	38.79	46.74	46.79	74	-27.21	Vertical
4890.000	5.71	34.79	39.27	51.03	52.26	74	-21.74	Vertical
5956.109	7.41	36.22	39.19	47.71	52.15	74	-21.85	Vertical
7335.000	8.42	35.49	39.06	46.11	50.96	74	-23.04	Vertical
9780.000	9.17	37.86	37.83	44.18	53.38	74	-20.62	Vertical
11027.980	9.66	38.10	38.24	43.64	53.16	74	-20.84	Vertical
3795.660	5.72	33.15	38.87	46.68	46.68	74	-27.32	Horizontal
4890.000	5.71	34.79	39.27	49.40	50.63	74	-23.37	Horizontal
6001.768	7.51	36.30	39.18	47.67	52.30	74	-21.70	Horizontal
7335.000	8.42	35.49	39.06	46.61	51.46	74	-22.54	Horizontal
9780.000	9.17	37.86	37.83	43.37	52.57	74	-21.43	Horizontal
11545.040	10.09	38.26	38.49	43.91	53.77	74	-20.23	Horizontal

Test mode:		Transmitting		Test channel:		Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3634.910	5.82	33.03	38.80	46.45	46.50	74	-27.50	Vertical	
4942.000	5.84	34.84	39.28	51.99	53.39	74	-20.61	Vertical	
6047.776	7.47	36.25	39.18	47.57	52.11	74	-21.89	Vertical	
7413.000	8.51	35.42	39.05	47.83	52.71	74	-21.29	Vertical	
9884.000	9.11	38.17	37.77	44.03	53.54	74	-20.46	Vertical	
12024.960	10.26	38.73	38.72	43.54	53.81	74	-20.19	Vertical	
3489.840	5.91	32.88	38.74	45.43	45.48	74	-28.52	Horizontal	
4942.000	5.84	34.84	39.28	48.87	50.27	74	-23.73	Horizontal	
6094.137	7.44	36.20	39.17	46.80	51.27	74	-22.73	Horizontal	
7413.000	8.51	35.42	39.05	46.65	51.53	74	-22.47	Horizontal	
9884.000	9.11	38.17	37.77	43.82	53.33	74	-20.67	Horizontal	
11370.050	9.96	38.15	38.40	43.55	53.26	74	-20.74	Horizontal	

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB. So, only the peak measurements were shown in the report.

6.3 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205																						
Test Method:	ANSI C63.10: 2009																						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																						
Limit(band edge):	<p>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.</p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td></td> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>		Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value		74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																					
30MHz-88MHz	40.0	Quasi-peak Value																					
88MHz-216MHz	43.5	Quasi-peak Value																					
216MHz-960MHz	46.0	Quasi-peak Value																					
960MHz-1GHz	54.0	Quasi-peak Value																					
Above 1GHz	54.0	Average Value																					
	74.0	Peak Value																					
Test Setup:																							

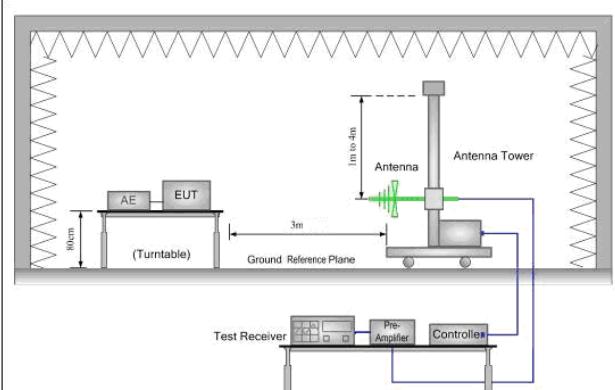


Figure 1. 30MHz to 1GHz

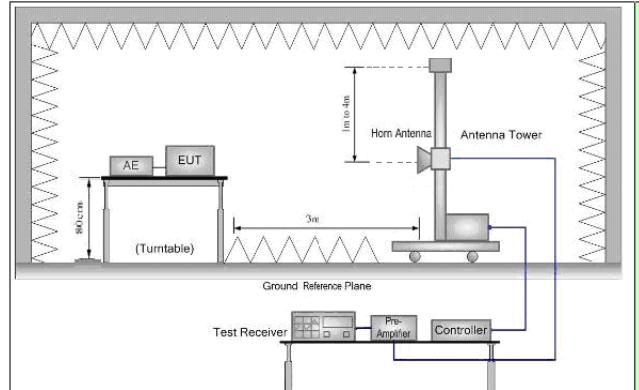



Figure 2. Above 1 GHz

Test Procedure:	<ul style="list-style-type: none">a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channelg. Test the EUT in the lowest channel , the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Test plot as follows:

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical
------------	--------------	---------------	--------	---------	------	----------

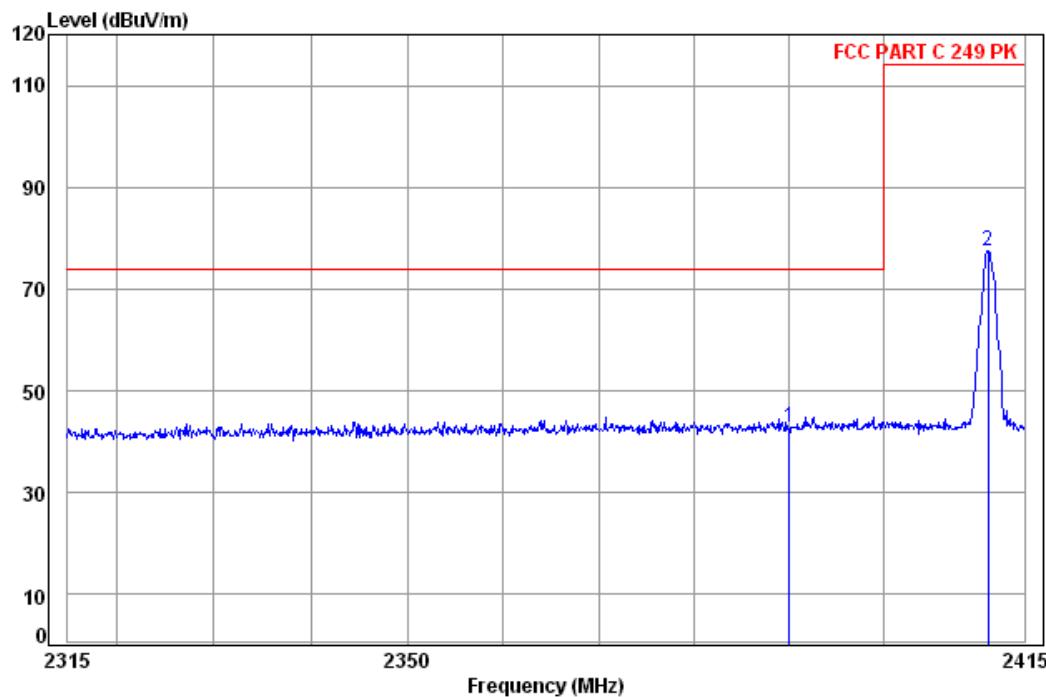Data: 287



Site : chamber

Condition: FCC PART C 249 PK 3m Vertical


Job No: : 1014CR

Mode: : 2411 Band edge

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2390.00	4.90	32.35	38.46	44.17	42.96	74.00	-31.04
2	2411.12	4.93	32.41	38.46	78.75	77.63	114.00	-36.37

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	--------------	---------------	--------	---------	------	------------

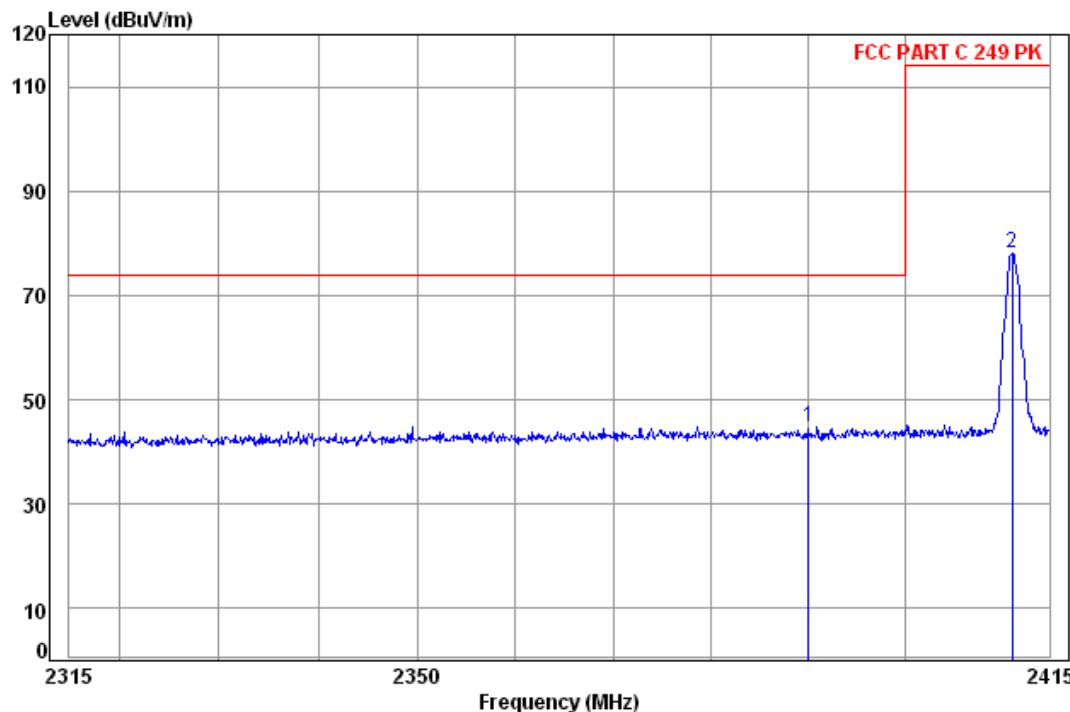Data: 286



Site : chamber

Condition: FCC PART C 249 PK 3m Horizontal


Job No: : 1014CR

Mode: : 2411 Band edge

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	pp	2390.00	4.90	32.35	38.46	45.94	44.73	74.00 -29.27
2		2411.12	4.93	32.41	38.46	79.42	78.30	114.00 -35.70

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------

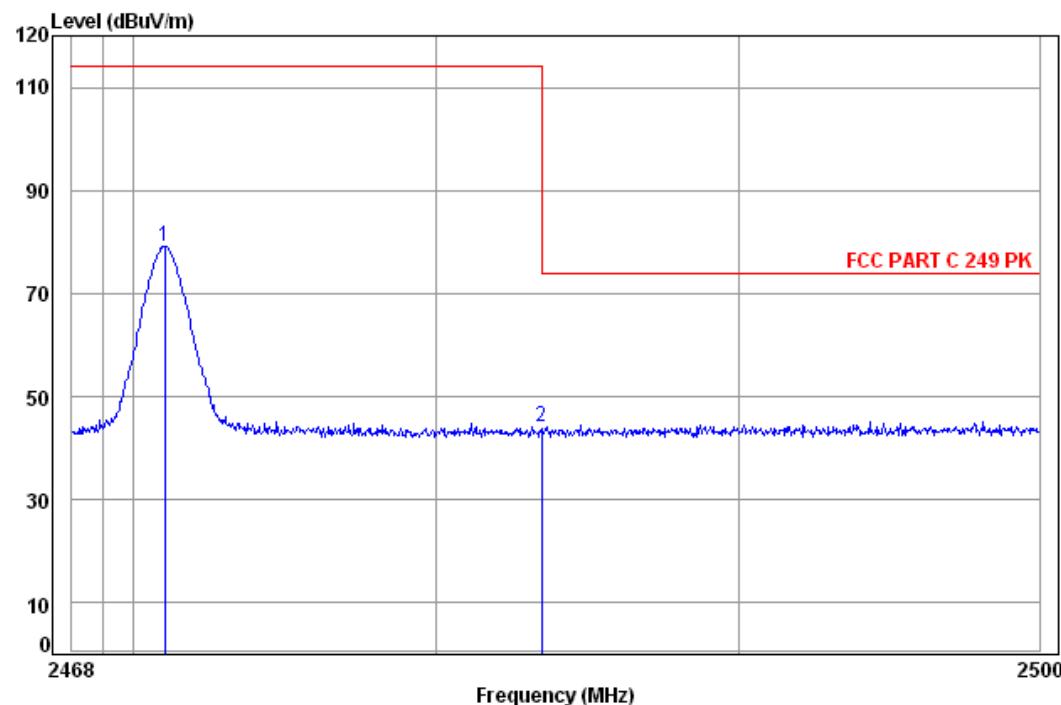Data: 284



Site : chamber

Condition: FCC PART C 249 PK 3m Vertical


Job No: : 1014CR

Mode: : 2471 Band edge

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	2471.06	5.01	32.44	38.46	80.21	79.20	114.00	-34.80
2 pp	2483.50	5.03	32.44	38.47	45.24	44.24	74.00	-29.76

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Horizontal
------------	--------------	---------------	---------	---------	------	------------

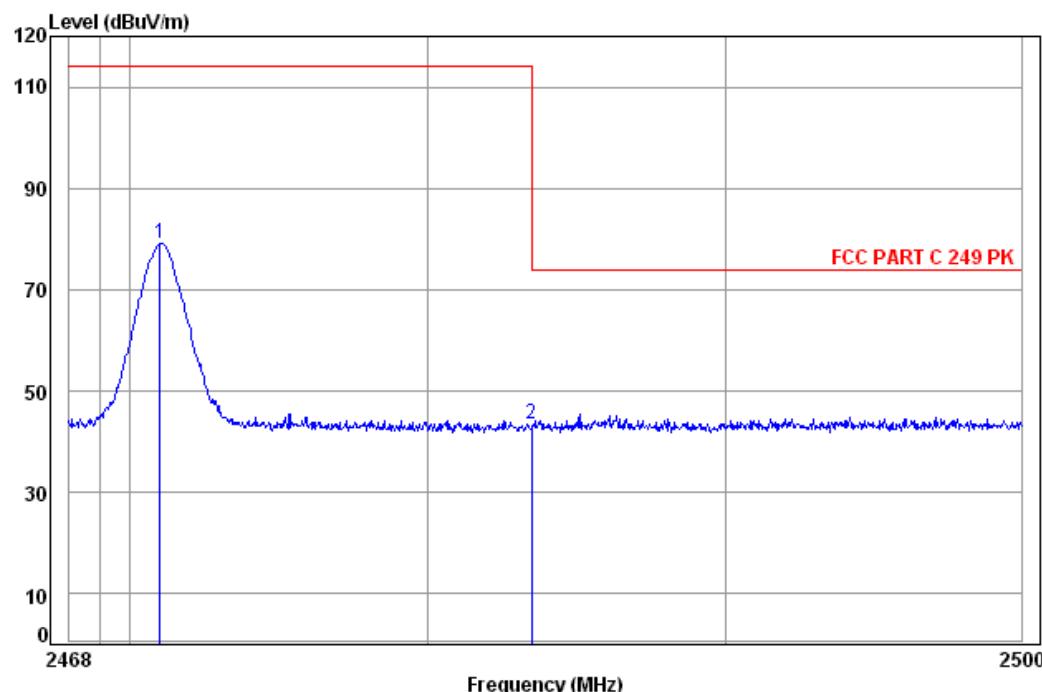Data: 285



Site : chamber

Condition: FCC PART C 249 PK 3m Horizontal

Job No: : 1014CR

Mode: : 2471 Band edge

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2471.02	5.01	32.44	38.46	80.22	79.21	114.00	-34.79
2 pp	2483.50	5.03	32.44	38.47	44.35	43.35	74.00	-30.65

Note:

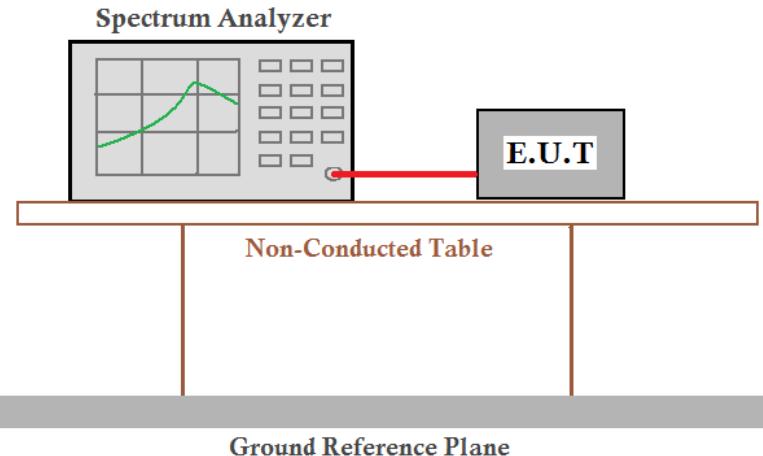
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB. So, only the peak measurements were shown in the report.



6.4 20dB Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2009
Test Setup:	
Limit:	N/A
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


Measurement Data

Test Channel	20dB bandwidth (MHz)	Results
Lowest	0.535	Pass
Middle	0.534	Pass
Highest	0.535	Pass

Test plot as follows:


Test channel:

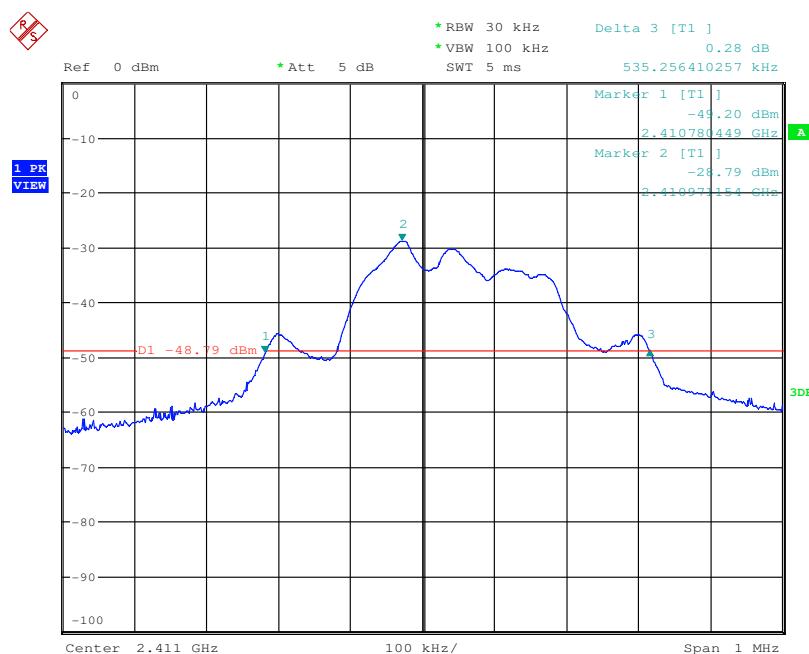Lowest




Test channel:

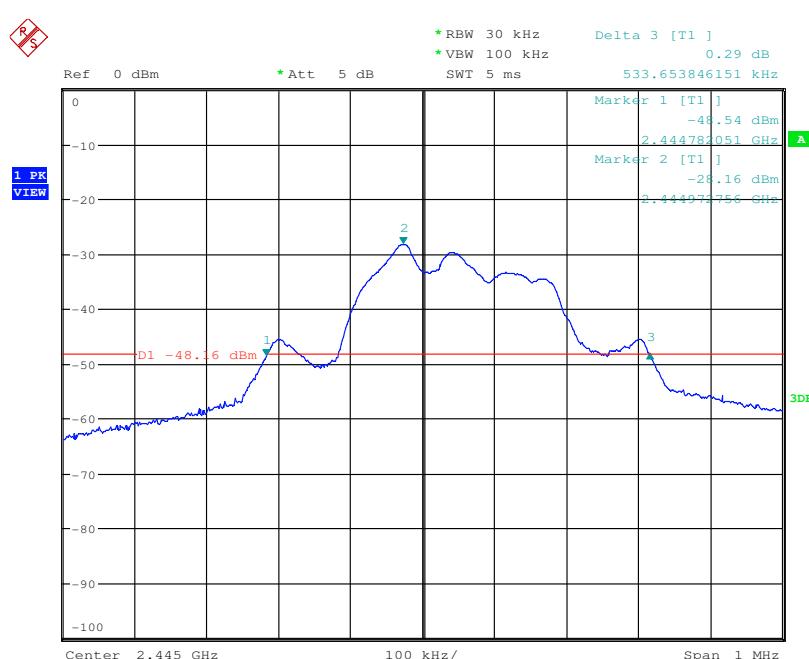Middle




Test channel:	Highest
---------------	---------

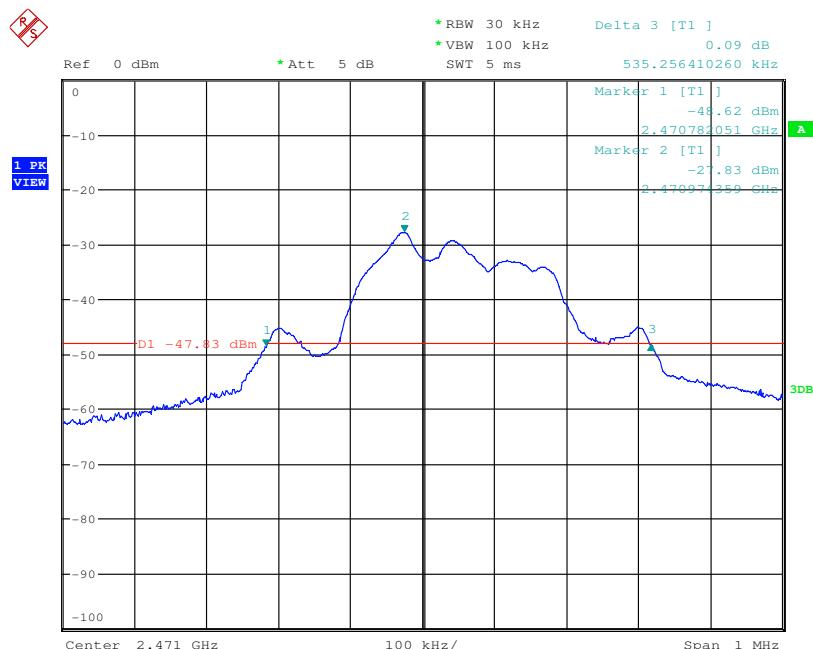

7 Photographs - EUT Test Setup

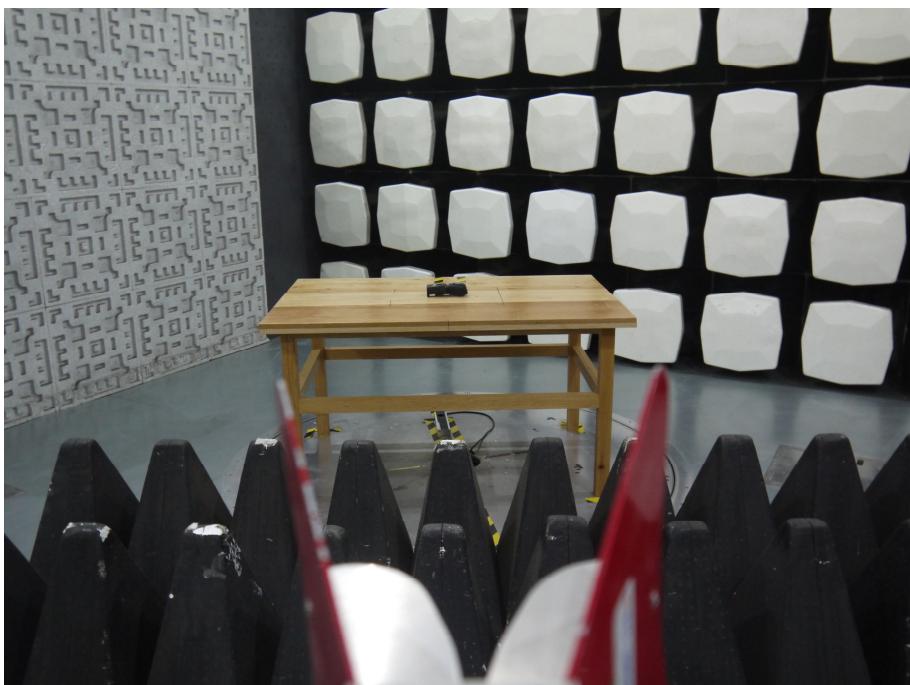7.1 Radiated Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1503001014CR.