

Test Report

Report Number:

F161065E2

Equipment under Test (EUT):

BT7000

Applicant:

Dräger Safety AG & Co. KGaA

Manufacturer:

Dräger Safety AG & Co. KGaA



Deutsche
Akkreditierungsstelle
D-PL-17186-01-01
D-PL-17186-01-02
D-PL-17186-01-03

References

- [1] **ANSI C63.10: 2013** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- [2] **FCC CFR 47 Part 15** Radio Frequency Devices
- [3] **RSS-210 Issue 8 (December 2010)** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
- [4] **RSS-Gen Issue 4 (November 2014)** General Requirements for Compliance of Radio Apparatus

Test result

The requirements of the tests performed as shown in the overview (chapter 4 of this test report) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Test engineer:	Thomas KÜHN		07/15/2016
	Name	Signature	Date
Authorized reviewer:	Bernd STEINER		07/15/2016
	Name	Signature	Date

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

This test report is valid in hardcopy form as well as in electronic form.

Contents:	Page
1 Identification	4
1.1 Applicant	4
1.2 Manufacturer	4
1.3 Test Laboratory	4
1.4 EUT (Equipment Under Test)	5
1.5 Technical data of equipment	5
1.6 Dates	5
2 Operational states and test setup	6
3 Additional information	7
4 Overview	7
5 Results	8
5.1 Radiated emissions	8
5.1.1 Method of measurement (radiated emissions)	8
5.1.2 Results preliminary measurement 9 kHz to 1 GHz	15
5.1.3 Result final measurement from 9 kHz to 30 MHz	18
5.1.4 Result final measurement from 30 MHz to 1 GHz	19
5.2 99 % bandwidth	20
5.2.1 Method of measurement	20
5.2.2 Test results	21
6 Test equipment	22
7 Report history	23
8 List of annexes	23

1 Identification

1.1 Applicant

Name:	Dräger Safety AG & Co. KGaA
Address:	Revalstr. 1 23560 Lübeck
Country:	Germany
Name for contact purposes:	Mr. Lutz RÜFFERT
Phone:	+49 451 – 882 – 16 23
Fax:	+49 451 – 882 – 71 623
eMail Address:	lutz.rueffert@draeger.com
Applicant represented during the test by the following person:	-

1.2 Manufacturer

Name:	Dräger Safety AG & Co. KGaA
Address:	Revalstr. 1 23560 Lübeck
Country:	Germany
Name for contact purposes:	Mr. Lutz RÜFFERT
Phone:	+49 451 – 882 – 16 23
Fax:	+49 451 – 882 – 71 623
eMail Address:	lutz.rueffert@draeger.com
Applicant represented during the test by the following person:	-

1.3 Test Laboratory

The tests were carried out at:

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Germany

accredited by Deutsche Akkreditierungsstelle GmbH (DAkkS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-02, FCC Test Firm Accreditation with the registration number 469623, designation number DE0004 and Industry Canada Test site registration SITE# IC3469A-1.

1.4 EUT (Equipment Under Test)

Type object: *	BT ACC for FPS COM 7000	
Model name / HVIN: *	BT7000	
Serial No.:	None	
FCC ID: *	X6O-BT7000	
IC: *	5895F-BT7000	
PCB identifier:	8323271	
Hardware version: *	8323271-05	
Software version: *	V1.2 (R61451)	
Lowest internal frequency: *	127.5 kHz	
Highest internal frequency: *	2 MHz	

1.5 Technical data of equipment

Channel 1	RX:	127.5 kHz	TX:	127.5 kHz		
Rated RF output power: *	<20 mW					
Antenna type: *	SMD wire antenna with 13.75 mm ²					
Number of channels: *	1					
Antenna connector: *	None					
Modulation: *	ON/OFF Keying (OOK→ 100% square wave amplitude modulation)					
Data rate: *	1.212 kbit/s					
Supply Voltage: *	U _{Nom} =	3.75 V DC	U _{Min} =	3.64 V DC	U _{Max} =	3.86 V DC
Temperature range: *	-35 °C to +60 °C					
Ancillary used for test:						

*: declared by the applicant.

Ports / Connectors			
Identification	Connector		Length during test
	EUT	Ancillary	
System connector (only DC lines used)	Samtec connector TFM-110-02-L~	-	2.0 m
-	-	-	-

1.6 Dates

Date of receipt of test sample:	06/23/2016
Start of test:	07/06/2016
End of test:	07/11/2016

2 Operational states and test setup

The EUT is a Bluetooth plug in unit for the FPS COM 7000 respirator mask. It will be powered by the battery powered FPS COM 7000. The 127.5 kHz part of the EUT is used for the exchange of pairing parameters for the Bluetooth connection. In normal operation mode it will be active for app. 6 s only.

Because the EUT is intended to be used in combination with a body worn equipment, the measurements were carried out with the EUT positioned in three orthogonal directions. These positions were defined as follows:

Positon 1: EUT standing on the small side, connector shows sideways.

Positon 2: EUT lying flat on its large side.


Positon 3: EUT standing on the small side, connector shows upwards to the ceiling.

For details of these positions refer also the photographs in annex A of this test report.

All measurements were carried out with an unmodified sample operating in a test mode. The test mode was entered with the help of a programing adapter and a laptop PC with a terminal program. With this test mode the EUT transmits continuously with normal modulation. The programing adapter was removed after activating the test mode.

During the tests the EUT was powered by an external power supply with 3.75 V DC, connected to the EUT with the help of an adapter plug, which allows the connection to the programing adapter also. This passive adapter plug was supplied by the applicant.

Physical boundaries of the Equipment Under Test

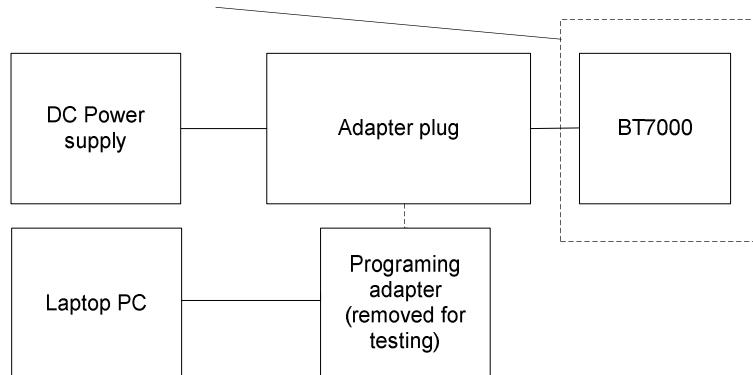

3 Additional information

The EUT uses an already certified Bluetooth module, which is not object of this test report. This test report shows the results of the low frequency transmitter part of the EUT only.

The EUT was not labeled as required by FCC / IC.

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS-Gen, Issue 4 [4] and RSS 210, Issue 8 [3]	Status	Refer page
Conducted emissions on supply line	0.15 – 30	15.207	8.8 [4]	Not applicable *	-
Radiated emissions	0.009 – 1.000	15.205 15.209	8.9 [4] 2.5 [3]	Passed	8 et seq.
99 % bandwidth	0.1275	-	6.6 [4]	-	19 et seq.
Antenna requirement	-	15.203	-	Passed **	-

*: Not applicable, because the EUT is intended to be used in combination with a battery powered device only.

**: Integrated antenna only, requirement fulfilled.

5 Results

5.1 Radiated emissions

5.1.1 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into six stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 9 kHz to 1 GHz.
- A final measurement carried out on an outdoor test side without reflecting ground plane and a fixed antenna height in the frequency range 9 kHz to 30 MHz.
- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out on an open area test side with reflecting ground plane and various antenna heights in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 5 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 5 GHz.


Preliminary measurement (9 kHz to 30 MHz):

In the first stage a preliminary measurement will be performed in a shielded room with a measuring distance of 3 meters. Table-top devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to [1].

The frequency range 9 kHz to 30 MHz will be monitored with a spectrum analyser while the system and its cables will be manipulated to find out the configuration with the maximum emission levels if applicable. The EMI Receiver will be set to MAX Hold mode. The EUT and the measuring antenna will be rotated around their vertical axis to found the maximum emissions.

The resolution bandwidth of the spectrum analyser will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	10 kHz

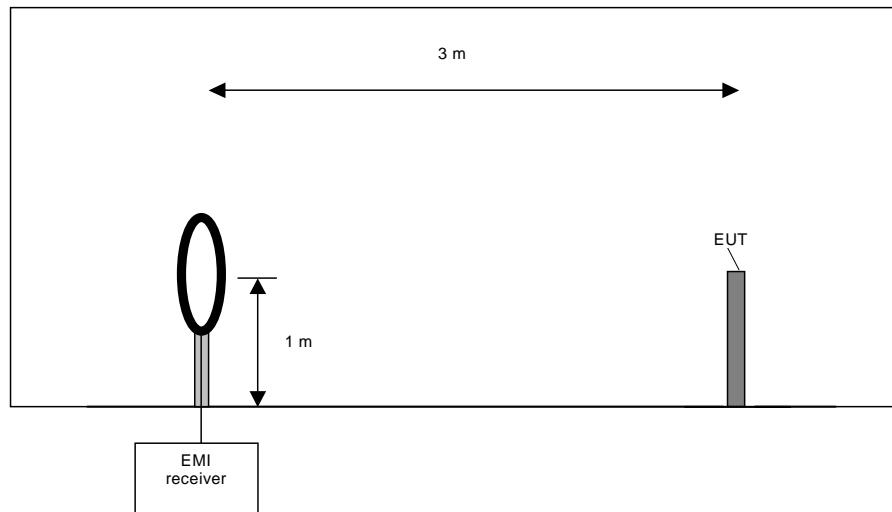

Preliminary measurement procedure:

Prescans were performed in the frequency range 9 kHz to 150 kHz and 150 kHz to 30 MHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
- 2) Manipulate the system cables within the range to produce the maximum level of emission.
- 3) Rotate the EUT by 360 ° to maximize the detected signals.
- 4) Make a hardcopy of the spectrum.
- 5) Measure the frequencies of highest detected emission with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 6) Repeat steps 1) to 5) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
- 7) Rotate the measuring antenna and repeat steps 1) to 5).


Final measurement (9 kHz to 30 MHz):

In the second stage a final measurement will be performed on an open area test site with no conducting ground plane in a measuring distances of 3 m, 10 m and 30 m. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with a EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 kHz to 490 kHz where an average detector will be used according Section 15.209 (d) [2].

On the frequencies, which were detected during the preliminary measurements, the final measurement will be performed while rotating the EUT and the measuring antenna in the range of 0 ° to 360 ° around their vertical axis until the maximum value is found.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
9 kHz to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz

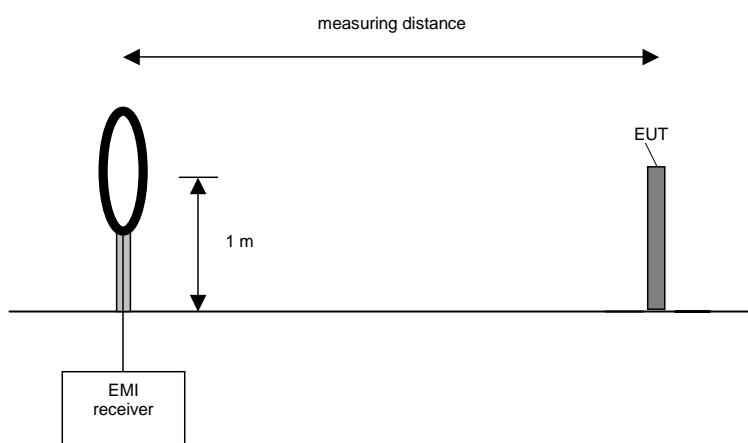

Final measurement procedure:

The following procedure will be used:

- 1) Monitor the frequency range with the measuring antenna at vertical orientation parallel to the EUT at an azimuth of 0 °.
- 2) Rotate the EUT by 360 ° to maximize the detected signals and note the azimuth and orientation.
- 3) Rotate the measuring antenna to find the maximum and note the value.
- 4) Rotate the measuring antenna and repeat steps 1) to 3) until the maximum value is found.
- 5) Repeat steps 1) to 4) with the other orthogonal axes of the EUT (if the EUT is a module and might be used in a handheld equipment application).


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 120 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

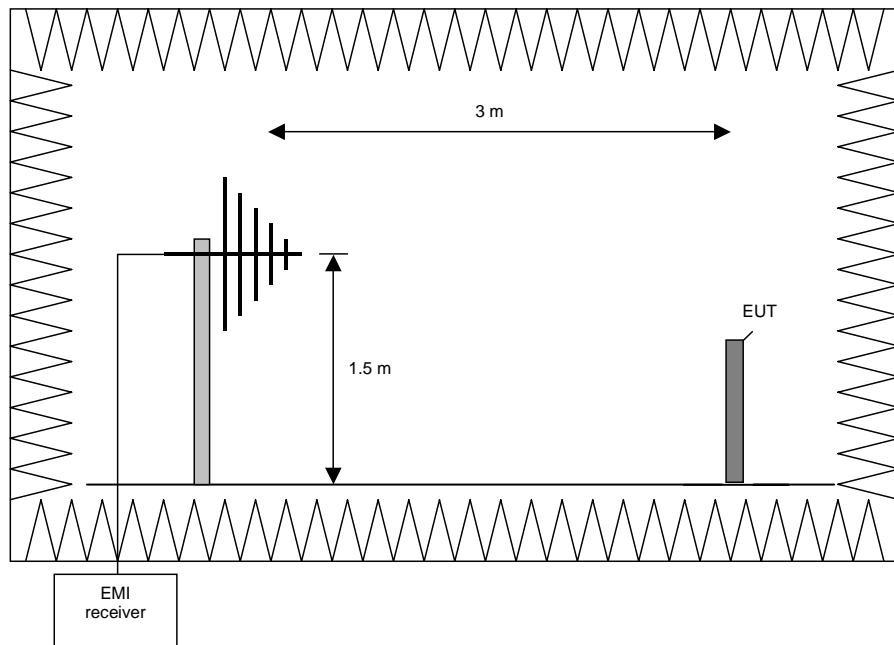

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT if handheld equipment.
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

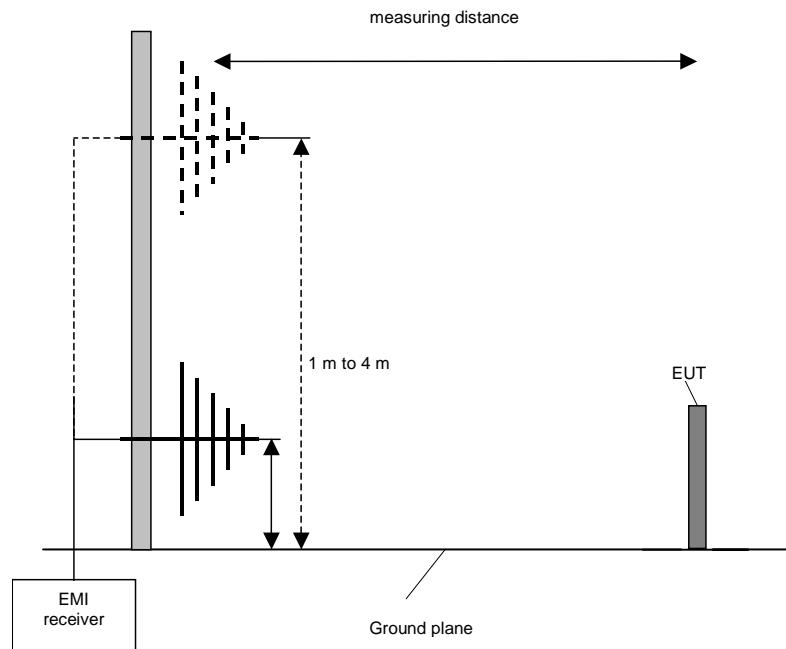

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT if handheld equipment.

Preliminary and final measurement (1 GHz to 110 GHz)


This measurement will be performed in a fully anechoic chamber. Table top devices will set up on a non-conducting turn device on the height of 1.5 m. The set-up of the Equipment under test will be in accordance to [1].

Preliminary measurement (1 GHz to 40 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °. This measurement is repeated after raising the EUT in 30 ° steps according 6.6.5.4 in [1].

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

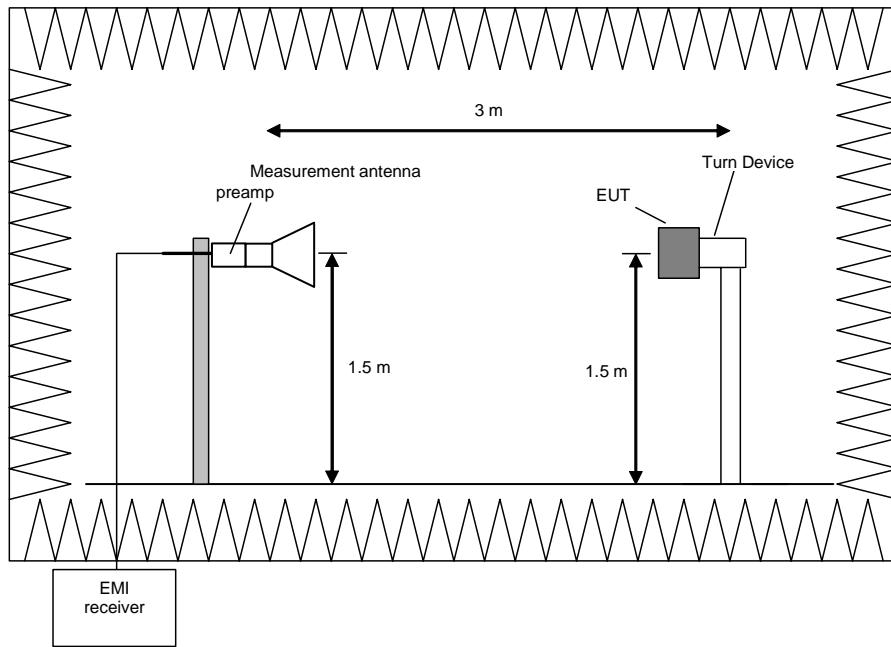

Procedure preliminary measurement:

Prescans were performed in the frequency range 1 to 40 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Rotate the EUT by 360° to maximize the detected signals.
3. Repeat 1) to 2) with the vertical polarisation of the measuring antenna.
4. Make a hardcopy of the spectrum.
5. Repeat 1) to 4) with the EUT raised by an angle of 30° (60°, 90°, 120° and 150°) according to 6.6.5.4 in [1].
6. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
7. The measurement antenna polarisation, with the according EUT position (Turntable and Turn device) which produces the highest emission for each frequency will be used for the final measurement. The six closest values to the applicable limit will be used for the final measurement.

Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed by rotating the turntable through 0 to 360° in the worst-case EUT orientation which was obtained during the preliminary measurements.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

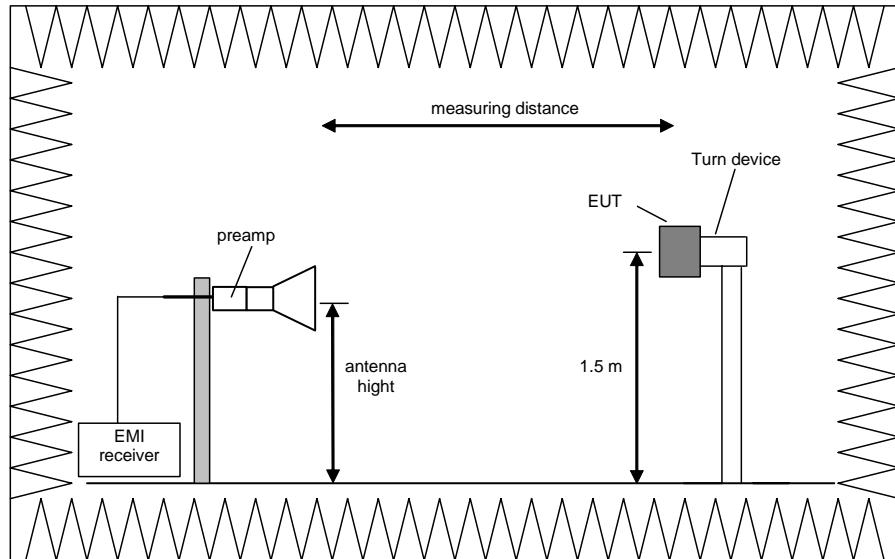

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 110 GHz.

The following procedure will be used:

- 1) Set the turntable and the turn device to obtain the worst-case emission for the first frequency identified in the preliminary measurements.
- 2) Set the measurement antenna polarisation to the orientation with the highest emission for the first frequency identified in the preliminary measurements.
- 3) Set the spectrum analyser to EMI mode with peak and average detector activated.
- 4) Rotate the turntable from 0° to 360° to find the EUT angle that produces the highest emissions.
- 5) Note the highest displayed peak and average values
- 6) Repeat the steps 1) to 5) for each frequency detected during the preliminary measurements.

5.1.2 Results preliminary measurement 9 kHz to 1 GHz

Ambient temperature	22 °C	Relative humidity	49 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table.


Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.



Test record: The test was carried out in TX-test mode of the EUT (refer also clause 2 of this test report). All results are shown in the following.

Power supply: During this test the EUT was powered with 3.75 V DC by an external power supply.

Frequency range: According to [2] from 9 kHz to 1 GHz.

161065_200.wmf: Spurious emissions from 9 kHz to 150 kHz


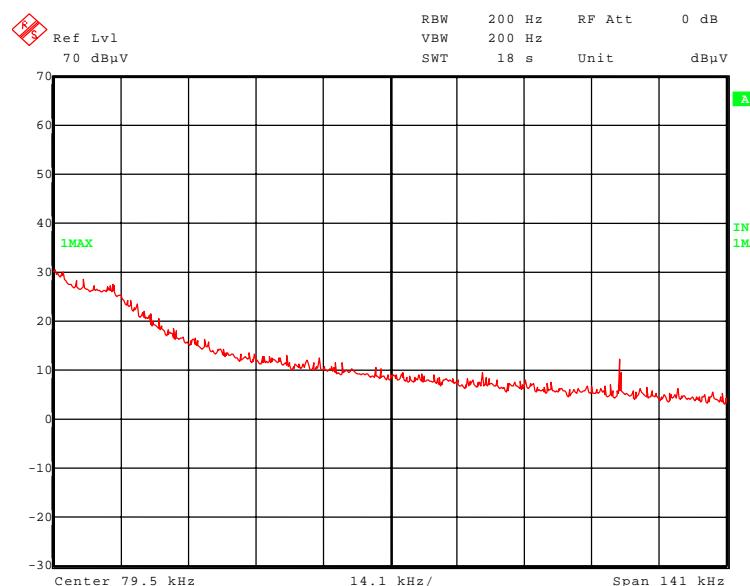


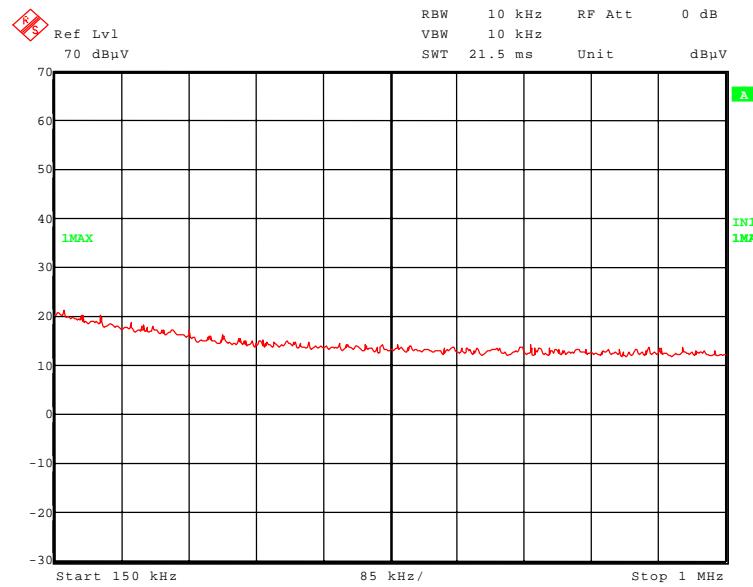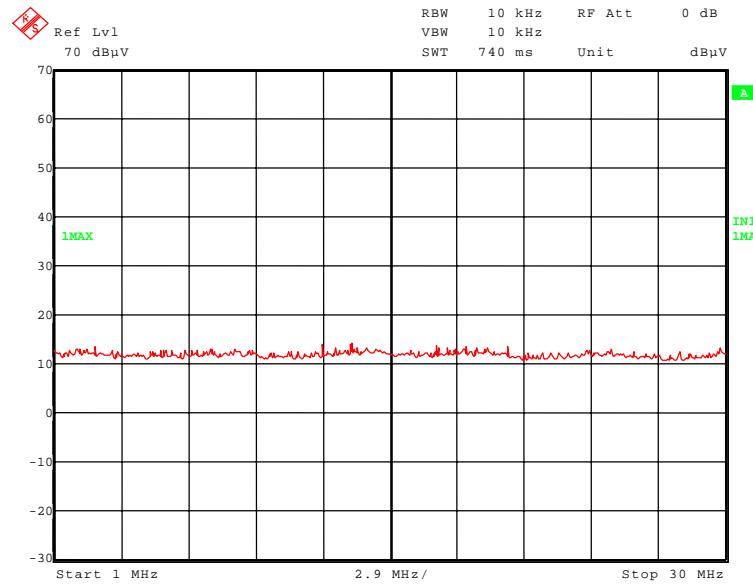161065_201.wmf: Spurious emissions from 150 kHz to 1 MHz

161065_202.wmf: Spurious emissions from 1 MHz to 30 MHz


The following emission was found according to [2] and [3].

127.522 kHz.

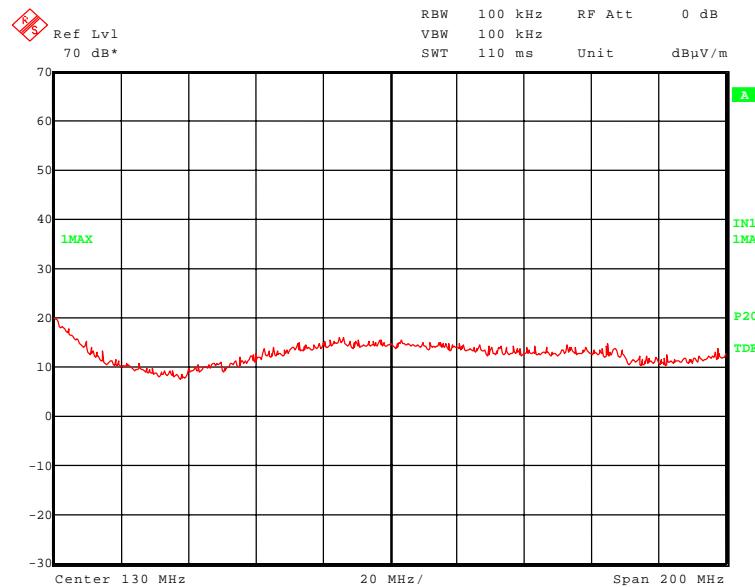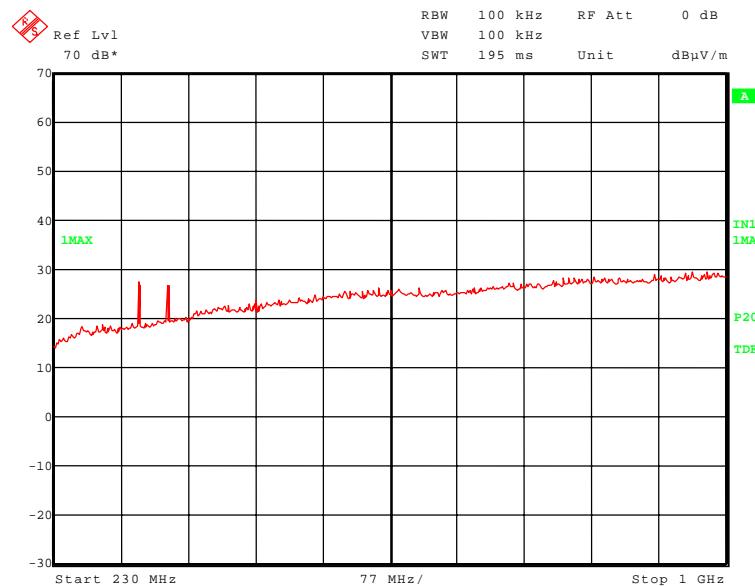This frequency has to be measured on the outdoor test site. The result is presented in the following.

161065_204.wmf: Spurious emissions from 30 MHz to 230 MHz

161065_205.wmf: Spurious emissions from 230 MHz to 1 GHz


The following frequency was found emission test outside restricted bands during the preliminary radiated:

- 360.276 MHz.

The following frequency was found inside the restricted bands during the preliminary radiated.

- 328.508 MHz.

These frequencies have to be measured on the open area test site. The results were presented in the following.

Test equipment used (see chapter 6)

30 – 35, 44, 51, 52, 55

5.1.3 Result final measurement from 9 kHz to 30 MHz

Ambient temperature	11 °C	Relative humidity	73 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m and 10 m.

Cable guide: The cable of the EUT was fixed on the non-conducting support. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: The test was carried out in TX-test mode of the EUT (refer also clause 2 of this test report). All results are shown in the following.

Power supply: During this test the EUT was powered with 3.75 V DC by an external power supply.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{antenna factor [dB/m]}$$

Results with measuring distance of 3 m						
Frequency MHz	Result dB μ V/m	Limit ²⁾ dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor ¹⁾ dB/m
0.1275	32.0	105.5	73.5	AV	12.0	20.0
Results with measuring distance of 10 m						
Frequency MHz	Result dB μ V/m	Limit ²⁾ dB μ V/m	Margin dB	Detector	Readings dB μ V	Antenna factor ¹⁾ dB/m
0.1275	Signal was below the noise floor of the measuring system at 10 m distance					
	Measurement uncertainty: +2.2 dB / -3.6 dB					

¹⁾: Cable loss included

²⁾: Limits according to [2] and [3] extrapolated with a factor of 40dB/decade according to [2]

Test: Passed

Test equipment used for the test:

31, 51 – 53, 55

5.1.4 Result final measurement from 30 MHz to 1 GHz

Ambient temperature	21 °C	Relative humidity	65 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was setup on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Test record: The test was carried out in TX-test mode of the EUT (refer also clause 2 of this test report). All results are shown in the following.

Power supply: During this test the EUT was powered with 3.75 V DC by an external power supply.

Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 5 seconds.

Result measured with the quasi-peak detector:

Spurious emissions inside restricted bands										
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.	Pos.
328.508	18.8	46.0	27.2	3.2	13.7	1.9	102	332	Hor.	2
Spurious emissions outside restricted bands										
360.276	24.2	46.0	21.8	7.8	14.3	2.1	106	232	Hor.	3
Measurement uncertainty				+2.2 dB / -3.6 dB						


Test: Passed

Test equipment used (see chapter 6):

14 – 21, 52, 55

5.2 99 % bandwidth

5.2.1 Method of measurement

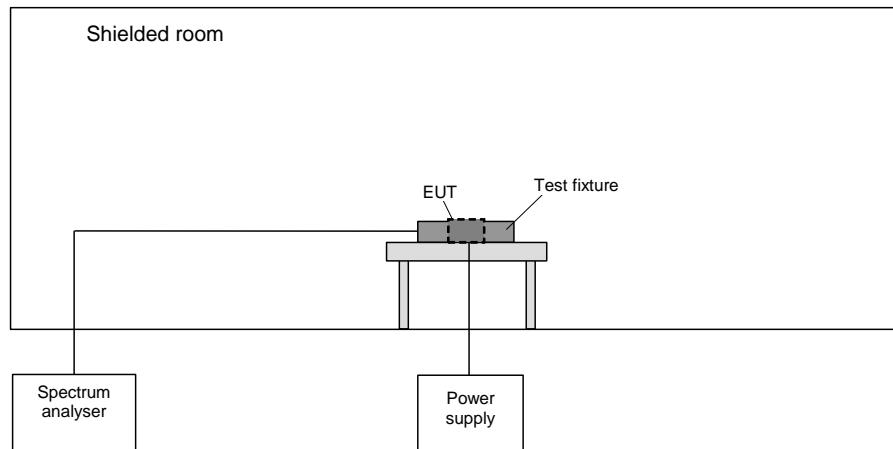

The following procedure will be used for the occupied bandwidth measurement according to [1]:

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.


5.2.2 Test results

Ambient temperature:	21 °C	Relative humidity:	62 %
----------------------	-------	--------------------	------

Test record: The test was carried out in TX-test mode of the EUT (refer also clause 2 of this test report). All results are shown in the following.

Power supply: During this test the EUT was powered with 3.75 V DC by an external power supply.

161065_207.wmf: 99 % bandwidth:

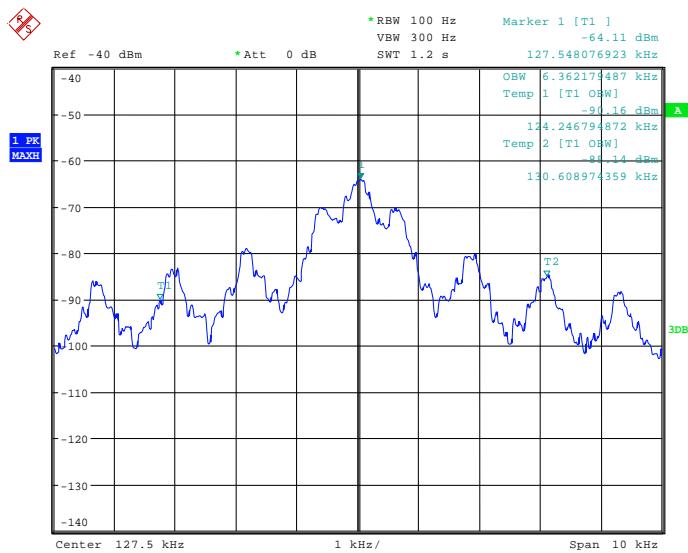

F_L	F_U	BW ($F_U - F_L$)
124.247 kHz	130.609 kHz	6.362 kHz
Measurement uncertainty		$< 1 \cdot 10^{-7}$

Test equipment used (see chapter 6)

43, 52, 54, 55

6 Test equipment

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
15	Measuring receiver	ESIB7	Rohde & Schwarz	100304	480521	02/18/2016	02/2018
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 D	Chase	25761	480894	09/18/2014	09/2017
20	EMI-Software	EMC 32	Rohde & Schwarz	-	481022	-	-
21	6 dB attenuator	R412706000	Radiall	9833	410082	Annual verification	
30	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	02/16/2016	02/2017
32	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2688	480328	04/14/2014	04/2017
43	Spectrum analyser	FSU46	Rohde & Schwarz	200125	480956	02/17/2016	02/2017
44	RF-cable No. 36	Sucoflex 106B	Suhner	0522/6B	480571	Weekly verification (system cal.)	
51	Loop antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	02/29/2016	02/2018
52	Power supply	TOE 8752	Toellner	31566	480010	-	-
53	Outdoor test site	-	Phoenix Testlab	-	480293	-	-
54	Loop Antenna Ø = 110 mm	-	Phoenix Test-Lab	-	410084	Weekly verification (system cal.)	
55	Multimeter	971A	Hewlett Packard	JP39009358	480721	01/19/2016	01/2017

7 Report history

Report Number	Date	Comment
F161065E2	07/15/2016	Document created
-	-	-

8 List of annexes

Annex A Test setup photos 7 pages

161065_1b.jpg: BT7000, test setup fully anechoic chamber (position 1)
 161065_1a.jpg: BT7000, test setup fully anechoic chamber (position 2)
 161065_1c.jpg: BT7000, test setup fully anechoic chamber (position 3)
 161065_1d.jpg: BT7000, test setup fully anechoic chamber
 161065_1e.jpg: BT7000, test setup fully anechoic chamber
 161065_1g.jpg: BT7000, test setup outdoor test site
 161065_1i.jpg: BT7000, test setup open area test site

Annex B External photographs 3 pages

161065_101.jpg: BT7000, 3D-view 1
 161065_103.jpg: BT7000, 3D-view 2
 161065_104.jpg: BT7000, detail view to connector

Annex C Internal photographs 4 pages

161065_105.jpg: BT7000, internal view
 161065_106.jpg: BT7000, PCB, top view
 161065_107.jpg: BT7000, PCB, bottom view
 161065_108.jpg: BT7000, PCB, bottom view, Bluetooth module removed