



System Performance Check Data (850MHz Head)

Date of measurement: 30/8/2010

Area Scan: 7 x 7 x 1

dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm dy=20mm dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptive 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	CW

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibrated: 06/17/2010
Network Analyzer	Agilent(E5071B, MY42301382)	Calibrated: 08/07/2010
Voltmeter	Keithley (2000, SN:1015843)	Calibrated: 05/01/2010
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibrated: 08/07/2010
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibrated: 07/29/2010
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibrated: 07/29/2010
Probe	Antenna (SN:SN_1109_EP_100)	Calibrated: 05/05/2011
DIPOLE 835	Antenna (DIPI32,SN 48/05)	Calibrated: 12/10/2010
Phantom	Antenna (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antenna	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A



C. SAR Measurement Results


Frequency (MHz)	835.000024
Relative permittivity (real part)	41.417999
Relative permittivity (imaginary part)	20.020350
Conductivity (S/m)	0.930279
Variation (%)	-0.470000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:1

SURFACE SAR

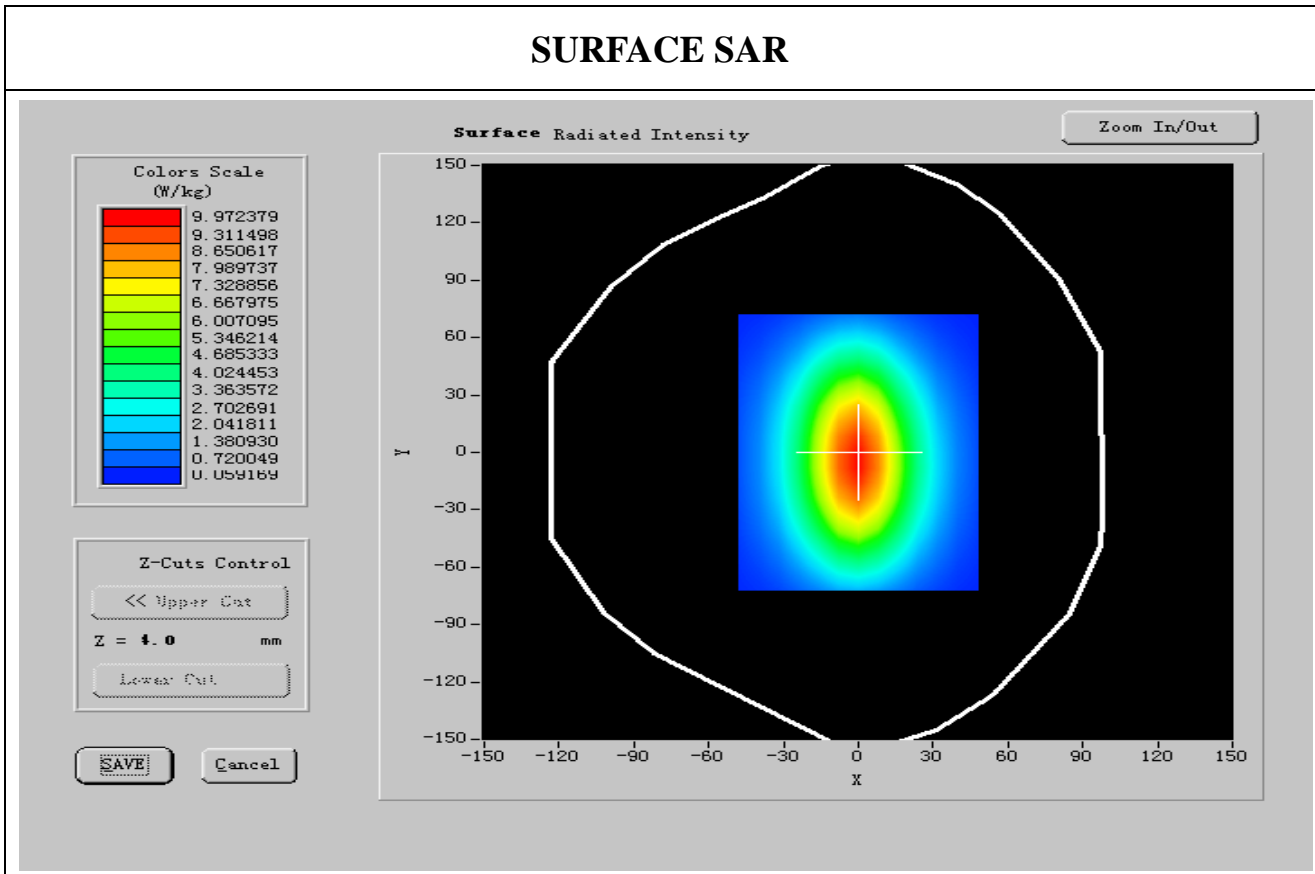



VOLUME SAR

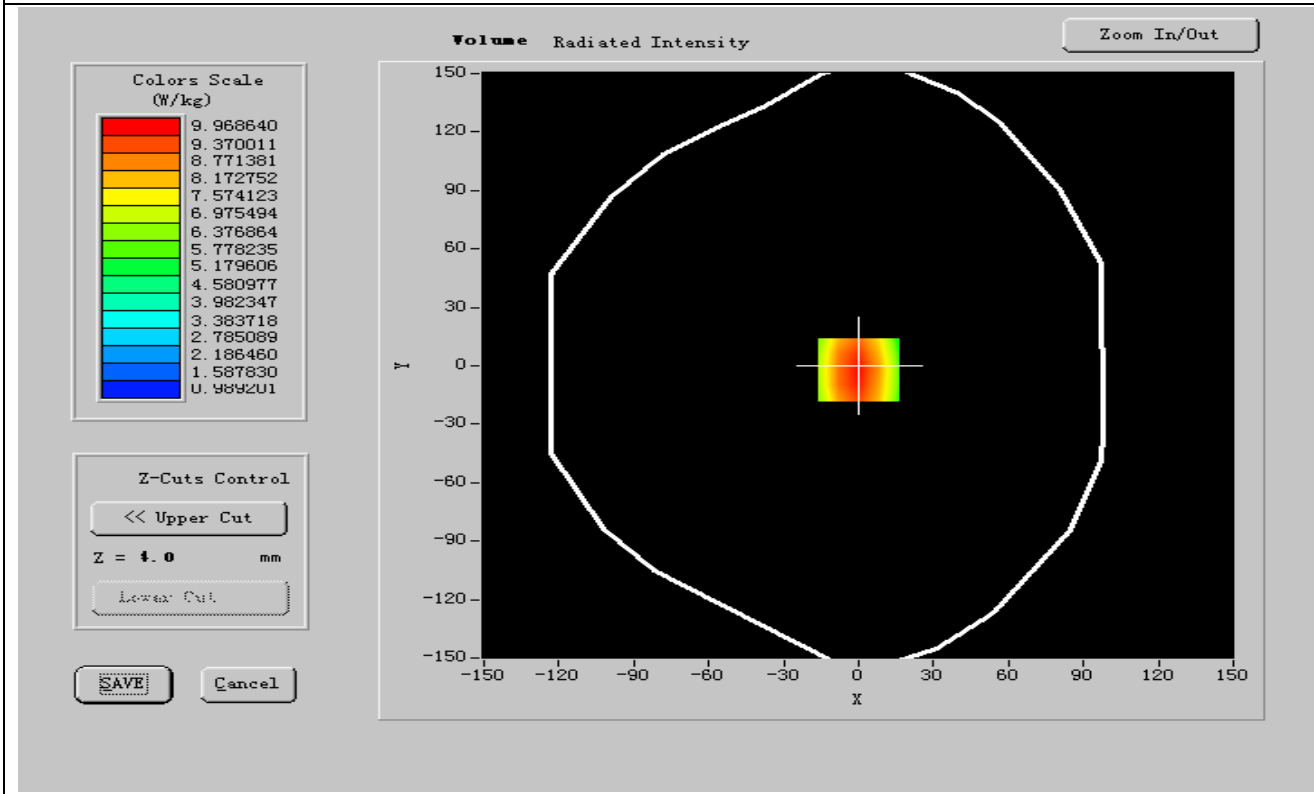


Maximum location: X=0.00, Y=-5.00

SAR 10g (W/Kg)	6.377661
SAR 1g (W/Kg)	9.535156

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -2)

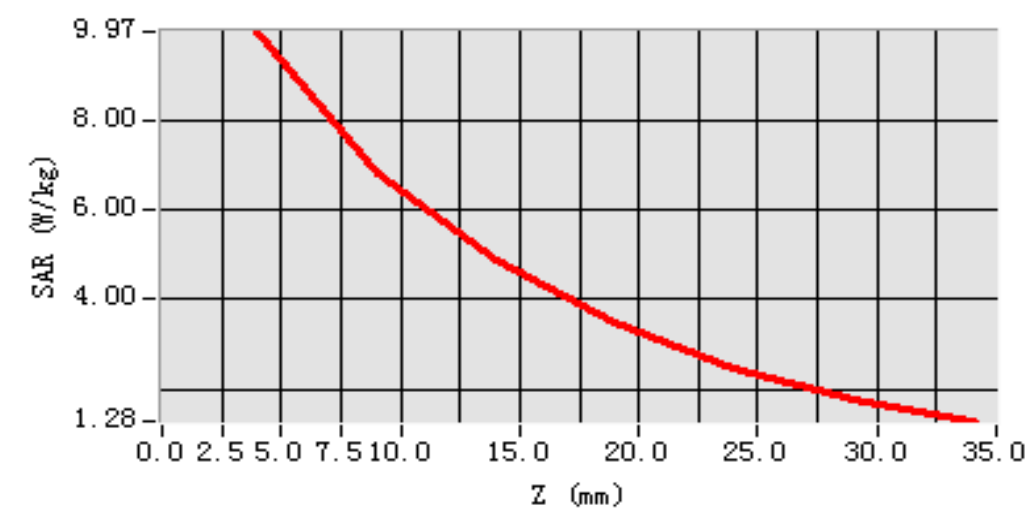



System Performance Check Data (850MHz Body)

Date of measurement: 30/8/2010

Area Scan: 7 x 7 x 1

dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm dy=20mm dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptive 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	CW

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibrated: 06/17/2010
Network Analyzer	Agilent(E5071B, MY42301382)	Calibrated: 08/07/2010
Voltmeter	Keithley (2000, SN:1015843)	Calibrated: 05/01/2010
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibrated: 08/07/2010
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibrated: 07/29/2010
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibrated: 07/29/2010
Probe	Antenna (SN:SN_1109_EP_100)	Calibrated: 05/05/2011
DIPOLE 835	Antenna (DIPI32,SN 48/05)	Calibrated: 12/10/2010
Phantom	Antenna (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antenna	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A



C. SAR Measurement Results


Frequency (MHz)	835.000024
Relative permittivity (real part)	57.501999
Relative permittivity (imaginary part)	21.866249
Conductivity (S/m)	1.016052
Variation (%)	-0.740000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77
Crest factor:	1:1

SURFACE SAR

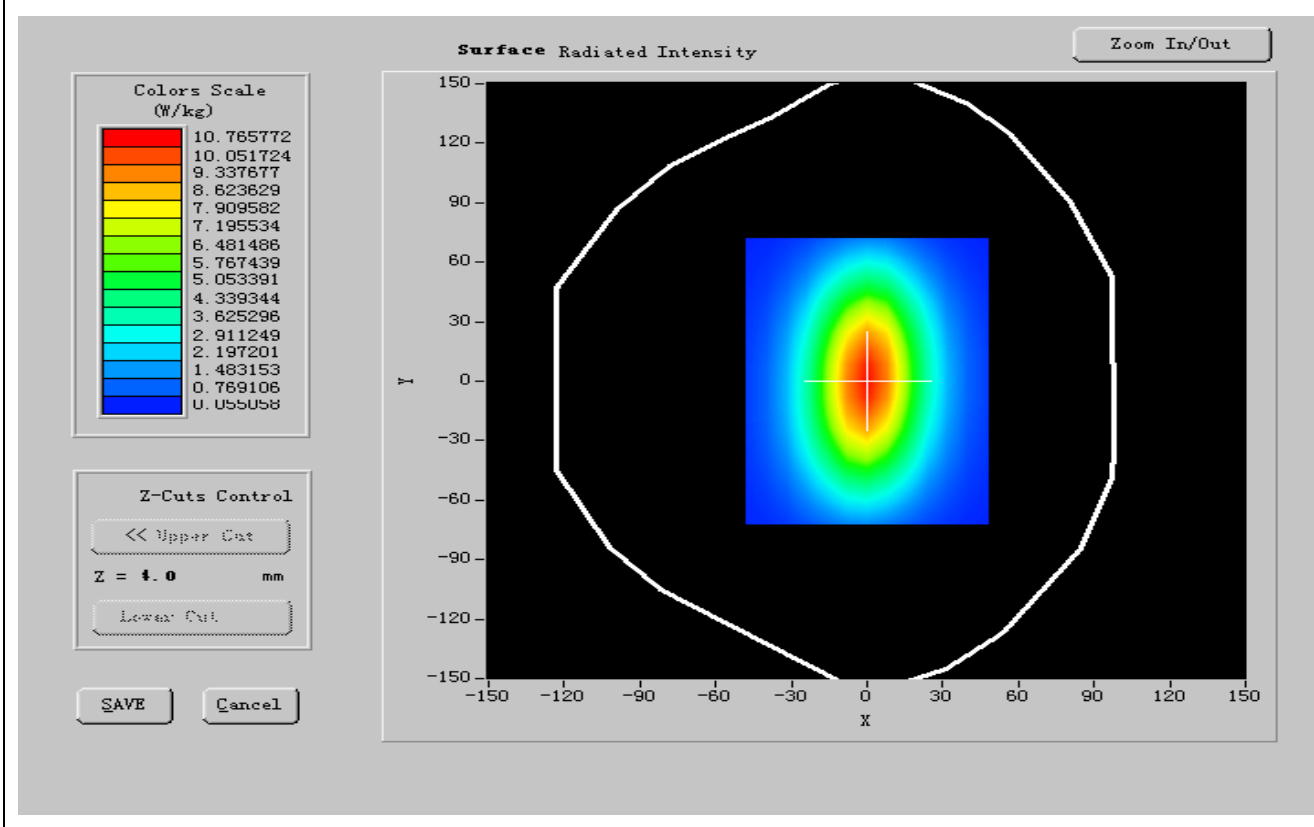



VOLUME SAR

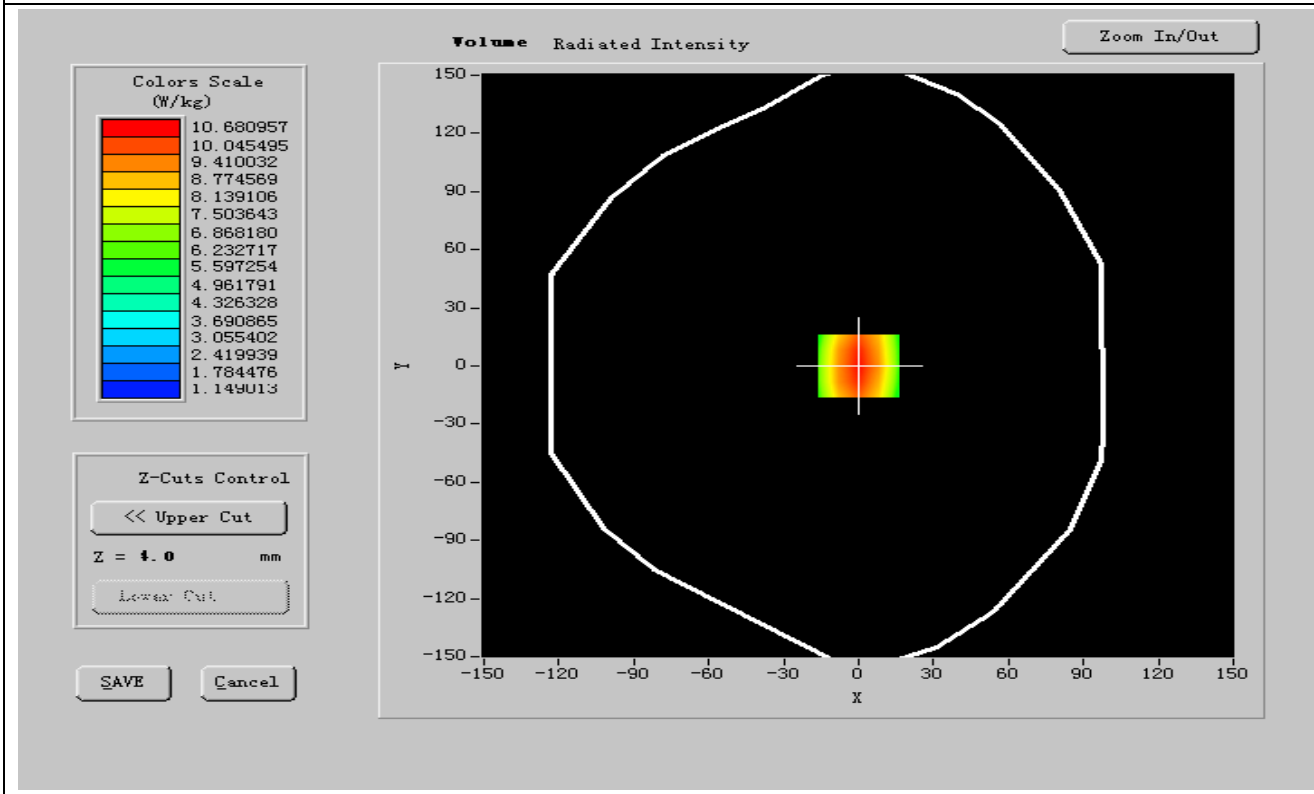


Maximum location: X=0.00, Y=-5.00

SAR 10g (W/Kg)	6.853908
SAR 1g (W/Kg)	10.170830

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = 0)

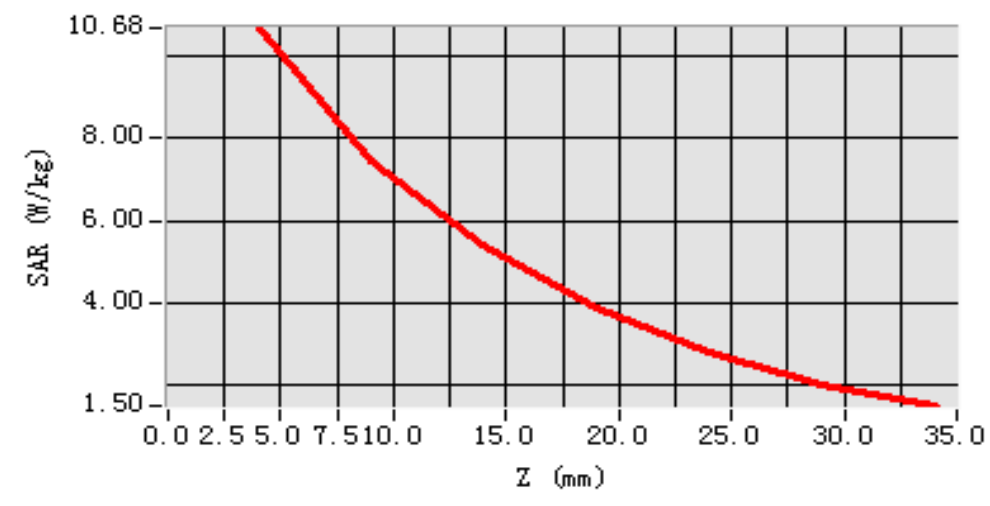



System Performance Check Data (1900MHz Head)

Date of measurement: 30/8/2010

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptive 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	CW

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibrated: 06/17/2010
Network Analyzer	Agilent(E5071B, MY42301382)	Calibrated: 08/07/2010
Voltmeter	Keithley (2000, SN:1015843)	Calibrated: 05/01/2010
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibrated: 08/07/2010
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibrated: 07/29/2010
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibrated: 07/29/2010
Probe	Antennessa (SN:SN_1109_EP_100)	Calibrated: 05/05/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibrated: 12/10/2010
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A



C. SAR Measurement Results


Frequency (MHz)	1950.000000
Relative permittivity (real part)	40.306999
Relative permittivity (imaginary part)	13.506150
Conductivity (S/m)	1.410642
Variation (%)	-0.460000
Ambient Temperature	21 °C
Liquid Temperature	20 °C
ConvF	41.91, 43.15, 56.44
Crest factor	1:1

SURFACE SAR

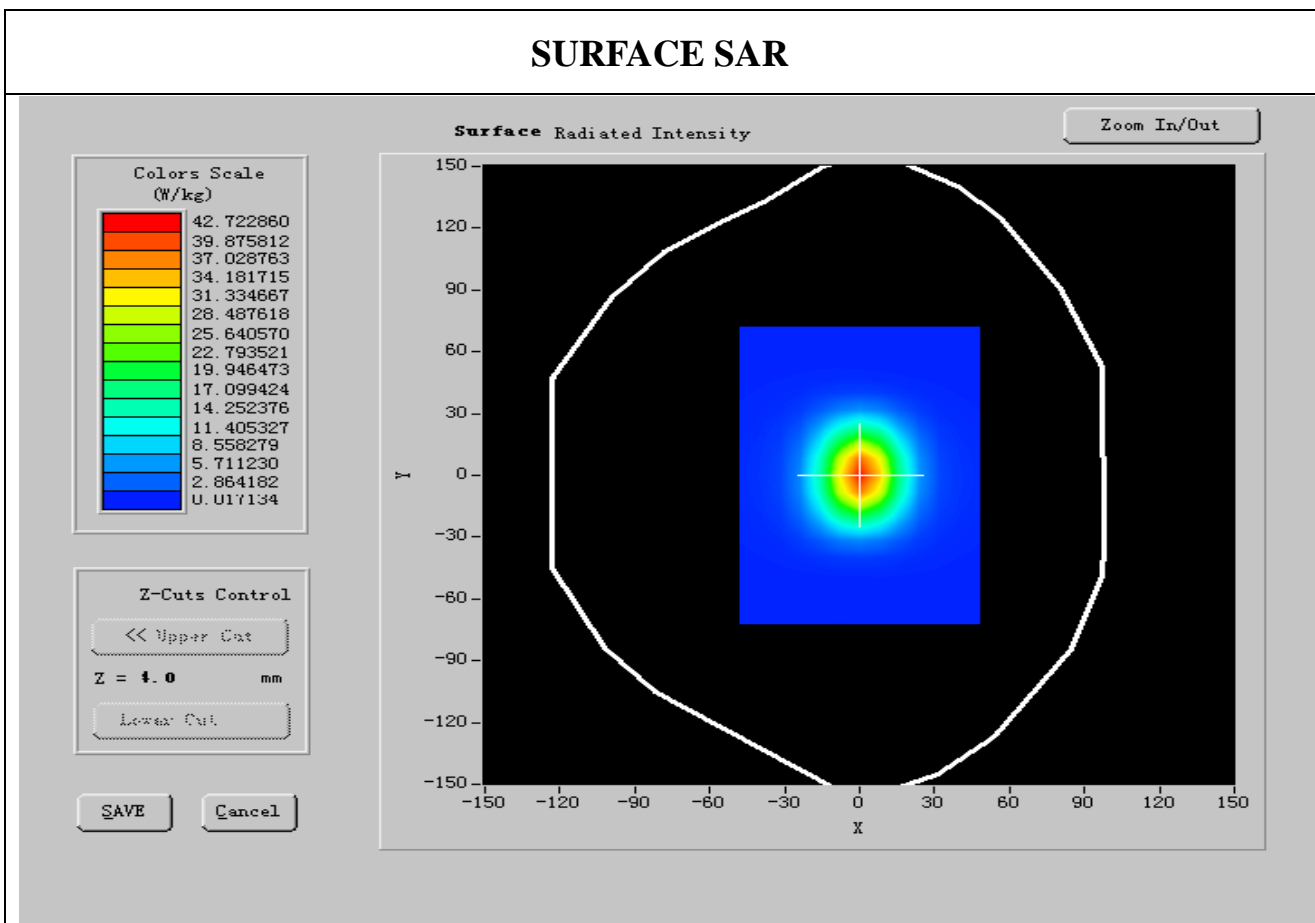



VOLUME SAR

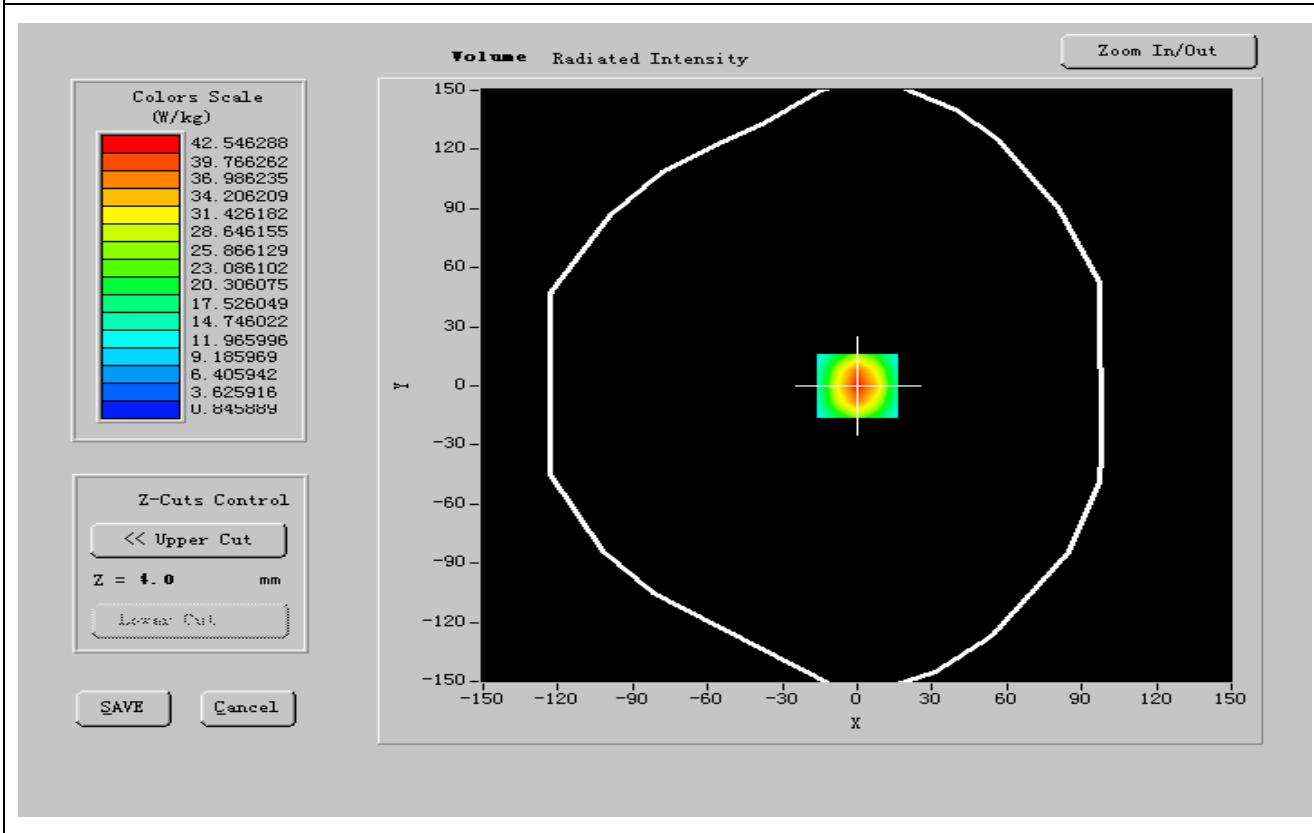


Maximum location: X=0.00, Y=-5.00

SAR 10g (W/Kg)	21.123966
SAR 1g (W/Kg)	39.374130

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = 0)

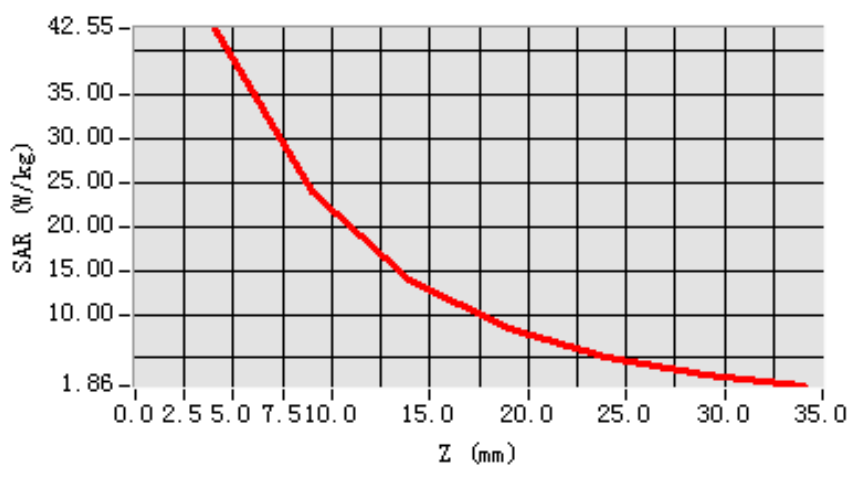



System Performance Check Data (1900MHz Body)

Date of measurement: 30/8/2010

Area Scan: 7 x 7 x 1

dx=15mm dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm dy=5mm dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm dy=20mm dz=5mm

A. Experimental conditions.

Phantom File	surf_sam_plan.txt, Adaptive 2 max
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	CW

B. Instrumentations.


PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibrated: 06/17/2010
Network Analyzer	Agilent(E5071B, MY42301382)	Calibrated: 08/07/2010
Voltmeter	Keithley (2000, SN:1015843)	Calibrated: 05/01/2010
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibrated: 08/07/2010
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibrated: 07/29/2010
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibrated: 07/29/2010
Probe	Antenna (SN:SN_1109_EP_100)	Calibrated: 05/05/2011
DIPOLE 1900	Antenna (DIPI36, SN 48/05)	Calibrated: 12/10/2010
Phantom	Antenna (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antenna	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A



C. SAR Measurement Results


Frequency (MHz)	1950.000000
Relative permittivity (real part)	52.143660
Relative permittivity (imaginary part)	13.691050
Conductivity (S/m)	1.4431460
Variation (%)	-0.450000
Ambient Temperature	21 °C
Liquid Temperature	20 °C
ConvF	41.01, 42.41, 55.65
Crest factor	1:1

SURFACE SAR

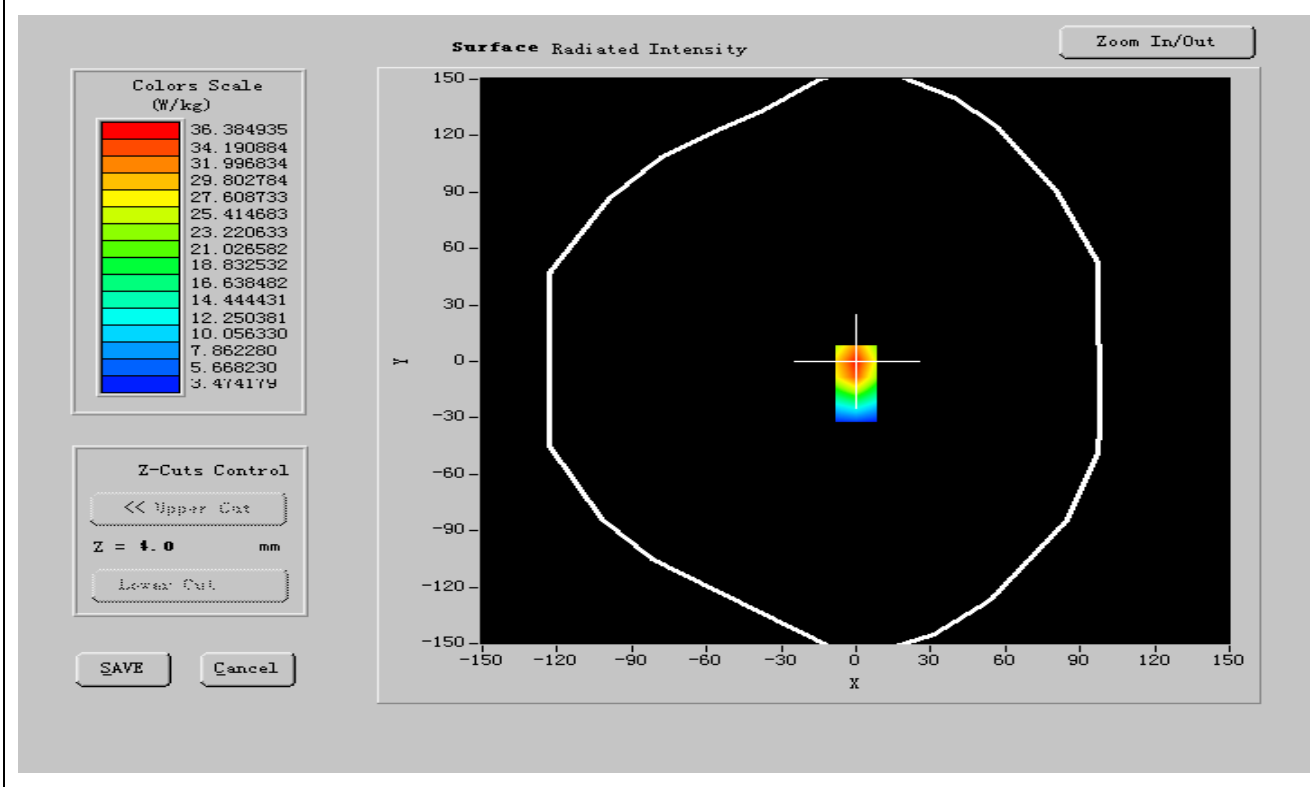



VOLUME SAR

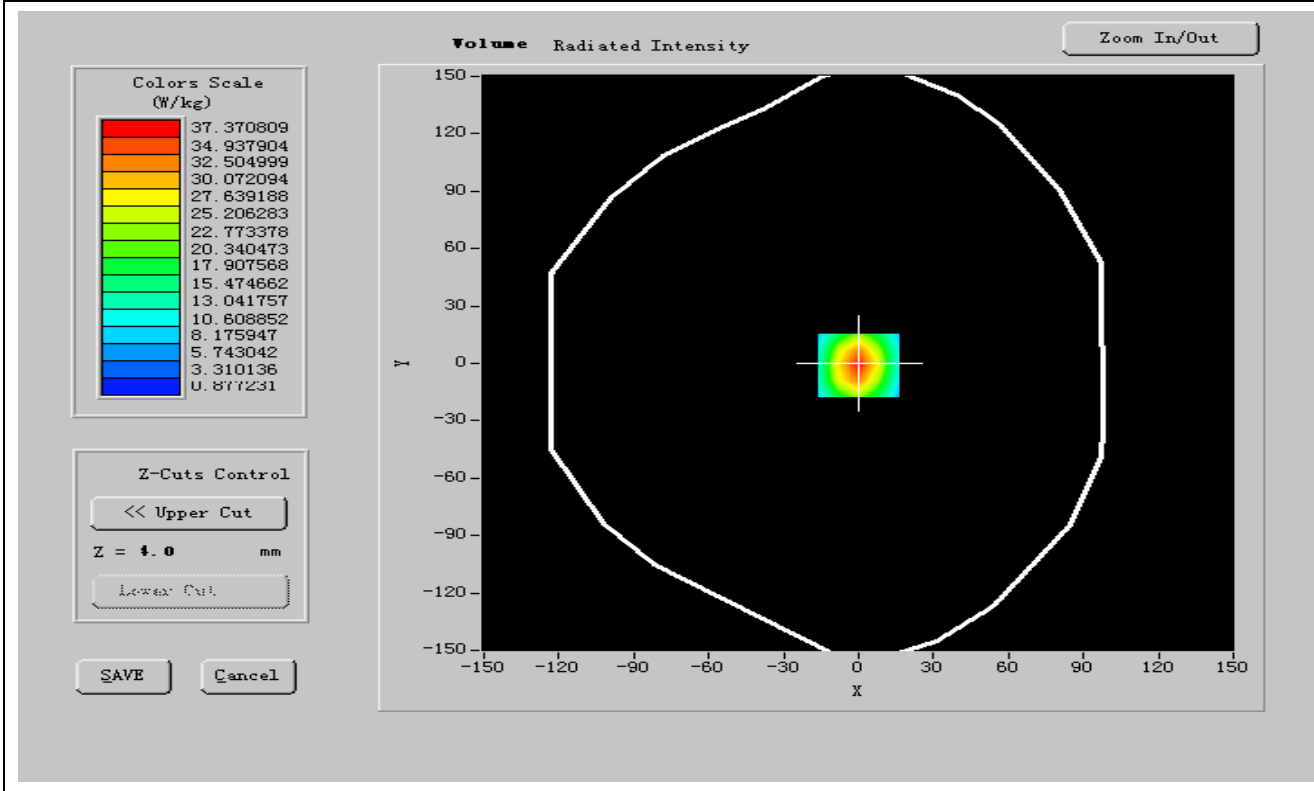

Maximum location: X=0.00, Y=-1.00

SAR 10g (W/Kg)	20.234159
SAR 1g (W/Kg)	38.413765

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -1)

