



Prüfbericht-Nr.: <i>Test Report No.:</i>	60187973-002	Auftrags-Nr.: <i>Order No.:</i>	3268115_060	Seite 1 von 24 <i>Page 1 of 24</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	—	Auftragsdatum: <i>Order date:</i>	28.08.2018	
Auftraggeber: <i>Client:</i>	TÜV Rheinland InterCert Kft., Váci út 48/a-b, H-1132 BUDAPEST			
Prüfgegenstand: <i>Test item:</i>	DIGITAL (IP) LPR CAMERA			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	MICROCAM02 (FCC ID: XCW-MICROCAM-02)			
Auftrags-Inhalt: <i>Order content:</i>	Prüfung der elektromagnetischen Verträglichkeit EMV / Test of electromagnetic compatibility EMC			
Prüfgrundlage: <i>Test specification:</i>	Komplettprüfung / Complete test 47 CFR FCC Part 15 Subpart B — — —			
Wareneingangsdatum: <i>Date of receipt:</i>	03.08.2018			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000205634-001			
Prüfzeitraum: <i>Testing period:</i>	10.10.2018			
Ort der Prüfung: <i>Place of testing:</i>	Nürnberg / Nuremberg			
Prüflaboratorium: <i>Testing laboratory:</i>	EMV Labor / EMC test lab			
Prüfergebnis*: <i>Test result*:</i>	PASS			
geprüft von / tested by:  kontrolliert von / reviewed by: 				
04.04.2019 Oliver Wagner, SV		04.04.2019 Dr. Tobias Wirth, SV		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other:				
Der Prüfbericht 60187973-002 ersetzt den Prüfbericht 60187973-001 (FCC ID hinzugefügt)/ <i>The test report 60187973-002 replaces the test report 60187973-001 (FCC ID added)</i>				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: 60187973-002
Test Report No.:

Seite 2 von 24
Page 2 of 24

Liste der verwendeten Prüfmittel
List of used test equipment

Prüfmittel <i>Test equipment</i>	Prüfmittel-Nr. / ID-Nr. <i>Equipment No. / ID-No.</i>	Nächste Kalibrierung <i>Next calibration</i>
Absorberhalle <i>Anechoic chamber</i> SAC 10	2728890	04.2019
Messantenne <i>Antenna</i> 3115	2728607	01.2020
Messantenne <i>Antenna</i> VULB 9168	2728787	08.2019
Steuereinheit Mast <i>Antenna mast/Slide bar</i> NCD	2733253	—
Umschaltmatrix <i>Commutation relay</i> KRE-3005-ESCU	2732065	01.2019
Vorverstärker <i>Preamplifier</i> BBV 9718B	2888179	09.2020
Messem Empfänger <i>Receiver</i> ESI 40	2728600	09.2020
Messem Empfänger <i>Receiver</i> ESU 26	2723865	07.2019
Steuereinheit Mast <i>Turntable</i> CO3000	2732515	—

Prüfbericht-Nr.: 60187973-002
Test Report No.:

Seite 3 von 24
Page 3 of 24

Produktbeschreibung
Product description

1	Prüfgegenstand <i>Test item</i>	DIGITAL (IP) LPR CAMERA
2	Modellbezeichnung <i>Model</i>	MICROCAM02
3	Baugleiche Modelle <i>Identical types</i>	—
4	Beschreibung <i>Description</i>	—
5	Seriennummer <i>Serial number</i>	1189586
6	Hersteller <i>Manufacturer</i>	ARH Inc.
7	Bemessungsspannung <i>Rated voltage</i>	48 VDC (PoE+)
8	Bemessungsfrequenz <i>Rated frequency</i>	—
9	Bemessungsstrom <i>Rated current</i>	—
10	Bemessungsleistung <i>Rated power consumption</i>	15 W
11	Gerätekategorie <i>Equipment categorie</i>	—
12	Anzahl der Phasen <i>Number of phases</i>	—
13	Schutzklasse <i>Protection class</i>	III - Schutzkleinspannung/Safety extra-low voltage
14	Abmessungen <i>Dimensions</i>	183 x 160 x 57
15	Gewicht <i>Weight</i>	—
16	Sonstiges <i>Other</i>	—

Prüfbericht-Nr.: 60187973-002
Test Report No.:

Seite 4 von 24
Page 4 of 24

Absatz		Messergebnisse - Bemerkungen	Bewertung																				
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation																				
17	Funkstörfeldstärke <i>Radiated disturbance</i> 47 CFR FCC Part 15 Section 15.109	<i>Details in protocol number:</i> #14 <i>Operating mode:</i> Videostream <i>EUT:</i> MICROCAM02 (A000205634-001) <i>Terminals:</i> Gehäuse / Enclosure <i>Remarks:</i> —	P ☒ F ☐ N/A ☐ N/T ☐																				
Grenzwerte <i>Limits</i> <i>Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values</i> <table><tr><td>Frequenz <i>Frequency</i> [MHz]</td><td>Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]</td></tr><tr><td>30 – 88</td><td>40</td></tr><tr><td>88 – 216</td><td>43.5</td></tr><tr><td>216 – 960</td><td>46</td></tr><tr><td>Above 960</td><td>54</td></tr></table> <i>The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following, using measurement instrumentation employing a CISPR quasi-peak detector.</i> <table><tr><td>Frequenz <i>Frequency</i> [MHz]</td><td>Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]</td></tr><tr><td>30 – 88</td><td>39.1</td></tr><tr><td>88 – 216</td><td>43.5</td></tr><tr><td>216 – 960</td><td>46.4</td></tr><tr><td>Above 960</td><td>49.5</td></tr></table> <i>Note: For frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified, there also is a limit on the peak level of the radio frequency emissions which is 20 dB above the maximum permitted average emission limit. (see § 15.35 Measurement detector functions and bandwidths)</i>				Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]	30 – 88	40	88 – 216	43.5	216 – 960	46	Above 960	54	Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]	30 – 88	39.1	88 – 216	43.5	216 – 960	46.4	Above 960	49.5
Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]																						
30 – 88	40																						
88 – 216	43.5																						
216 – 960	46																						
Above 960	54																						
Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]																						
30 – 88	39.1																						
88 – 216	43.5																						
216 – 960	46.4																						
Above 960	49.5																						

Prüfbericht-Nr.: 60187973-002
Test Report No.:

Seite 5 von 24
Page 5 of 24

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Methode
Method

The test setup was according to ANSI C63.4. Measurements were made in a 10-meter semi-anechoic chamber. The EUT was placed on a non-conducting table at a height of 0.8 m above the reference ground plane. Preliminary measurements were performed with a receiver employing a peak detector at an antenna to EUT distance of 3 m or 10 m as defined by the standard. The EUT was continuously rotated 360° about its azimuth to determine the position of the highest emissions. The measurement antenna was adjusted between 1 m and 4 m above ground to find the maximum signal strength. These measurements were done in both horizontal and vertical polarizations. After this, final measurements with a receiver employing a quasi-peak detector were performed by rotating the EUT 360° and adjusting the receive antenna height from 1 m to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

The quasi-peak emission limits are calculated from the field strength limit of this section using this formula:

$$\text{Emission level} \left(\frac{\text{dB}\mu\text{V}}{\text{m}} \right) = 20 \log \text{Emission level} \left(\frac{\mu\text{V}}{\text{m}} \right)$$

When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade as per §15.31(f)(1). For this documentation a distance extrapolation factor was added to the limit that was calculated using this formula:

$$\text{Emission limit}_{\text{new}} \left(\frac{\text{dB}\mu\text{V}}{\text{m}} \right) = \text{Emission limit}_{\text{old}} + 20 \log \left(\frac{d_1}{d_2} \right)$$

Where

d_1 : old distance (e.g. 3 m)

d_2 : new distance (e.g. 10 m)

The field strength is calculated by adding the antenna factor and cable loss. The basic equation with a sample calculation is as follows:

$$E = U + AF + CA$$

For example:

Frequency (MHz)	Receiver reading U (dBμV)	Correction antenna factor AF + cable loss CA (dB)	Field strength E (dBμV/m)
320	15.9	15.8	31.7

Prüfbericht-Nr.: 60187973-002
Test Report No.:

Seite 6 von 24
Page 6 of 24

Absatz		Messergebnisse - Bemerkungen	Bewertung																				
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation																				
18	Funkstörfeldstärke <i>Radiated disturbance</i> 47 CFR FCC Part 15 Subpart B 15.109	<i>Details in protocol number:</i> #15 <i>Operating mode:</i> Videostream <i>EUT:</i> MICROCAM02 (A000205634-001) <i>Terminals:</i> Gehäuse / Enclosure <i>Remarks:</i> —	P ☒ F ☐ N/A ☐ N/T ☐																				
Grenzwerte <i>Limits</i> <i>Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values</i> <table><tr><td>Frequenz <i>Frequency</i> [MHz]</td><td>Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]</td></tr><tr><td>30 – 88</td><td>40</td></tr><tr><td>88 – 216</td><td>43.5</td></tr><tr><td>216 – 960</td><td>46</td></tr><tr><td>Above 960</td><td>54</td></tr></table> <i>The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following, using measurement instrumentation employing a CISPR quasi-peak detector.</i> <table><tr><td>Frequenz <i>Frequency</i> [MHz]</td><td>Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]</td></tr><tr><td>30 – 88</td><td>39.1</td></tr><tr><td>88 – 216</td><td>43.5</td></tr><tr><td>216 – 960</td><td>46.4</td></tr><tr><td>Above 960</td><td>49.5</td></tr></table> <i>Note: For frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified, there also is a limit on the peak level of the radio frequency emissions which is 20 dB above the maximum permitted average emission limit. (see § 15.35 Measurement detector functions and bandwidths)</i>				Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]	30 – 88	40	88 – 216	43.5	216 – 960	46	Above 960	54	Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]	30 – 88	39.1	88 – 216	43.5	216 – 960	46.4	Above 960	49.5
Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]																						
30 – 88	40																						
88 – 216	43.5																						
216 – 960	46																						
Above 960	54																						
Frequenz <i>Frequency</i> [MHz]	Quasi-Spitzenwert <i>Quasi-peak</i> [dB(µV)/m]																						
30 – 88	39.1																						
88 – 216	43.5																						
216 – 960	46.4																						
Above 960	49.5																						

Prüfbericht-Nr.: 60187973-002
Test Report No.:

Seite 7 von 24
Page 7 of 24

Absatz		Messergebnisse - Bemerkungen	Bewertung
Clause	Anforderungen - Prüfungen / Requirements - Tests	Measuring results - Remarks	Evaluation

Methode
Method

The test setup was according to ANSI C63.4. Measurements were made in a 10-meter semi-anechoic chamber. The EUT was placed on a non-conducting table at a height of 0.8 m above the reference ground plane. Preliminary measurements were performed with a receiver employing a peak detector at an antenna to EUT distance of 3 m or 10 m as defined by the standard. The EUT was continuously rotated 360° about its azimuth to determine the position of the highest emissions. The measurement antenna was adjusted between 1 m and 4 m above ground to find the maximum signal strength. These measurements were done in both horizontal and vertical polarizations. After this, final measurements with a receiver employing a quasi-peak detector were performed by rotating the EUT 360° and adjusting the receive antenna height from 1 m to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity.

The quasi-peak emission limits are calculated from the field strength limit of this section using this formula:

$$\text{Emission level} \left(\frac{\text{dB}\mu\text{V}}{\text{m}} \right) = 20 \log \text{Emission level} \left(\frac{\mu\text{V}}{\text{m}} \right)$$

When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade as per §15.31(f)(1). For this documentation a distance extrapolation factor was added to the limit that was calculated using this formula:

$$\text{Emission limit}_{\text{new}} \left(\frac{\text{dB}\mu\text{V}}{\text{m}} \right) = \text{Emission limit}_{\text{old}} + 20 \log \left(\frac{d_1}{d_2} \right)$$

Where

d_1 : old distance (e.g. 3 m)

d_2 : new distance (e.g. 10 m)

The field strength is calculated by adding the antenna factor and cable loss. The basic equation with a sample calculation is as follows:

$$E = U + AF + CA$$

For example:

Frequency (MHz)	Receiver reading U (dBμV)	Correction antenna factor AF + cable loss CA (dB)	Field strength E (dBμV/m)
320	15.9	15.8	31.7

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 8 von 24
Page 8 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

19 **Änderungsverzeichnis**
Change history

Rev. No.	List of revisions	Date Author
1	First edition (60187973-001)	2018-10-11 Oliver Wagner
2	Second edition (60187973-002): FCC ID added	2019-04-04 Oliver Wagner

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 9 von 24
Page 9 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

20	Kalibrierung Calibration
	<i>Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.</i> <i>All measurement equipment calibrations are traceable to DKD or where calibration is performed outside Germany, to equivalent nationally recognized standards organizations.</i>
21	Registrierung Registration
	<i>The measurement facilities for conducted and for radiated disturbance measurement of the TRLP, have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. Measurement data will be accepted in conjunction with applications for Certification under Parts 15 and 18 of the Commission's Rules.</i> FCC Registration-Number: 939976 Bundesnetzagentur Registriernummer: BNetzA-CAB-17/21-16
22	Verifizierung Verification
	<i>Pursuant to 47 CFR part 15 - RADIO FREQUENCY DEVICES, Section 15.19.</i> <i>This device shall bear the following statement in a conspicuous location on the device:</i> This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
23	Angewendete Standards Applied Standards
	<i>According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:</i> - Title 47 CFR FCC Part 15 Subpart B - ANSI C63.4-2014 (Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz) - ICES-003:2016 (Issue 6) (Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement) <i>For frequencies $f \leq 1000$ MHz the test setup and test was done according to: ANSI C63.4-2014.</i> <i>For frequencies $f > 1000$ MHz the test setup and test was done according to ANSI C63.4-2014.</i>

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 10 von 24
Page 10 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

24	Testkonfiguration Equipment used during test					
	Prüfgegenstand Equipment under test					
	Nr. No.	Produktart Product type	Hersteller Manufacturer	Modell Model	Kommentare Comments	
	1	DIGITAL (IP) LPR CAMERA	ARH Inc.	MICROCAM02	—	
	Hilfsmittel / Peripherie Auxiliary Equipment / Peripherals					
	Nr. No.	Produktart Product type	Hersteller Manufacturer	Modell Model	Kommentare Comments	
	1	Notebook	Medion	MD 96290	—	
2	Switch	Moxa	EDS-G205A-4PoE-T	48 VDC		
25	Ein-/Ausgabeanschlüsse Input/Output ports					
	Nr. No.	Name	Art* Type*	Kabel- länge Cable length	Kabel geschirmt Cable shielded	Kommentare Comments
	1	Enclosure	N/E	—	—	None
	2	Ethernet (PoE)	TP, DC	5 m	Yes	48 VDC (PoE+)
	* AC = AC Power Port DC = DC Power Port N/E = Non-Electrical I/O = Signal Input or Output Port (Not Involved in Process Control) TP = Telecommunication Ports					

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 11 von 24
Page 11 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

26	Interne Betriebsfrequenzen Internal operating frequencies																						
	<table><tr><td>Nr. No.</td><td>Frequenz Frequency</td><td>Beschreibung Description</td></tr><tr><td>1</td><td>766 MHz</td><td>ARM Dual Core 2x766MHz</td></tr><tr><td>2</td><td>1 GHz</td><td>ARM Quad Core 4x1GHz for ANPR</td></tr></table> For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table: <table><tr><td>Highest frequency generated or used in the device or on which the device operates or tunes (MHz)</td><td>Upper frequency of measurement range (MHz)</td></tr><tr><td>Below 1.705</td><td>30</td></tr><tr><td>1.705–108</td><td>1000</td></tr><tr><td>108–500</td><td>2000</td></tr><tr><td>500–1000</td><td>5000</td></tr><tr><td>Above 1000</td><td>5th harmonic of the highest frequency or 40 GHz, whichever is lower.</td></tr></table>		Nr. No.	Frequenz Frequency	Beschreibung Description	1	766 MHz	ARM Dual Core 2x766MHz	2	1 GHz	ARM Quad Core 4x1GHz for ANPR	Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)	Below 1.705	30	1.705–108	1000	108–500	2000	500–1000	5000	Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
Nr. No.	Frequenz Frequency	Beschreibung Description																					
1	766 MHz	ARM Dual Core 2x766MHz																					
2	1 GHz	ARM Quad Core 4x1GHz for ANPR																					
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)																						
Below 1.705	30																						
1.705–108	1000																						
108–500	2000																						
500–1000	5000																						
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.																						
27	Betriebsarten Operating modes																						
	The EUT has been connected with peripherals pursuant ANSI C63.4 and was operated in a configuration to maximize its emission characteristics in a typical application. <table><tr><td>Nr. No.</td><td>Beschreibung Description</td></tr><tr><td>1</td><td>Videostream Videostream</td></tr></table>		Nr. No.	Beschreibung Description	1	Videostream Videostream																	
Nr. No.	Beschreibung Description																						
1	Videostream Videostream																						

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 12 von 24
Page 12 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

28	Prüfaufbau <i>EUT configuration</i>						
	Der Prüfaufbau erfolgte entsprechend den Angaben der genannten EMV-Normen. Die Messungen und Tests wurden unter "worst case"-Bedingungen durchgeführt, d.h. es wurden typische Anordnungen und Betriebszustände gewählt bzw. angenommen, die maximale Störaussendung und Störempfindlichkeit vermuten lassen (sogenannte "Ungünstigste Konfiguration"). Einzelheiten der Geräteeinstellungen sind u.a. der Fotodokumentation zu entnehmen. Soweit nicht anders angegeben, gelten diese Angaben für alle nachfolgenden Messungen. <i>The test setup was made in accordance with mentioned EMC standards.</i> <i>Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").</i> <i>Details of test setup or adjustments are (particularly) shown inside the photo documentation.</i> <i>As far as not mentioned otherwise these statements are valid for all following tests.</i>						
29	Besondere EMV-Massnahmen <i>Special EMC measures</i>						
	Keine / None						
30	Klimatische Bedingungen <i>Climatic conditions</i>						
	<table> <tr> <td><i>Umgebungstemperatur</i> <i>Ambient Temperature</i></td> <td>15 - 35 °C</td> </tr> <tr> <td><i>Relative Luftfeuchte</i> <i>Relative Humidity</i></td> <td>30 - 60 %</td> </tr> <tr> <td><i>Luftdruck</i> <i>Air pressure</i></td> <td>860 - 1060 mbar</td> </tr> </table>	<i>Umgebungstemperatur</i> <i>Ambient Temperature</i>	15 - 35 °C	<i>Relative Luftfeuchte</i> <i>Relative Humidity</i>	30 - 60 %	<i>Luftdruck</i> <i>Air pressure</i>	860 - 1060 mbar
<i>Umgebungstemperatur</i> <i>Ambient Temperature</i>	15 - 35 °C						
<i>Relative Luftfeuchte</i> <i>Relative Humidity</i>	30 - 60 %						
<i>Luftdruck</i> <i>Air pressure</i>	860 - 1060 mbar						

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 13 von 24
Page 13 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

31

Aussage zur Messunsicherheit

Statement of the measurement uncertainty

Die in diesem Dokument genannten Daten und Ergebnisse sind wahr und genau. Der Leser wird darauf hingewiesen, dass innerhalb der Kalibriergrenzen der Geräte und Einrichtungen Fehler auftreten können. Die Messunsicherheit wurde für alle Prüfungen in diesem Prüfbericht gemäß CISPR 16-4 "Anforderungen an Geräte und Einrichtungen sowie Festlegung der Verfahren zur Messung der hochfrequenten Störaussendung (Funkstörungen) und Störfestigkeit – Teil 4-2: Unsicherheiten, Statistik und Modelle zur Ableitung von Grenzwerten (Störmodell) – Messgeräte-Unsicherheit" berechnet und ist im Qualitätssicherungssystem gemäß ISO / IEC 17025 dokumentiert. Darüber hinaus können Veränderungen bei den Bauteilen und im Herstellungsprozess zu einer zusätzlichen Abweichung führen.

Der Hersteller ist alleine verantwortlich dafür, dass zukünftige Geräte die einschlägigen Normen und Standards einhalten.

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device.

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

32 **Messunsicherheiten**
Measurement uncertainties

Folgende Messunsicherheiten wurden nach CISPR 16-4-2 ermittelt. Es handelt sich um die erweiterte Messunsicherheit, mit einer Wahrscheinlichkeit von 95%, dass die Werte im zugeordneten Intervall liegen ($k = 2$).
The following measurement uncertainties have been calculated in accordance with CISPR 16-4-2. The stated values are the expanded uncertainty values, the measurand lies within the assigned range of values with a probability of 95% ($k = 2$).

Measurement procedure	U_{Lab}
Measurement of conducted emissions at the power supply connection to LISN in the frequency range 9k-150kHz (CISPR Band A)	2.3 dB
Measurement of conducted emissions at the power supply connection to LISN in the frequency range 150k-30MHz (CISPR Band B) with 150 ohm Delta LISN	3.3 dB
Measurement of conducted emissions at the power supply connection to LISN in the frequency range 150k-30MHz (CISPR Band B)	2.2 dB
Measurement of conducted emissions at the power supply connection to voltage probes in the frequency range 9k-30MHz (CISPR Band A and B)	2.0 dB
Measurement of conducted emissions at telecommunication connection to ISN in the frequency range 150k-30MHz (CISPR Band B) ISN CAT 5	3.3 dB
Measurement of conducted emissions at the telecommunication connection to ISN in the frequency range 150k-30MHz (CISPR Band B) ISN CAT 6 Shielded	2.6 dB
Measurement of conducted emissions at the telecommunications connection to current clamps in the frequency range 150k-30MHz (CISPR Band B)	2.2 dB
Measurement of interference power in the frequency range 30-300MHz (CISPR Band C)	2.9 dB
Measurement of interference power in the frequency range 30-300MHz (CISPR Band C) CDNE	2.6 dB
Measurement of magnetic emissions in the frequency range 9k-150kHz (CISPR Band A) with frame antenna HFH2 (small loop antenna)	1.6 dB
Measurement of magnetic emissions in the frequency range 9k-150kHz (CISPR Band A) with frame antenna HL562 (3-axis loop antenna)	1.6 dB
Measurement of the field strength in the frequency range 30-1000MHz (CISPR Band C and D) with 10m distance with VULB 9168 Vertical	4.5 dB
Measurement of the field strength in the frequency range 30-1000MHz (CISPR band C and D) with 10m distance with VULB 9168 Horizontal	4.4 dB
Measurement of the field strength in the frequency range 1-18GHz (CISPR Band E) with 3m distance with HL025 1-6GHz	5.0 dB
Measurement of the field strength in the frequency range 1-18GHz (CISPR Band E) with 3m distance with HL025 6-18GHz	5.3 dB

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 15 von 24
Page 15 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

Funkstörfeldstärke Radiated disturbance		PASS
Prüfungsbezeichnung u. -nummer Test name and number	Radiated disturbance (30 MHz - 1 GHz) in operating mode videostream #14	
Datum des Tests Test date	10.10.2018	
Angewendete Norm Applied Standard	47 CFR FCC Part 15 Section 15.109	
Prüfmethode Test method	ANSI C63.4-2014	
Temperatur (°C) Temperature	24.0	
Luftfeuchte (% rH) Humidity	40.1	
Luftdruck (mbar) Air pressure	981.0	
Bearbeiter Tested by	Wagner	
Modellbezeichnung Model	MICROCAM02	
Prüfmuster-Nr. Test sample No.:	A000205634-001	
Betriebsart Operating mode	Videostream	
Anschlüsse Tested terminals	Gehäuse / Enclosure	
Grenzwert Limit	47 CFR Part 15 section 15.109	
Bemerkung Remarks	—	
Version der Prüfsoftware Version of testing software	3.17.0.29	

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 16 von 24
Page 16 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

Verwendete Prüfmittel
Used test equipment

Typ	Hersteller <i>Manufacturer</i>	Modell	ID	Kalibriert am <i>Last calibration</i>	Kalibriert bis <i>Next calibration</i>
Absorberhalle <i>Anechoic chamber</i>	TDK	SAC 10	2728890	13.04.2018	13.04.2019
Messantenne <i>Antenna</i>	Schwarzbeck	VULB 9168	2728787	31.08.2016	31.08.2019
Umschaltmatrix <i>Commutation relay</i>	MTS Systemtechnik	KRE-3005-ESCU	2732065	29.01.2018	29.01.2019
Messempfänger <i>Receiver</i>	Rohde & Schwarz	ESU 26	2723865	31.07.2018	31.07.2019

Prüfparameter zu Funkstörfeldstärke

#14

Test parameter of Radiated disturbance

Radiated disturbance (30 MHz - 1 GHz) in operating mode videostream, A000205634-001, MICROCAM02

Startfrequenz <i>Start Frequency</i>	Stopfrequenz <i>Stop Frequency</i>	Schrittweite <i>Frequency step</i>	Anschluss <i>Terminal</i>	Durchlaufzeit <i>Sweep time</i>	ZF-Bandbreite <i>IF bandwidth</i>
30MHz	1GHz	30kHz	Horizontal	20 ms	120kHz

Startfrequenz <i>Start Frequency</i>	Stopfrequenz <i>Stop Frequency</i>	Schrittweite <i>Frequency step</i>	Anschluss <i>Terminal</i>	Durchlaufzeit <i>Sweep time</i>	ZF-Bandbreite <i>IF bandwidth</i>
30MHz	1GHz	30kHz	Vertical	20 ms	120kHz

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 17 von 24
Page 17 of 24



ZUSATZDOKUMENTATION ADDITIONAL DOCUMENTATION

Messdiagramme zu Funkstörfeldstärke

#14

Graphical presentation of Radiated disturbance

Radiated disturbance (30 MHz - 1 GHz) in operating mode videostream, A000205634-001,
MICROCAM02

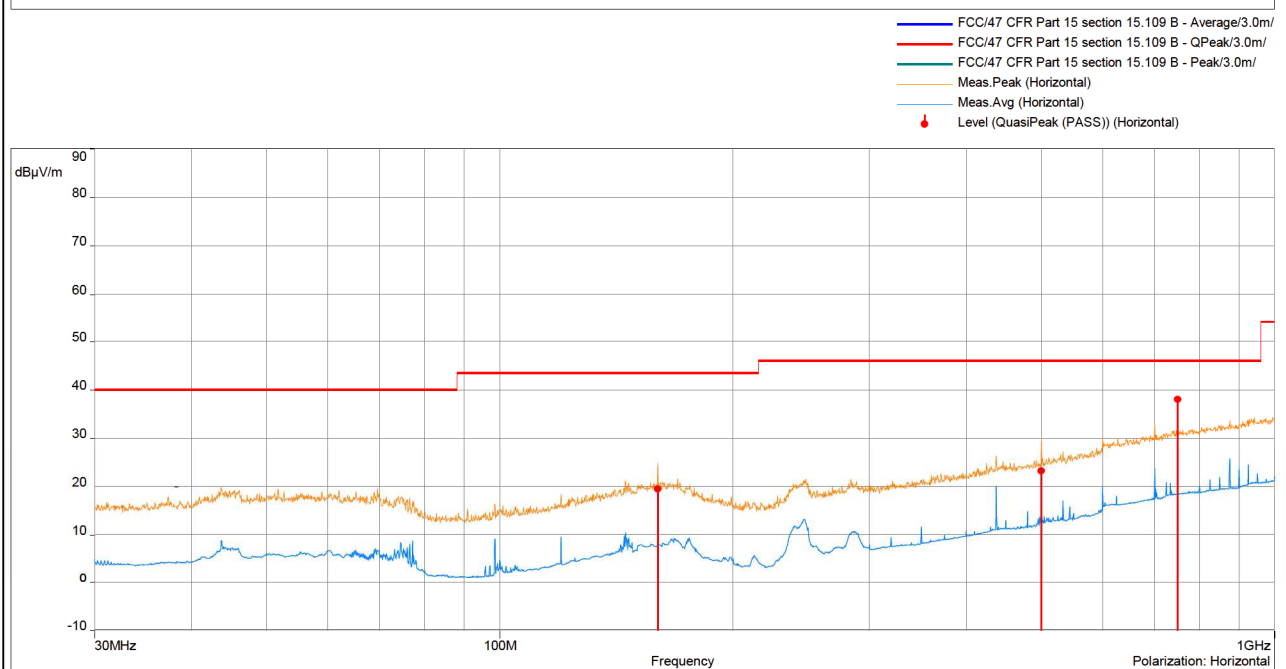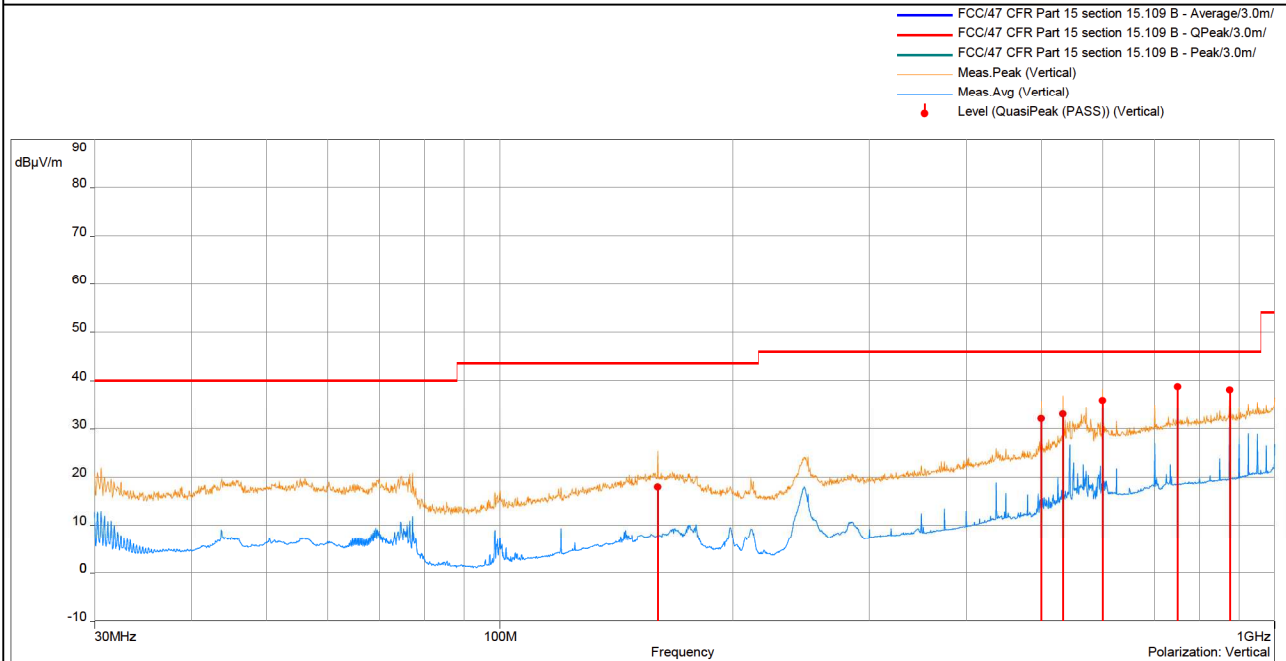

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 18 von 24
Page 18 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

Messdiagramme zu Funkstörfeldstärke

#14

Graphical presentation of Radiated disturbance

Radiated disturbance (30 MHz - 1 GHz) in operating mode videostream, A000205634-001, MICROCAM02

Messdaten zu Funkstörfeldstärke

#14

Measurement data of Radiated disturbance

Radiated disturbance (30 MHz - 1 GHz) in operating mode videostream, A000205634-001, MICROCAM02

QuasiPeak (PASS) (9)

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	Correction (dB)
159.99	19.48	43.50	-24.02	2.42	56.40	Horizontal	16.35
500.01	23.26	46.00	-22.74	2.73	9.40	Horizontal	20.52
750.06	38.06	46.00	-7.94	1.06	229.40	Horizontal	25.30
159.99	17.97	43.50	-25.53	2.63	340.40	Vertical	16.35
500.01	32.12	46.00	-13.88	1.05	2.10	Vertical	20.52
533.34	33.10	46.00	-12.90	1.00	203.00	Vertical	21.12
600	35.80	46.00	-10.20	1.00	2.30	Vertical	22.85
750.06	38.75	46.00	-7.25	1.63	89.30	Vertical	25.30
875.07	38.08	46.00	-7.92	1.25	106.90	Vertical	26.44

Bemerkungen / Remarks:

Margin value = Measurement value – Limit value

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 19 von 24
Page 19 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

Funkstörfeldstärke Radiated disturbance		PASS
Prüfungsbezeichnung u. -nummer Test name and number	Radiated disturbance (1 GHz - 6 GHz) in operating mode videostream #15	
Datum des Tests Test date	10.10.2018	
Angewendete Norm Applied Standard	47 CFR FCC Part 15 Subpart B 15.109	
Prüfmethode Test method	ANSI C63.4-2014	
Temperatur (°C) Temperature	24.9	
Luftfeuchte (% rH) Humidity	39.4	
Luftdruck (mbar) Air pressure	978.0	
Bearbeiter Tested by	Wagner	
Modellbezeichnung Model	MICROCAM02	
Prüfmuster-Nr. Test sample No.:	A000205634-001	
Betriebsart Operating mode	Videostream	
Anschlüsse Tested terminals	Gehäuse / Enclosure	
Grenzwert Limit	47 CFR Part 15 section 15.109	
Bemerkung Remarks	—	
Version der Prüfsoftware Version of testing software	3.17.0.29	

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 20 von 24
Page 20 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

Verwendete Prüfmittel
Used test equipment

Typ	Hersteller <i>Manufacturer</i>	Modell	ID	Kalibriert am <i>Last calibration</i>	Kalibriert bis <i>Next calibration</i>
Absorberhalle <i>Anechoic chamber</i>	TDK	SAC 10	2728890	13.04.2018	13.04.2019
Messantenne <i>Antenna</i>	EMCO	3115	2728607	11.01.2017	11.01.2020
Vorverstärker <i>Preamplifier</i>	Schwarzbeck	BBV 9718B	2888179	21.09.2019	21.09.2020
Messempfänger <i>Receiver</i>	Rohde & Schwarz	ESI 40	2728600	05.09.2018	05.09.2020

Prüfparameter zu Funkstörfeldstärke

#15

Test parameter of Radiated disturbance

Radiated disturbance (1 GHz - 6 GHz) in operating mode videostream, A000205634-001, MICROCAM02

Startfrequenz <i>Start Frequency</i>	Stopfrequenz <i>Stop Frequency</i>	Schrittweite <i>Frequency step</i>	Anschluss <i>Terminal</i>	Durchlaufzeit <i>Sweep time</i>	ZF-Bandbreite <i>IF bandwidth</i>
1GHz	6GHz	300kHz	Horizontal	5 ms	1MHz

Startfrequenz <i>Start Frequency</i>	Stopfrequenz <i>Stop Frequency</i>	Schrittweite <i>Frequency step</i>	Anschluss <i>Terminal</i>	Durchlaufzeit <i>Sweep time</i>	ZF-Bandbreite <i>IF bandwidth</i>
1GHz	6GHz	300kHz	Vertical	5 ms	1MHz

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 21 von 24
Page 21 of 24



ZUSATZDOKUMENTATION ADDITIONAL DOCUMENTATION

Messdiagramme zu Funkstörfeldstärke

#15

Graphical presentation of Radiated disturbance

Radiated disturbance (1 GHz - 6 GHz) in operating mode videostream, A000205634-001,
MICROCAM02

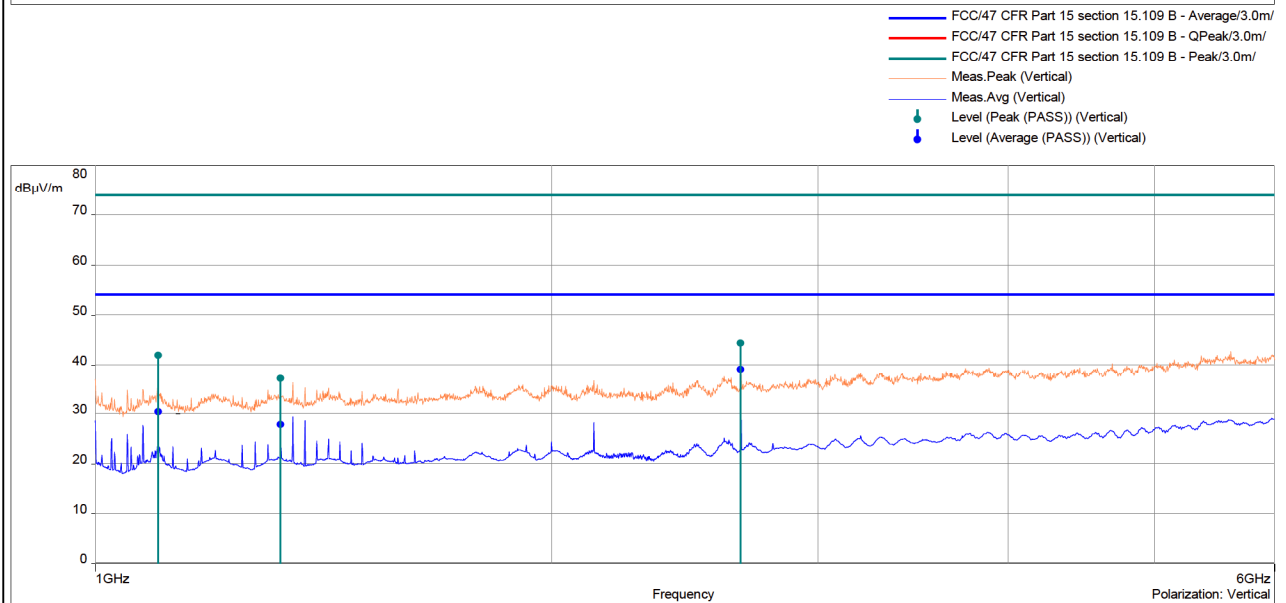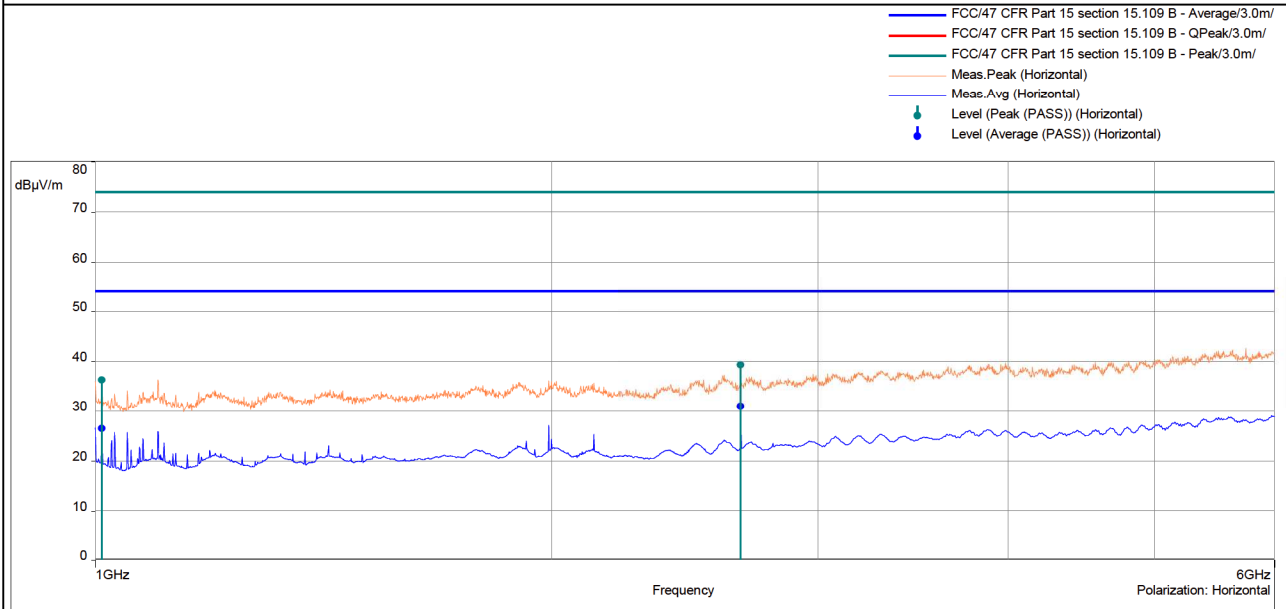

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 22 von 24
Page 22 of 24

ZUSATZDOKUMENTATION
ADDITIONAL DOCUMENTATION

Messdaten zu Funkstörfeldstärke

#15

Measurement data of Radiated disturbance

Radiated disturbance (1 GHz - 6 GHz) in operating mode videostream, A000205634-001,
MICROCAM02

Average (PASS) (5)

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	Correction (dB)
1009.9	26.54	54.00	-27.46	1.00	320.30	Horizontal	-8.82
2666.5	31.03	54.00	-22.97	1.99	23.00	Horizontal	-3.60
1100.2	30.39	54.00	-23.61	1.29	299.90	Vertical	-8.85
1325.2	27.88	54.00	-26.12	1.88	61.30	Vertical	-7.37
2666.5	39.15	54.00	-14.85	1.97	244.10	Vertical	-3.60

Peak (PASS) (5)

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	Correction (dB)
1009.9	36.25	74.00	-37.75	1.00	320.30	Horizontal	-8.82
2666.5	39.31	74.00	-34.69	1.99	23.00	Horizontal	-3.60
1100.2	41.91	74.00	-32.09	1.29	299.90	Vertical	-8.85
1325.2	37.17	74.00	-36.83	1.88	61.30	Vertical	-7.37
2666.5	44.36	74.00	-29.64	1.97	244.10	Vertical	-3.60

Bemerkungen / Remarks:

Margin value = Measurement value – Limit value

ANLAGE zum Prüfbericht-Nr.: 60187973-002
APPENDIX to Test Report No.:

Seite 24 von 24
Page 24 of 24

FOTODOKUMENTATION
PHOTO DOCUMENTATION

Ende des Prüfberichts
End of test report