



FCC PART 15B TEST REPORT

No. 25T04Z100481-007

for

Shenzhen Tinno Mobile Technology Corp.

Weymouth

Model Name: B321MH

FCC ID: XD6B321MH

with

Hardware Version: V1.0

Software Version: B321 MHV01.07.10

Issued Date: 2025-05-13

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
25T04Z100481-007	Rev.0	1 st edition	2025-05-13

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. SUMMARY OF TEST RESULTS.....	8
6. TEST EQUIPMENTS UTILIZED.....	9
7. MEASUREMENT UNCERTAINTY	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2025-04-02

Testing End Date: 2025-05-08

1.4. Signature




Wang Xue

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zhang Xia

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
27-001, South Side of Tianlong Mobile Headquarters Building,
Address: Tongfa South Road, Xili Community, Xili Street, Nanshan District,
Shenzhen ,PRC
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-86095550
Fax: 0755-86095551

2.2. Manufacturer Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
27-001, South Side of Tianlong Mobile Headquarters Building,
Address: Tongfa South Road, Xili Community, Xili Street, Nanshan District,
Shenzhen ,PRC
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-86095550
Fax: 0755-86095551

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Weymouth
Model Name	B321MH
FCC ID:	XD6B321MH

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
UT39a	864214070007994	V1.0	B321 MHV01.07.10

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer	Remark
AE1	Battery1	TNO496386AG-N1	Guangdong Fenghua New Energy Co.,Ltd.	
AE2	Charger1	TN-050200U3	SICHUAN PROVINCE GANGQI ELECTROINC CO.,LTD	
AE3	USB Cable1	T365-011B-1	Shenzhen Yihuaxing Electronics Co. Ltd	

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	UT39a + AE1 +AE2+AE3	Charger1+LTE B12 idle
Set.2	UT39a + AE1 +AE2+AE3	Charger1+n71 idle
Set.3	UT39a + AE1 +AE3+PC	USB

Note:

Equipment Under Test (EUT) is a model of Weymouth.

It supports

LTE Band	FDD Bands 2/4/12/25/66/71
5G NR	n25/41/66/71

It has USB memory, Bluetooth 5.2, Wi-Fi (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz, 40MHz and 80MHz bandwidth).

The device contains receivers which tune and operate between 30MHz-960MHz in the following mode: LTE Band 12/71 , 5G NR n71. All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2024
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	BR	CTTL(huayuan North Road)

Items	Test status	Set-up
Radiated Emission	Charging mode and USB mode	Set.1/2/3
Conducted Emission	Charging mode and USB mode	Set.1/2/3

6. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103023	R&S	2025-06-06	1 year
2	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2025-09-11	1 year
3	EMI Antenna	3115	00146404	ETS-Lindgren	2025-05-16	1 year
4	Universal Communication Tester	CMW500	116588	R&S	2026-01-25	1 year
5	Universal Communication Tester	CMX500	102710	R&S	2026-04-01	1 year
6	Test Receiver	ESCI	100344	R&S	2026-04-01	1 year
7	LISN	ENV216	101200	R&S	2025-05-16	1 year
8	Universal Communication Tester	E7515B	MY60102215	KEYSIGHT	2025-06-09	1 year

Test software information		
Test Item	Software	Version
Radiated Emission	EMC32	V11.50.00
Conducted Emission	EMC32	V8.53.00

Semi-anechoic chamber utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz

Shielded room utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL(huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.72dB($k=2$)
	1GHz-18GHz	4.84dB($k=2$)
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB($k=2$)

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode, and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement results for Set.1:

Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.50	44.23	-26.80	42.30	28.73	54.00	9.77	H
17985.00	44.19	-26.80	42.30	28.69	54.00	9.81	H
17927.20	44.15	-26.80	42.30	28.65	54.00	9.85	V
17980.30	44.15	-26.80	42.30	28.65	54.00	9.85	V
17926.60	44.10	-26.80	42.30	28.60	54.00	9.90	H
17941.20	44.09	-26.80	42.30	28.59	54.00	9.91	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17940.80	55.55	-26.80	42.30	40.05	74.00	18.45	H
17904.80	55.44	-26.80	42.30	39.94	74.00	18.56	V
17948.30	55.20	-26.80	42.30	39.70	74.00	18.80	V
17905.80	55.15	-26.80	42.30	39.65	74.00	18.85	V
17869.80	55.07	-26.80	42.30	39.57	74.00	18.93	V
17981.00	55.02	-26.80	42.30	39.52	74.00	18.98	V

Measurement results for Set.2:
Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17923.20	44.38	-26.80	42.30	28.88	54.00	9.62	V
17970.10	44.30	-26.80	42.30	28.80	54.00	9.70	H
17920.10	44.16	-26.80	42.30	28.66	54.00	9.84	V
17972.80	44.16	-26.80	42.30	28.66	54.00	9.84	H
17961.90	44.15	-26.80	42.30	28.65	54.00	9.85	H
17965.00	44.13	-26.80	42.30	28.63	54.00	9.87	V

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17962.90	56.56	-26.80	42.30	41.06	74.00	17.44	V
17942.50	55.79	-26.80	42.30	40.29	74.00	18.21	V
17904.10	55.42	-26.80	42.30	39.92	74.00	18.58	H
17890.90	54.95	-26.80	42.30	39.45	74.00	19.05	H
17977.90	54.95	-26.80	42.30	39.45	74.00	19.05	V
17987.40	54.92	-26.80	42.30	39.42	74.00	19.08	H

Measurement results for Set.3:
USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
6053.40	47.33	-36.15	35.40	48.08	54.00	6.67	V
6053.10	46.89	-36.15	35.40	47.64	54.00	7.11	V
6053.80	45.25	-36.15	35.40	46.00	54.00	8.75	V
17933.00	44.20	-26.80	42.30	28.70	54.00	9.80	H
17958.90	44.20	-26.80	42.30	28.70	54.00	9.80	H
17967.40	44.18	-26.80	42.30	28.68	54.00	9.82	H

USB Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17986.70	55.42	-26.80	42.30	39.92	74.00	18.58	H
17923.80	55.35	-26.80	42.30	39.85	74.00	18.65	H
17896.00	55.18	-26.80	42.30	39.68	74.00	18.82	V
17977.60	55.14	-26.80	42.30	39.64	74.00	18.86	H
17977.90	54.98	-26.80	42.30	39.48	74.00	19.02	V
17864.70	54.83	-26.80	42.30	39.33	74.00	19.17	V

Measurement results for Set.1:

Full Spectrum

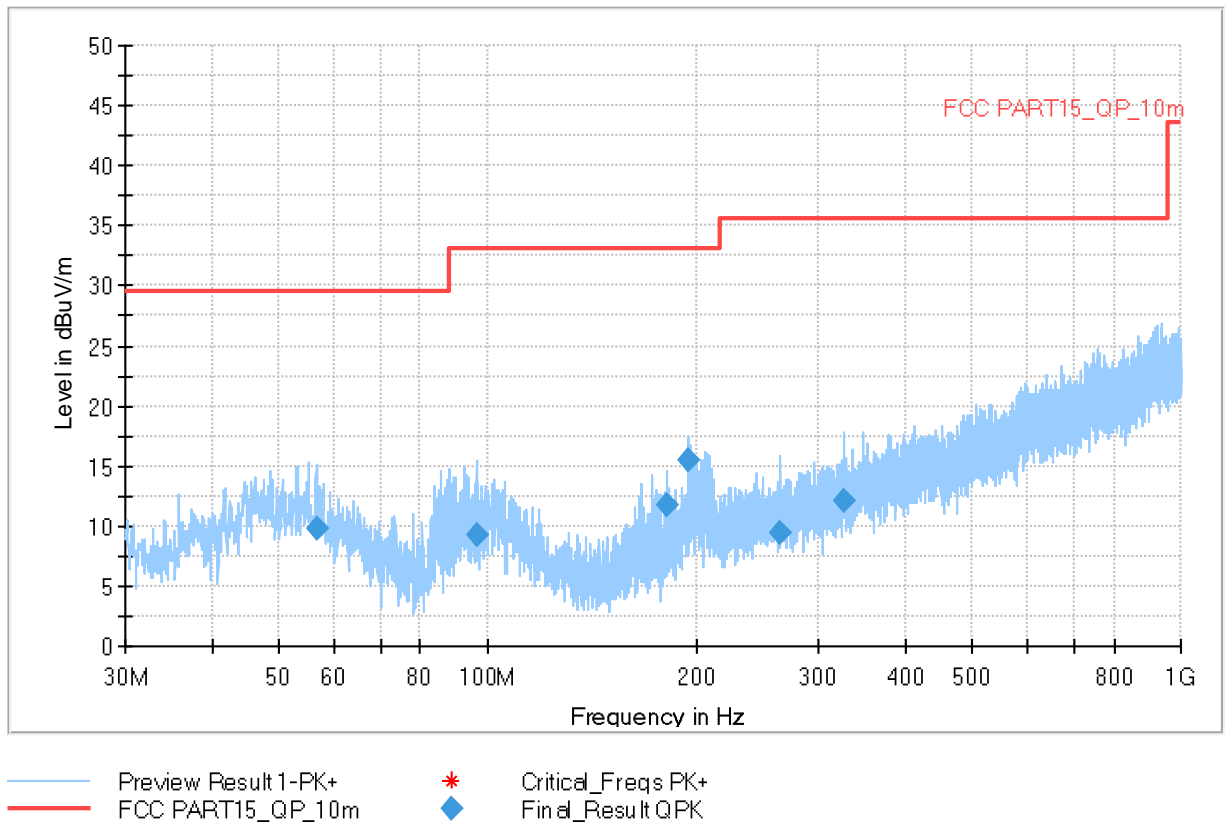


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
56.578000	9.86	29.54	19.68	120.000	217.0	V	315.0
96.251000	9.22	33.06	23.84	120.000	100.0	V	-23.0
180.980500	11.79	33.06	21.27	120.000	100.0	V	248.0
194.415000	15.41	33.06	17.65	120.000	100.0	V	129.0
263.721500	9.36	35.56	26.20	120.000	100.0	V	293.0
327.353500	12.08	35.56	23.48	120.000	118.0	V	151.0

Full Spectrum

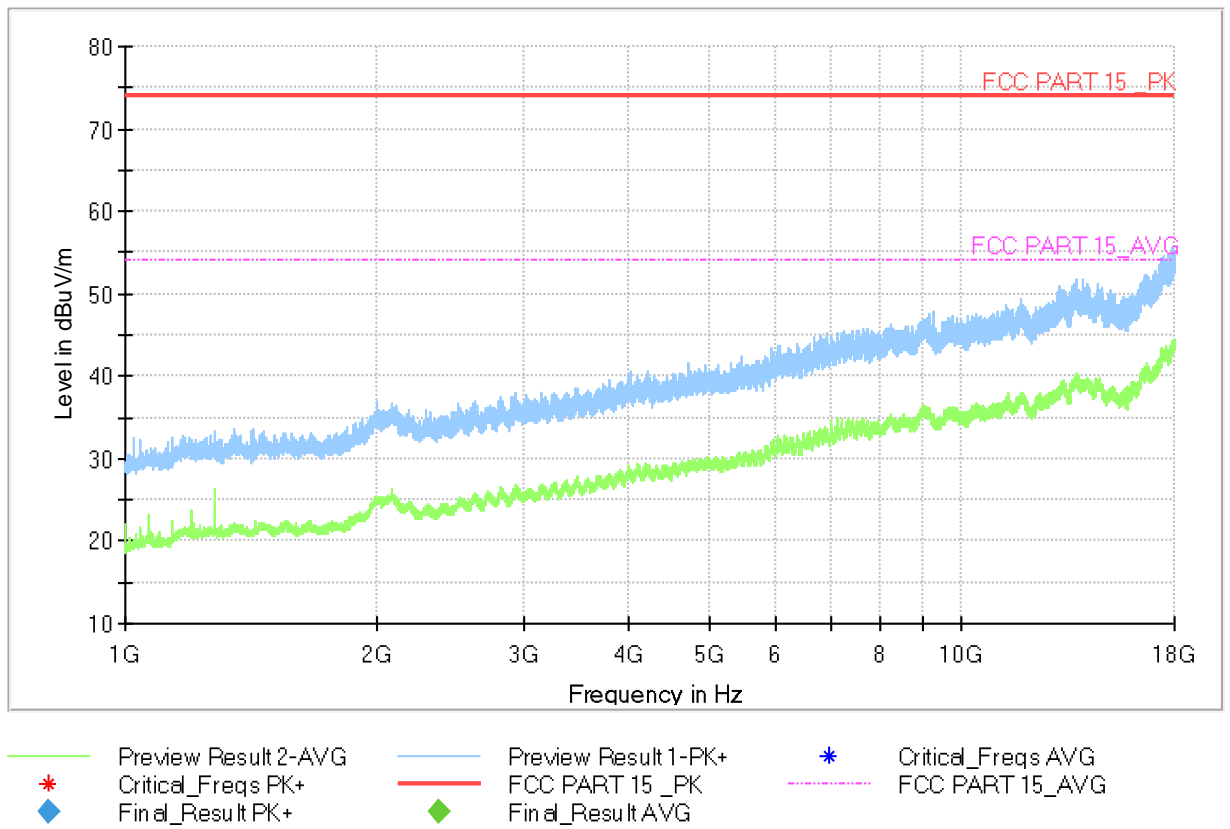


Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.2:

Full Spectrum

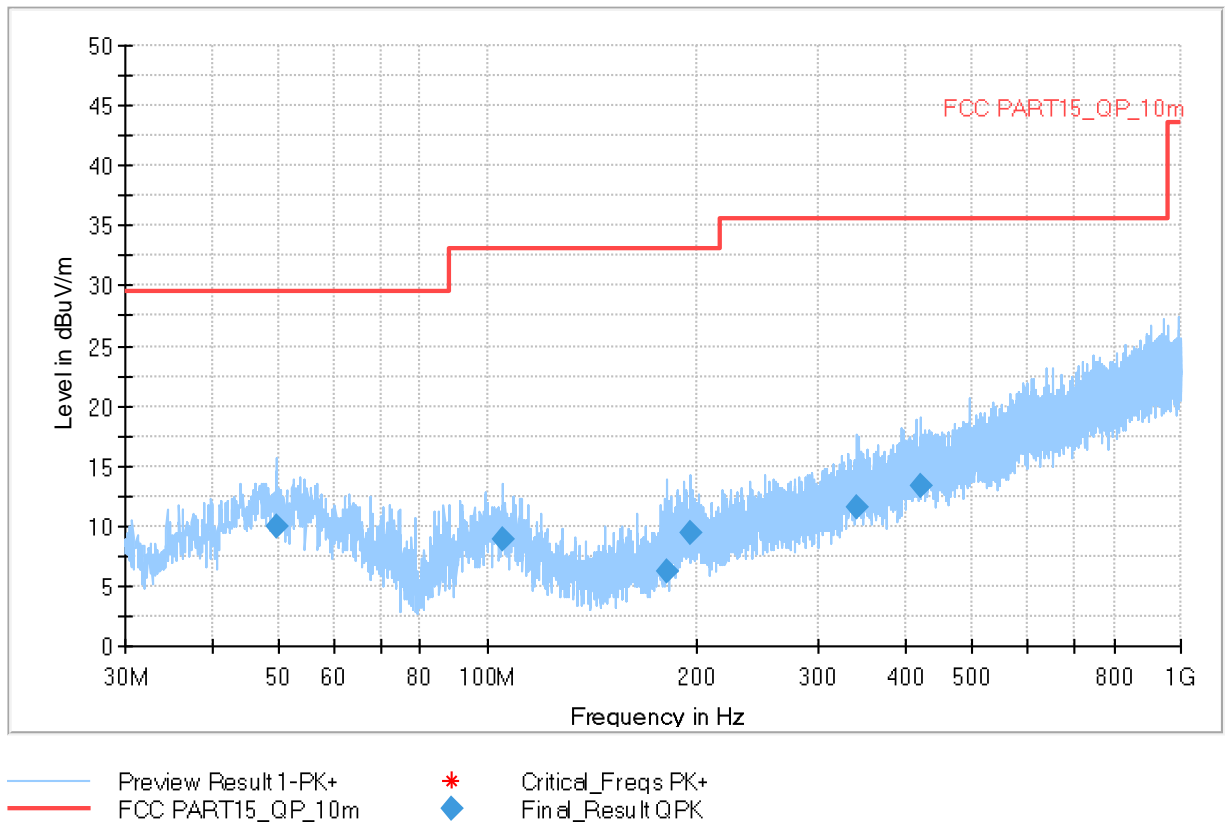


Fig A.3 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
49.642500	9.94	29.54	19.60	120.000	275.0	H	-29.0
105.078000	8.81	33.06	24.25	120.000	108.0	V	180.0
180.835000	6.32	33.06	26.74	120.000	122.0	V	315.0
196.452000	9.45	33.06	23.61	120.000	108.0	V	240.0
341.321500	11.51	35.56	24.05	120.000	205.0	V	173.0
420.667500	13.28	35.56	22.28	120.000	118.0	V	292.0

Full Spectrum

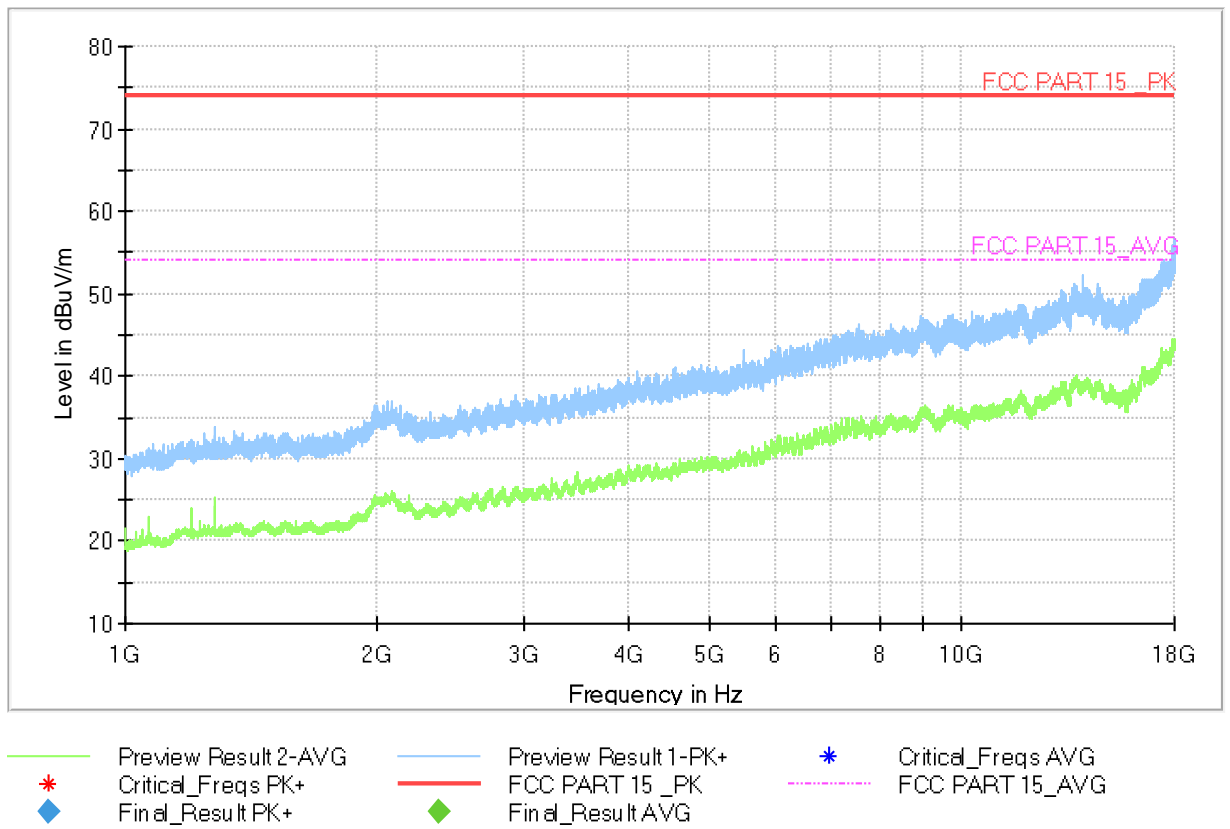


Fig A.4 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.3:

Full Spectrum

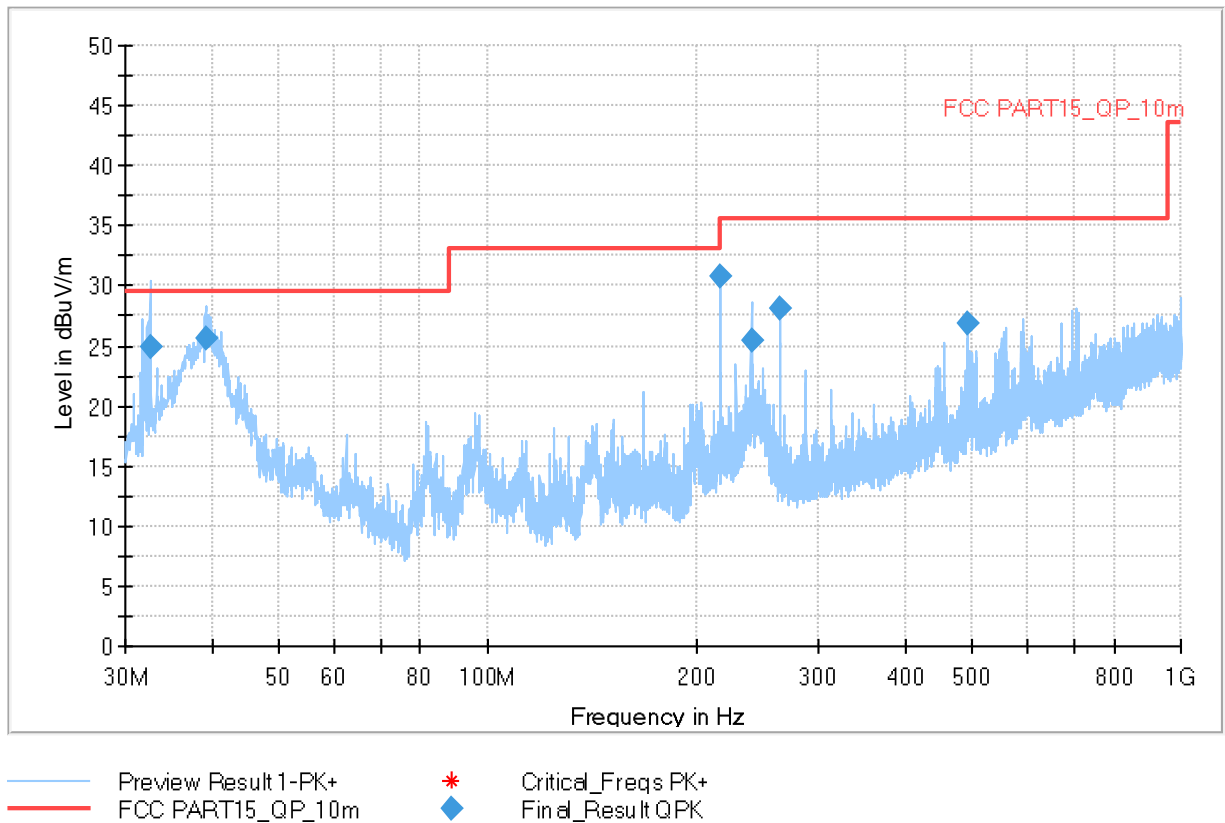


Fig A.5 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
32.619000	25.00	29.54	4.54	120.000	175.0	V	45.0
39.215000	25.61	29.54	3.93	120.000	225.0	V	227.0
215.997500	30.70	33.06	2.36	120.000	325.0	H	0.0
239.956500	25.49	35.56	10.07	120.000	100.0	V	175.0
264.012500	28.15	35.56	7.41	120.000	316.0	H	98.0
492.011000	26.81	35.56	8.75	120.000	281.0	V	-44.0

Full Spectrum

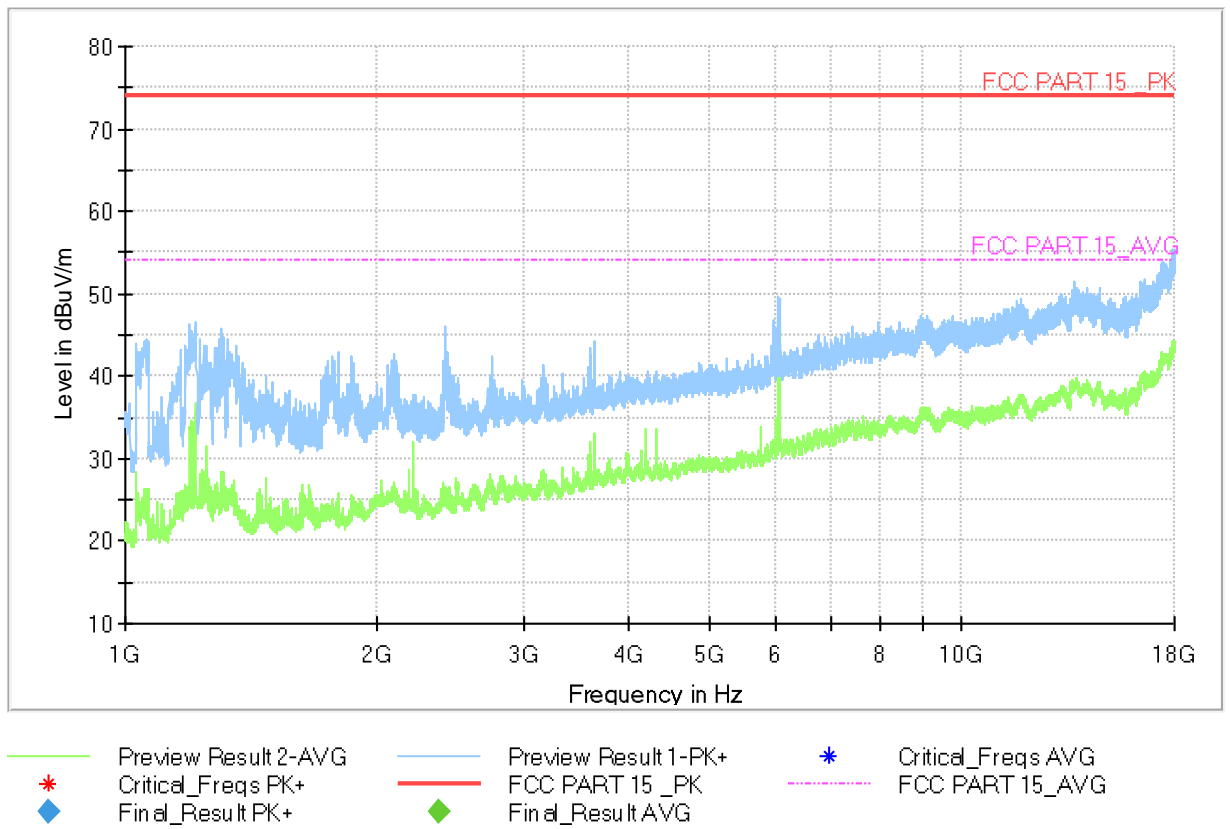


Fig A.6 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U = 3.08 \text{ dB}$, $k=2$.

Charging Mode, Set.1:

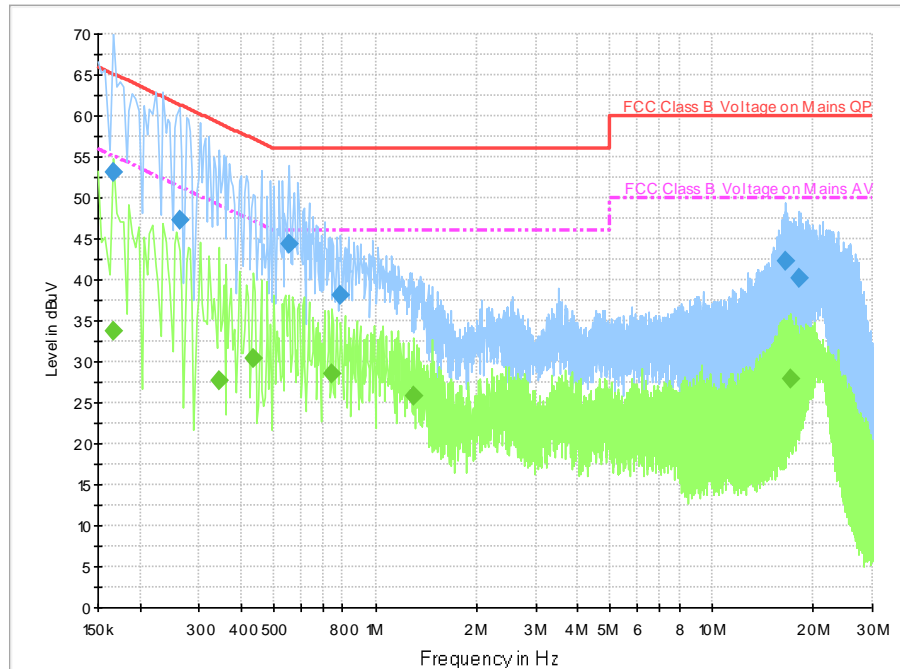


Fig A.7 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.166000	53.2	2000.0	9.000	On	L1	19.9	12.0	65.2	
0.262000	47.3	2000.0	9.000	On	L1	19.9	14.1	61.4	
0.554000	44.4	2000.0	9.000	On	L1	20.0	11.6	56.0	
0.790000	38.2	2000.0	9.000	On	L1	19.9	17.8	56.0	
16.566000	42.2	2000.0	9.000	On	N	19.8	17.8	60.0	
18.158000	40.2	2000.0	9.000	On	N	19.8	19.8	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.166000	33.7	2000.0	9.000	On	L1	19.9	21.4	55.2	
0.342000	27.8	2000.0	9.000	On	L1	19.9	21.4	49.2	
0.434000	30.5	2000.0	9.000	On	N	19.9	16.7	47.2	
0.746000	28.6	2000.0	9.000	On	N	19.8	17.4	46.0	
1.306000	25.8	2000.0	9.000	On	L1	19.9	20.2	46.0	
17.118000	28.0	2000.0	9.000	On	L1	20.0	22.0	50.0	

Charging Mode, Set.2:

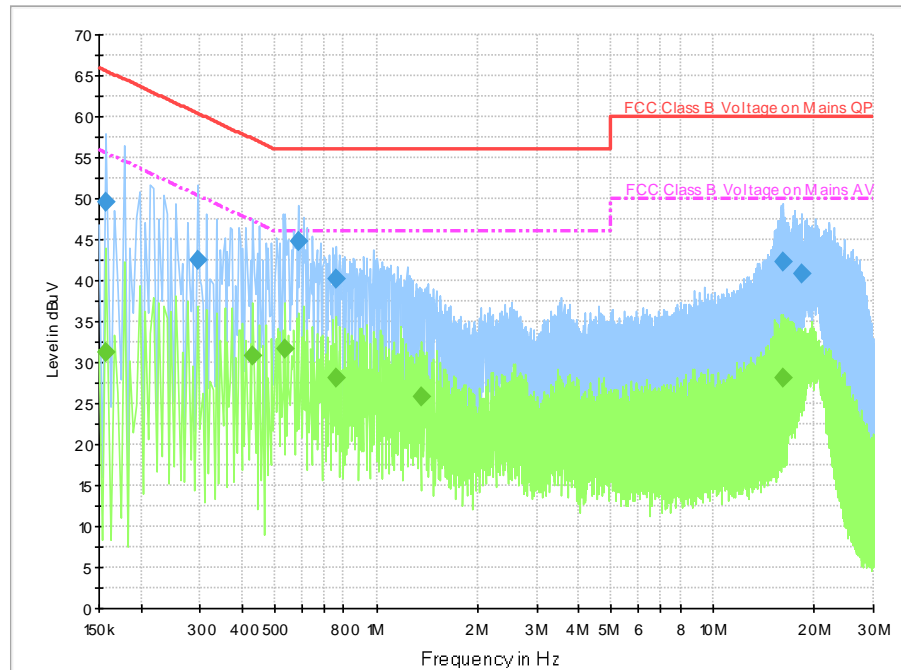


Fig A.8 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.158000	49.7	2000.0	9.000	On	L1	19.9	15.9	65.6	
0.294000	42.4	2000.0	9.000	On	L1	19.9	18.0	60.4	
0.586000	44.8	2000.0	9.000	On	N	19.9	11.2	56.0	
0.762000	40.1	2000.0	9.000	On	N	19.8	15.9	56.0	
16.102000	42.4	2000.0	9.000	On	N	19.8	17.6	60.0	
18.294000	40.8	2000.0	9.000	On	N	19.8	19.2	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.158000	31.2	2000.0	9.000	On	L1	19.9	24.4	55.6	
0.430000	30.9	2000.0	9.000	On	N	19.9	16.3	47.3	
0.538000	31.8	2000.0	9.000	On	N	19.9	14.2	46.0	
0.762000	28.2	2000.0	9.000	On	N	19.8	17.8	46.0	
1.358000	25.8	2000.0	9.000	On	L1	19.9	20.2	46.0	
16.246000	28.1	2000.0	9.000	On	L1	20.0	21.9	50.0	

USB Mode, Set.3:

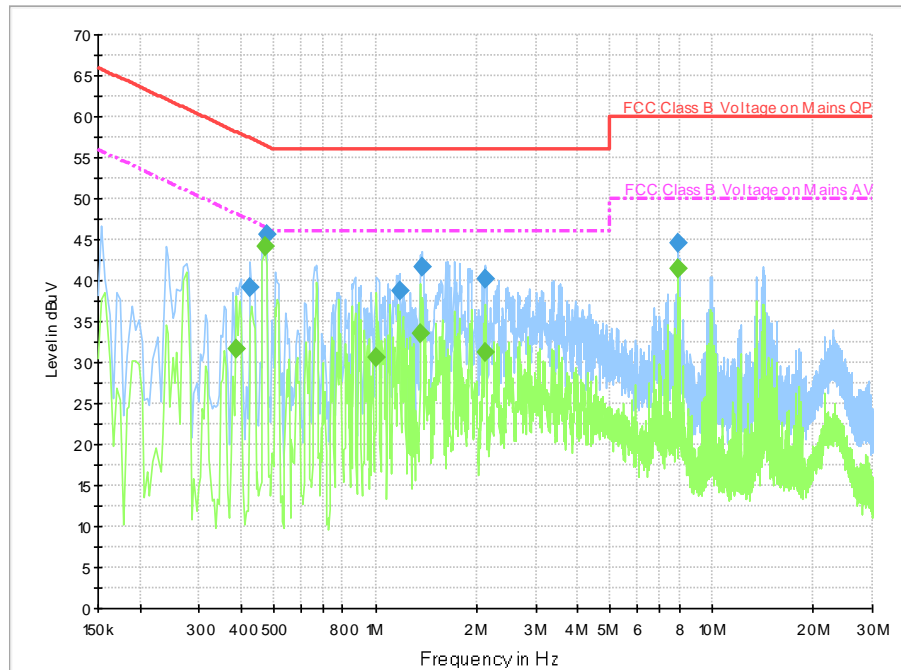


Fig A.9 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.426000	39.2	2000.0	9.000	On	L1	20.0	18.2	57.3	
0.474000	45.6	2000.0	9.000	On	N	19.9	10.9	56.4	
1.182000	38.7	2000.0	9.000	On	L1	19.9	17.3	56.0	
1.378000	41.6	2000.0	9.000	On	L1	19.9	14.4	56.0	
2.130000	40.2	2000.0	9.000	On	N	19.6	15.8	56.0	
7.922000	44.5	2000.0	9.000	On	L1	19.9	15.5	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.386000	31.7	2000.0	9.000	On	L1	19.9	16.4	48.1	
0.470000	44.1	2000.0	9.000	On	L1	20.0	2.4	46.5	
1.010000	30.6	2000.0	9.000	On	L1	19.9	15.4	46.0	
1.362000	33.6	2000.0	9.000	On	L1	19.9	12.4	46.0	
2.130000	31.2	2000.0	9.000	On	L1	19.8	14.8	46.0	
7.922000	41.6	2000.0	9.000	On	L1	19.9	8.5	50.0	

END OF REPORT