

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**Retail Demo Portal of Power**

**MODEL No.: 68067790**

**FCC ID:XLU68067790**

**Trademark: Activision**

**REPORT NO:KAD130711023E**

**ISSUE DATE: July 24, 2013**

*Prepared for*

**ACTIVISION PUBLISHING, INC  
3100 Ocean Park Blvd., Santa Monica, CA90405, USA**

*Prepared by*

**DONGGUAN EMTEK CO., LTD.**

**No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China**

**TEL: 86-769-22807078**

**FAX: 86-769-22807079**

## VERIFICATION OF COMPLIANCE

Applicant:	ACTIVISION PUBLISHING, INC 3100 Ocean Park Blvd., Santa Monica, CA90405, USA
Manufacturer:	SUNLIGHT TECHNOLOGY ELECTRONIC MANUFACTURING CO., LTD. New Asia Industrial City, Lin Village, Tangxia Town, Dongguan City, China
Product Description:	Retail Demo Portal of Power
Model Number:	68067790
Trademark:	Activision
File Number:	KAD130711023E
Date of Test:	July 11, 2013 to July 24, 2013

### We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

***Approved By***



---

***Sam Lv / Q.A. Manager  
DONGGUAN EMTEK CO., LTD.***

## Table of Contents

<b>1</b>	<b>GENERAL INFORMATION.....</b>	<b>4</b>
1.1	PRODUCT DESCRIPTION .....	4
1.2	RELATED SUBMITTAL(S) / GRANT(S) .....	4
1.3	TEST METHODOLOGY .....	5
1.4	SPECIAL ACCESSORIES .....	5
1.5	EQUIPMENT MODIFICATIONS .....	5
1.6	TEST FACILITY.....	5
<b>2</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
2.1	EUT CONFIGURATION.....	6
2.2	EUT EXERCISE .....	6
2.3	TEST PROCEDURE.....	6
2.4	CONFIGURATION OF TESTED SYSTEM.....	7
<b>3</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>4</b>	<b>CONDUCTED EMISSIONS TEST .....</b>	<b>9</b>
4.1	MEASUREMENT PROCEDURE .....	9
4.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	9
4.3	MEASUREMENT EQUIPMENT USED .....	9
4.4	CONDUCTED EMISSION LIMIT .....	10
4.5	MEASUREMENT RESULT .....	10
4.6	CONDUCTED MEASUREMENT PHOTOS:.....	11
<b>5</b>	<b>RADIATED EMISSION TEST .....</b>	<b>12</b>
5.1	MEASUREMENT PROCEDURE .....	12
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
5.3	MEASUREMENT EQUIPMENT USED .....	13
5.4	RADIATED EMISSION LIMIT .....	13
5.5	MEASUREMENT RESULT .....	15
5.6	RADIATED MEASUREMENT PHOTOS:.....	17
<b>6</b>	<b>FREQUENCY STABILITY MEASUREMENT .....</b>	<b>18</b>
6.1	FREQUENCY STABILITY LIMITS .....	18
6.2	MEASUREMENT INSTRUMENTS LIST .....	18
6.3	TEST PROCEDURE .....	18
6.4	EUT OPERATING CONDITIONS .....	18
6.5	TEST RESULTS.....	19
<b>7</b>	<b>EMISSION BANDWIDTH .....</b>	<b>28</b>
7.1	EMISSION BANDWIDTH LIMIT .....	28
7.2	TEST INSTRUMENTS .....	28
7.3	TEST PROCEDURE .....	28
7.4	TEST SETUP.....	28

APPENDIX (Photos of EUT) (3 pages)

## **1 General Information**

### **1.1 Product Description**

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: RFID: 13.56MHz
- B). Modulation: ASK for RFID
- C). Number of Channel: 1 channel for RFID
- D). Power Supply: DC 5V From Wired Input AC 120V/60Hz

Note: for a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### **1.2 Related Submittal(s) / Grant(s)**

This submittal(s) (test report) is intended for FCC ID: XLU68067790 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.

### 1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 1.4 Special Accessories

Not available for this EUT intended for grant.

### 1.5 Equipment Modifications

Not available for this EUT intended for grant.

### 1.6 Test Facility

Site Description  
EMC Lab.

:

Accredited by FCC, Aug. 18, 2011  
The Certificate Number is 247565.

Accredited by Industry Canada, January 13, 2011  
The Certificate Registration Number. is 9444A.

Name of Firm  
Site Location

:  
:

DONGGUAN EMTEK CO., LTD.  
No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China

## **2 System Test Configuration**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### **2.3 Test Procedure**

#### **2.3.1 Conducted Emissions**


The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

#### **2.3.2 Radiated Emissions**

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**

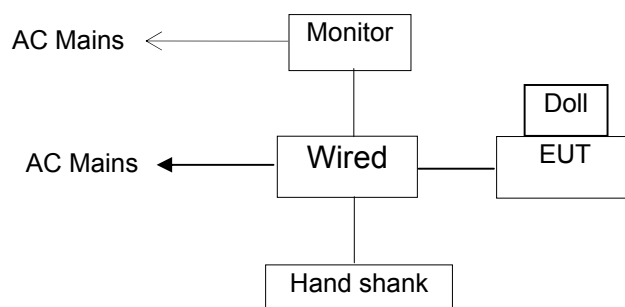

**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1	Retail Demo Portal of Power	Activision	68067790	XLU68067790	N/A	<b>EUT</b>
2.	RVT-R Reader(Wired)	Activision	RVT-002	EW4DWMW004	RUA20000487	support equipment
3.	Monitor	WEASTAM	WE-1705	N/A	N/A	support equipment
4	Hand shank	N/A	RVL-003	N/A	N/A	support equipment

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

### 3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.225(a)(b)(c), (d), §15.209	Radiated Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215	20dB Bandwidth	Compliant




## 4 Conducted Emissions Test

### 4.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 4.2 Test SET-UP (Block Diagram of Configuration)

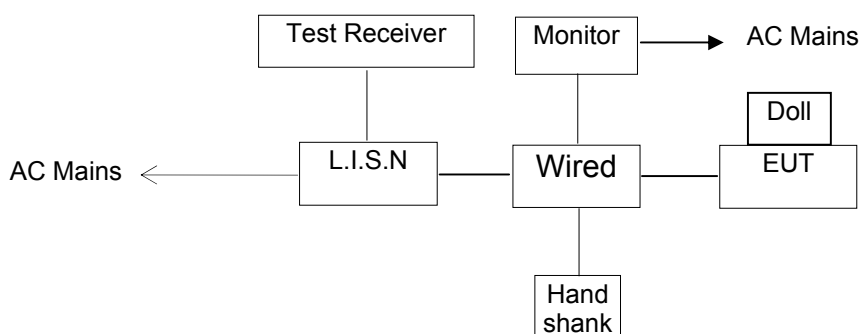

### 4.3 Measurement Equipment Used

Equipment	Serial No.	Manufacturer	Model No.	Cal. Date	Due Date
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/05/2013	05/25/2014
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/25/2013	05/25/2014
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/25/2013	05/25/2014

#### 4.4 Conducted Emission Limit

Conducted Emission Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50


**Note:** 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 4.5 Measurement Result

Date of Test:	July 14, 2013	Temperature:	22°C
Frequency	0.15~30MHz	Humidity:	50%
Detector:			
Test Result:	PASS	Test Mode:	TX Mode

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Over QP dB(μV)	Over AV dB(μV)
Line	0.150	51.20	21.77	66.00	56.00	-14.80	-34.23
	0.170	49.20	29.96	64.96	54.96	-15.76	-25.00
	0.226	44.30	29.25	62.57	52.57	-18.27	-23.32
	0.350	39.60	34.62	58.96	48.96	-19.36	-14.34
	1.220	36.40	29.01	56.00	46.00	-19.60	-16.99
	13.650	48.60	42.71	60.00	50.00	-11.40	-7.29
Neutral	0.150	51.30	20.77	66.00	56.00	-14.70	-35.23
	0.167	48.90	29.25	65.08	55.08	-16.18	-25.83
	0.228	43.50	31.88	62.52	52.52	-19.02	-20.64
	0.290	42.60	30.43	60.52	50.52	-17.92	-20.09
	0.350	40.10	34.62	58.96	48.96	-18.86	-14.34
	13.450	48.90	41.51	60.00	50.00	-11.10	-8.49

#### 4.6 Conducted Measurement Photos:

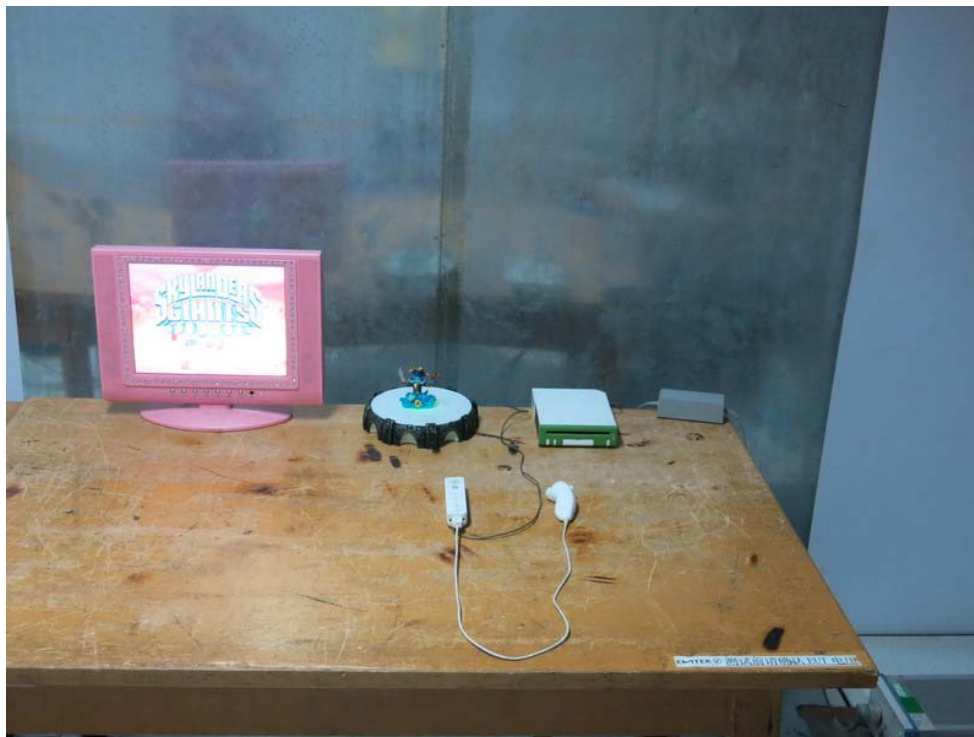


## 5 Radiated Emission Test

### 5.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

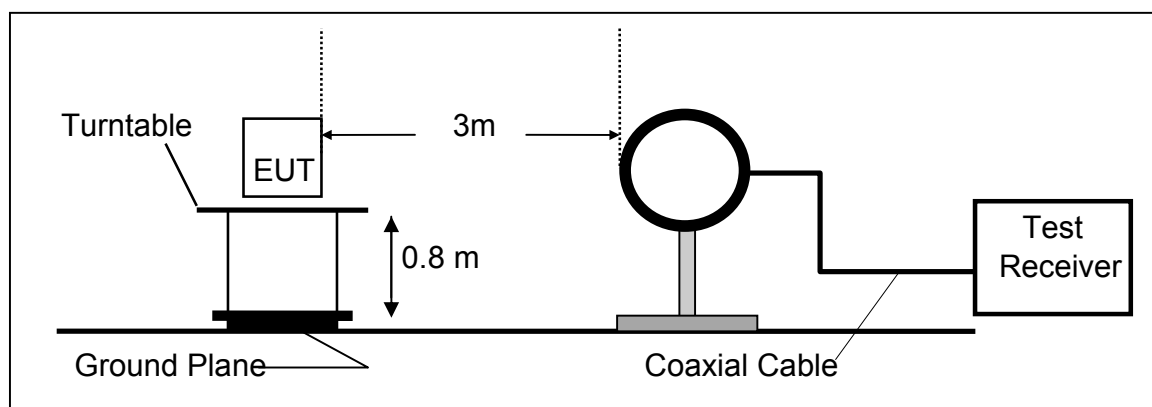

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

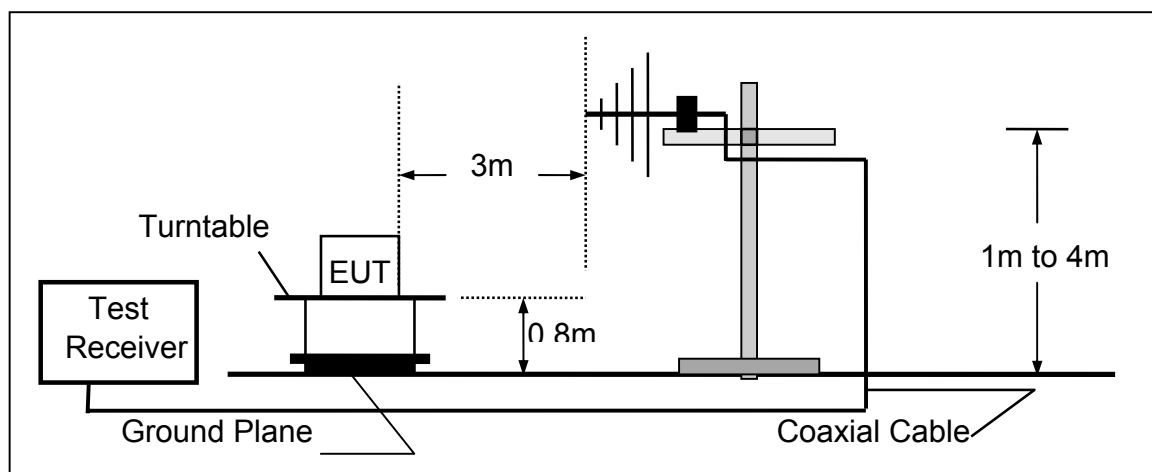

### 5.3 Measurement Equipment Used

Equipment	Serial No.	Manufacturer	Model No.	Cal. Date	Due Date
Test Receiver	100137	Rohde & Schwarz	ESCI	05/15/2013	05/15/2014
Power Amplifier	OPT H64	HP	8447F	05/02/2013	05/02/2014
Bilog Antenna	000141	Schwarzbeck	VULB9163	06/03/2013	05/03/2014
Loop Antenna	012	Schwarzbeck	FMZB 1519	05/09/2013	05/09/2014
Color Monitor	N/A	SUNSP0	SP-140A	05/04/2013	05/04/2014
Cable	549489	Schwarzbeck	PLF-100	05/16/2013	05/16/2014
Cable	A0783566	Rosenberger	CIL02	05/16/2013	05/16/2014
Cable	525178	Rosenberger	RG 233/U	05/06/2013	05/06/2014

### 5.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

FCC Part 15.225(a)/(b)/(c)				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
13.110 – 13.410	106	30 m	106*100	80.5
13.410 – 13.553	334	30 m	334*100	90.5
13.553 – 13.567	15,848	30 m	15,848*100	124
13.567 – 13.710	334	30 m	334*100	90.5
13.710 – 14.010	106	30 m	106*100	80.5

#### 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- :
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

## 5.5 Measurement Result


Operation Mode: TX Mode Test Date : July 14, 2013  
Frequency Range: 9KHz~30MHz Temperature : 28℃  
Test Result: PASS Humidity : 65 %  
Measured Distance: 3m Test By: KYO

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
11.23	V	29.23	69.54	-40.31	QP
16.34	V	23.34	69.54	-46.20	QP
17.12	V	27.45	69.54	-42.09	QP
19.23	V	30.45	69.54	-39.09	QP
22.45	V	30.65	69.54	-38.89	QP
11.45	H	27.45	69.54	-42.09	QP
17.74	H	29.65	69.54	-39.89	QP
20.34	H	28.68	69.54	-40.86	QP
24.44	H	29.78	69.54	-39.76	QP
27.84	H	29.94	69.54	-39.60	QP

Operation Mode: TX Mode Test Date : July 14, 2013  
Frequency Range: 30~1000MHz Temperature : 28℃  
Test Result: PASS Humidity : 65 %  
Measured Distance: 3m Test By: KYO



Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)	Note
175.500	V	35.62	43.50	-7.88	QP
263.770	V	33.77	46.00	-12.23	QP
527.610	V	40.28	46.00	-5.72	QP
612.00	V	38.97	46.00	-7.03	QP
747.800	V	40.54	46.00	-5.46	QP
906.880	V	41.05	46.00	-4.95	QP
214.300	H	35.13	43.50	-8.37	QP
312.270	H	35.23	46.00	-10.77	QP
384.050	H	36.99	46.00	-9.01	QP
527.610	H	41.18	46.00	-4.82	QP
612.000	H	41.09	46.00	-4.91	QP
747.800	H	40.01	46.00	-5.99	QP

Operation Mode:	TX Mode	Test Date :	July 14, 2013
Frequency Range:	13.110MHz~14.010 MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	KYO

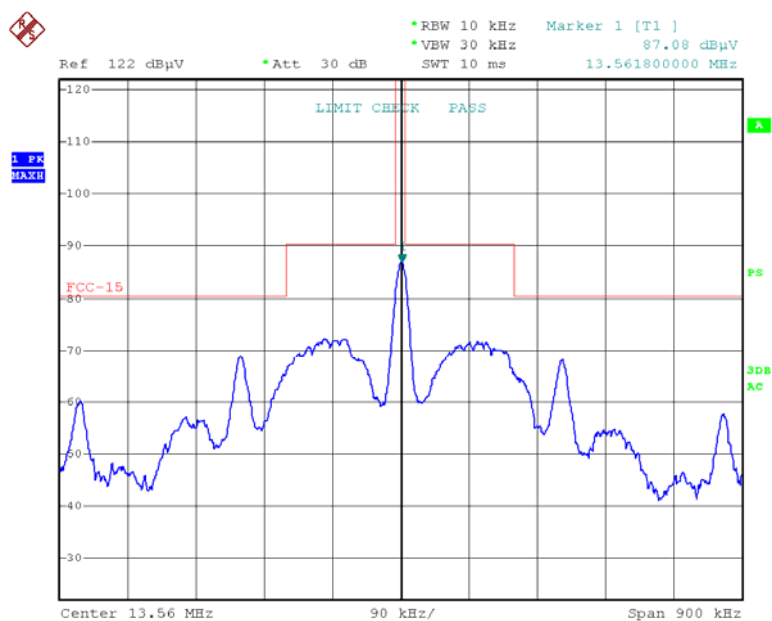



## 5.6 Radiated Measurement Photos:

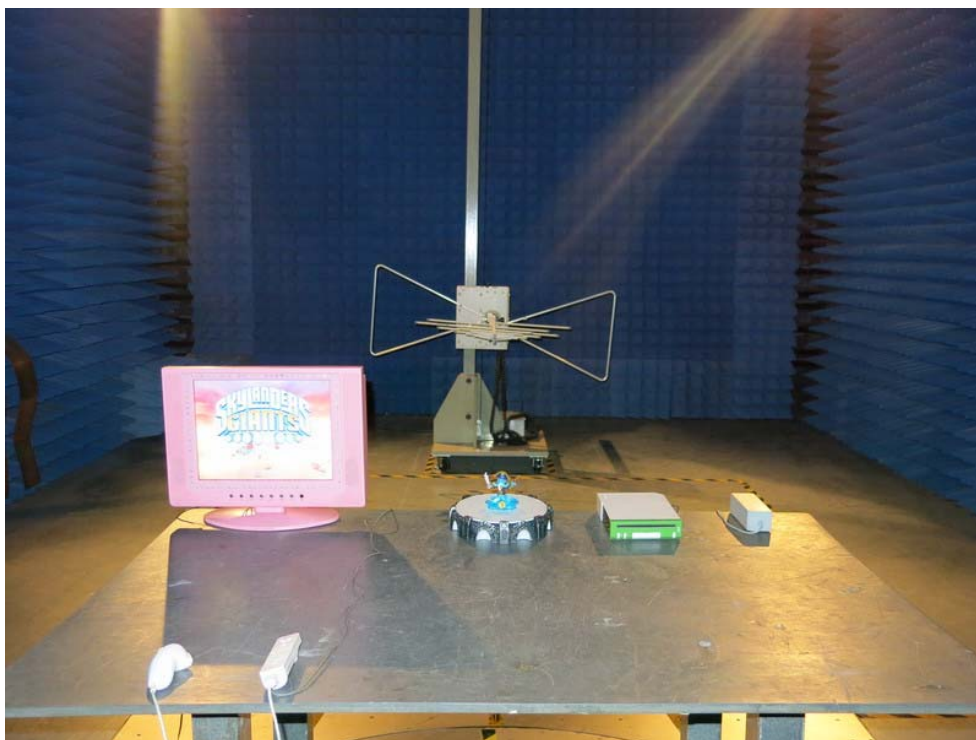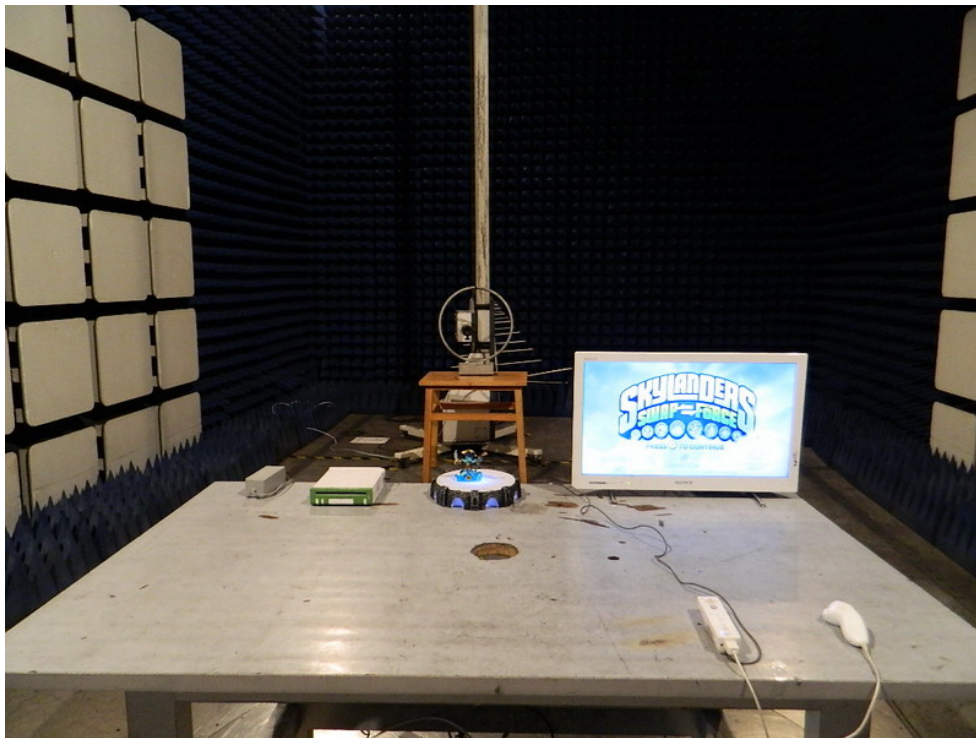

## 6 FREQUENCY STABILITY MEASUREMENT

### 6.1 FREQUENCY STABILITY LIMITS

FCC Part 15.225(e)

the frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new w battery.

### 6.2 MEASUREMENT INSTRUMENTS LIST

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	ESCI	100137	05/15/2013	05/15/2014

### 6.3 TEST PROCEDURE

- The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.
- At room temperature ( $25\pm5^{\circ}\text{C}$ ), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 6.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



## 6.5 TEST RESULTS



E.U.T :	Retail Demo Portal of Power	Test Mode :	TX Mode
Test Voltage :	DC 5V From Wired input AC 120V/60Hz		



Frequency Stability Versus Environmental Temperature					
Temperature (°C)	Voltage (Vac)	Frequency (MHz)	Freq Error (ppm)	Limit (ppm)	Results
-20	5V	13.56010	7.37	100	PASS
-10	5V	13.56025	18.44	100	PASS
0	5V	13.56015	11.06	100	PASS
10	5V	13.56010	7.37	100	PASS
20	5V	13.56000	0.00	100	PASS
30	5V	13.56025	18.44	100	PASS
40	5V	13.56015	11.06	100	PASS
50	5V	13.56025	18.44	100	PASS



Frequency Stability Versus Input Voltage					
Temperature (°C)	Voltage (Vac)	Frequency (MHz)	Freq Error (ppm)	Limit (ppm)	Results
20	102	13.56020	14.75	100	PASS
20	108	13.56025	18.44	100	PASS
20	114	13.56020	14.75	100	PASS
20	120	13.56025	18.44	100	PASS
20	126	13.56005	3.69	100	PASS
20	132	13.56015	11.06	100	PASS
20	138	13.56013	9.59	100	PASS

## Frequency Stability Versus Environmental Temperature

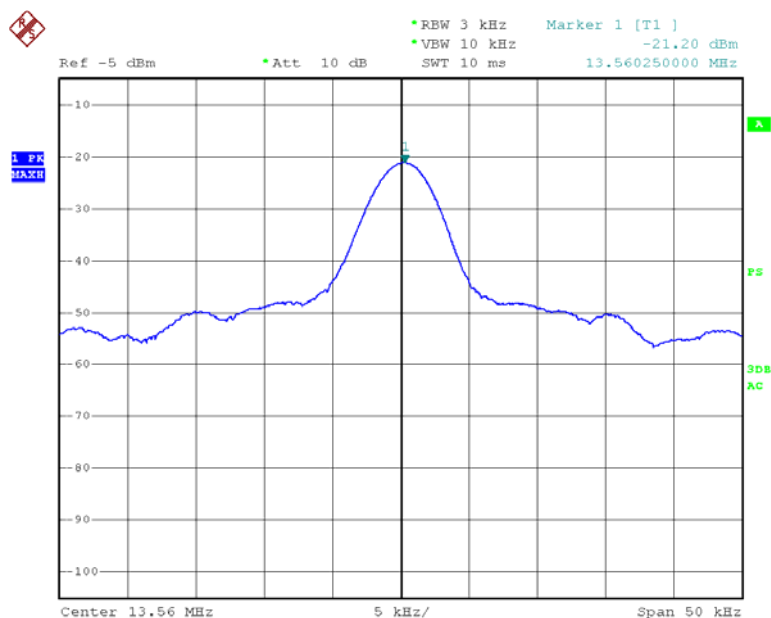
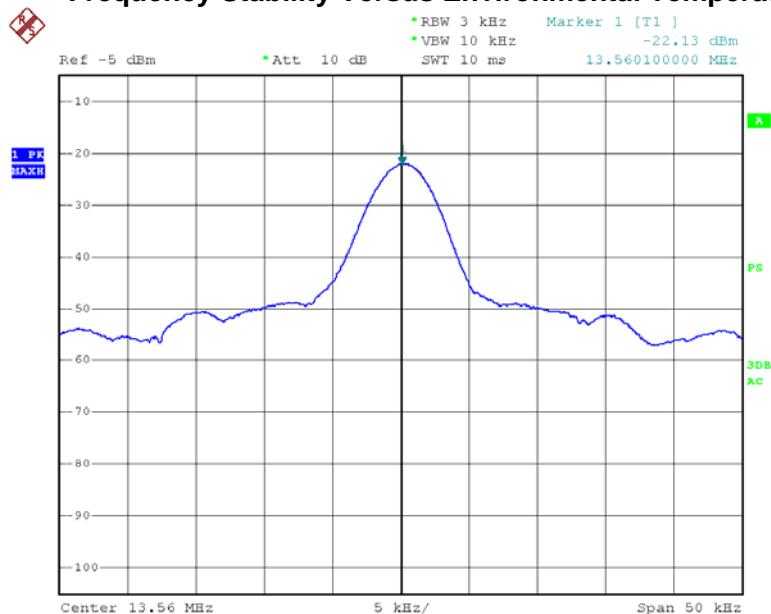


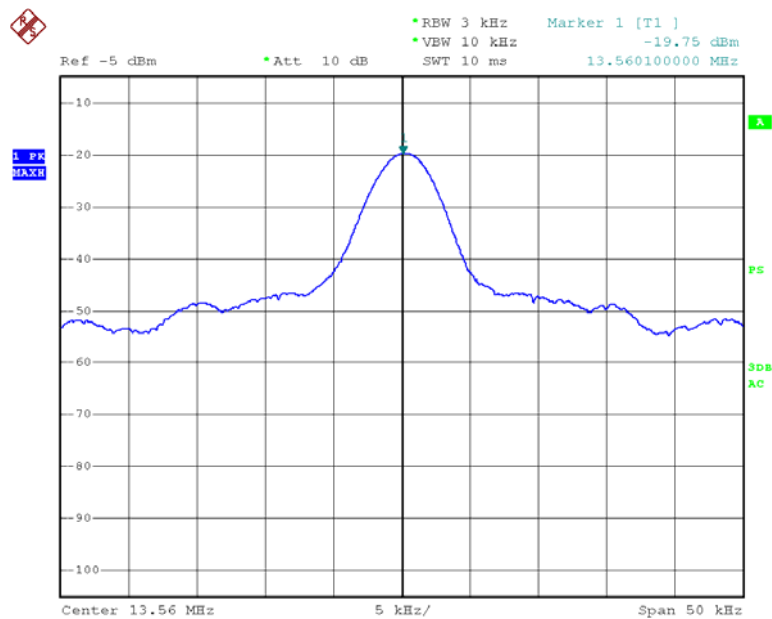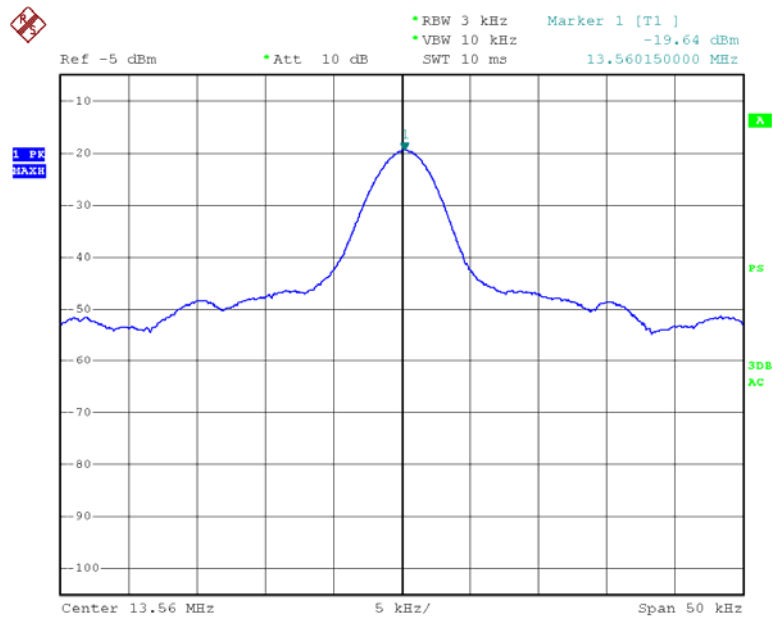

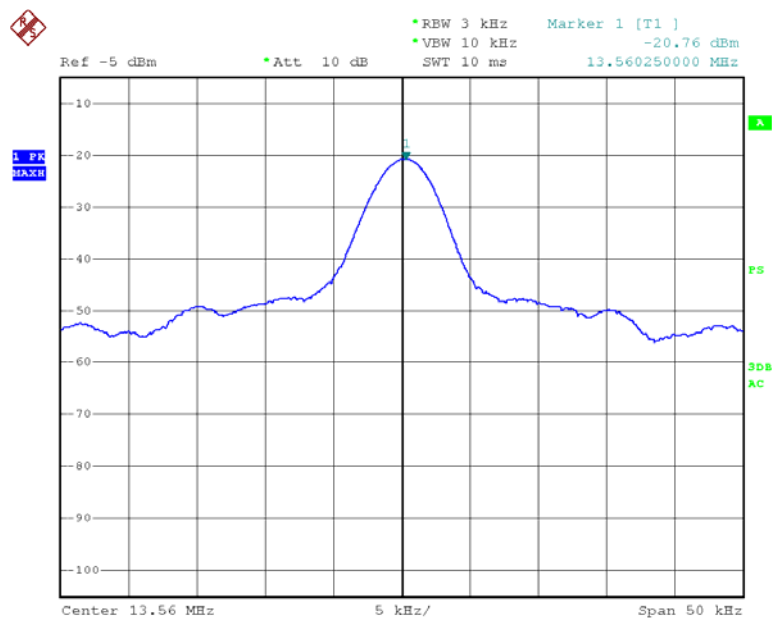
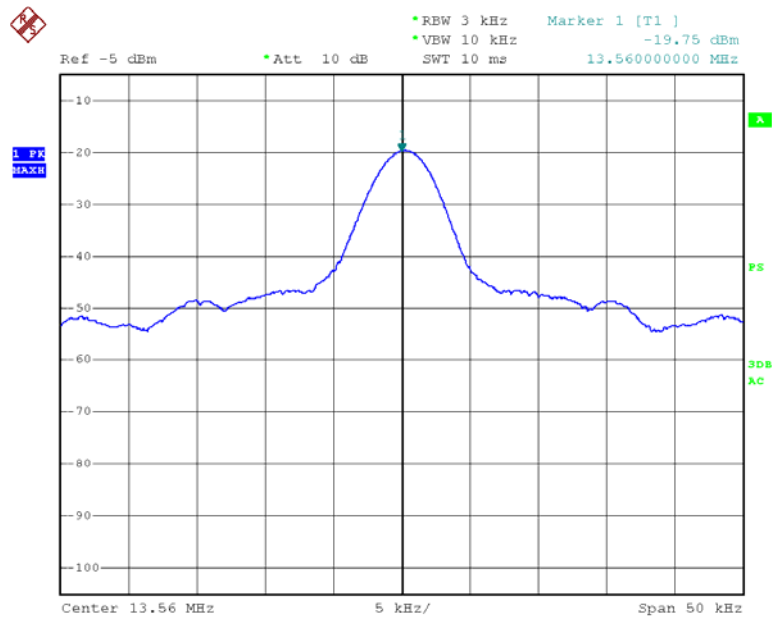


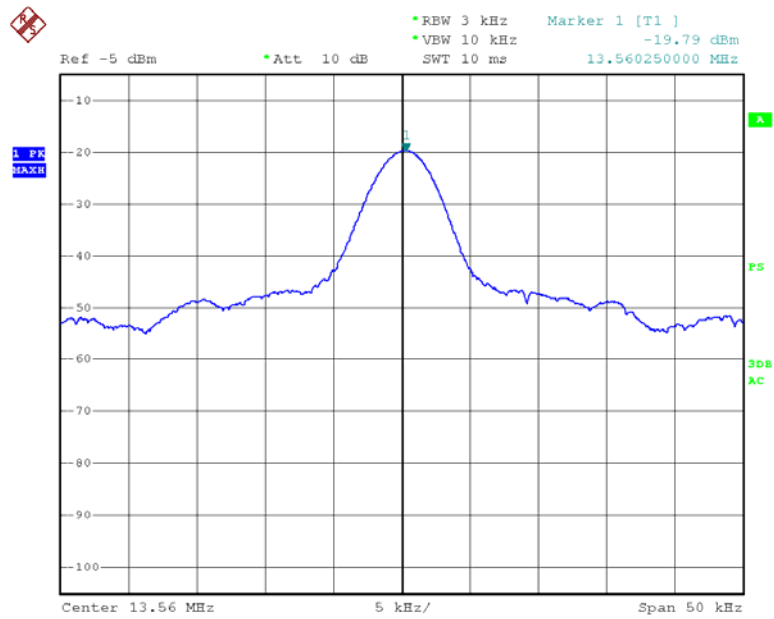
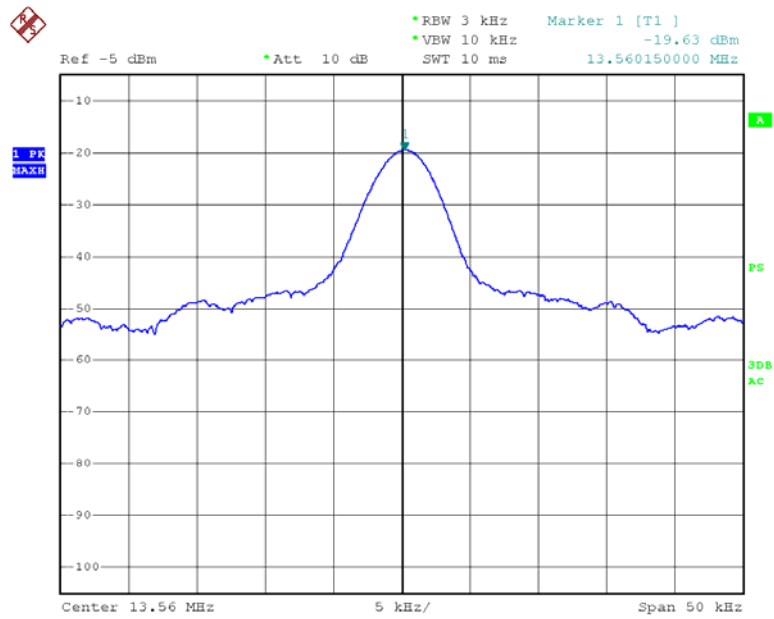



## Frequency Stability Versus Input Voltage

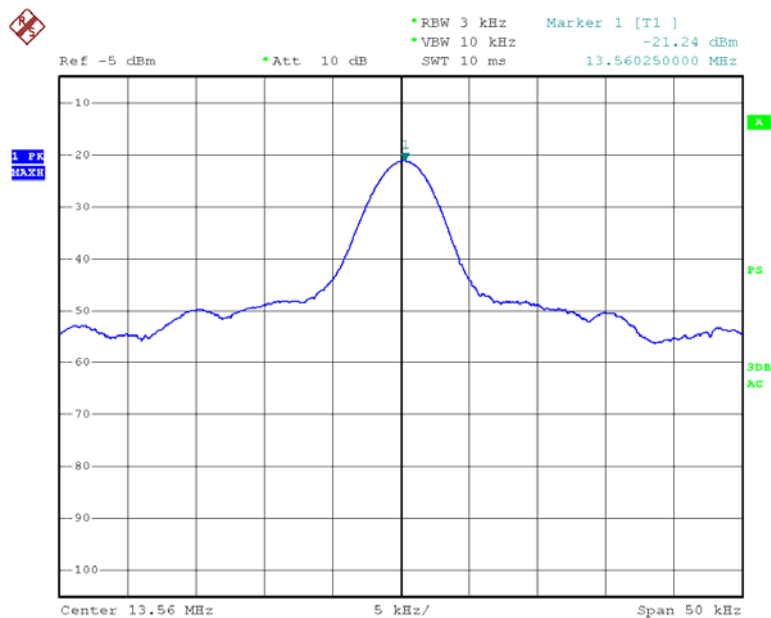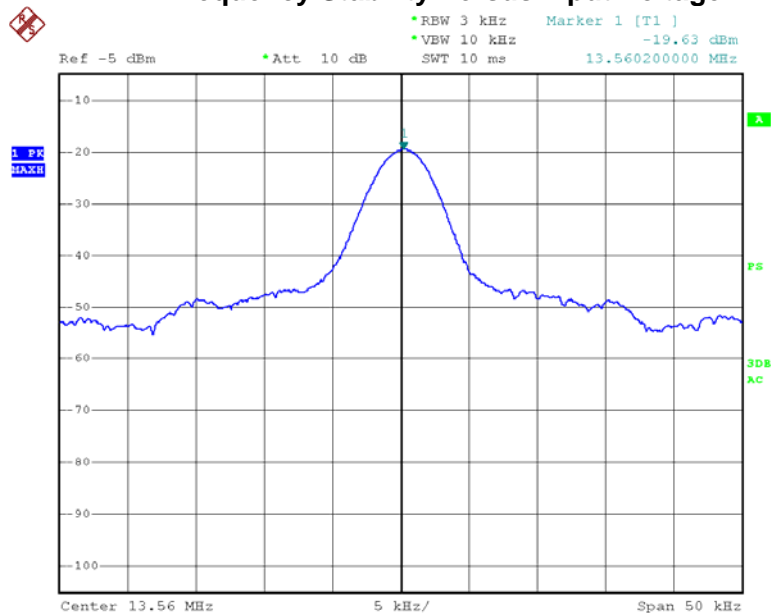



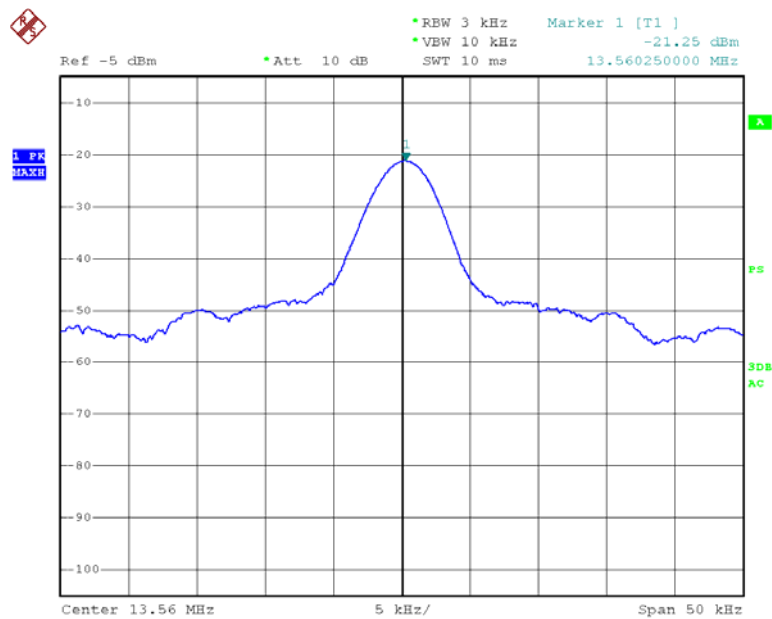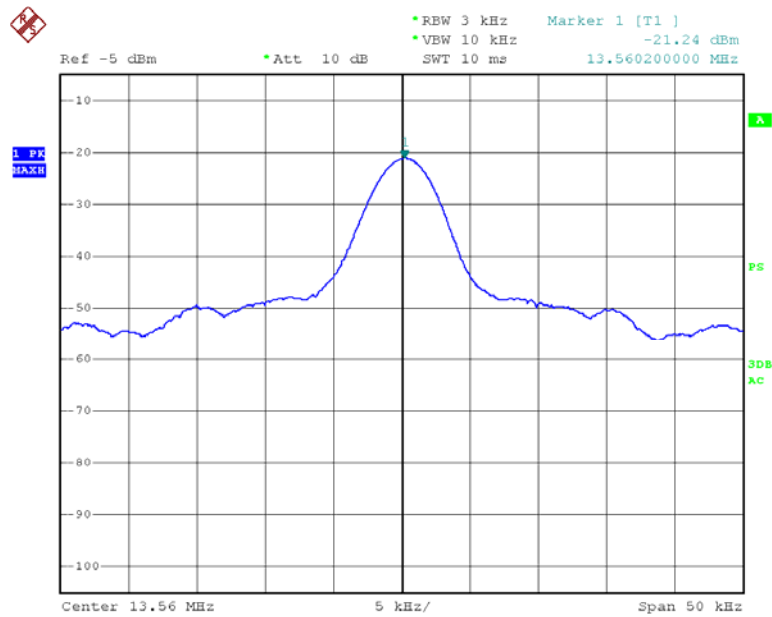

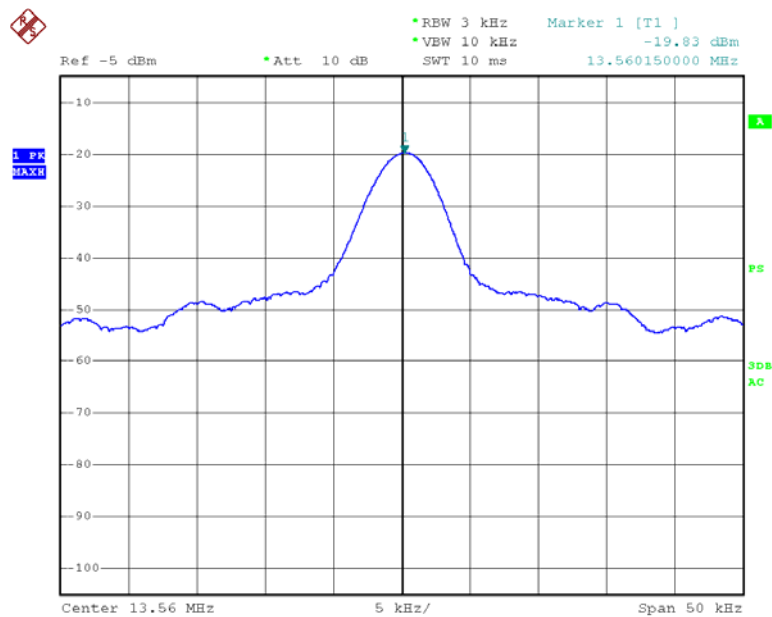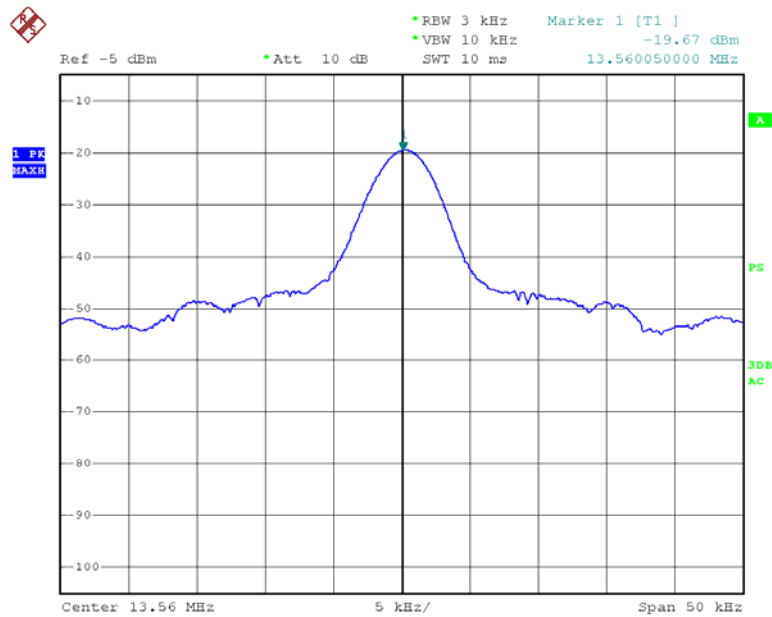

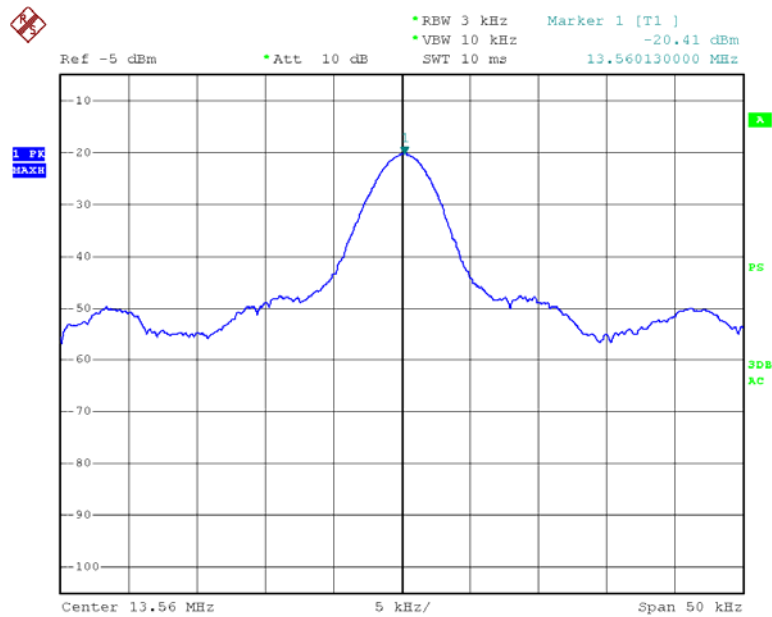

## 7 EMISSION BANDWIDTH

### 7.1 Emission Bandwidth Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


### 7.2 TEST INSTRUMENTS

Refer a test equipment and calibration data table in this test report.

### 7.3 TEST PROCEDURE


The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10kHz RBW and 10kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 7.4 Test Setup

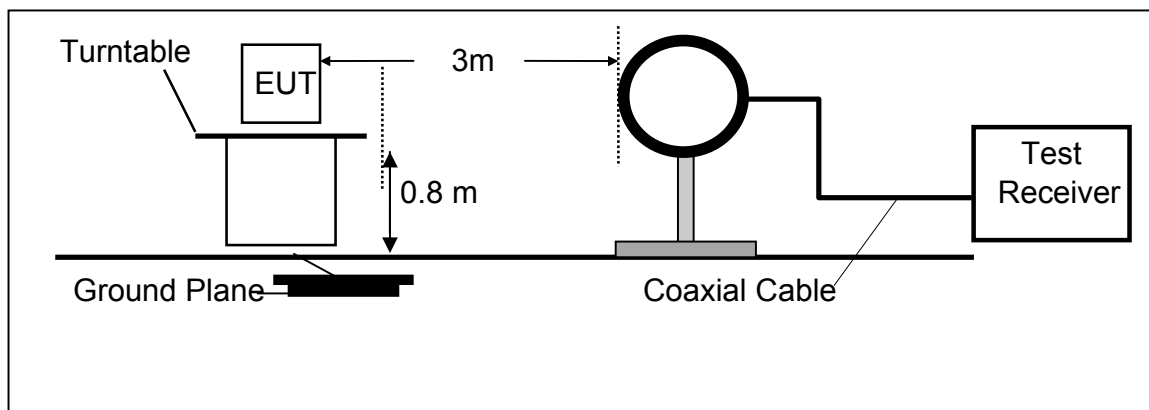


Frequency (MHz)	20dB Bandwidth (kHz)	99%Bandwidth (kHz)	Results
13.56	432	485	PASS

## 20dB BANDWIDTH TEST PLOT

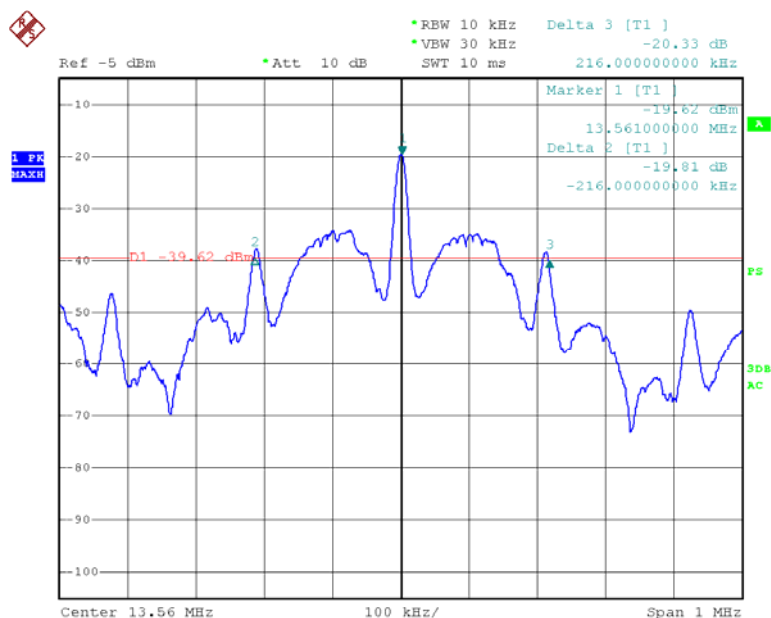

## 99% BANDWIDTH TEST PLOT

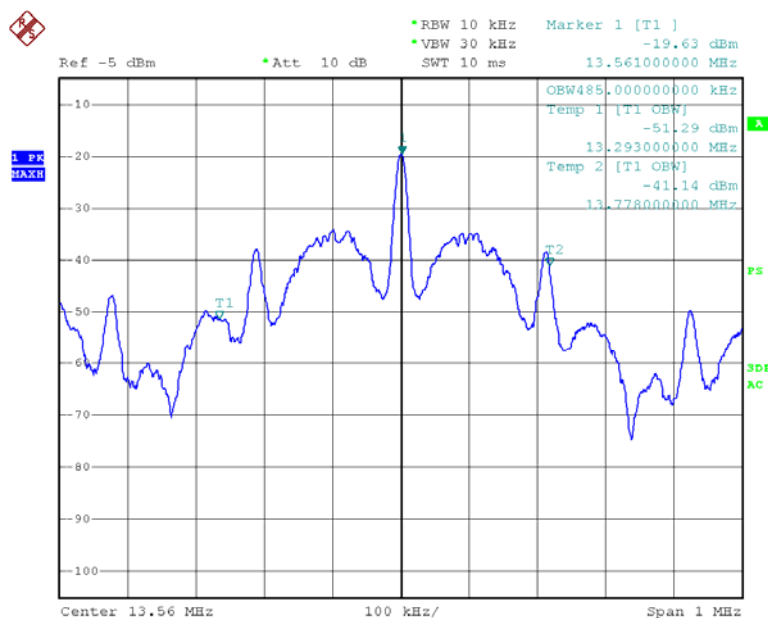

# APPENDIX I (Photos of EUT)

