

Report Reference ID:	REP108809
----------------------	-----------

Test specification:	Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter D – Safety and special radio services Part 90 – Private land mobile services Subpart I – General technical standards
---------------------	--

Applicant:	TEKO Telecom Srl. Via Meucci, 24/a 40024 – Castel S. Pietro Terme (BO) – Italy
Apparatus:	Medium Power Remote Unit
Model:	TRM7E8AE19HAWX23AT
FCC ID:	XM2-MP6B

Testing laboratory:	<b>Nemko Italy Spa</b> Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221
---------------------	---

	Name and title	Date
Tested by:	 P. Barbieri, Wireless/EMC Specialist	2025-08-01
Reviewed by:	 R. Giampaglia, Wireless/EMC Specialist	2025-08-01

## Table of contents

<b>Section 1: Report summary .....</b>	<b>3</b>
1.1 Test specification .....	3
1.2 Statement of compliance .....	3
1.3 Exclusions .....	3
1.4 Registration number .....	3
1.5 Test report revision history .....	3
1.6 Limits of responsibility .....	3
<b>Section 2: Summary of test results .....</b>	<b>4</b>
2.1 FCC Part 90, test results .....	4
<b>Section 3: Equipment under test (EUT) and application details .....</b>	<b>5</b>
3.1 Applicant details .....	5
3.2 Modular equipment .....	5
3.3 Product details .....	5
3.4 Application purpose .....	5
3.5 Composite/related equipment .....	6
3.6 Sample information .....	6
3.7 EUT technical specifications .....	6
3.8 Accessories and support equipment .....	7
3.9 Operation of the EUT during testing .....	8
3.10 EUT setup diagram .....	8
<b>Section 4: Engineering considerations .....</b>	<b>9</b>
4.1 Modifications incorporated in the EUT .....	9
4.2 Deviations from laboratory tests procedures .....	9
4.3 Technical judgment .....	9
<b>Section 5: Test conditions .....</b>	<b>10</b>
5.1 Deviations from laboratory tests procedures .....	10
5.2 Test conditions, power source and ambient temperatures .....	10
5.3 Measurement uncertainty .....	10
5.4 Test equipment .....	12
<b>Appendix A: Test results .....</b>	<b>13</b>
Clause 935210 D05v01r04 (4.2) AGC threshold .....	13
Clause 935210 D05v01r04 (4.3) Out of band rejection .....	15
Clause 90.209, 90.219(e)(4) Occupied bandwidth .....	17
Clause 90.205, 90.542(a)(3), 90.219(e)(1) Output power at RF antenna connector .....	20
Clause 935210 D05v01 (4.6) Noise figure .....	24
Clause 90.543(e), 90.219(e)(3) Spurious emissions at the antenna terminal .....	25
Clause 90.543(e), 90.219(e)(3) Spurious emissions radiated .....	29
Clause 90.543(f) Radiated spurious emissions within 1559–1610 MHz band .....	31
<b>Appendix B: Block diagrams of test set-ups .....</b>	<b>32</b>
<b>Appendix C: EUT Photos .....</b>	<b>33</b>

## Section 1: Report summary

### 1.1 Test specification

Specifications	Part 90 – Private land mobile services
----------------	--

### 1.2 Statement of compliance

Compliance	In the configuration tested the EUT was found compliant Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Test method: ANSI C63.26-2015, 935210 D05 Measurements guidance for industrial and non-consumer signal booster, repeater and amplifier devices v01r04.	

### 1.3 Exclusions

Exclusions	None
------------	------

### 1.4 Registration number

FCC site number	682159
-----------------	--------

### 1.5 Test report revision history

Revision #	Details of changes made to test report
REP108809	Original report issued

### 1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



## Section 2: Summary of test results

### 2.1 FCC Part 90, test results

Part	Methods	Test description	Verdict
	§ 935210 D05v01r04 (4.2)	AGC threshold	Pass
	§ 935210 D05v01r04 (4.3)	Out of band rejection	Pass
§90.209 §90.219(e)(4)	§ 935210 D05v01r04 (4.4)	Occupied bandwidth	Pass
§90.205 §90.542(a)(3) §90.219(e)(1)	§ 935210 D05v01r04 (4.5)	Output power at RF antenna connector	Pass
§90.219(e)(2)	§ 935210 D05v01r04 (4.6)	Noise Figure	Pass
§90.543(e) §90.219(e)(3)	§ 935210 D05v01r04 (4.7)	Spurious emissions at RF antenna connector	Pass
§90.543(e) §90.219(e)(3)	§ 935210 D05v01r04 (4.9)	Radiated spurious emissions	Pass
§90.543(f) §90.219(e)(3)	§ 935210 D05v01r04 (4.9)	Radiated spurious emissions within 1559–1610 MHz band	Pass
§90.213	§ 935210 D05v01r04 (4.8)	Frequency stability	N/A a)

#### Notes:

- NOT APPLICABLE: Modulation/frequency conversion circuitry not in use. No frequency change in EUT (input and output have same frequency)

## Section 3: Equipment under test (EUT) and application details

### 3.1 Applicant details

<b>Applicant complete business name</b>	Name:	Teko Telecom Srl
	Federal Registration Number (FRN):	0018963462
	Grantee code	XM2
<b>Mailing address</b>	Address: City: Province/State: Post code: Country:	Via Meucci, 24/a Castel S. Pietro Terme Bologna 40024 Italy

### 3.2 Modular equipment

<b>a) Single modular approval</b>	Single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>b) Limited single modular approval</b>	Limited single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

### 3.3 Product details

<b>FCC ID</b>	Grantee code:	XM2
	Product code:	-MP6B
<b>Equipment class</b>	B9B	
<b>Description of product as it is marketed</b>	Booster	
	Model name/number:	TRM7E8AE19HAWX23AT
	Serial number:	1007267001

### 3.4 Application purpose

<b>Type of application</b>	<input type="checkbox"/> Original certification
	<input type="checkbox"/> Change in identification of presently authorized equipment
	Original FCC ID: <input type="text"/> Grant date: <input type="text"/>
	<input checked="" type="checkbox"/> Class II permissive change or modification of presently authorized equipment

## Section 3: Equipment under test

## 3.5 Composite/related equipment

<b>a) Composite equipment</b>	The EUT is a composite device subject to an additional equipment authorization Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
<b>b) Related equipment</b>	The EUT is part of a system that operates with, or is marketed with, another device that requires an equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>c) Related FCC ID</b>	If either of the above is "yes": <input checked="" type="checkbox"/> has been granted under the FCC ID(s) listed below: <input type="checkbox"/> is in the process of being filled under the FCC ID(s) listed below: <input type="checkbox"/> is pending with the FCC ID(s) listed below: <input type="checkbox"/> has a mix of pending and granted statuses under the FCC ID(s) listed below: i FCC ID: XM2-MP6B ii FCC ID:

## 3.6 Sample information

Receipt date:	2025-07-01
Nemko sample ID number:	PRJ0084048

## 3.7 EUT technical specifications

<b>Operating band:</b>	Down Link: 758–768 MHz, Up Link: 788-798 MHz
<b>Operating frequency:</b>	Wideband
<b>Modulation type:</b>	TDD 5G NR (QAM and QPSK)
<b>Occupied bandwidth:</b>	5G NR: 5 MHz to 10 MHz
<b>Channel spacing:</b>	standard
<b>Emission designator:</b>	5G NR: D7W
<b>RF Output</b>	Down Link: 33dBm (2W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Gain</b>	Down Link: 38dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Antenna type:</b>	External Antenna is not provided, equipment that has an external 50 Ω RF connector
<b>Power source:</b>	100-240 Vac



## Section 3: Equipment under test

**3.8 Accessories and support equipment**

The following information identifies accessories used to exercise the EUT during testing:

## Item # 1

Type of equipment:	Master Unit - Subrack
Brand name:	Teko Telecom srl
Model name or number:	SUB-TRX-PSU
Serial number:	1007067005
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

## Item # 2

Type of equipment:	Master Unit – Management Module
Brand name:	Teko Telecom srl
Model name or number:	TSPV-EBB
Serial number:	1007944030
Nemko sample number:	-----
Connection port:	LAN port
Cable length and type:	-----

## Item # 3

Type of equipment:	Master Unit – Optical Module
Brand name:	Teko Telecom srl
Model name or number:	TTRU4W-S-M
Serial number:	1008678019
Nemko sample number:	-----
Connection port:	DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit)
Cable length and type:	-----

## Item # 4

Type of equipment:	Master Unit – Power Supply
Brand name:	Teko Telecom srl
Model name or number:	TPSU/AC
Serial number:	100012284
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

## Section 3: Equipment under test

## 3.9 Operation of the EUT during testing

<b>Details:</b>
In down-link direction, normal working at max gain with max RF power output.

## 3.10 EUT setup diagram

In this system, Remote Unit is the EUT. Master Unit includes only management module and optical module (to convert RF signal in optical signal in down link direction and vice versa optical signal in RF signal in uplink direction). As described in “Operational description”, master unit is connected directly to base station, so the system doesn’t use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF connector of optical module in the Master Unit.

**Test setup for output power, occupied bandwidth, spurious emissions:****Procedure**

Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.

## Section 4: Engineering considerations

### 4.1 Modifications incorporated in the EUT

<b>Modifications</b>	Modifications performed to the EUT during this assessment None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> , performed by Client <input type="checkbox"/> or Nemko <input type="checkbox"/>
Details:	

### 4.2 Deviations from laboratory tests procedures

<b>Deviations</b>	Deviations from laboratory test procedures None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> - details are listed below:

### 4.3 Technical judgment

<b>Judgment</b>	None

## Section 5: Test conditions

### 5.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

### 5.2 Test conditions, power source and ambient temperatures

Normal temperature, humidity and air pressure test conditions	Temperature: 18–33 °C Relative humidity: 25–75 % Air pressure: 86–106 kPa  When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$ , for which the equipment was designed.

### 5.3 Measurement uncertainty

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002. The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

**Section 5: Test conditions, continued**

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
			0.009 MHz ÷ 30 MHz	1.1 dB	(1)
		Carrier power	30 MHz ÷ 18 GHz	1.5 dB	(1)
		RF Output Power	18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
			0.009 MHz ÷ 18 GHz	3.0 dB	(1)
		Conducted spurious emissions	18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter – Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
	Radiated	Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
Receiver	Radiated		66 GHz ÷ 220 GHz	10 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
		Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
		Sensitivity measurement	66 GHz ÷ 220 GHz	10 dB	(1)
	Conducted	Conducted spurious emissions	1 MHz ÷ 18 GHz	6.0 dB	(1)
			0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)

**NOTES:**

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95 %



## Section 5: Test conditions, continued

## 5.4 Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2026-07
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12
Combiner	Miczen	MZP200506GA (0.5-6 GHz)	210314001	COU

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's



## Appendix A: Test results

### Clause 935210 D05v01r04 (4.2) AGC threshold

#### Measure of EUT AGC Threshold

Test date: 2025-07-01 to 2025-07-01

Test results: Pass

#### Special notes



—

### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

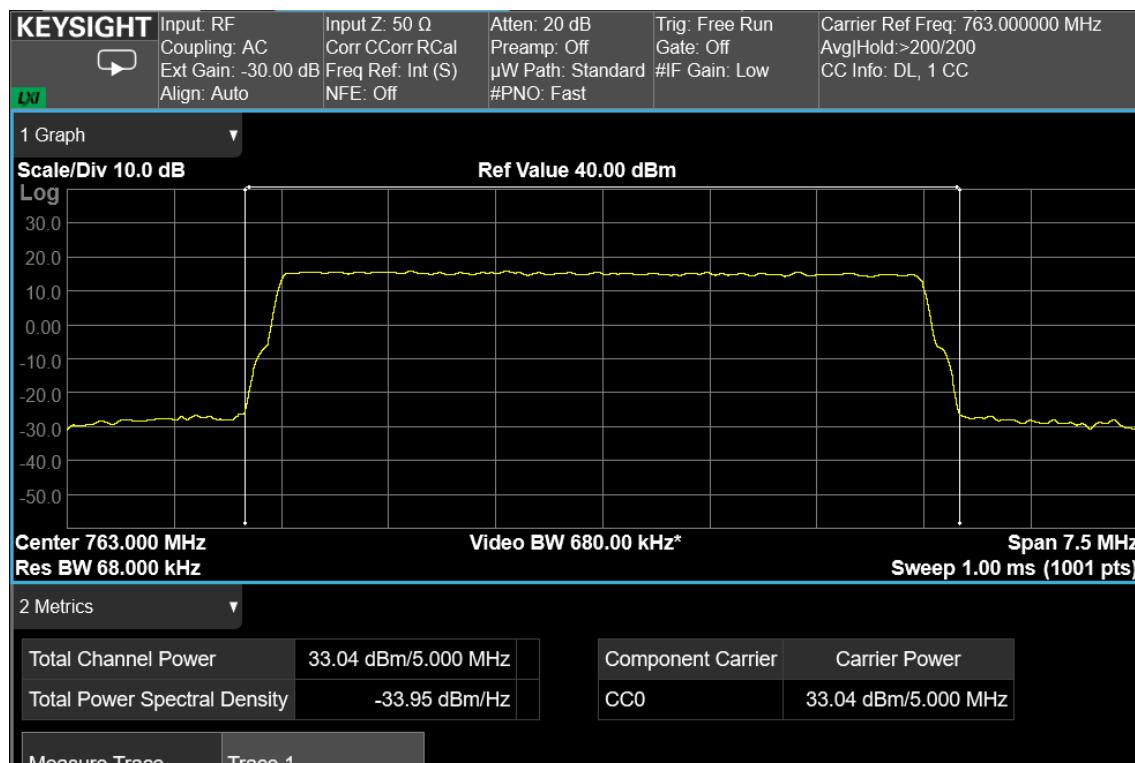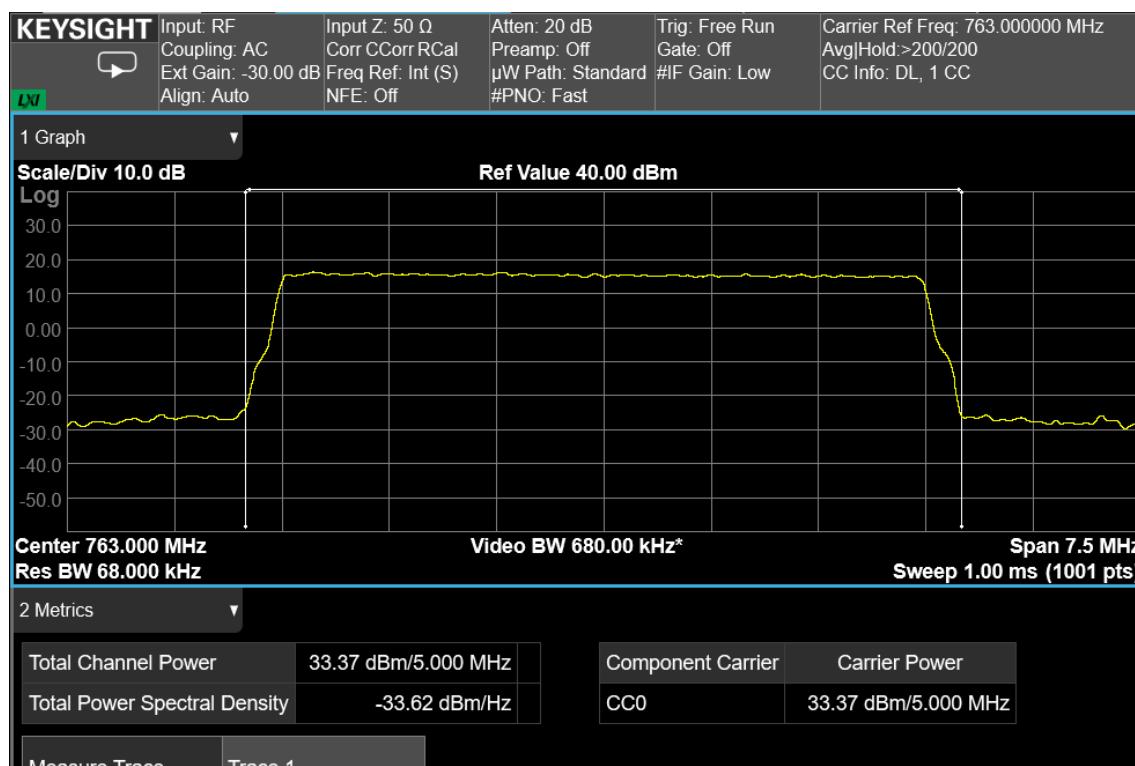**Test data**

**5 MHz signal, middle channel, nominal input signal**

**5 MHz signal, middle channel, nominal input signal +1 dB**

**Clause 935210 D05v01r04 (4.3) Out of band rejection****Out of Band Rejection – Test for rejection of out of band signals.****Test date:** 2025-07-01 to 2025-07-01**Test results:** Pass**Special notes**


–

**Test equipment**

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

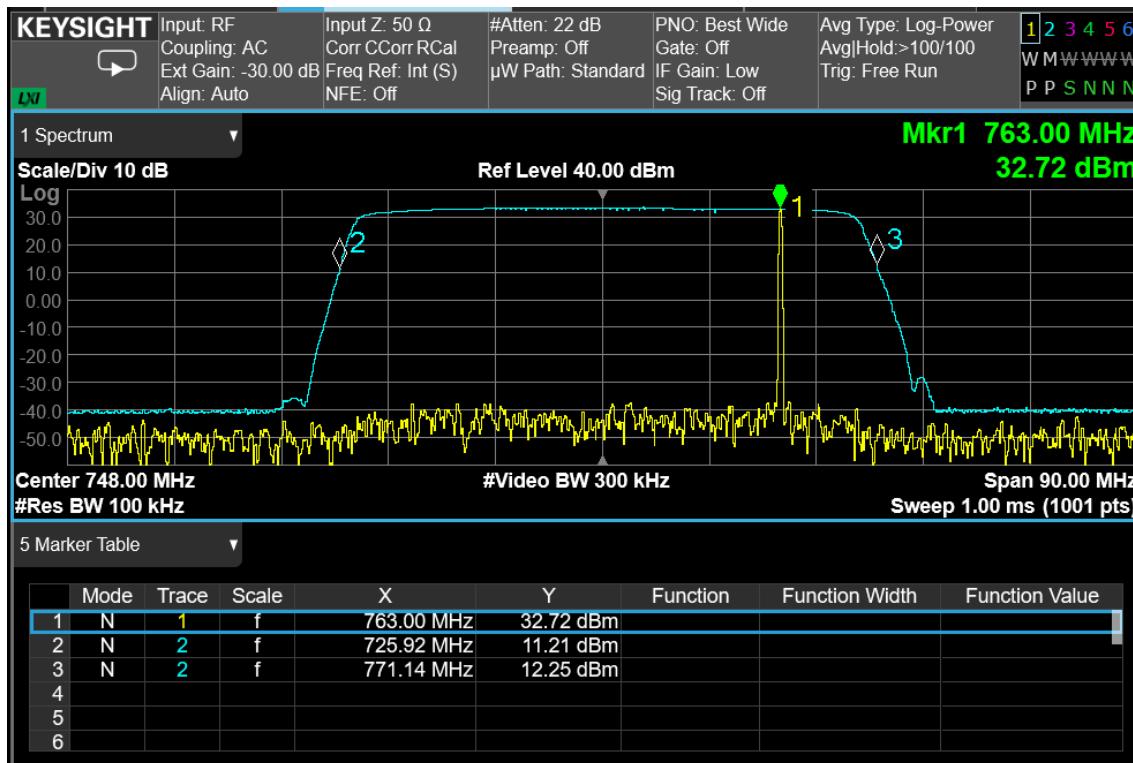**Test data**


## Clause 90.209, 90.219(e)(4) Occupied bandwidth

### § 90.219(e)(4)

A signal booster must be designed such that all signals that it retransmits meet the following requirements:

- (i) The signals are retransmitted on the same channels as received. Minor departures from the exact provider or reference frequencies of the input signals are allowed, *provided that* the retransmitted signals meet the requirements of § 90.213.
- (ii) There is no change in the occupied bandwidth of the retransmitted signals.
- (iii) The retransmitted signals continue to meet the unwanted emissions limits of § 90.210 applicable to the corresponding received signals (assuming that these received signals meet the applicable unwanted emissions limits by a reasonable margin).

Test date: 2025-07-01 to 2025-07-01

Test results: Pass

### Special notes



-


### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12


Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

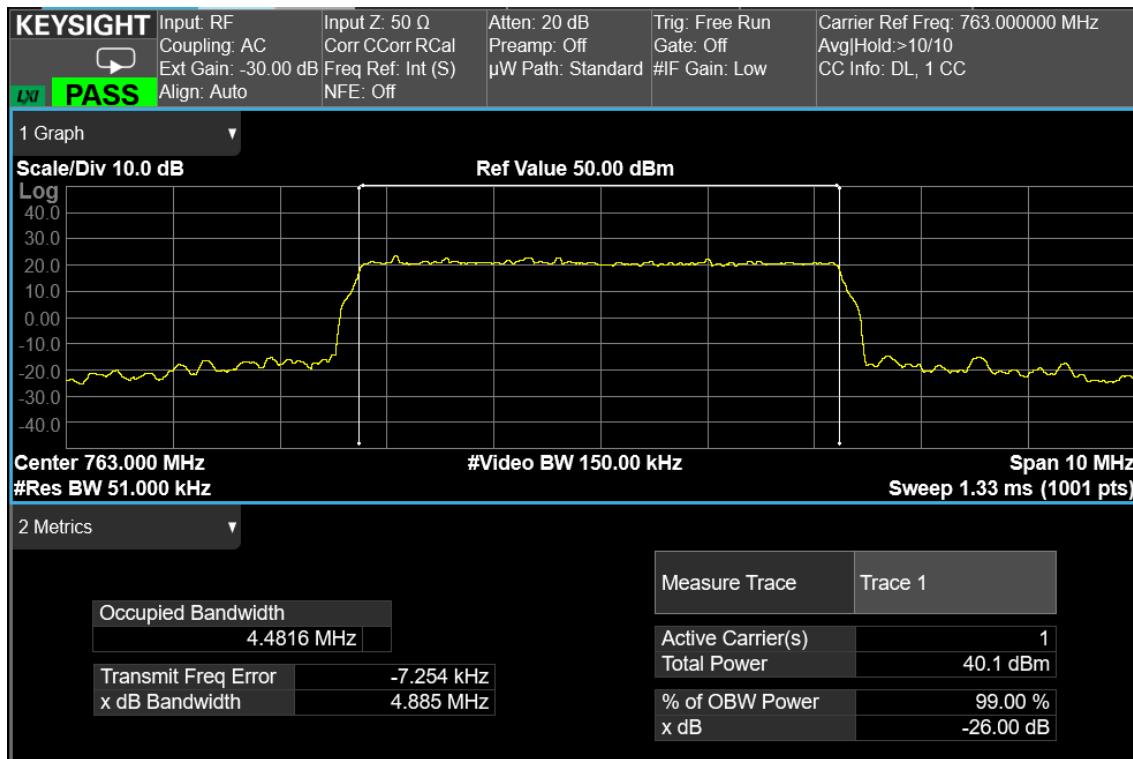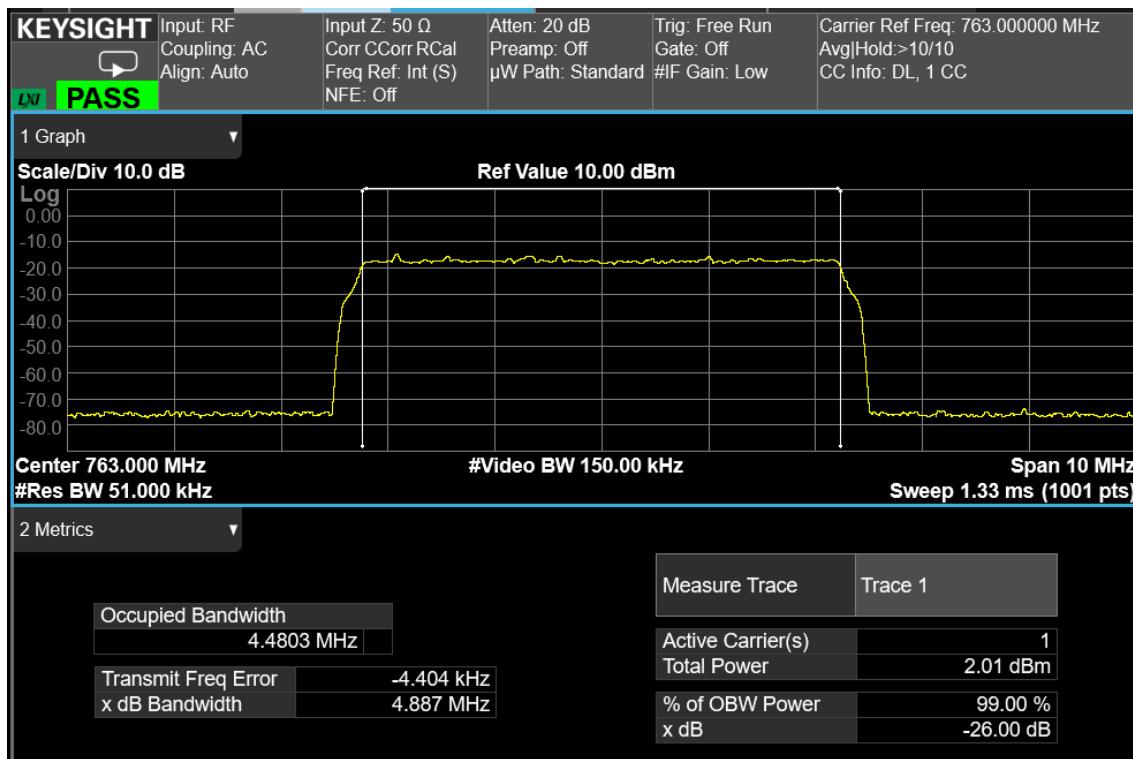**Test data**

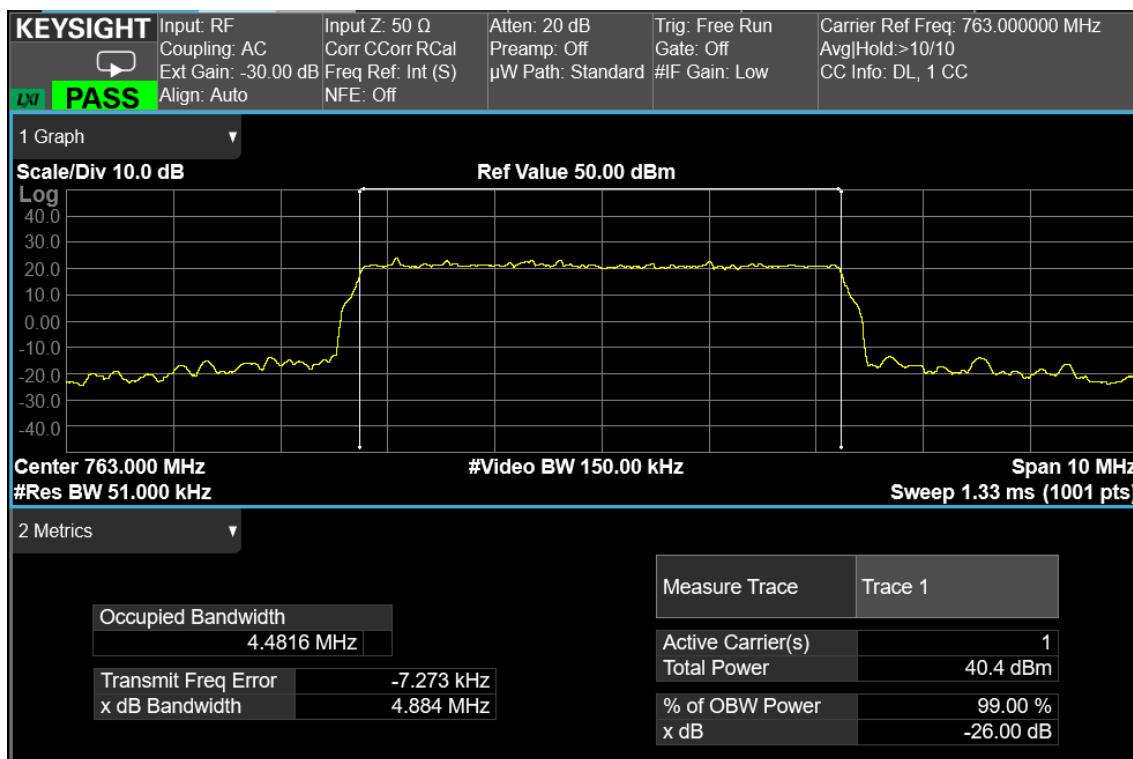**5 MHz signal, middle channel, nominal input signal - Output**

**5 MHz signal, middle channel, nominal input signal - Input**

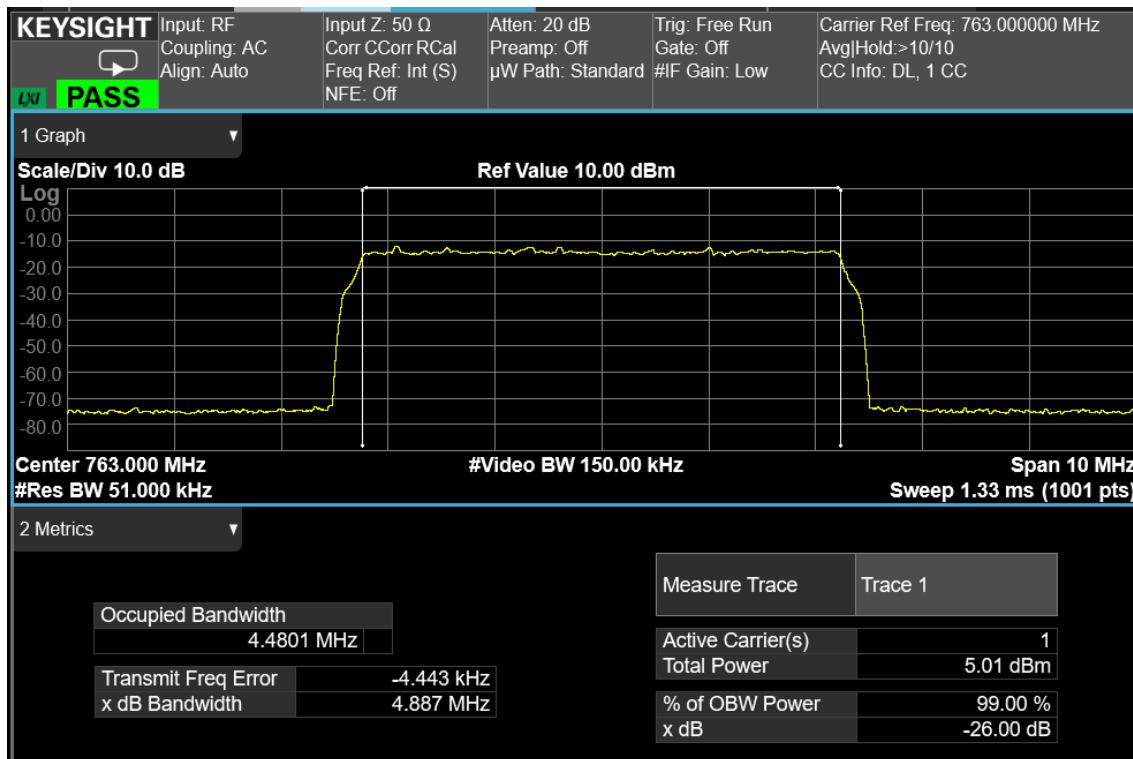

**5 MHz signal, middle channel, nominal input signal + 3dB - Output**



**5 MHz signal, middle channel, nominal input signal + 3dB - Input**

**Clause 90.205, 90.542(a)(3), 90.219(e)(1) Output power at RF antenna connector****§ 90.205**

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation. Except where otherwise specifically provided for, the maximum power that will be authorized to applicants whose license applications for new stations are filed after August 18, 1995 is as follows:

(j) 758-775 MHz and 788-805 MHz. Power and height limitations are specified in §§ 90.541 and 90.542.

**§ 90.542(a)(3)**

(a) The following power limits apply to the 758-768/788-798 MHz band:

(3) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP accordance with Table 3 of this section.

**§ 90.219(e)(1)**

The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

Test date: 2025-07-01 to 2025-07-01

Test results: Pass

**Special notes**

-

**Test equipment**

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's



**Test data****AWGN signal, nominal input signal**

<b>Test data</b>						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	5G NR, 5 MHz	763.0	33.0	2.0	0.4	10.8



**AWGN signal, nominal input signal + 3dB**

<b>Test data</b>						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	5G NR, 5 MHz	763.0	33.4	2.2	0.4	10.8

Note: PAR measure is performed by the “CCDF” function installed on Spectrum analyzer that provides average power (the same measured with “Channel power” function), peak power and PAR.

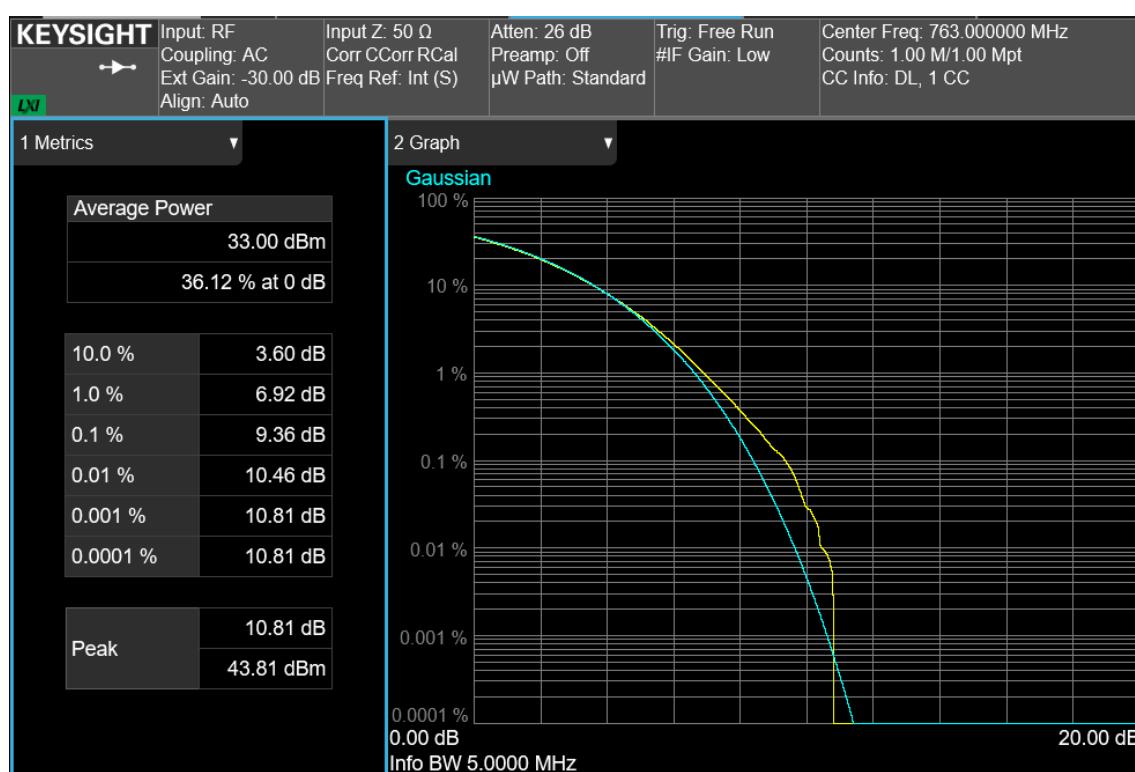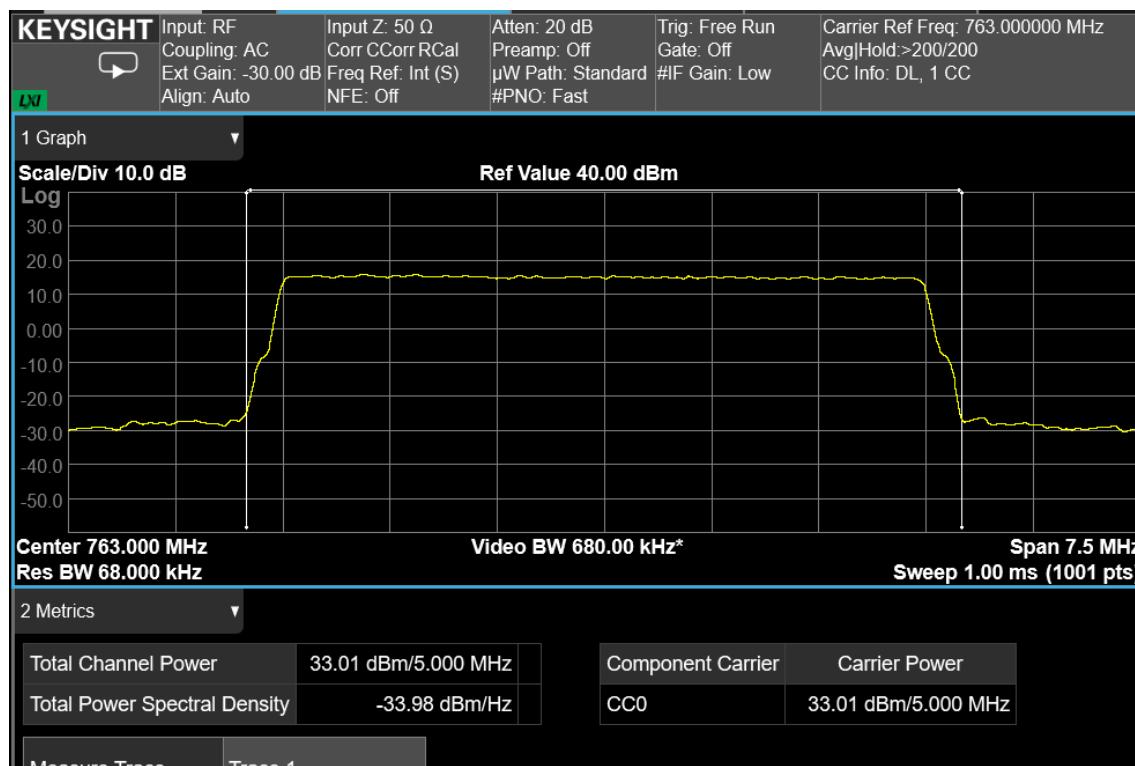

#### 5 MHz signal, middle channel, nominal input signal

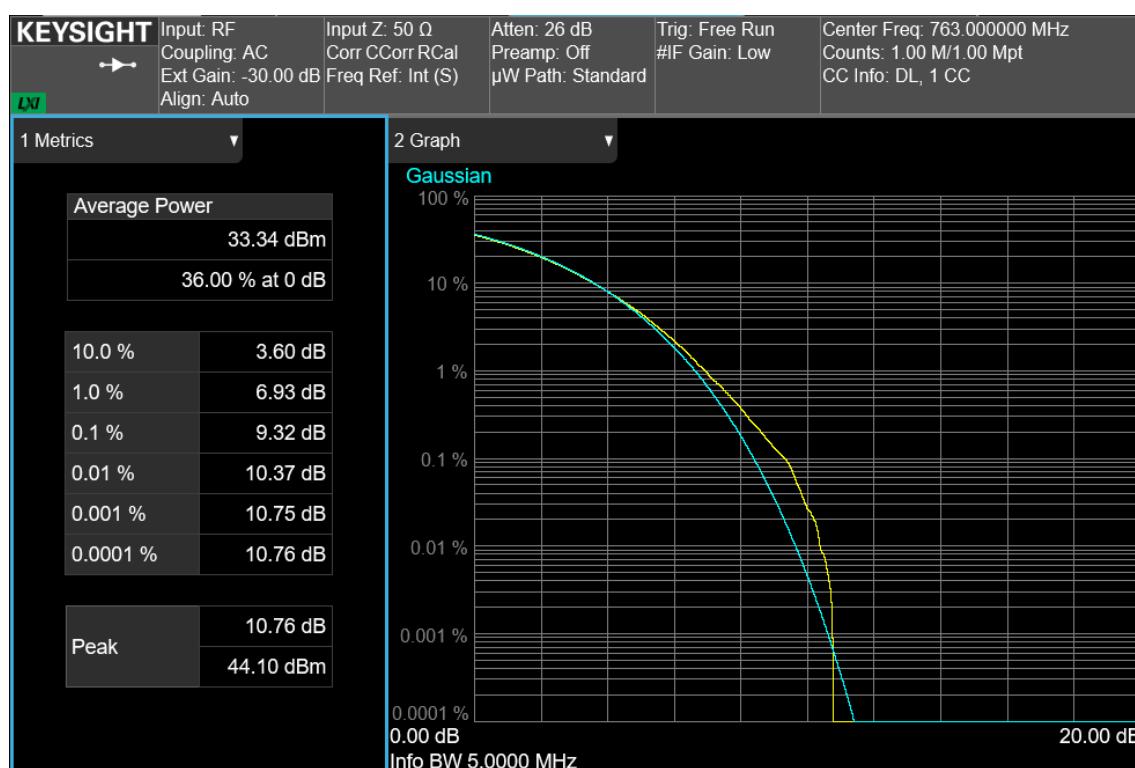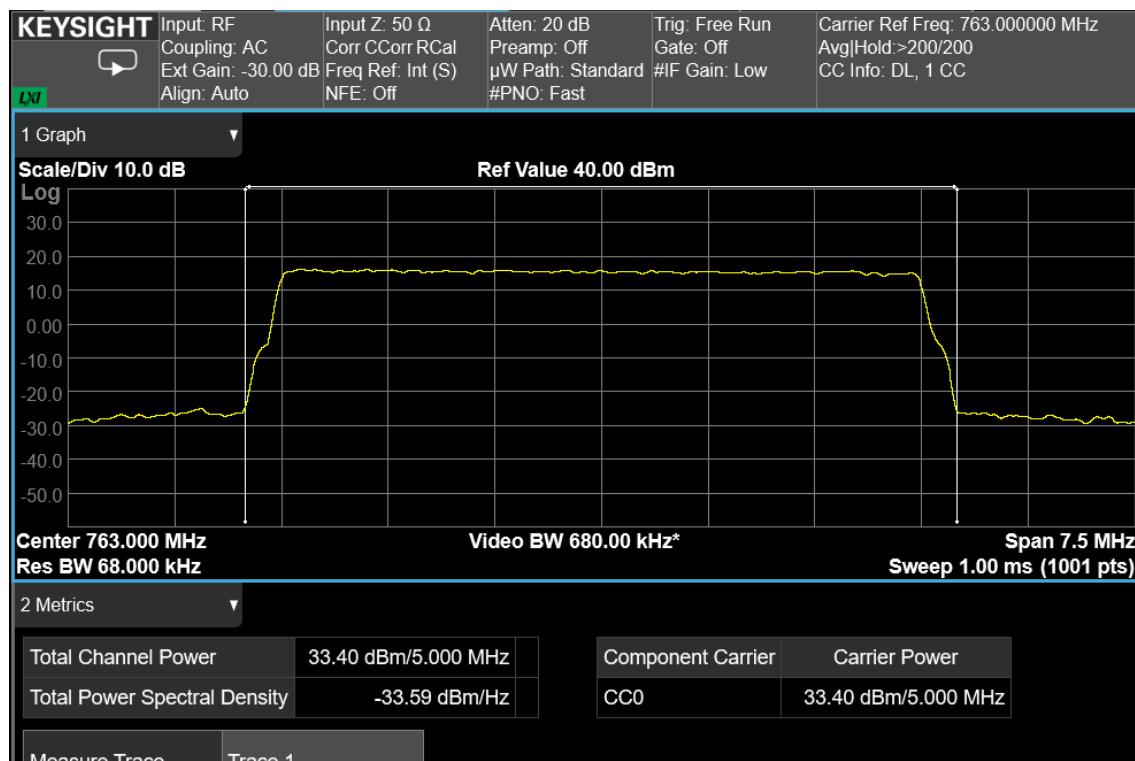

**5 MHz signal, middle channel, nominal input signal + 3dB**



## Clause 935210 D05v01 (4.6) Noise figure

### § 90.219(e)(2)

The noise figure of a signal booster must not exceed 9 dB in either direction.

Test date: N/A

Test results: N/A

### Special notes

For Class 2 Permissive Change new tests were not performed.

For previous test outcomes see **332502-3TRFWL.pdf** report.

## Clause 90.543(e), 90.219(e)(3) Spurious emissions at the antenna terminal

### § 90.543(e)

For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

### § 90.219(e)(3)

Spurious emissions from a signal booster must not exceed  $-13\text{dBm}$  within any 100 kHz measurement bandwidth.

Test date: 2025-07-01 to 2025-07-01

Test results: Pass

### Special notes

For Class 2 Permissive Change new tests were performed only on band edges intermodulation. For previous spurious emissions tests at RF antenna connector see **332502-3TRFWL.pdf** report.

### Test equipment


Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2026-07
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12
Combiner	Miczen	MZP200506GA (0.5-6 GHz)	210314001	COU

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use


(\*) Equipment supplied by manufacturer's




Test data			
<b>See Plots below</b>			
Spurious emissions measurement results:			
Frequency (MHz)	Spurious emission (dBm)	Limit (dBm)	Margin (dB)
First channel	Negligible	-13	
Mid channel	Negligible	-13	
Last channel	Negligible	-13	

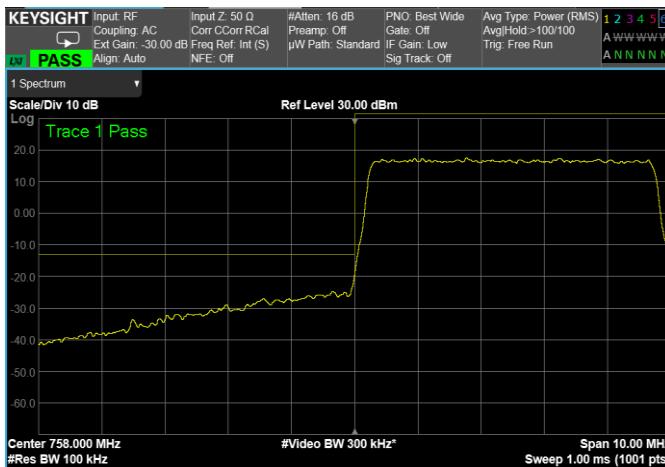**Test data, continued: band edges Inter modulation**


**5 MHz signal, Low Band Edge, 1 carrier, nominal input signal**

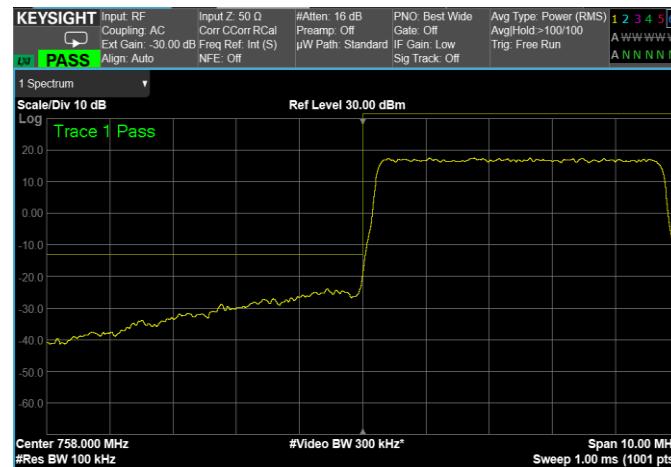


**5 MHz signal, Low Band Edge, 1 carrier, nominal input signal + 3dB**

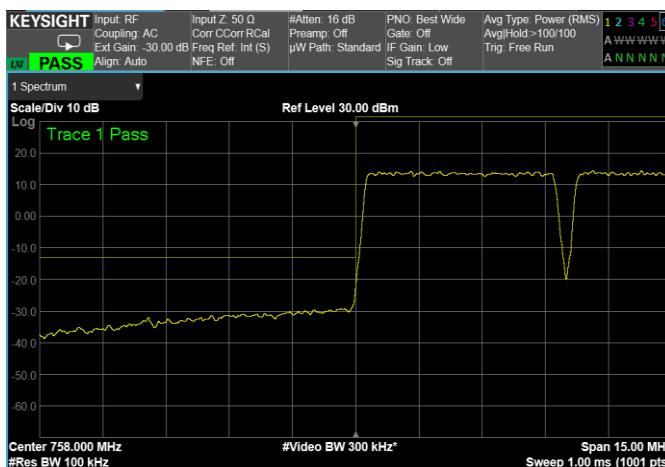

**5 MHz signal, Low Band Edge, 2 carriers, nominal input signal**




**5 MHz signal, Low Band Edge, 2 carriers, nominal input signal + 3dB**

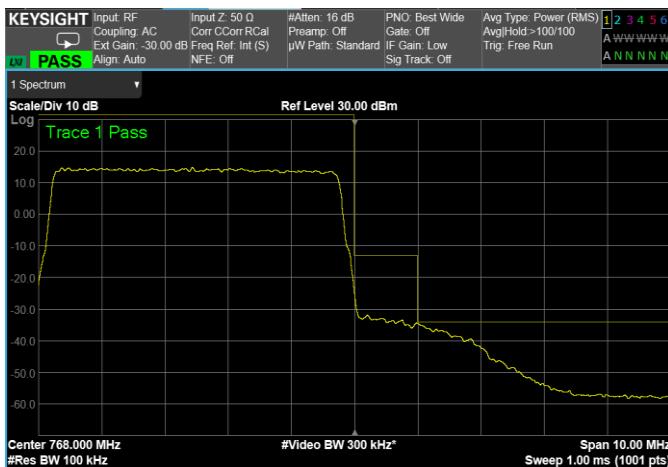


**5 MHz signal, High Band Edge, 1 carrier, nominal input signal**



**5 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB**

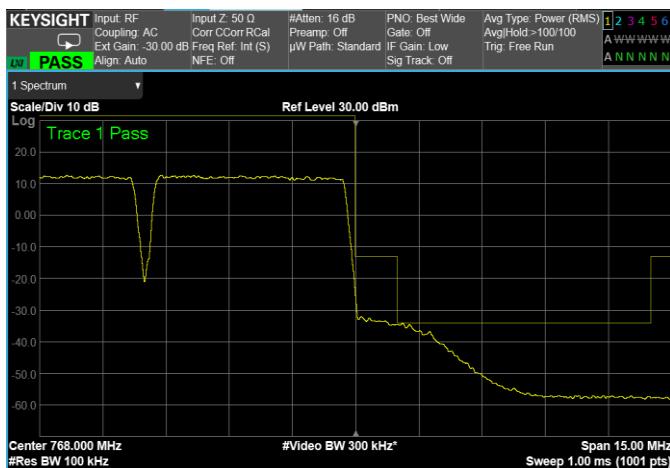

**5 MHz signal, High Band Edge, 2 carriers, nominal input signal**

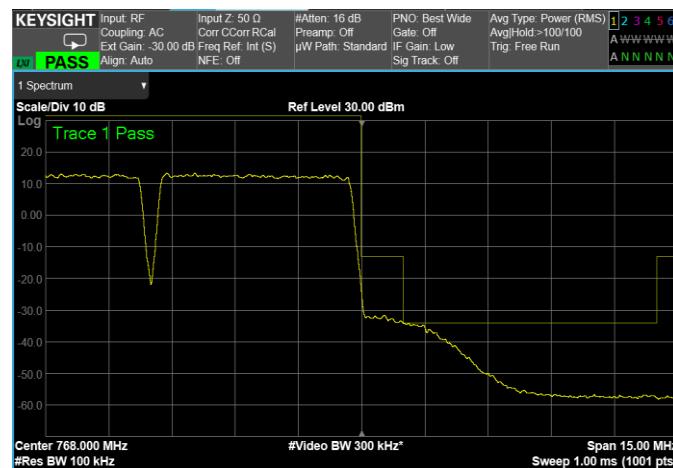

**5 MHz signal, High Band Edge, 2 carriers, nominal input signal + 3dB**

## Clause 90.543(e), 90.219(e)(3) Spurious emissions radiated

### § 90.543(e)

For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

### § 90.219(e)(3)

Spurious emissions from a signal booster must not exceed  $-13\text{dBm}$  within any 100 kHz measurement bandwidth.

Test date: N/A

Test results: N/A

### Special notes

Test not performed because not requested for a Class 2 Permissive Change.  
For previous radiated spurious emission tests see **332502-3TRFWL** report.

### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's



## Clause 90.543(e), 90.219(e)(3) Spurious emissions radiated, continued

Test data				
Spurious emissions measurement results:				
Frequency (MHz)	Polarization. V/H	Field strength (dBm)	Limit (dBm)	Margin (dB)
Low channel				
-				
-				
-				
Mid channel				
High channel				
-				
-				
-				
Note:				

## Clause 90.543(f) Radiated spurious emissions within 1559–1610 MHz band

### § 90.543(f)

For operations in the 758-775 MHz and, 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation

#### Note:

Method of measurement according to TIA-603-C (EIRP in GNSS band: 1.556 to 1.610 GHz) .  
 $\Delta$  Band = 51 MHz, Correction Factor calculated at central band 1604.5 MHz. in Fraunhofer Region.

Test date: N/A


Test results: N/A

### Special notes


- Test not performed because not requested for a Class 2 Permissive Change.
- For previous radiated spurious emission tests see [332502-3TRFWL.pdf](#) report.

## Appendix B: Block diagrams of test set-ups

### Radiated emissions set-up

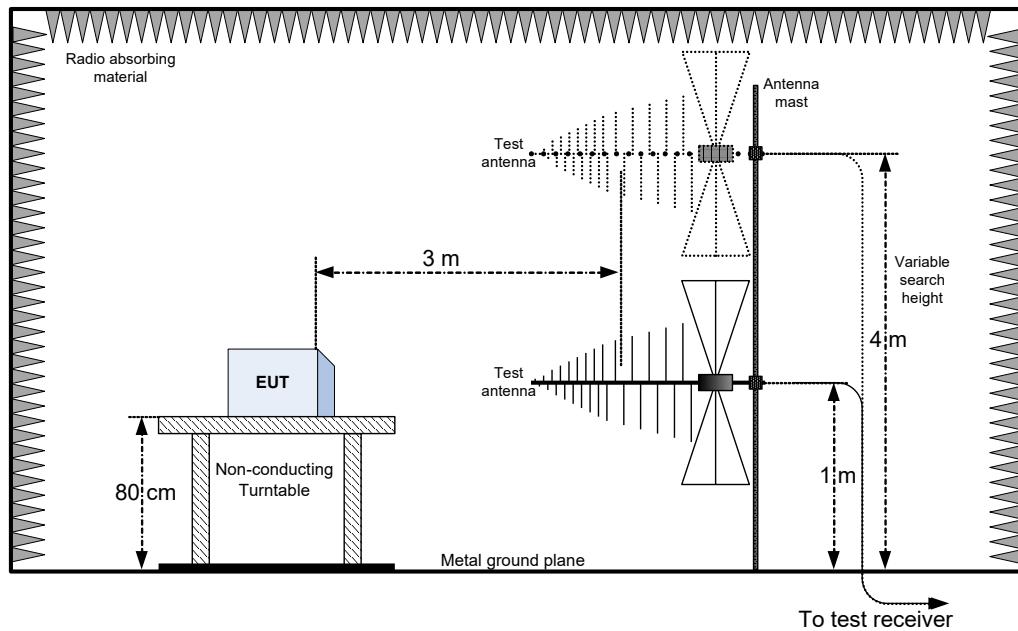


### Substitution method set-up

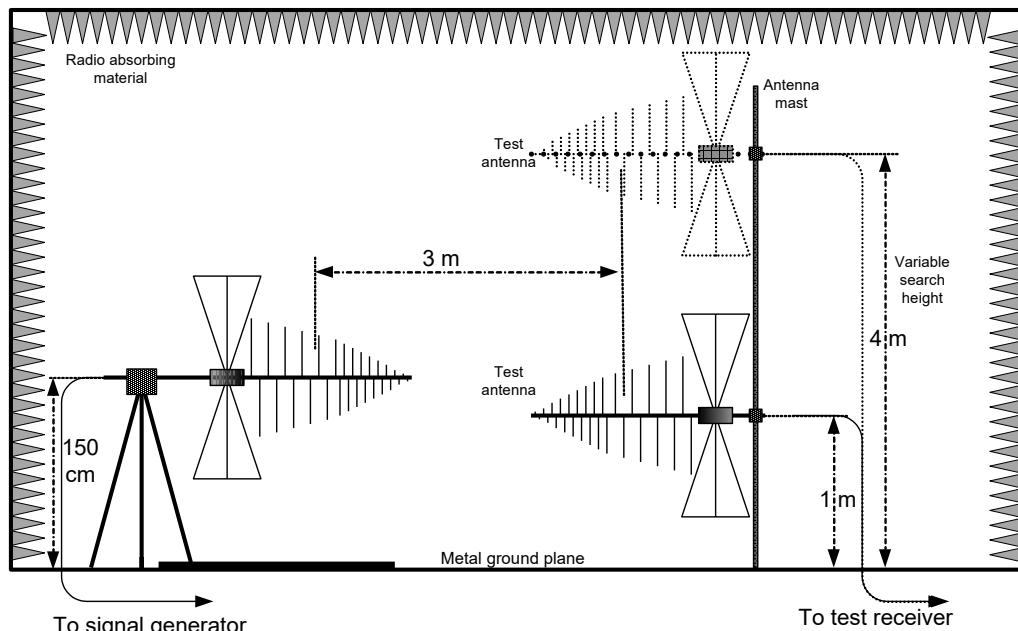

## Appendix C: EUT Photos


## Photo Set up

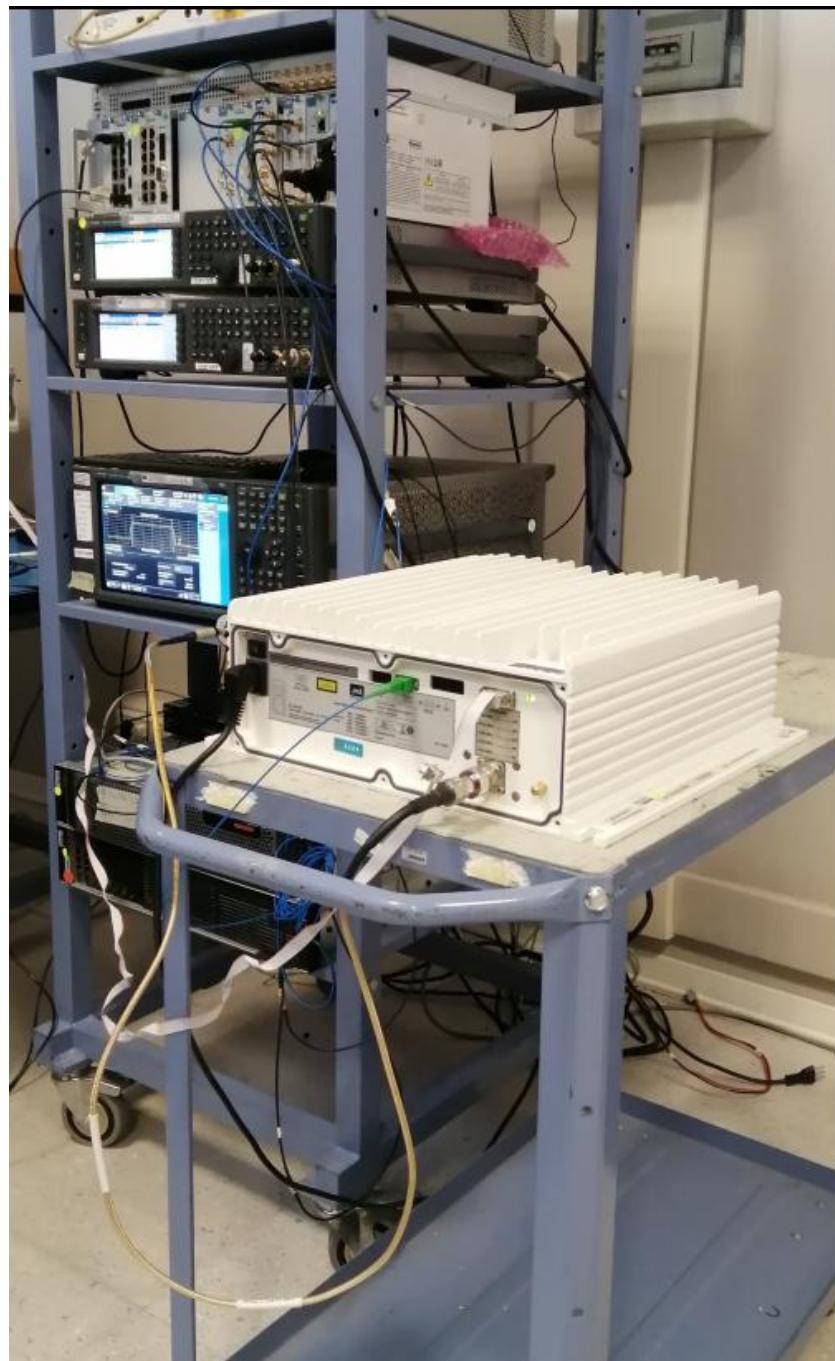

## Photo EUT





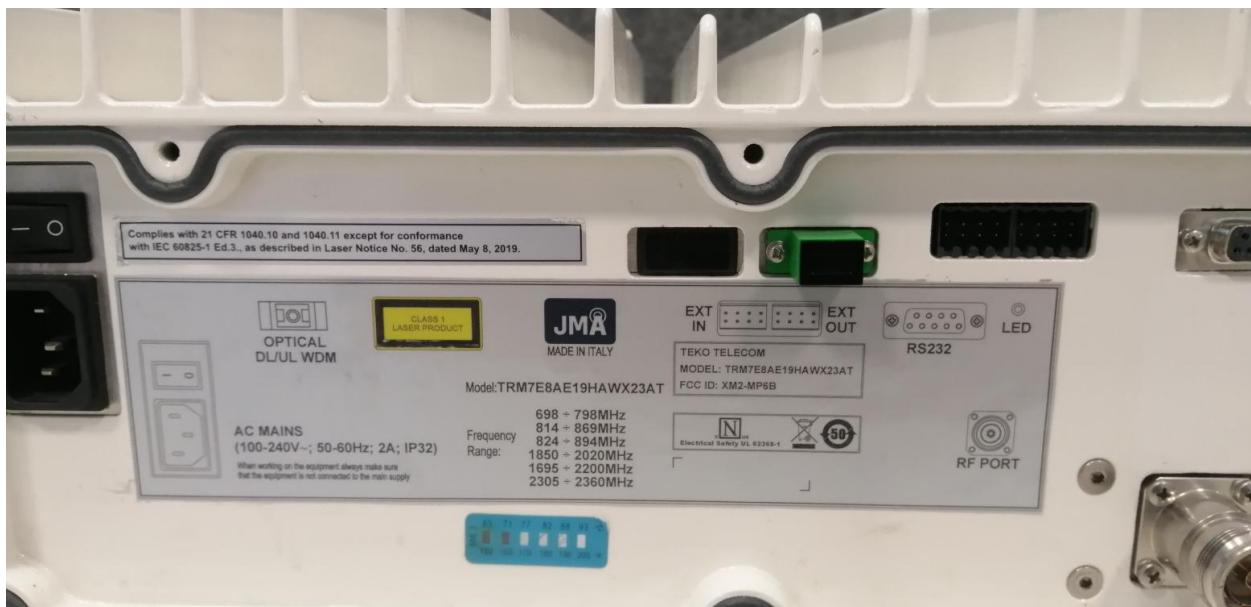

- END OF REPORT -