

Report Reference ID:	REP108813
----------------------	-----------

Test specification:	Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter B – Common carrier services Part 27 – Miscellaneous wireless communications services
---------------------	---

Applicant:	TEKO Telecom Srl. Via Meucci, 24/a 40024 – Castel S. Pietro Terme (BO) – Italy
Apparatus:	Medium Power Remote Unit
Model:	TRM7E8AE19HAWX23AT
FCC ID:	XM2-MP6B

Testing laboratory:	<b>Nemko Italy Spa</b> Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221
---------------------	---

	Name and title	Date
Tested by:	 P. Barbieri, Wireless/EMC Specialist	2025-08-01
Reviewed by:	 R. Giampaglia, Wireless/EMC Specialist	2025-08-01

## Table of contents

<b>Section 1: Report summary .....</b>	<b>3</b>
1.1 Test specification.....	3
1.2 Statement of compliance .....	3
1.3 Exclusions .....	3
1.4 Registration number .....	3
1.5 Test report revision history .....	3
1.6 Limits of responsibility .....	3
<b>Section 2: Summary of test results .....</b>	<b>4</b>
2.1 FCC Part 27, test results .....	4
<b>Section 3: Equipment under test (EUT) and application details.....</b>	<b>5</b>
3.1 Applicant details .....	5
3.2 Modular equipment.....	5
3.3 Product details.....	5
3.4 Application purpose .....	5
3.5 Composite/related equipment.....	6
3.6 Sample information.....	6
3.7 EUT technical specifications.....	6
3.8 Accessories and support equipment.....	7
3.9 Operation of the EUT during testing .....	8
3.10 EUT setup diagram.....	8
<b>Section 4: Engineering considerations .....</b>	<b>9</b>
4.1 Modifications incorporated in the EUT .....	9
4.2 Deviations from laboratory tests procedures.....	9
4.3 Technical judgment .....	9
<b>Section 5: Test conditions .....</b>	<b>10</b>
5.1 Deviations from laboratory tests procedures.....	10
5.2 Test conditions, power source and ambient temperatures .....	10
5.3 Measurement uncertainty .....	10
5.4 Test equipment.....	12
<b>Appendix A: Test results.....</b>	<b>13</b>
Clause 935210 D05v01r04 (3.2) AGC threshold .....	13
Clause 935210 D05v01r04 (3.3) Out of band rejection .....	15
Clause 27.53(h)(3) Occupied bandwidth.....	17
Clause 27.50(d) Peak output power at RF antenna connector .....	20
Clause 27.53(h) Spurious emissions at RF antenna connector .....	24
Clause 27.53(h) Radiated Spurious emissions .....	28
<b>Appendix B: Block diagrams of test set-ups .....</b>	<b>30</b>
<b>Appendix C: EUT Photos .....</b>	<b>31</b>

## Section 1: Report summary

### 1.1 Test specification

Specifications	Part 27 – Miscellaneous wireless communications services
----------------	--

### 1.2 Statement of compliance

Compliance	In the configuration tested the EUT was found compliant Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
Test method: ANSI C63.26-2015, 935210 D05 Measurements guidance for industrial and non-consumer signal booster, repeater and amplifier devices v01r04.	

### 1.3 Exclusions

Exclusions	None
------------	------

### 1.4 Registration number

FCC site number	682159
-----------------	--------

### 1.5 Test report revision history

Revision #	Details of changes made to test report
REP108813	Original report issued

### 1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



## Section 2: Summary of test results

### 2.1 FCC Part 27, test results

Part	Methods	Test description	Verdict
	§ 935210 D05v01r04 (3.2)	AGC threshold	Pass
	§ 935210 D05v01r04 (3.3)	Out of band rejection	Pass
§27.53(h)(3)	§ 935210 D05v01r04 (3.4)	Occupied bandwidth	Pass
§27.50(d)	§ 935210 D05v01r04 (3.5)	Peak output power at RF antenna connector	Pass
§27.53(h)	§ 935210 D05v01r04 (3.6)	Spurious emissions at RF antenna connector	Pass
§27.53(h)	§ 935210 D05v01r04 (3.8)	Radiated spurious emissions	Pass
§27.54	§ 935210 D05v01r04 (3.7)	Frequency stability	N/A a)

#### Notes:

- a) NOT APPLICABLE: Modulation/frequency conversion circuitry not in use. No frequency change in EUT (input and output have same frequency)

## Section 3: Equipment under test (EUT) and application details

### 3.1 Applicant details

<b>Applicant complete business name</b>	Name:	Teko Telecom Srl
	Federal Registration Number (FRN):	0018963462
	Grantee code	XM2
<b>Mailing address</b>	Address: City: Province/State: Post code: Country:	Via Meucci, 24/a Castel S. Pietro Terme Bologna 40024 Italy

### 3.2 Modular equipment

<b>a) Single modular approval</b>	Single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>b) Limited single modular approval</b>	Limited single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

### 3.3 Product details

<b>FCC ID</b>	Grantee code:	XM2
	Product code:	-MP6B
<b>Equipment class</b>	B2I	
<b>Description of product as it is marketed</b>	Booster	
	Model name/number:	TRM7E8AE19HAWX23AT
	Serial number:	1007267001

### 3.4 Application purpose

<b>Type of application</b>	<input type="checkbox"/> Original certification
	<input type="checkbox"/> Change in identification of presently authorized equipment
	Original FCC ID: <input type="text"/> Grant date: <input type="text"/>
	<input checked="" type="checkbox"/> Class II permissive change or modification of presently authorized equipment

## Section 3: Equipment under test

## 3.5 Composite/related equipment

<b>a) Composite equipment</b>	The EUT is a composite device subject to an additional equipment authorization Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
<b>b) Related equipment</b>	The EUT is part of a system that operates with, or is marketed with, another device that requires an equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>c) Related FCC ID</b>	If either of the above is "yes": <input checked="" type="checkbox"/> has been granted under the FCC ID(s) listed below: <input type="checkbox"/> is in the process of being filled under the FCC ID(s) listed below: <input type="checkbox"/> is pending with the FCC ID(s) listed below: <input type="checkbox"/> has a mix of pending and granted statuses under the FCC ID(s) listed below: i FCC ID: XM2-MP6B ii FCC ID:

## 3.6 Sample information

Receipt date:	2025-07-01
Nemko sample ID number:	PRJ0084048

## 3.7 EUT technical specifications

<b>Operating band:</b>	Down Link: 2110–2200 MHz, Up Link: 1695–1780
<b>Operating frequency:</b>	Wideband
<b>Modulation type:</b>	TDD 5G NR (QAM and QPSK)
<b>Occupied bandwidth:</b>	5G NR: 5 MHz to 45 MHz
<b>Channel spacing:</b>	standard
<b>Emission designator:</b>	5G NR: D7W
<b>RF Output</b>	Down Link: 33dBm (2W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Gain</b>	Down Link: 38dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Antenna type:</b>	External Antenna is not provided, equipment that has an external 50 Ω RF connector
<b>Power source:</b>	100-240 Vac



## Section 3: Equipment under test

**3.8 Accessories and support equipment**

The following information identifies accessories used to exercise the EUT during testing:

## Item # 1

Type of equipment:	Master Unit - Subrack
Brand name:	Teko Telecom srl
Model name or number:	SUB-TRX-PSU
Serial number:	1007067005
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

## Item # 2

Type of equipment:	Master Unit – Management Module
Brand name:	Teko Telecom srl
Model name or number:	TSPV-EBB
Serial number:	1007944030
Nemko sample number:	-----
Connection port:	LAN port
Cable length and type:	-----

## Item # 3

Type of equipment:	Master Unit – Optical Module
Brand name:	Teko Telecom srl
Model name or number:	TTRU4W-S-M
Serial number:	1008678019
Nemko sample number:	-----
Connection port:	DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit)
Cable length and type:	-----

## Item # 4

Type of equipment:	Master Unit – Power Supply
Brand name:	Teko Telecom srl
Model name or number:	TPSU/AC
Serial number:	100012284
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

## Section 3: Equipment under test

## 3.9 Operation of the EUT during testing

<b>Details:</b>	In down-link direction, normal working at max gain with max RF power output.
-----------------	--

## 3.10 EUT setup diagram

In this system, Remote Unit is the EUT. Master Unit includes only management module and optical module (to convert RF signal in optical signal in down link direction and vice versa optical signal in RF signal in uplink direction). As described in “Operational description”, master unit is connected directly to base station, so the system doesn’t use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF connector of optical module in the Master Unit.

**Test setup for output power, occupied bandwidth, spurious emissions:****Procedure**

Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.

## Section 4: Engineering considerations

### 4.1 Modifications incorporated in the EUT

<b>Modifications</b>	Modifications performed to the EUT during this assessment None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> , performed by Client <input type="checkbox"/> or Nemko <input type="checkbox"/> Details:
----------------------	---

### 4.2 Deviations from laboratory tests procedures

<b>Deviations</b>	Deviations from laboratory test procedures None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> - details are listed below:
-------------------	---

### 4.3 Technical judgment

<b>Judgment</b>	None
-----------------	------

## Section 5: Test conditions

### 5.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

### 5.2 Test conditions, power source and ambient temperatures

Normal temperature, humidity and air pressure test conditions	Temperature: 18–33 °C Relative humidity: 25–75 % Air pressure: 86–106 kPa  When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$ , for which the equipment was designed.

### 5.3 Measurement uncertainty

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002. The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

**Section 5: Test conditions, continued**

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
			0.009 MHz ÷ 30 MHz	1.1 dB	(1)
		Carrier power	30 MHz ÷ 18 GHz	1.5 dB	(1)
		RF Output Power	18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
			0.009 MHz ÷ 18 GHz	3.0 dB	(1)
		Conducted spurious emissions	18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter – Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
	Radiated	Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
Receiver	Radiated		66 GHz ÷ 220 GHz	10 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
	Conducted	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
		Sensitivity measurement	66 GHz ÷ 220 GHz	10 dB	(1)
		Conducted spurious emissions	1 MHz ÷ 18 GHz	6.0 dB	(1)
			0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)

**NOTES:**

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95 %



## Section 5: Test conditions, continued

## 5.4 Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2026-07
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12
Combiner	Miczen	MZP200506GA (0.5-6 GHz)	210314001	COU

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's



## Appendix A: Test results

### Clause 935210 D05v01r04 (3.2) AGC threshold

#### Measure of EUT AGC Threshold

Test date: 2025-07-03 to 2025-07-04

Test results: Pass

#### Special notes



—

### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

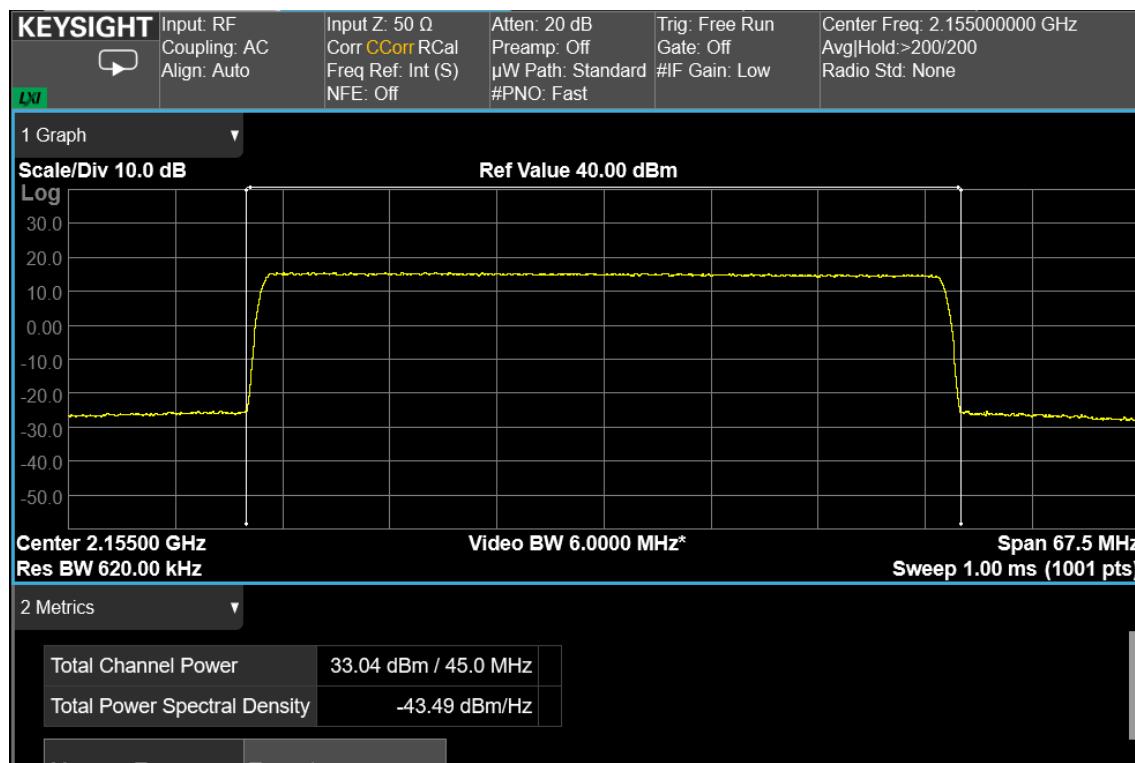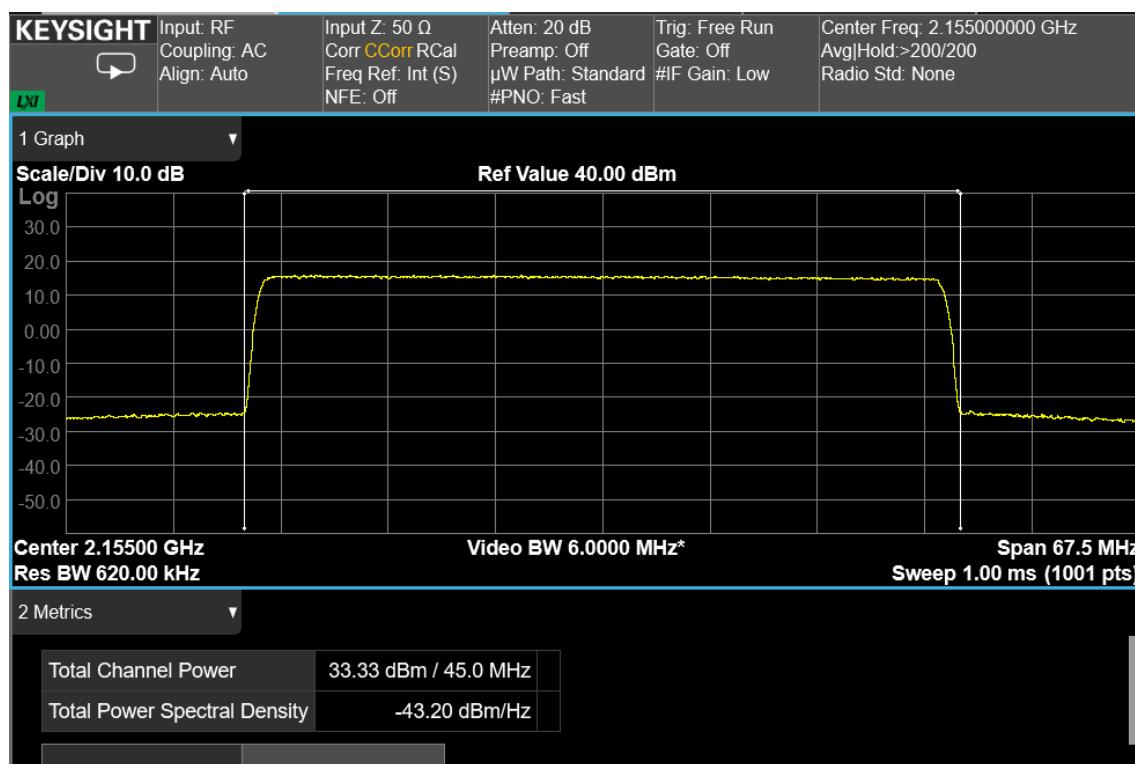**Test data**

**45 MHz signal, middle channel, nominal input signal**

**45 MHz signal, middle channel, nominal input signal +1 dB**

**Clause 935210 D05v01r04 (3.3) Out of band rejection****Out of Band Rejection – Test for rejection of out of band signals.****Test date:** 2025-07-03 to 2025-07-04**Test results:** Pass**Special notes**


–

**Test equipment**

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

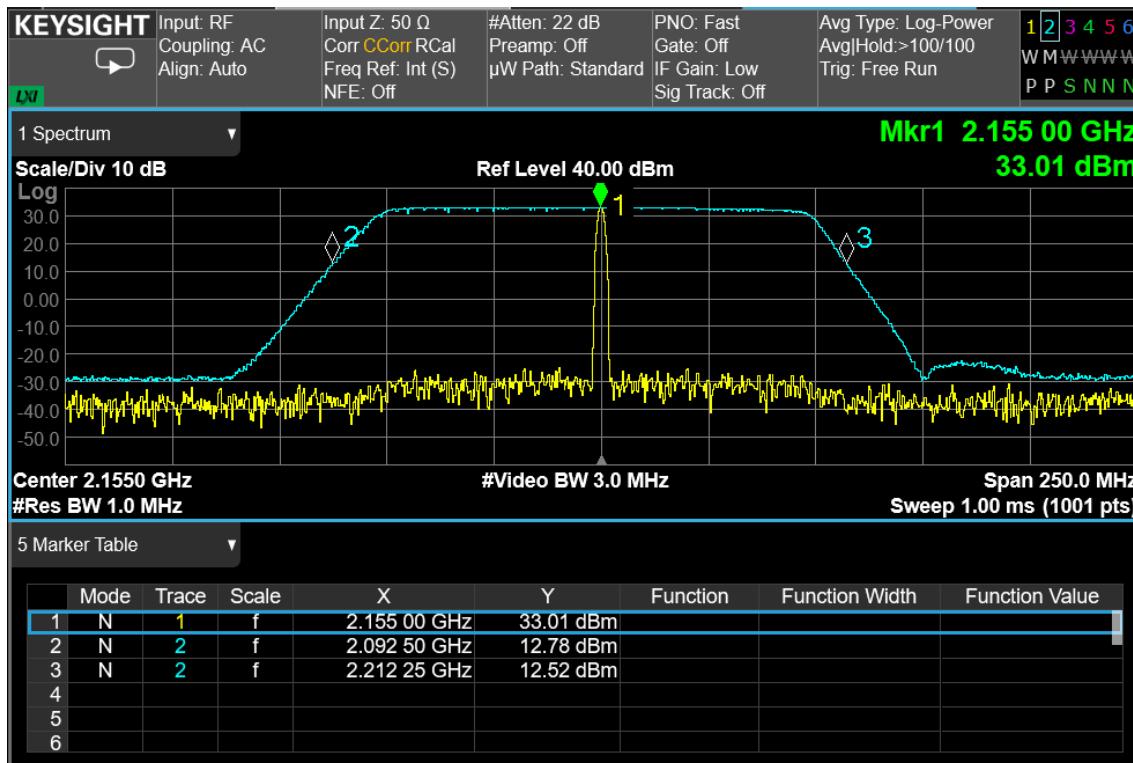**Test data**




### Clause 27.53(h)(3) Occupied bandwidth

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: 2025-07-03 to 2025-07-04

Test results: Pass

### Special notes



-


### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12


Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's

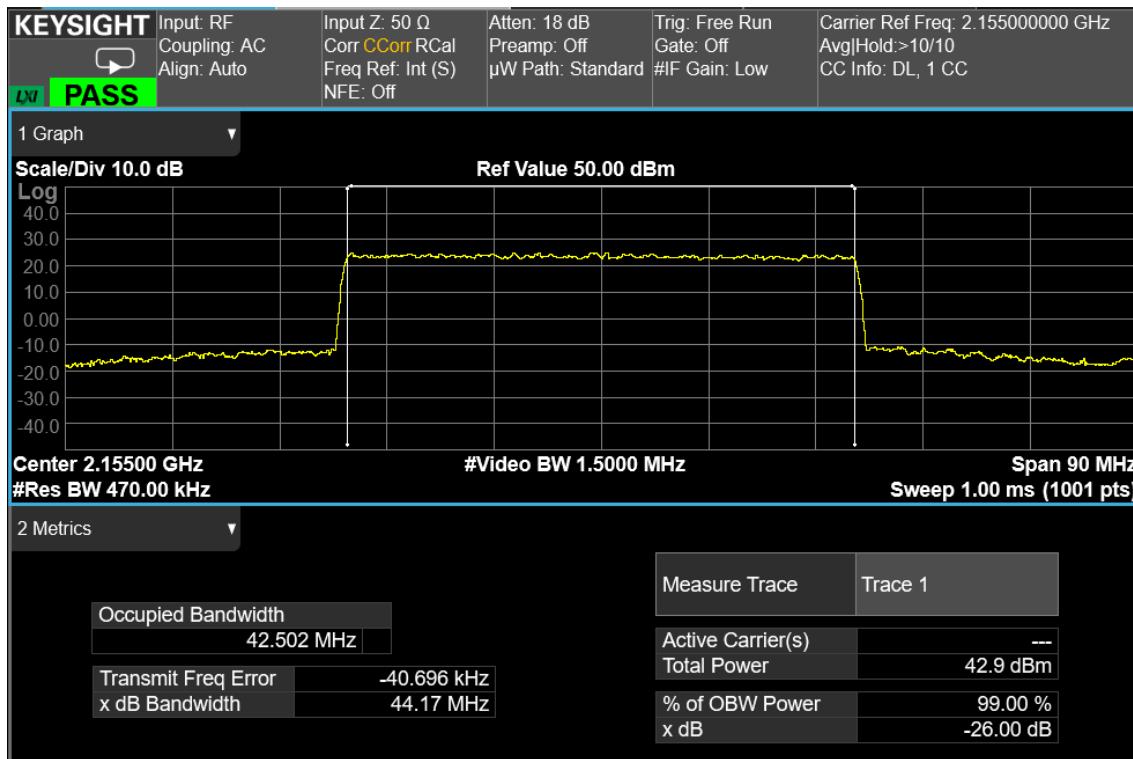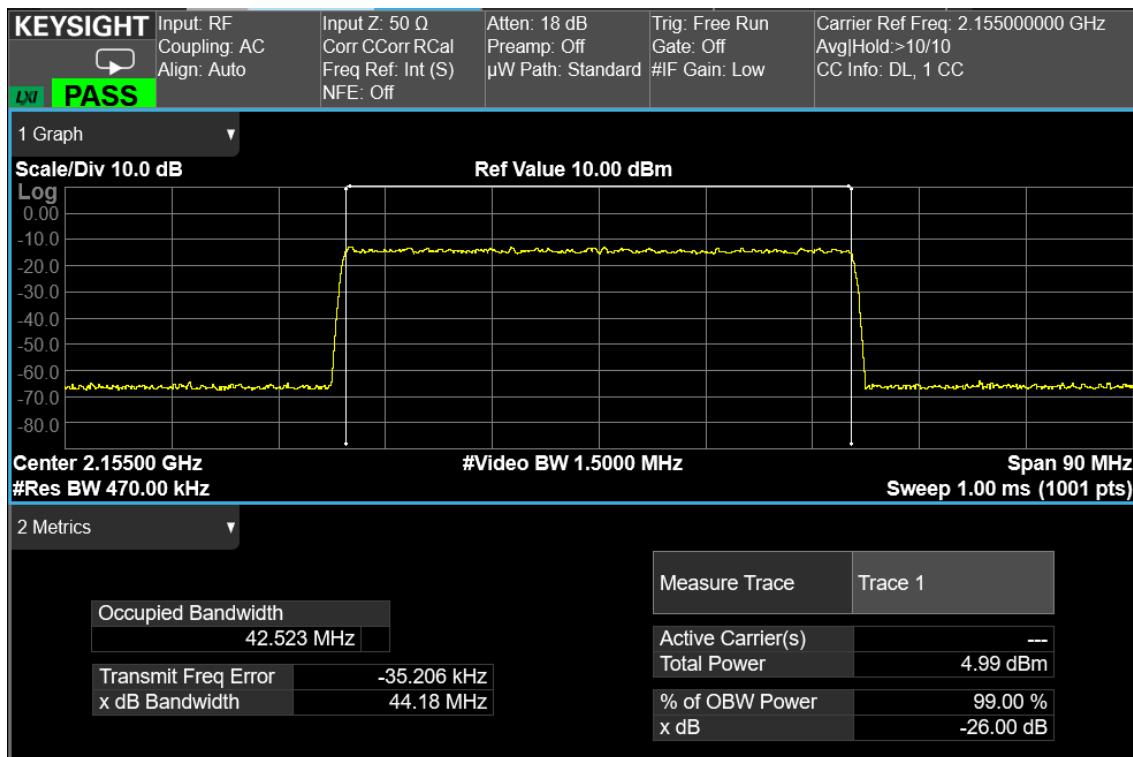**Test data**

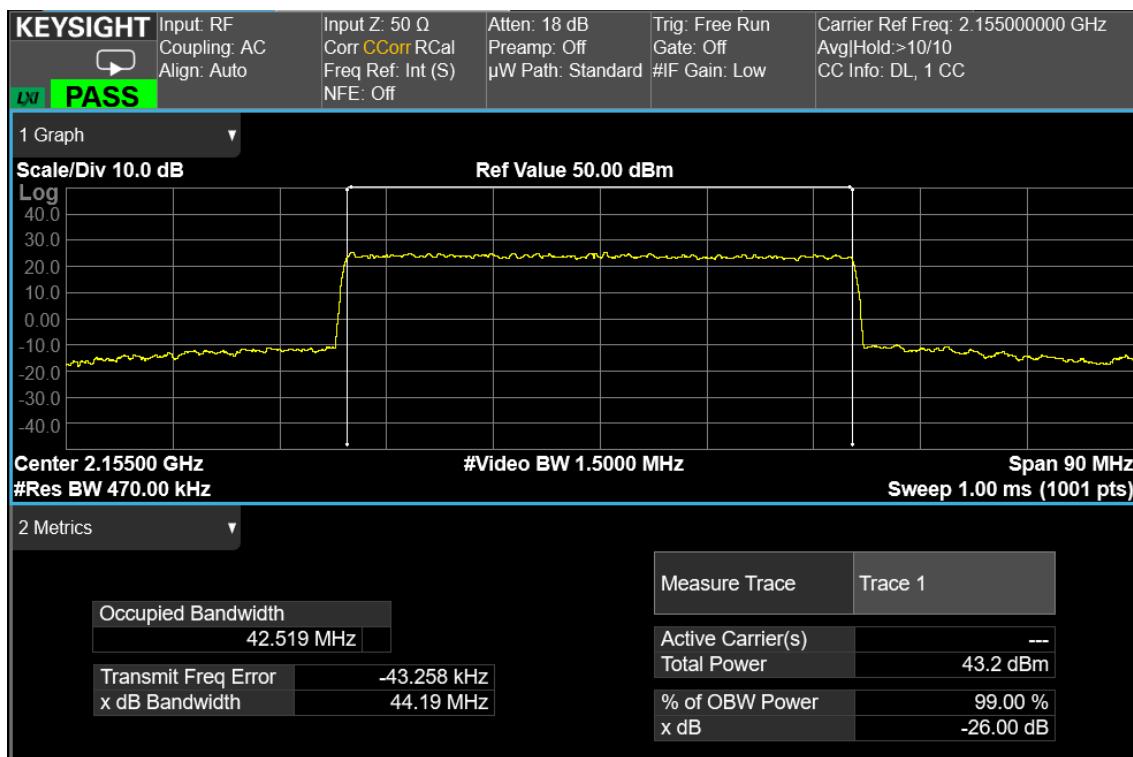**45 MHz signal, middle channel, nominal input signal - Output**

**45 MHz signal, middle channel, nominal input signal - Input**

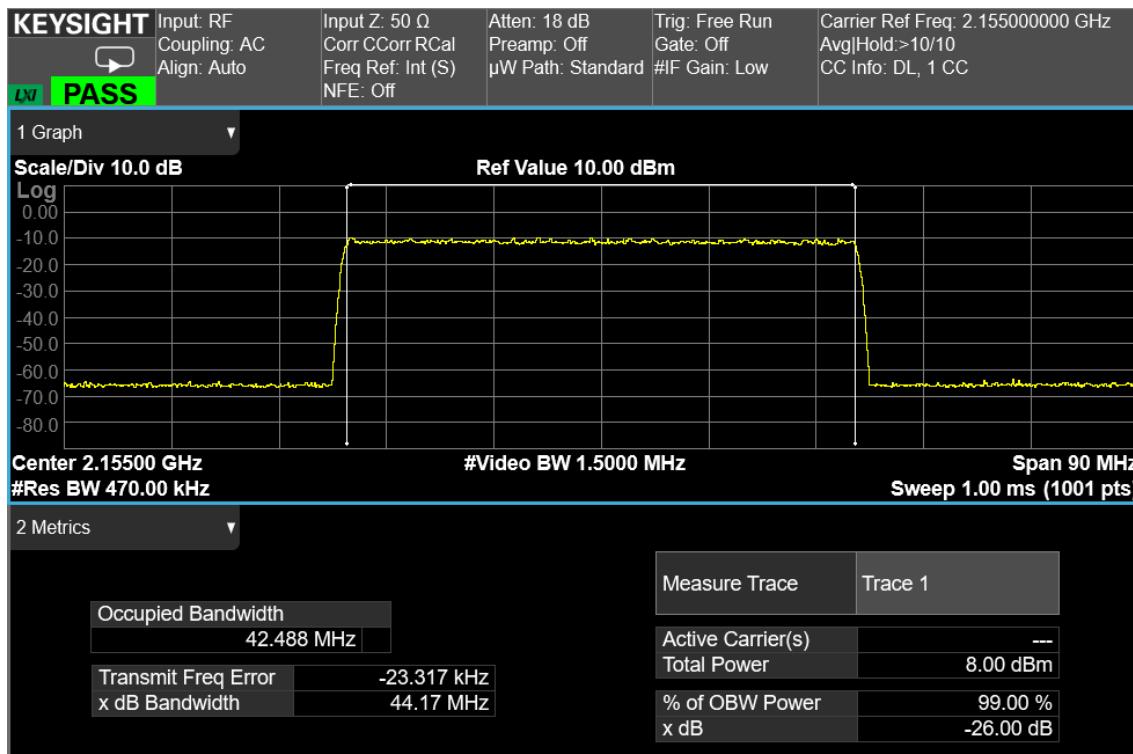

**45 MHz signal, middle channel, nominal input signal + 3dB - Output**



**45 MHz signal, middle channel, nominal input signal + 3dB - Input**

## Clause 27.50(d) Peak output power at RF antenna connector

**§ 27.50(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:**

- (2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:
- (i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;
  - (ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.
- (5) Equipment employed must be authorized in accordance with the provisions of §24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test date: 2025-07-03 to 2025-07-04

Test results: Pass

## Special notes

-

## Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's



**Test data****AWGN signal, nominal input signal**

<b>Test data</b>						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	5G NR, 45 MHz	2155.0	33.0	2.0	0.04	10.8


**AWGN signal, nominal input signal + 3dB**

<b>Test data</b>						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	5G NR, 45 MHz	2155.0	33.3	2.1	0.05	10.7

Note: PAR measure is performed by the “CCDF” function installed on Spectrum analyzer that provides average power (the same measured with “Channel power” function), peak power and PAR.

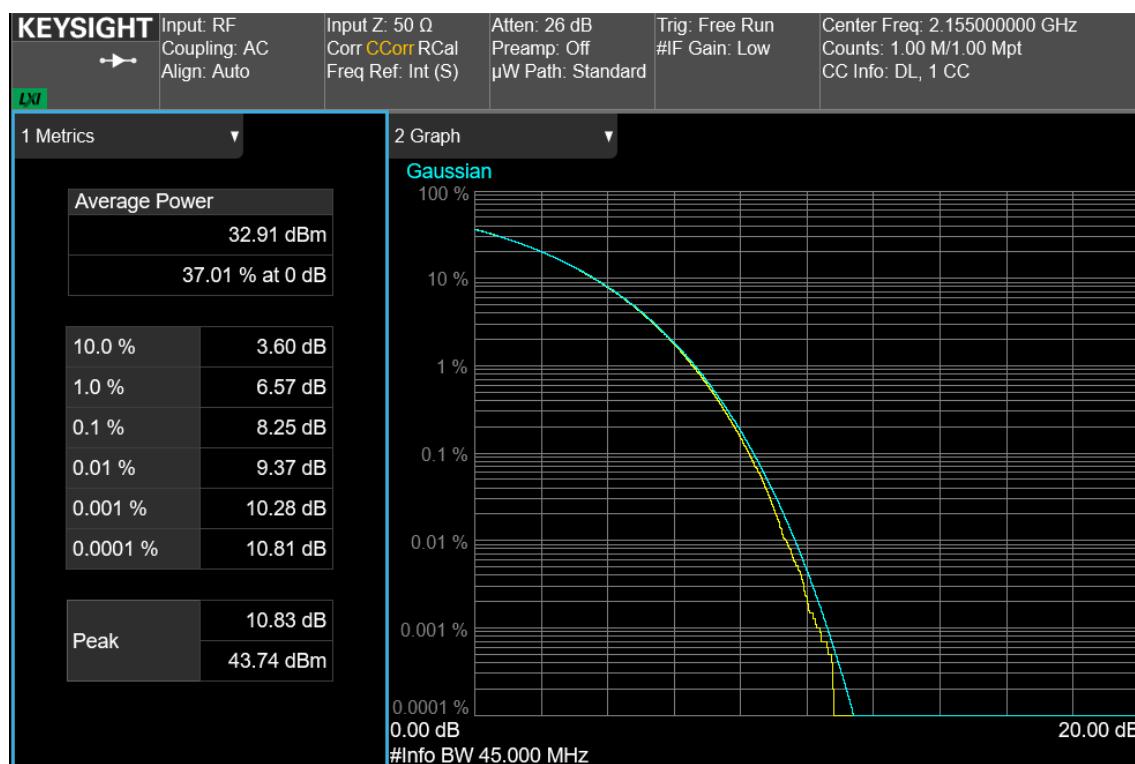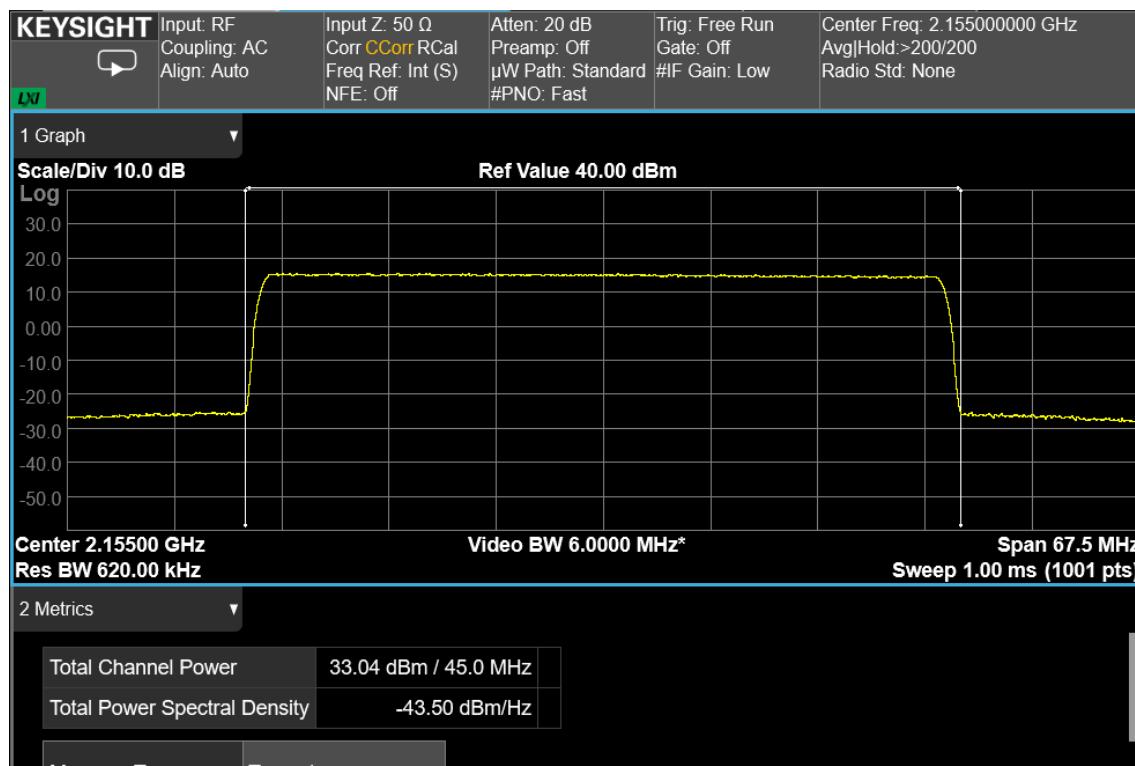

**45 MHz signal, middle channel, nominal input signal**

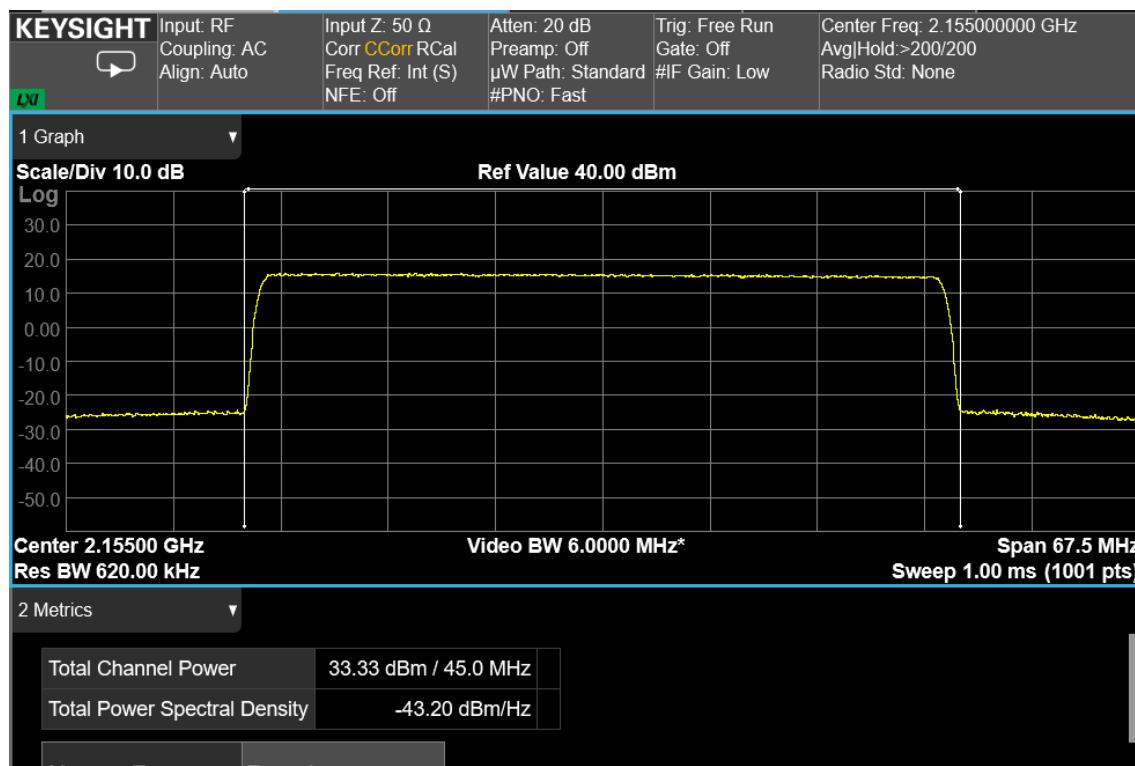

**45 MHz signal, middle channel, nominal input signal + 3dB**

## Clause 27.53(h) Spurious emissions at RF antenna connector

### (h) AWS emission limits:

- (1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.
- (3) Measurement procedure.
- (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

Test date: 2025-07-03 to 2025-07-04

Test results: Pass

### Special notes

For Class 2 Permissive Change new tests were performed only on band edges intermodulation.  
For previous spurious emissions tests at RF antenna connector see **332502-9TRFWL.pdf** report.

### Test equipment





Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2026-07
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2025-12
Combiner	Miczen	MZP200506GA (0.5-6 GHz)	210314001	COU

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use

(\*) Equipment supplied by manufacturer's




Test data			
<b>See Plots below</b>			
Spurious emissions measurement results:			
Frequency (MHz)	Spurious emission (dBm)	Limit (dBm)	Margin (dB)
First channel	Negligible	-13	
Mid channel	Negligible	-13	
Last channel	Negligible	-13	

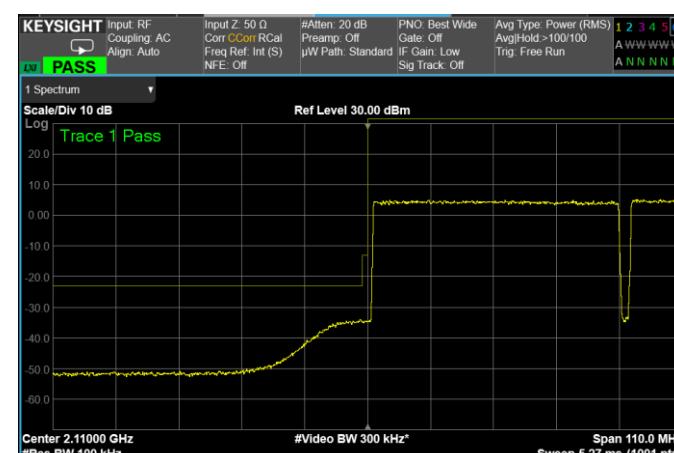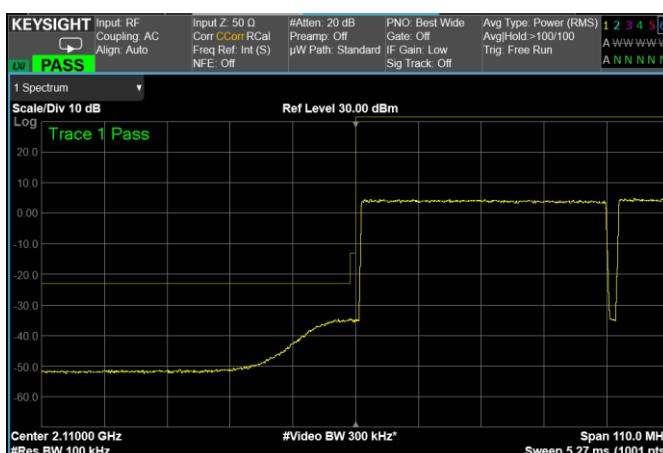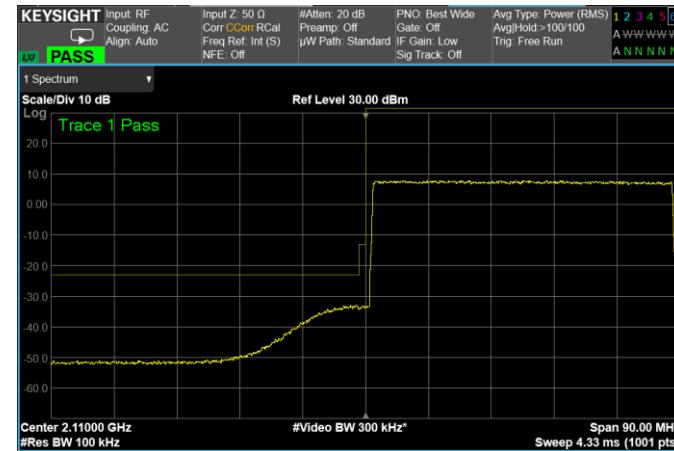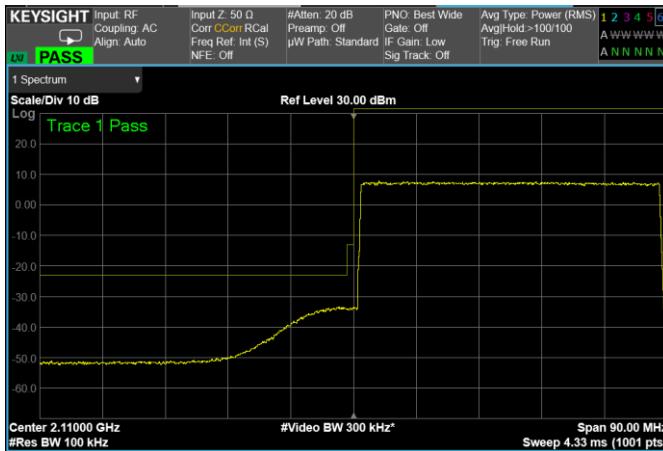
**Test data, continued: band edges Inter modulation**




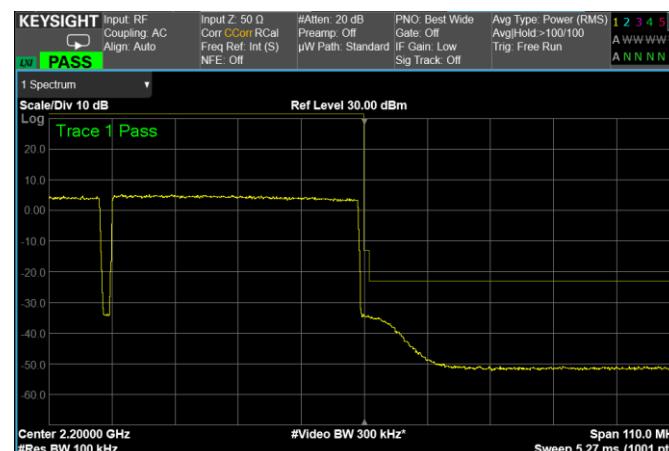
**45 MHz signal, High Band Edge, 1 carrier, nominal input signal**

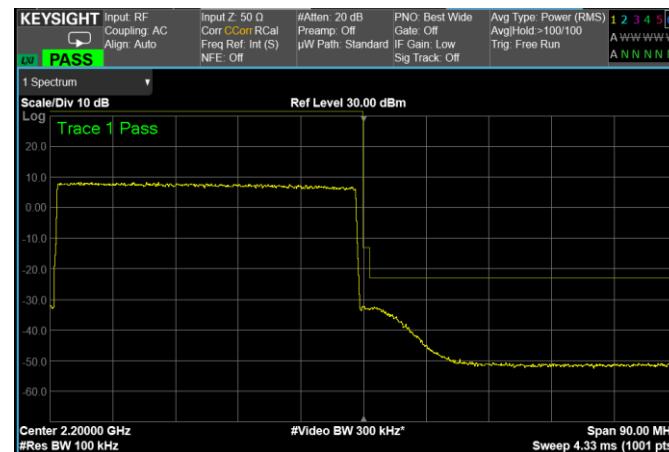

**45 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB**

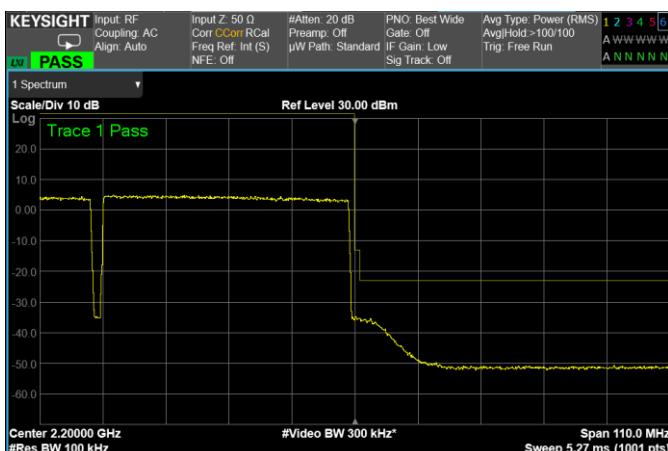

**45 MHz signal, High Band Edge, 2 carriers, nominal input signal**



**45 MHz signal, High Band Edge, 2 carriers, nominal input signal + 3dB**

## Clause 27.53(h) Radiated Spurious emissions

### (h) AWS emission limits:

- (1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.
- (3) Measurement procedure.
- (i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (ii) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (iii) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

Test date: N/A

Test results: N/A

### Special notes

Test not performed because not requested for a Class 2 Permissive Change.  
For previous radiated spurious emission tests see **332502-9TRFWL** report.

### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's



## Clause 27.53(h) Radiated spurious emissions, continued


## Test data

## Spurious emissions measurement results:


Frequency (MHz)	Polarization. V/H	Field strength (dBm)	Limit (dBm)	Margin (dB)
Low channel				
-				
-				
-				
Mid channel				
High channel				
-				
-				
-				
Note:				

## Appendix B: Block diagrams of test set-ups

### Radiated emissions set-up

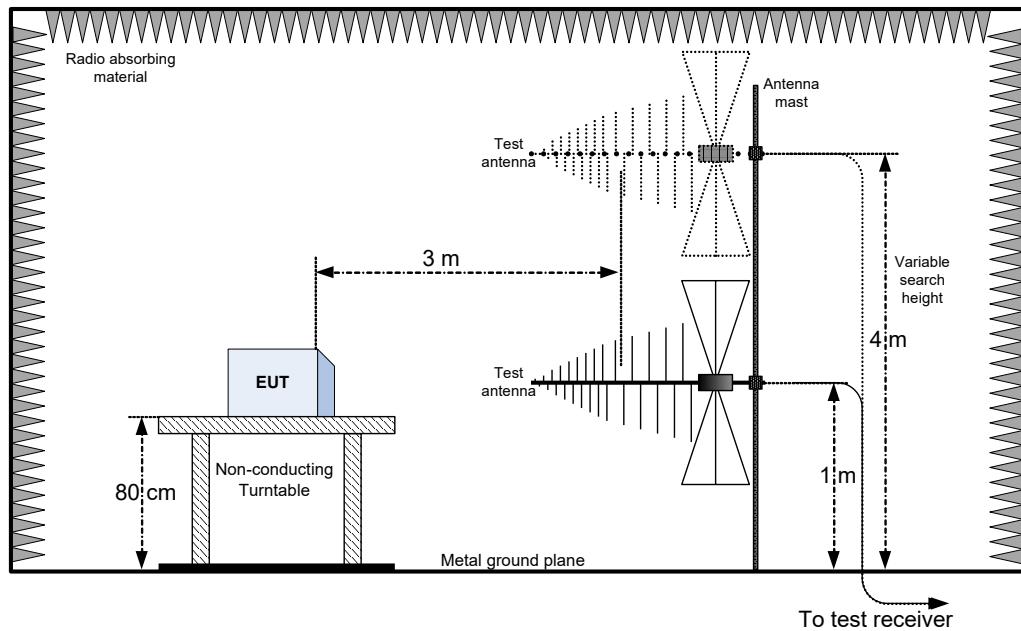


### Substitution method set-up

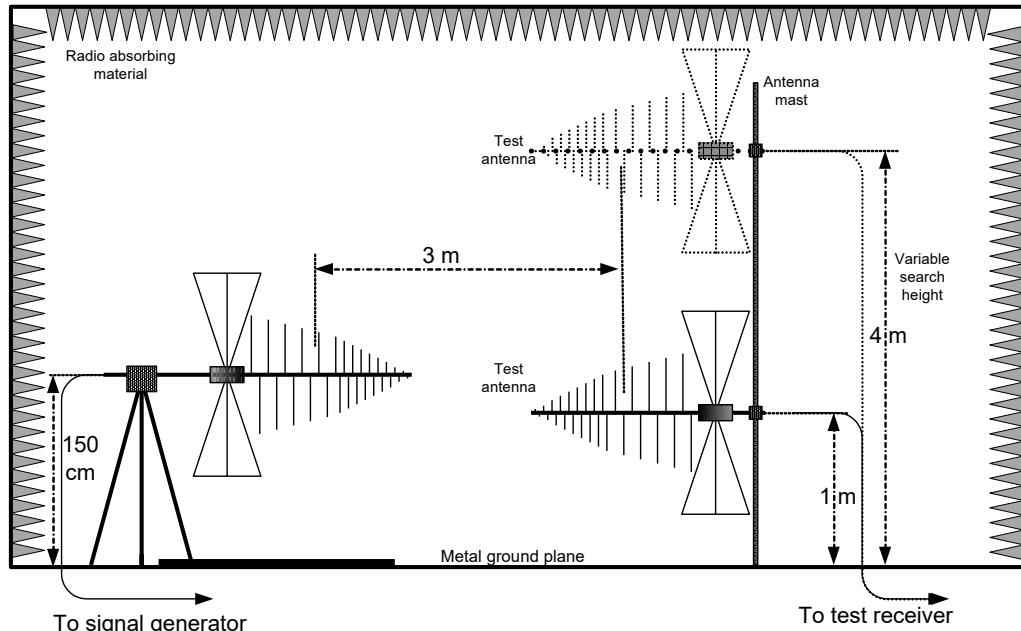


## Appendix C: EUT Photos


## Photo Set up

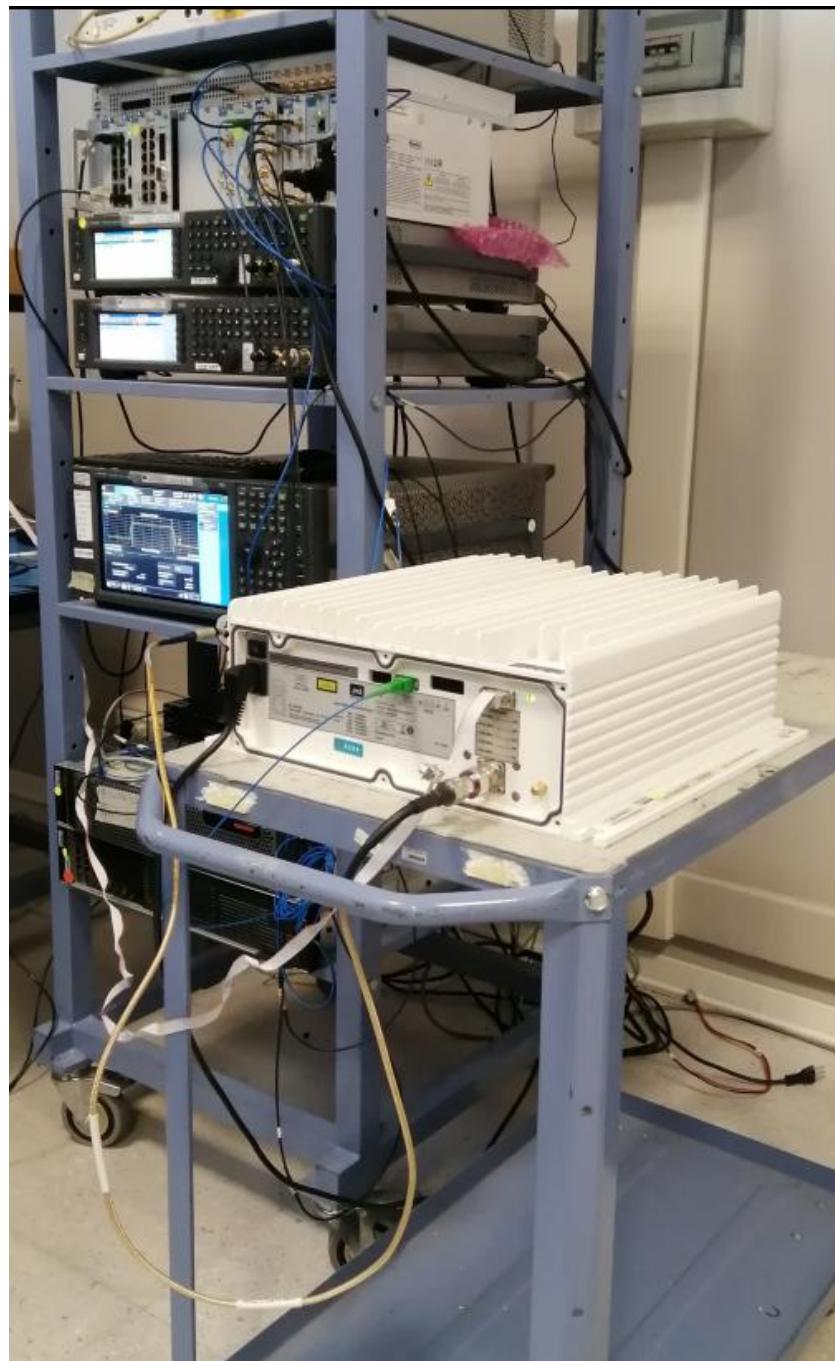

## Photo EUT



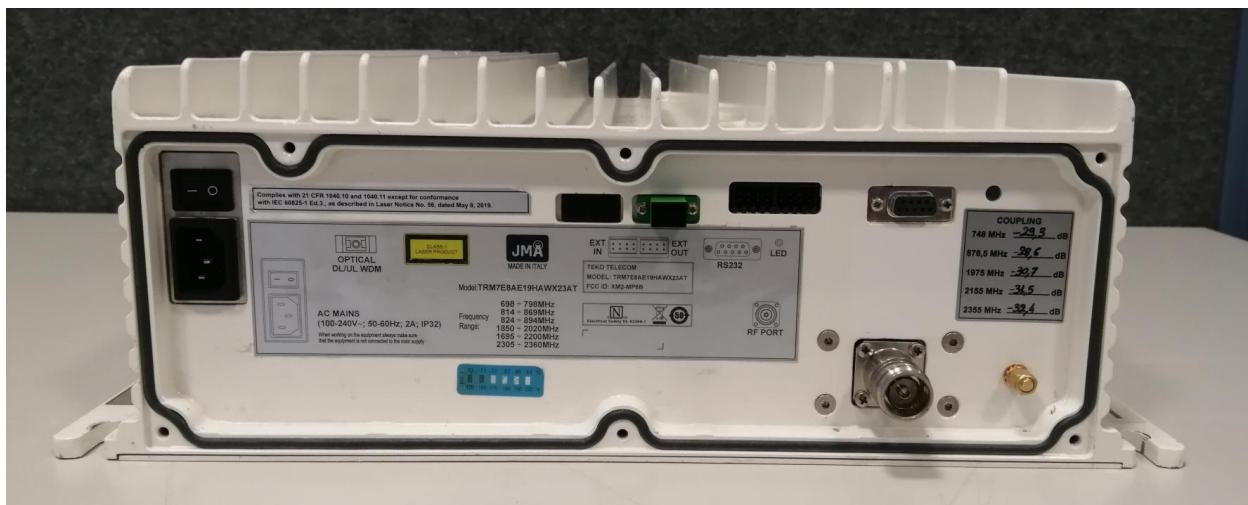

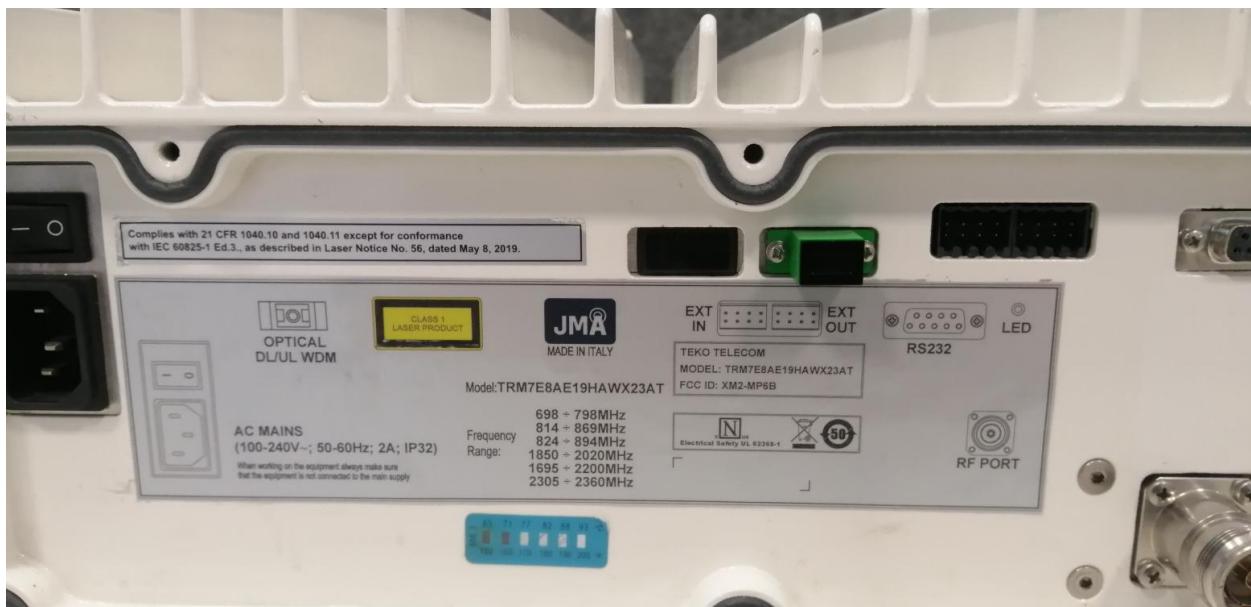

- END OF REPORT -