


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

120.0 dBuV/m

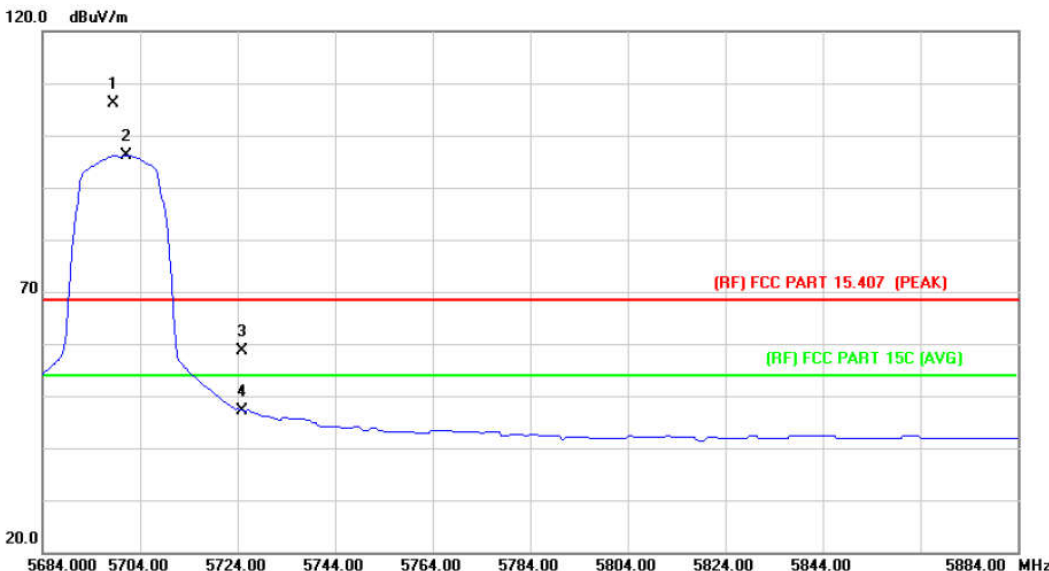

70 (RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


20.0

5684.00 5704.00 5724.00 5744.00 5764.00 5784.00 5804.00 5824.00 5844.00 5884.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5698.570	88.40	17.73	106.13			peak
2	*	5701.200	78.39	17.73	96.12			AVG
3		5725.000	40.74	17.82	58.56	68.30	-9.74	peak
4		5725.000	29.27	17.82	47.09	54.00	-6.91	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

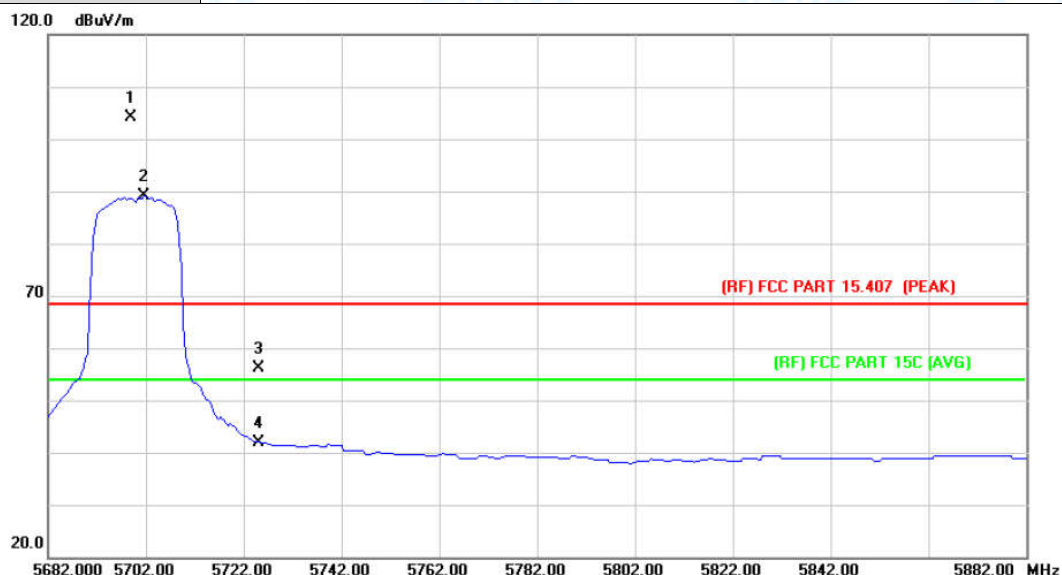

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5698.970	86.52	17.73	104.25	Fundamental Frequency		peak
2	X	5701.600	71.30	17.73	89.03	Fundamental Frequency		AVG
3		5725.000	38.31	17.82	56.13	68.30	-12.17	peak
4		5725.000	24.11	17.82	41.93	54.00	-12.07	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

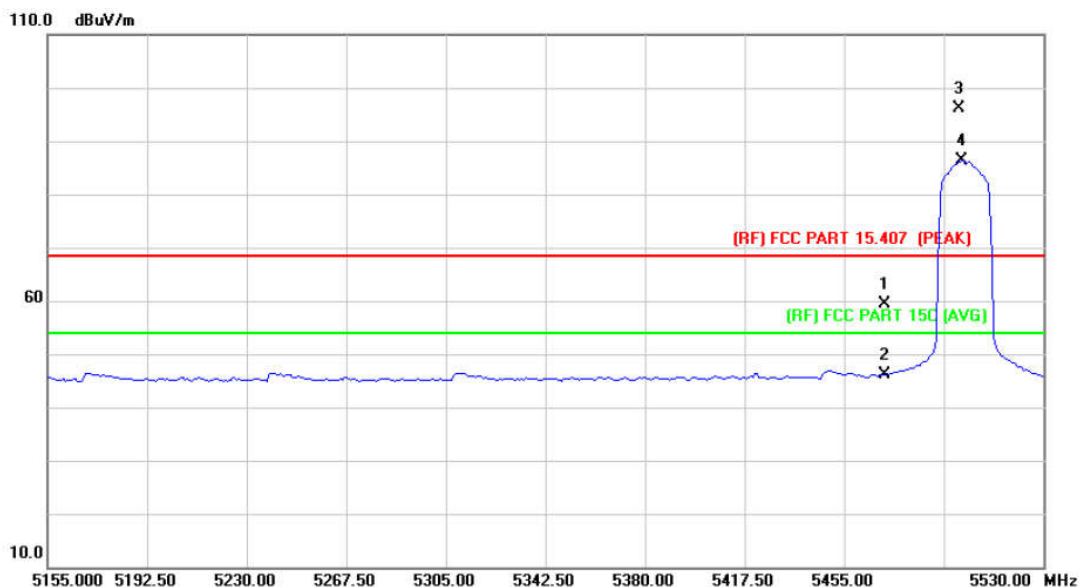

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	45.96	13.31	59.27	68.30	-9.03	peak
2		5470.000	32.82	13.31	46.13	54.00	-7.87	AVG
3	X	5498.190	82.92	13.29	96.21	Fundamental Frequency		peak
4	*	5499.250	73.12	13.29	86.41	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

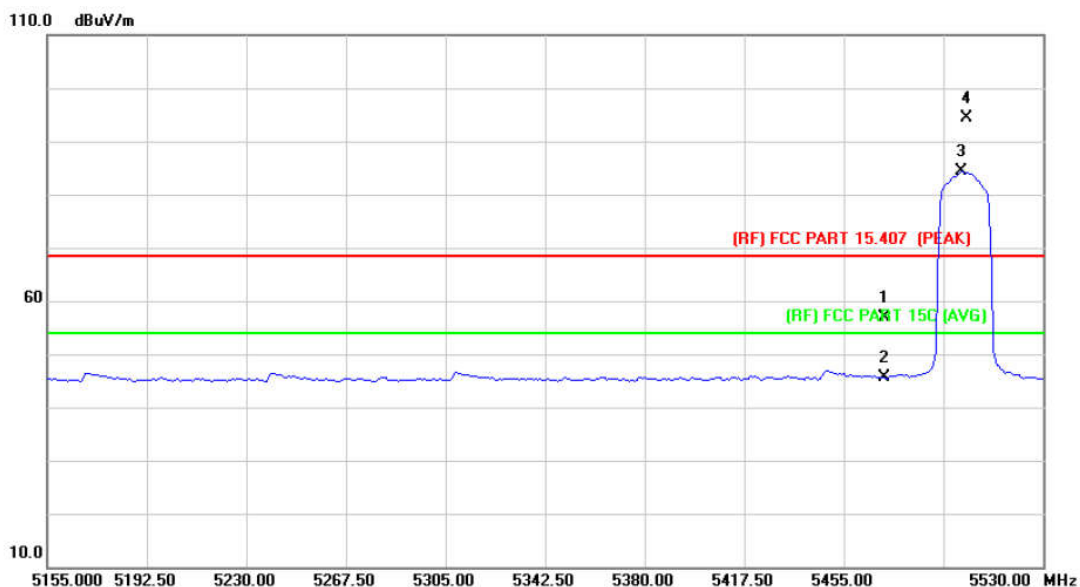

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	33.94	16.61	50.55	54.00	-3.45	AVG
2		5150.600	44.80	16.61	61.41	68.30	-6.89	peak
3	X	5180.000	89.41	16.65	106.06	Fundamental Frequency		peak
4	*	5183.200	80.98	16.65	97.63	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

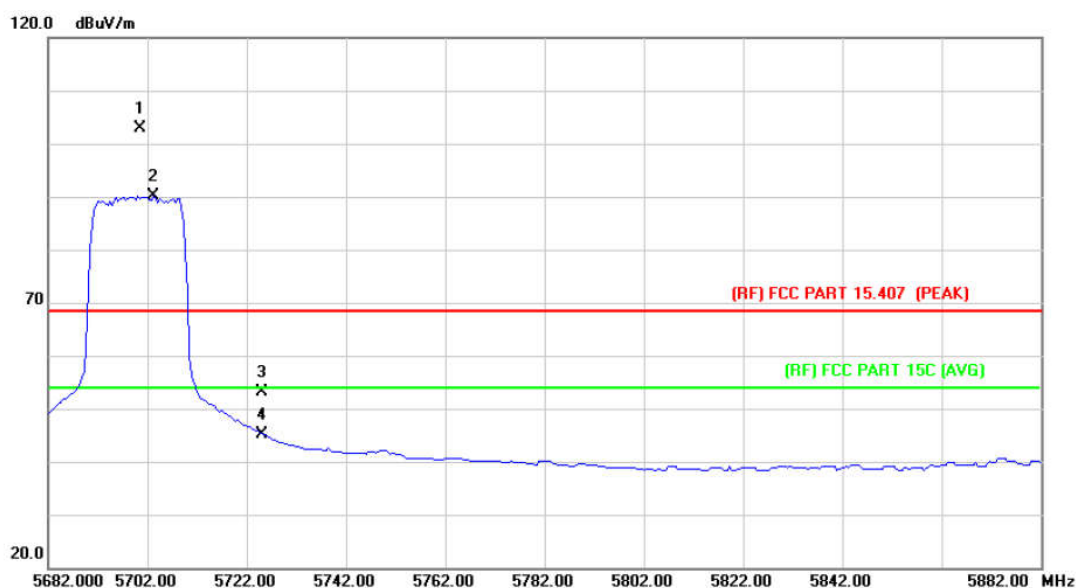

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5700.560	85.19	17.73	102.92	Fundamental Frequency		peak
2	*	5703.200	72.50	17.74	90.24	Fundamental Frequency		AVG
3		5725.000	35.41	17.82	53.23	68.30	-15.07	peak
4		5725.000	27.40	17.82	45.22	54.00	-8.78	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

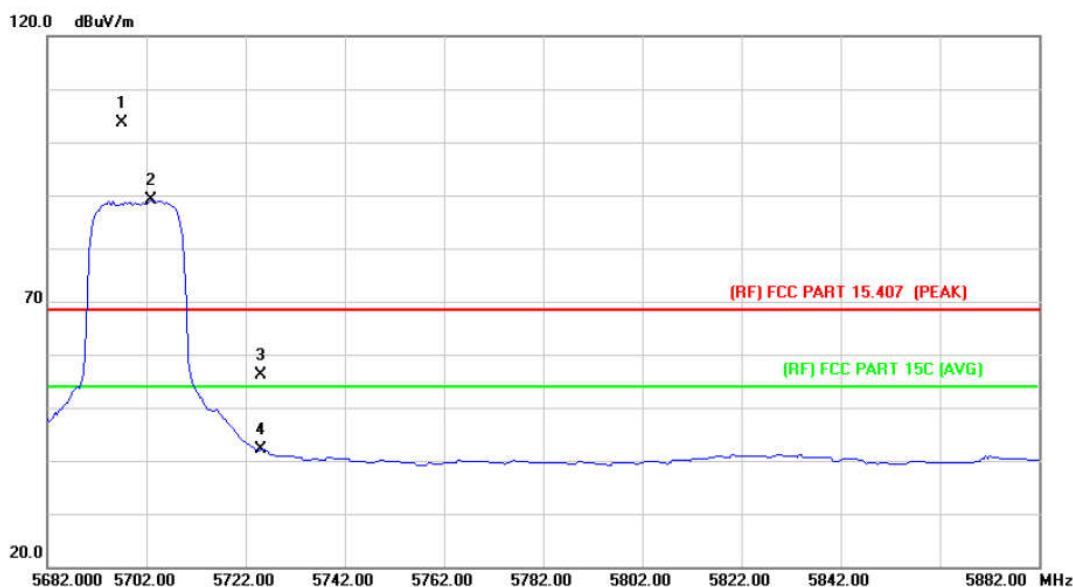

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5696.970	85.84	17.71	103.55	Fundamental Frequency		peak
2	X	5702.800	71.34	17.74	89.08	Fundamental Frequency		AVG
3		5725.000	38.33	17.82	56.15	68.30	-12.15	peak
4		5725.000	24.28	17.82	42.10	54.00	-11.90	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

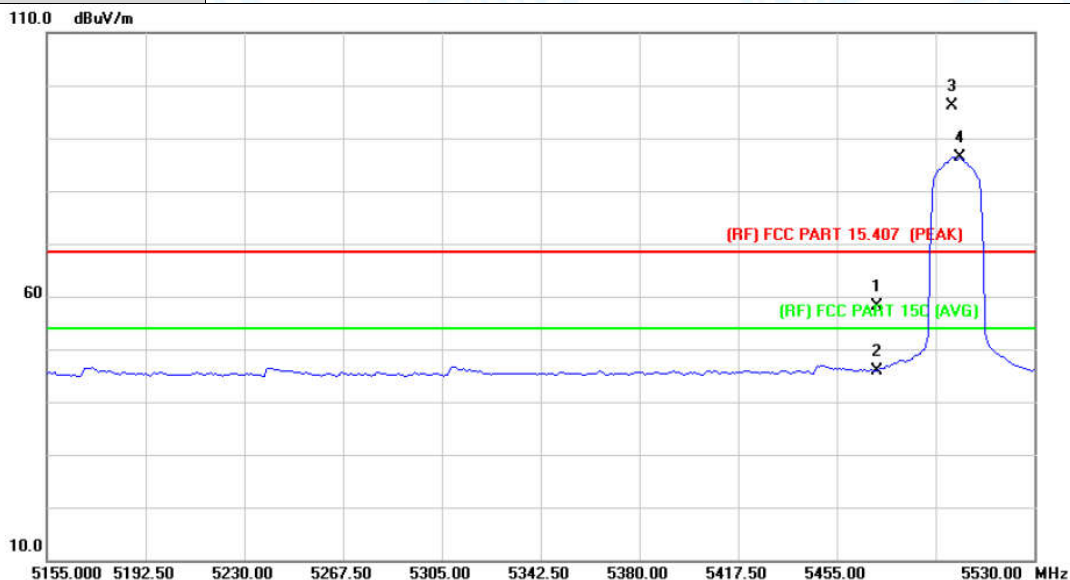

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	44.77	13.31	58.08	68.30	-10.22	peak
2		5470.000	32.68	13.31	45.99	54.00	-8.01	AVG
3	X	5498.940	82.93	13.29	96.22	Fundamental Frequency		peak
4	*	5501.500	72.99	13.29	86.28	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

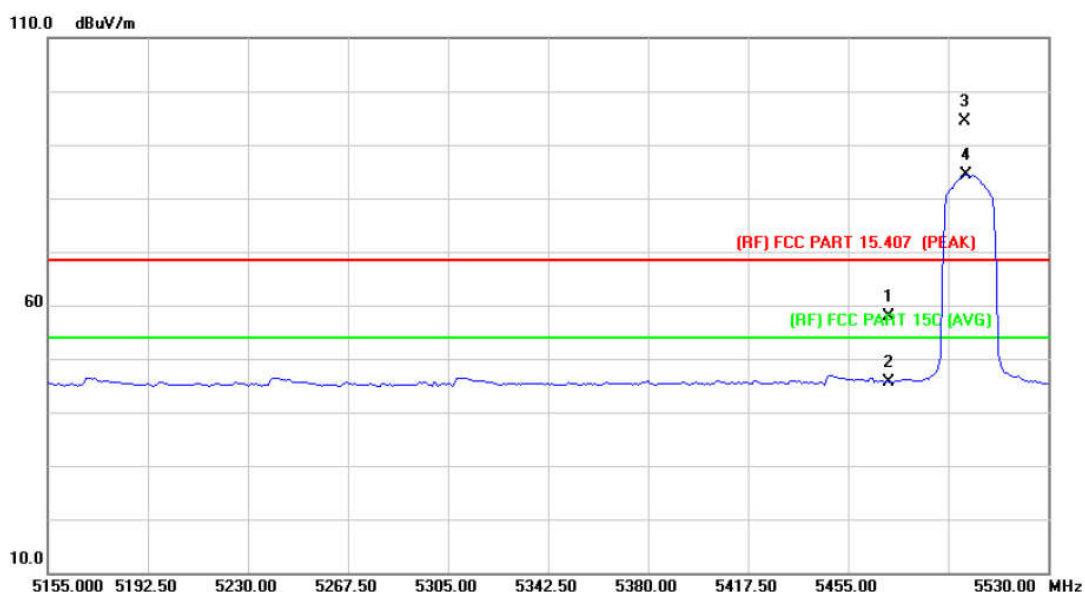

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	44.58	13.31	57.89	68.30	-10.41	peak
2		5470.000	32.28	13.31	45.59	54.00	-8.41	AVG
3	X	5498.940	81.01	13.29	94.30	Fundamental Frequency		peak
4	*	5499.250	71.13	13.29	84.42	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

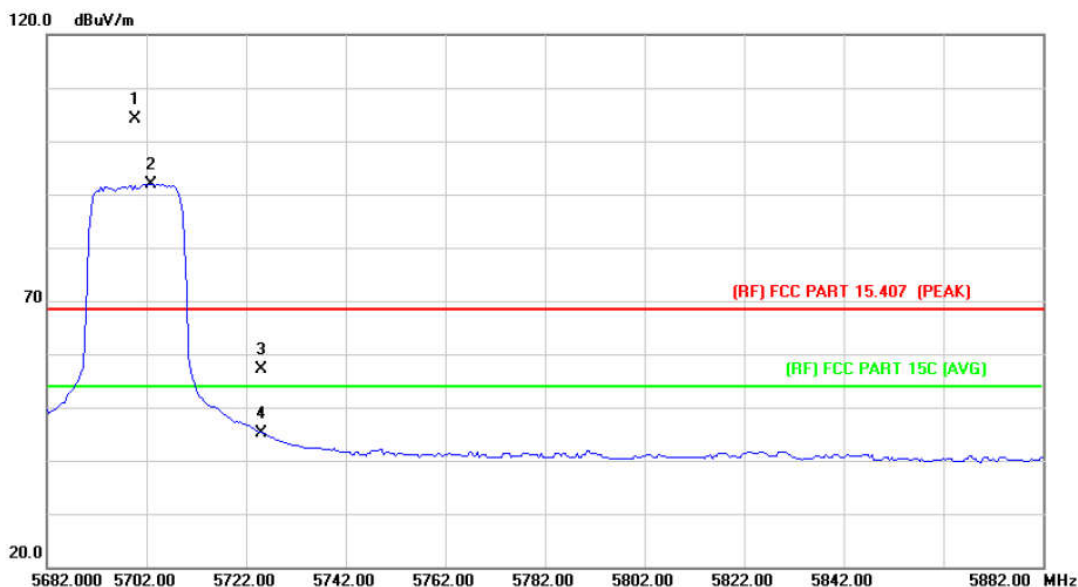

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5699.760	86.52	17.73	104.25	Fundamental Frequency		peak
2	*	5702.800	74.23	17.74	91.97	Fundamental Frequency		AVG
3		5725.000	39.31	17.82	57.13	68.30	-11.17	peak
4		5725.000	27.39	17.82	45.21	54.00	-8.79	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

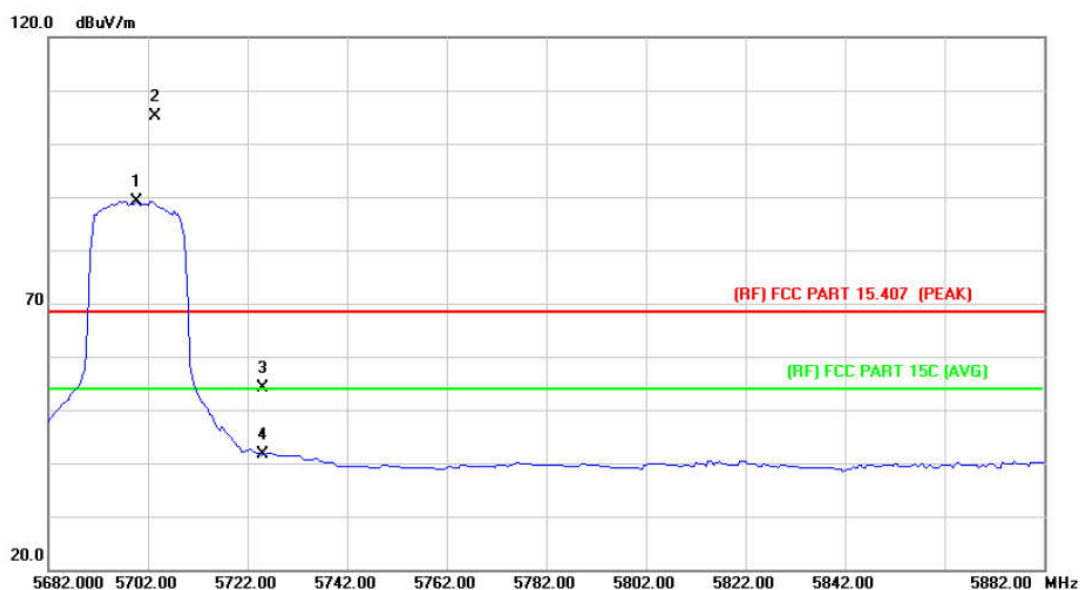

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5699.600	71.49	17.73	89.22	Fundamental Frequency		AVG
2	*	5703.360	87.39	17.74	105.13	Fundamental Frequency		peak
3		5725.000	36.31	17.82	54.13	68.30	-14.17	peak
4		5725.000	23.90	17.82	41.72	54.00	-12.28	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

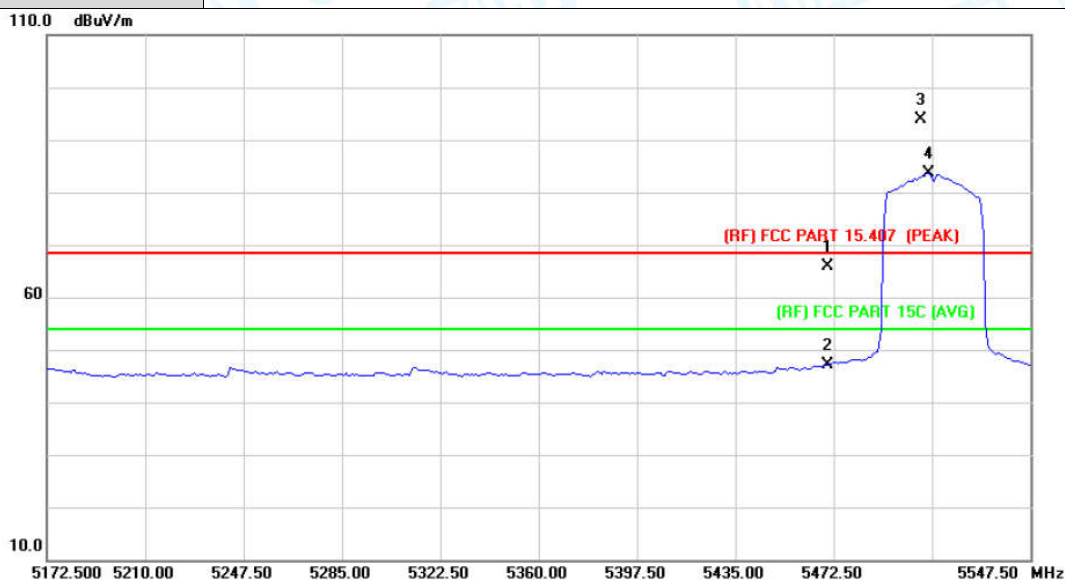

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	52.57	13.31	65.88	68.30	-2.42	peak
2		5470.000	33.91	13.31	47.22	54.00	-6.78	AVG
3	X	5505.960	80.58	13.30	93.88	Fundamental Frequency		peak
4	*	5508.500	70.33	13.31	83.64	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

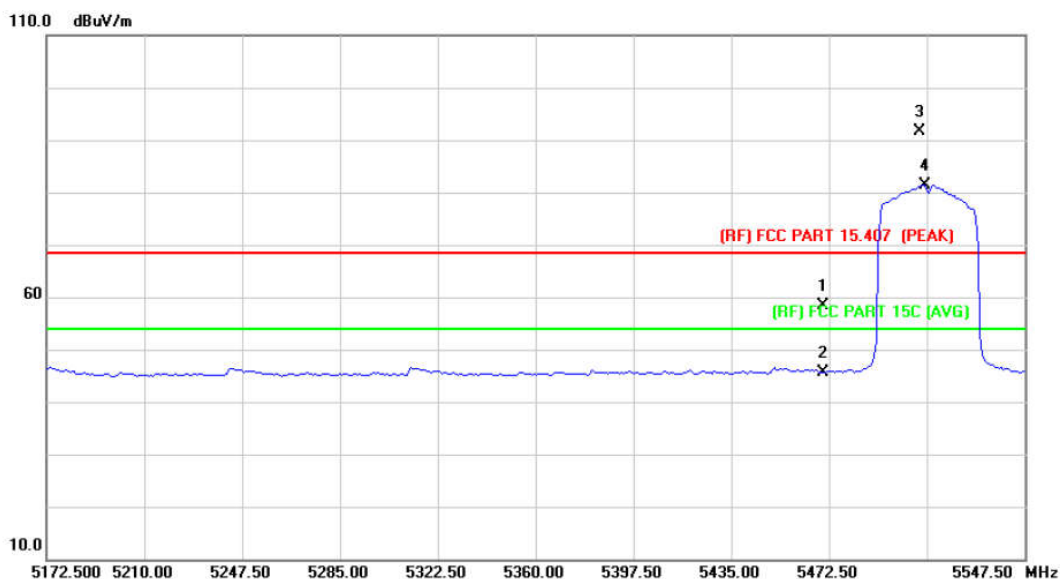

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	45.01	13.31	58.32	68.30	-9.98	peak
2		5470.000	32.26	13.31	45.57	54.00	-8.43	AVG
3	X	5507.460	78.43	13.30	91.73	Fundamental Frequency		peak
4	*	5509.250	68.05	13.31	81.36	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

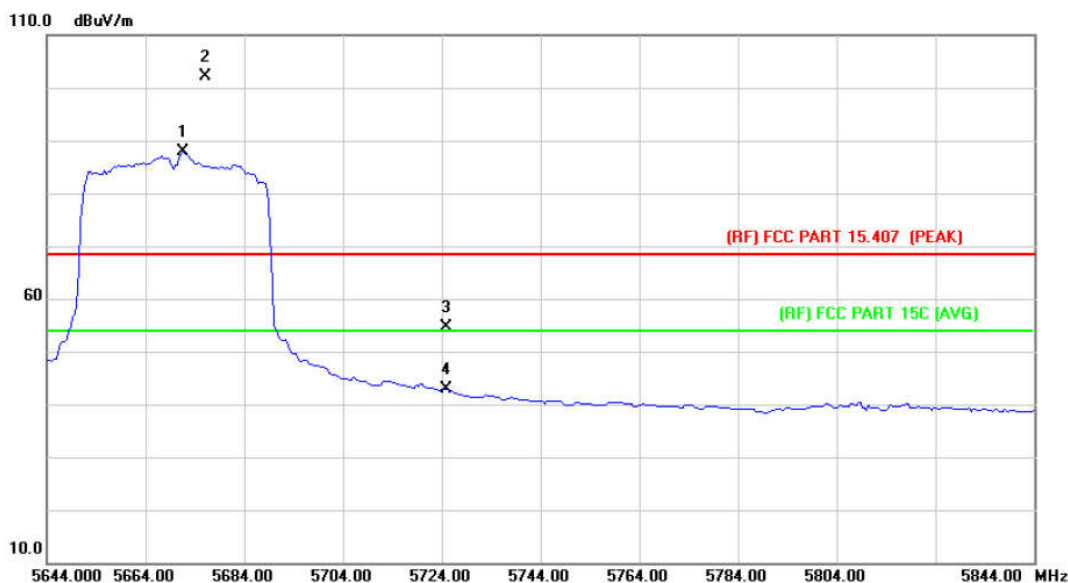

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5671.600	70.28	17.62	87.90	Fundamental Frequency		AVG
2	X	5676.140	84.49	17.63	102.12	Fundamental Frequency		peak
3		5725.000	36.73	17.82	54.55	68.30	-13.75	peak
4		5725.000	24.94	17.82	42.76	54.00	-11.24	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

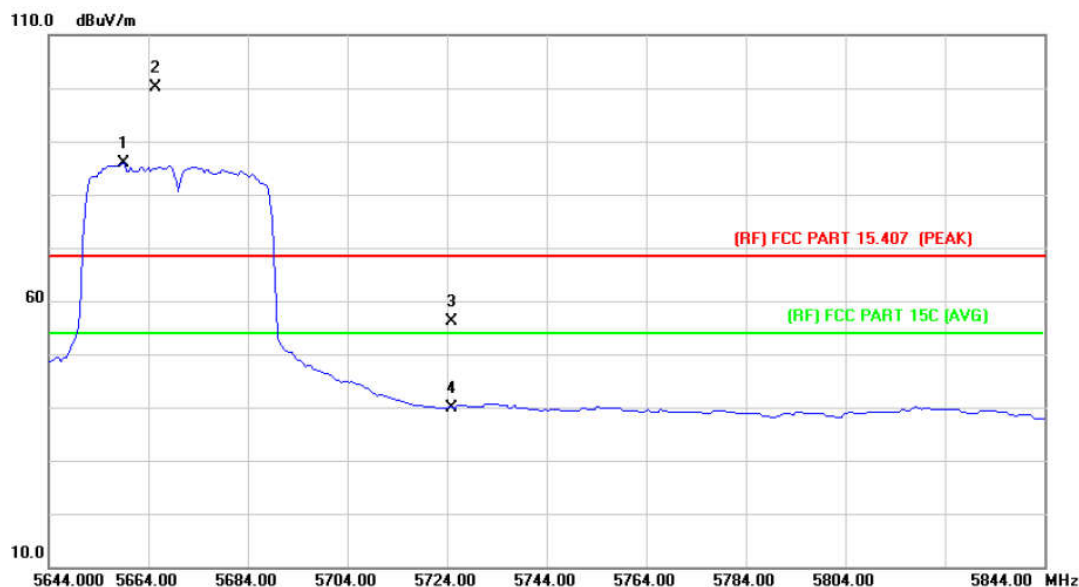

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5659.200	68.20	17.58	85.78	Fundamental Frequency	AVG
2	*	5665.360	82.53	17.60	100.13	Fundamental Frequency	peak
3		5725.000	38.31	17.82	56.13	68.30	-12.17 peak
4		5725.000	22.15	17.82	39.97	54.00	-14.03 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

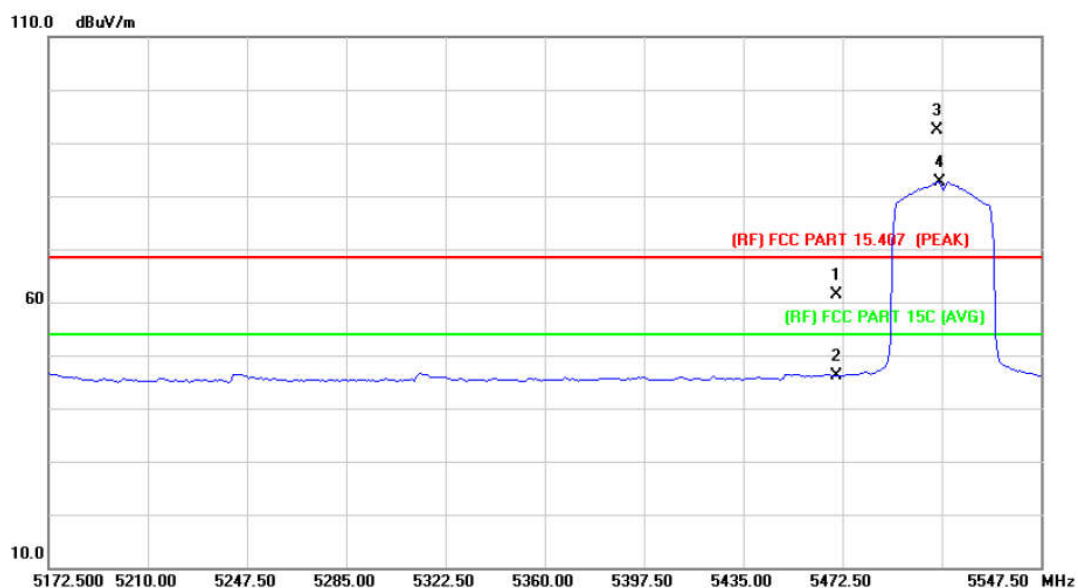

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	47.95	13.31	61.26	68.30	-7.04	peak
2		5470.000	32.78	13.31	46.09	54.00	-7.91	AVG
3	X	5508.200	79.20	13.30	92.50	Fundamental Frequency		peak
4	*	5509.250	69.34	13.31	82.65	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

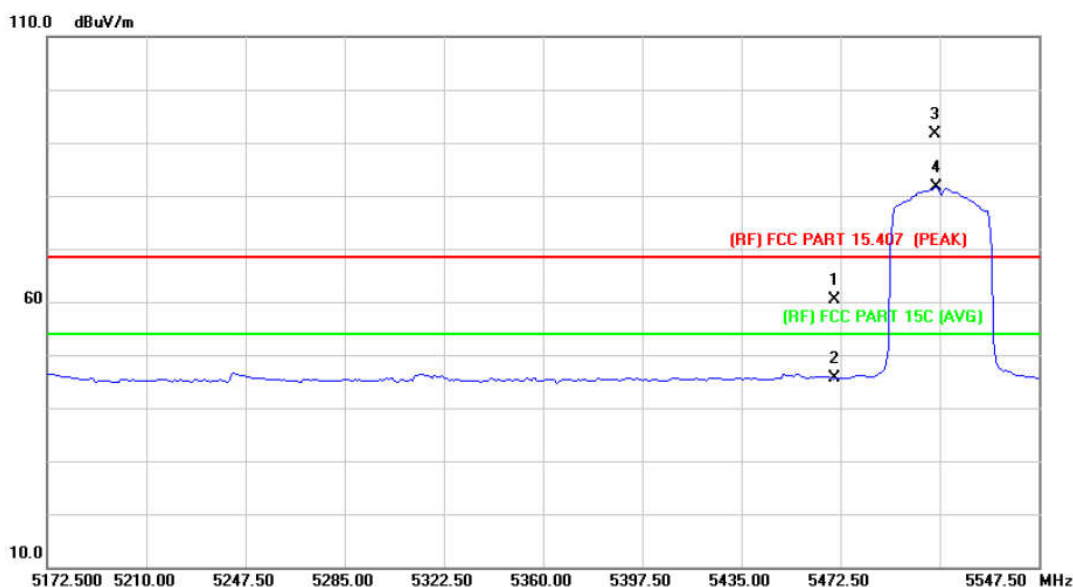

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	47.18	13.31	60.49	68.30	-7.81	peak
2		5470.000	32.26	13.31	45.57	54.00	-8.43	AVG
3	X	5508.200	78.32	13.30	91.62	Fundamental Frequency		peak
4	*	5508.500	68.31	13.31	81.62	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

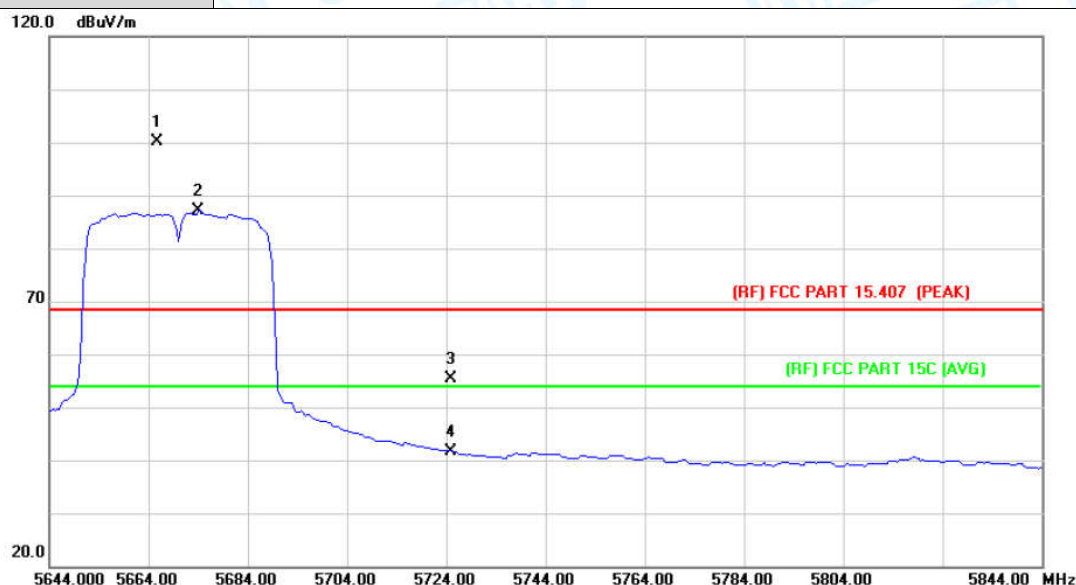

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5665.760	82.53	17.60	100.13	Fundamental Frequency		peak
2	*	5674.000	69.58	17.63	87.21	Fundamental Frequency		AVG
3		5725.000	37.49	17.82	55.31	68.30	-12.99	peak
4		5725.000	23.91	17.82	41.73	54.00	-12.27	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

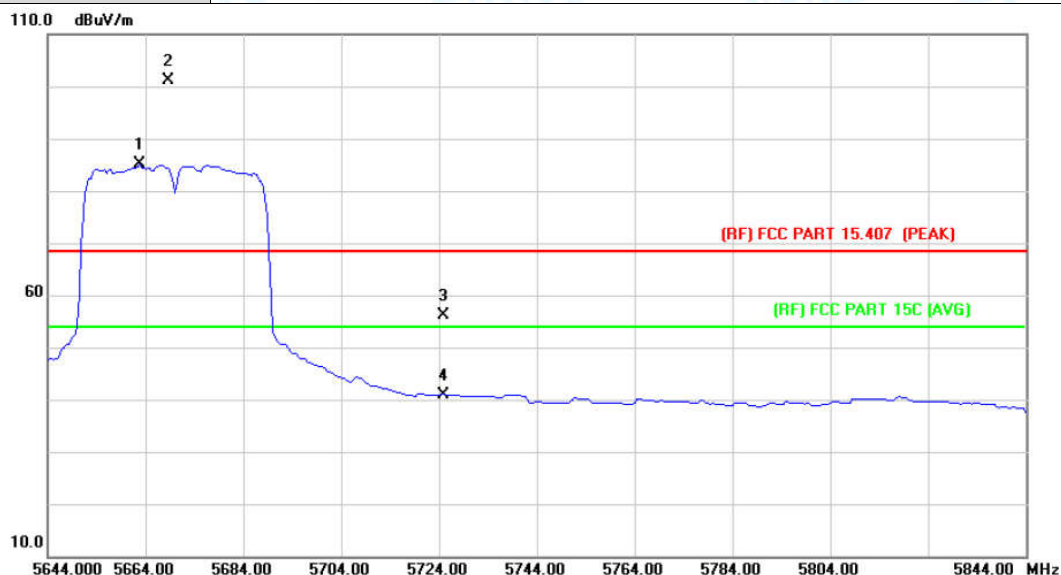

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	X	5662.800	67.65	17.60	85.25	Fundamental Frequency	AVG
2	*	5668.550	83.52	17.61	101.13	Fundamental Frequency	peak
3		5725.000	38.31	17.82	56.13	68.30	-12.17 peak
4		5725.000	23.16	17.82	40.98	54.00	-13.02 AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

110.0 dBuV/m

60


10.0

5213.750 5251.25 5288.75 5326.25 5363.75 5401.25 5438.75 5476.25 5513.75 5588.75 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	50.37	13.31	63.68	Fundamental Frequency		peak
2		5470.000	34.85	13.31	48.16	Fundamental Frequency		AVG
3	X	5518.760	77.08	13.34	90.42	68.30	22.12	peak
4	*	5528.000	66.62	13.36	79.98	54.00	25.98	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

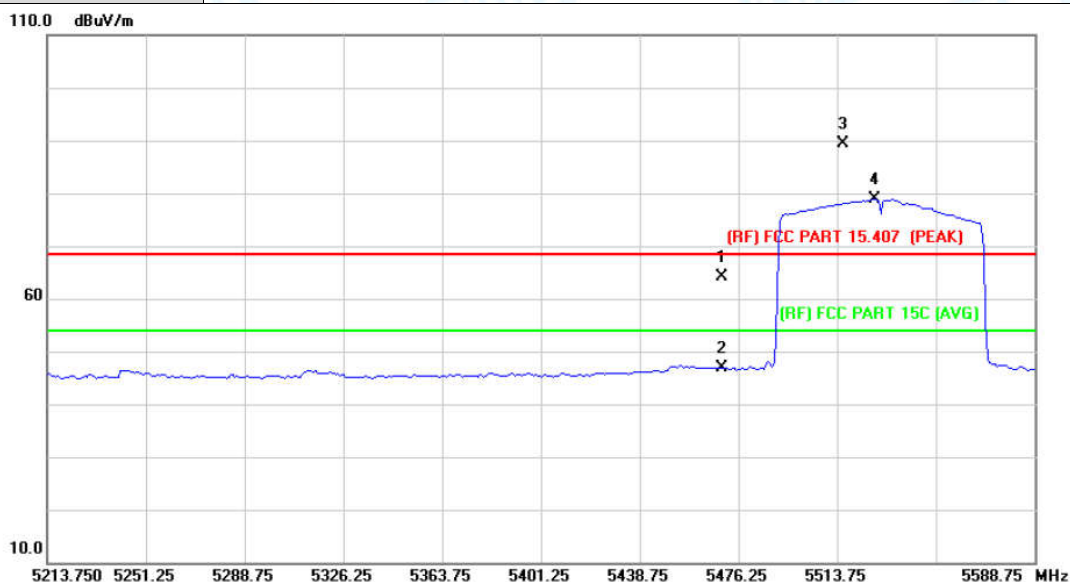

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	50.77	13.31	64.08	Fundamental Frequency	2	peak
2		5470.000	33.53	13.31	46.84	Fundamental Frequency	3	AVG
3	X	5515.770	76.10	13.34	89.44	68.30	21.14	peak
4	*	5528.000	65.59	13.36	78.95	54.00	24.95	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

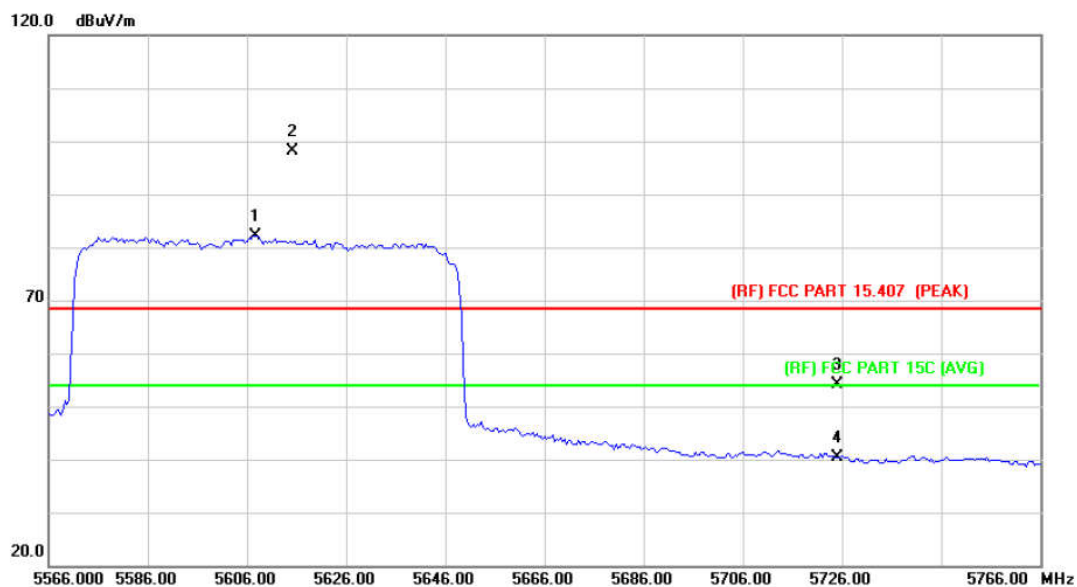

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5607.600	64.82	17.38	82.20	Fundamental Frequency		AVG
2	*	5615.300	80.71	17.42	98.13	Fundamental Frequency		peak
3		5725.000	36.31	17.82	54.13	68.30	-14.17	peak
4		5725.000	22.52	17.82	40.34	54.00	-13.66	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

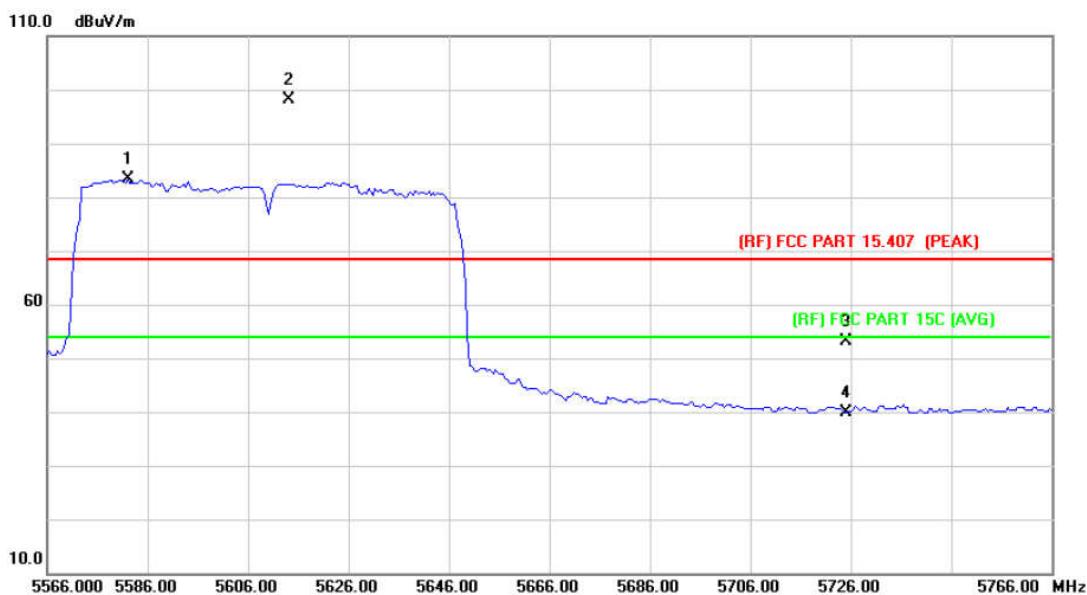


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5582.000	66.16	17.29	83.45	Fundamental Frequency		AVG
2	*	5614.100	80.72	17.41	98.13	Fundamental Frequency		peak
3		5725.000	35.35	17.82	53.17	68.30	-15.13	peak
4		5725.000	22.13	17.82	39.95	54.00	-14.05	AVG

Emission Level= Read Level+ Correct Factor

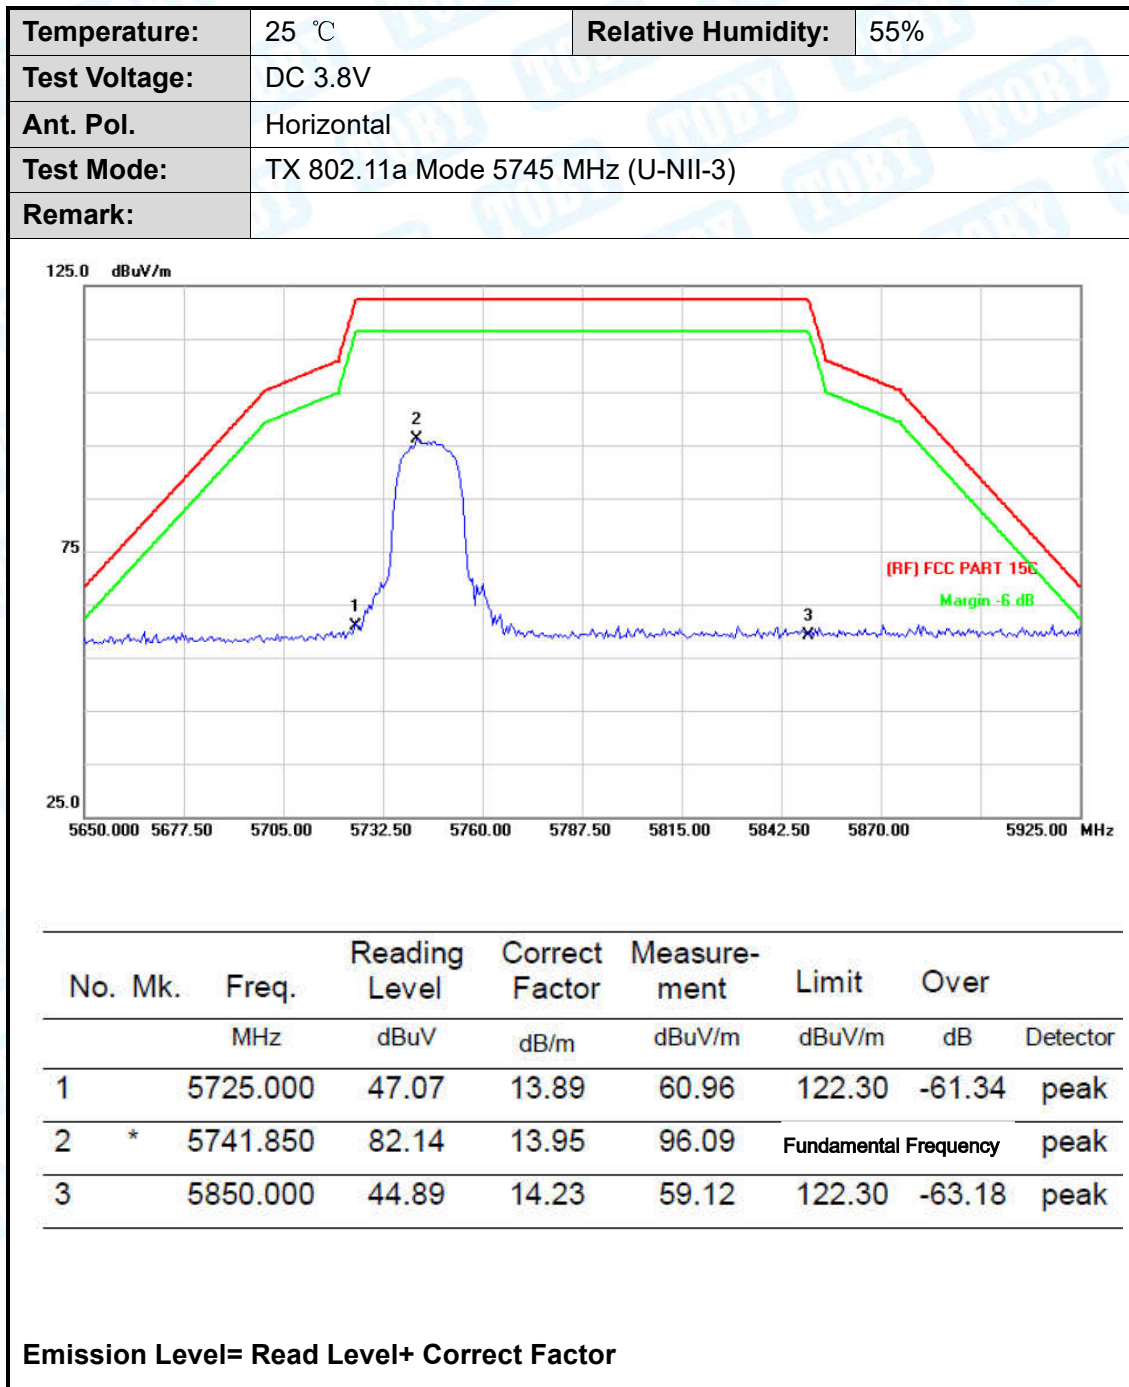


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

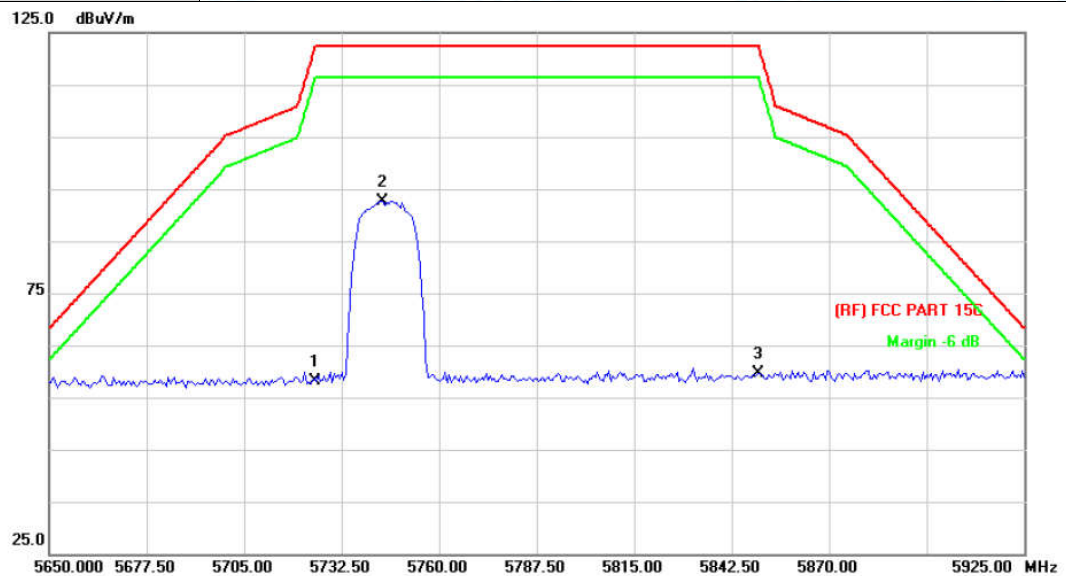

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.29	13.89	58.18	122.30	-64.12	peak
2	*	5744.050	78.62	13.95	92.57	Fundamental Frequency		peak
3		5850.000	45.32	14.23	59.55	122.30	-62.75	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

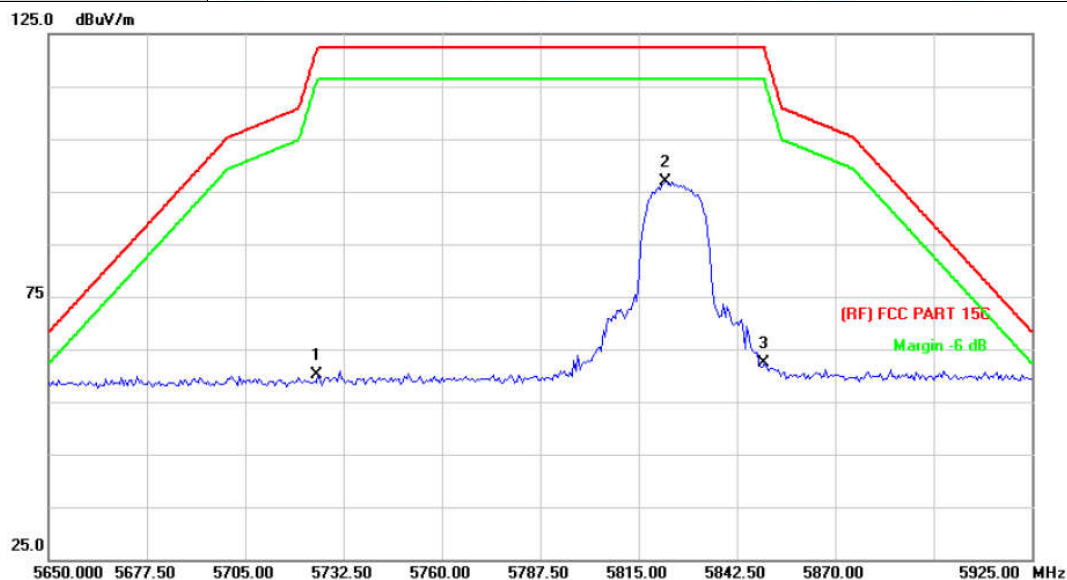

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.33	13.89	60.22	122.30	-62.08	peak
2	*	5822.700	82.68	14.15	96.83	Fundamental Frequency		peak
3		5850.000	48.21	14.23	62.44	122.30	-59.86	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

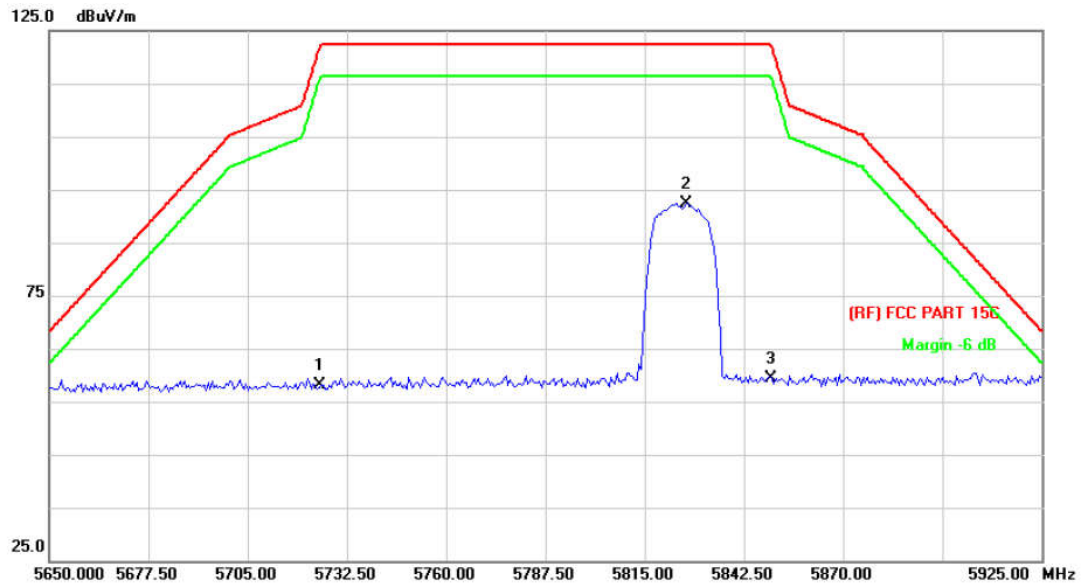

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.27	13.89	58.16	122.30	-64.14	peak
2	*	5826.550	78.25	14.17	92.42	Fundamental Frequency		peak
3		5850.000	45.09	14.23	59.32	122.30	-62.98	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

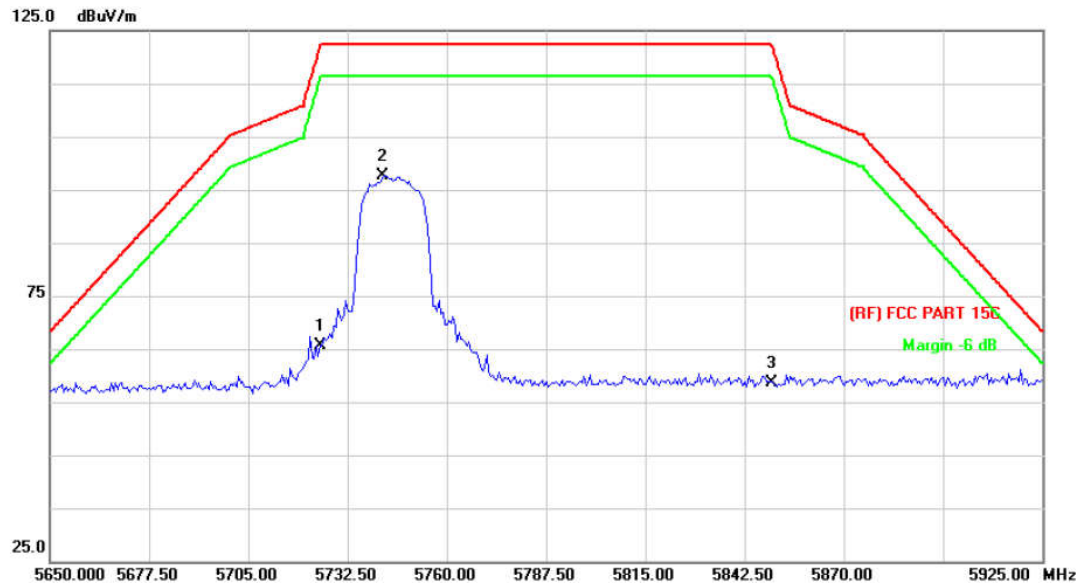

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.64	13.89	65.53	122.30	-56.77	peak
2	*	5742.400	83.71	13.95	97.66	Fundamental Frequency		peak
3		5850.000	44.29	14.23	58.52	122.30	-63.78	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

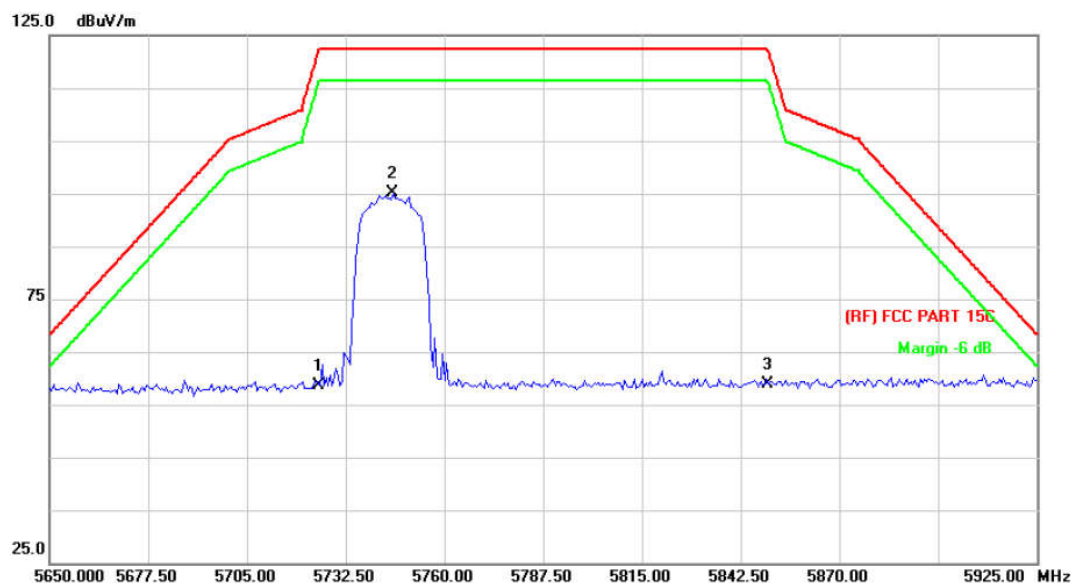

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.84	13.89	58.73	122.30	-63.57	peak
2	*	5745.700	81.07	13.95	95.02	Fundamental Frequency		peak
3		5850.000	44.69	14.23	58.92	122.30	-63.38	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:			

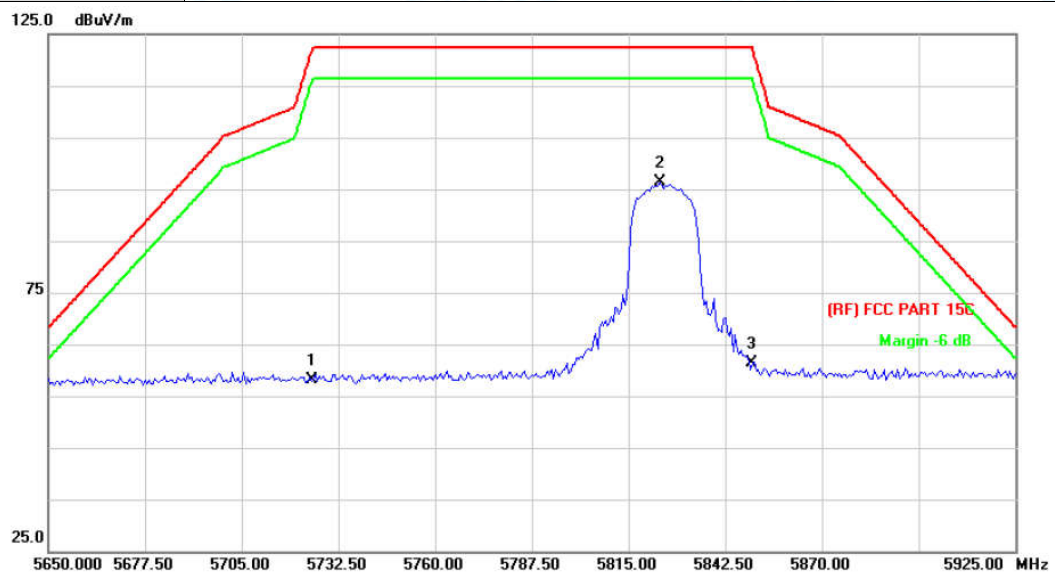

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.23	13.89	58.12	122.30	-64.18	peak
2	*	5823.800	82.18	14.16	96.34	Fundamental Frequency		peak
3		5850.000	47.19	14.23	61.42	122.30	-60.88	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:			

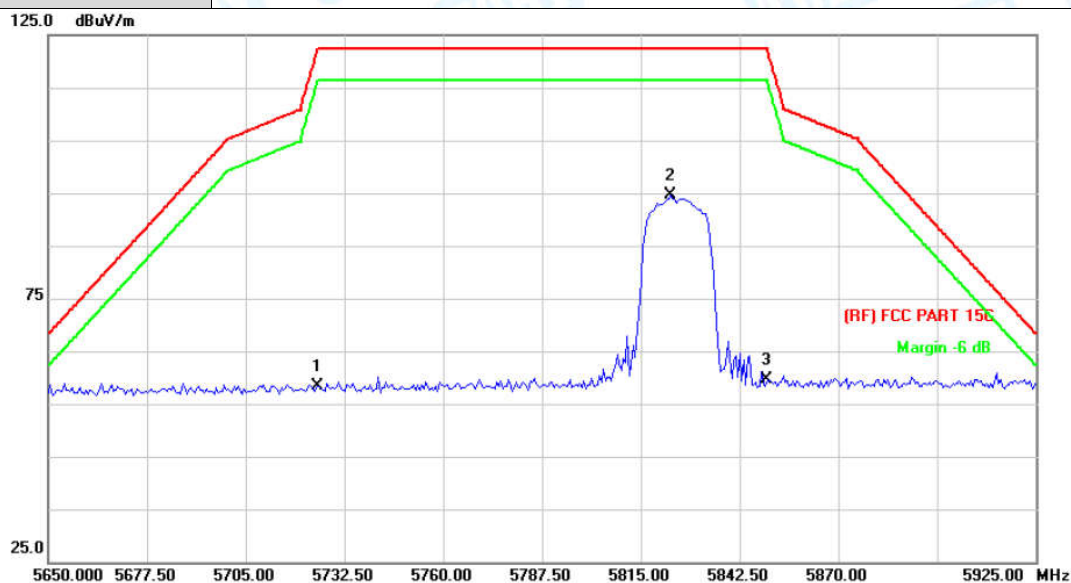

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.52	13.89	58.41	122.30	-63.89	peak
2	*	5823.250	80.42	14.16	94.58	Fundamental Frequency		peak
3		5850.000	45.35	14.23	59.58	122.30	-62.72	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:			

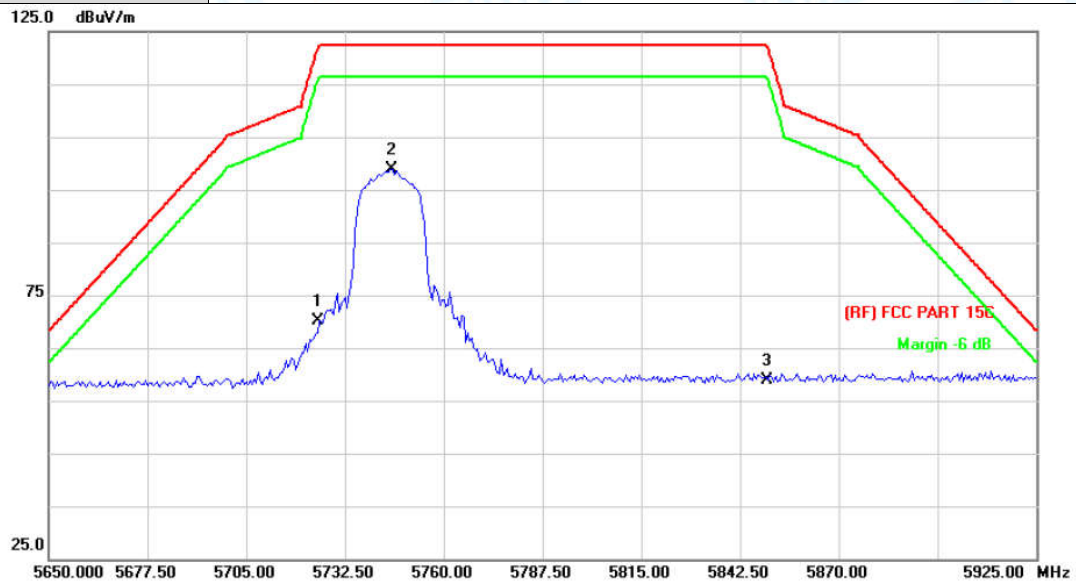


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	56.25	13.89	70.14	122.30	-52.16	peak
2	*	5745.700	84.93	13.95	98.88	Fundamental Frequency		peak
3		5850.000	44.63	14.23	58.86	122.30	-63.44	peak

Emission Level= Read Level+ Correct Factor

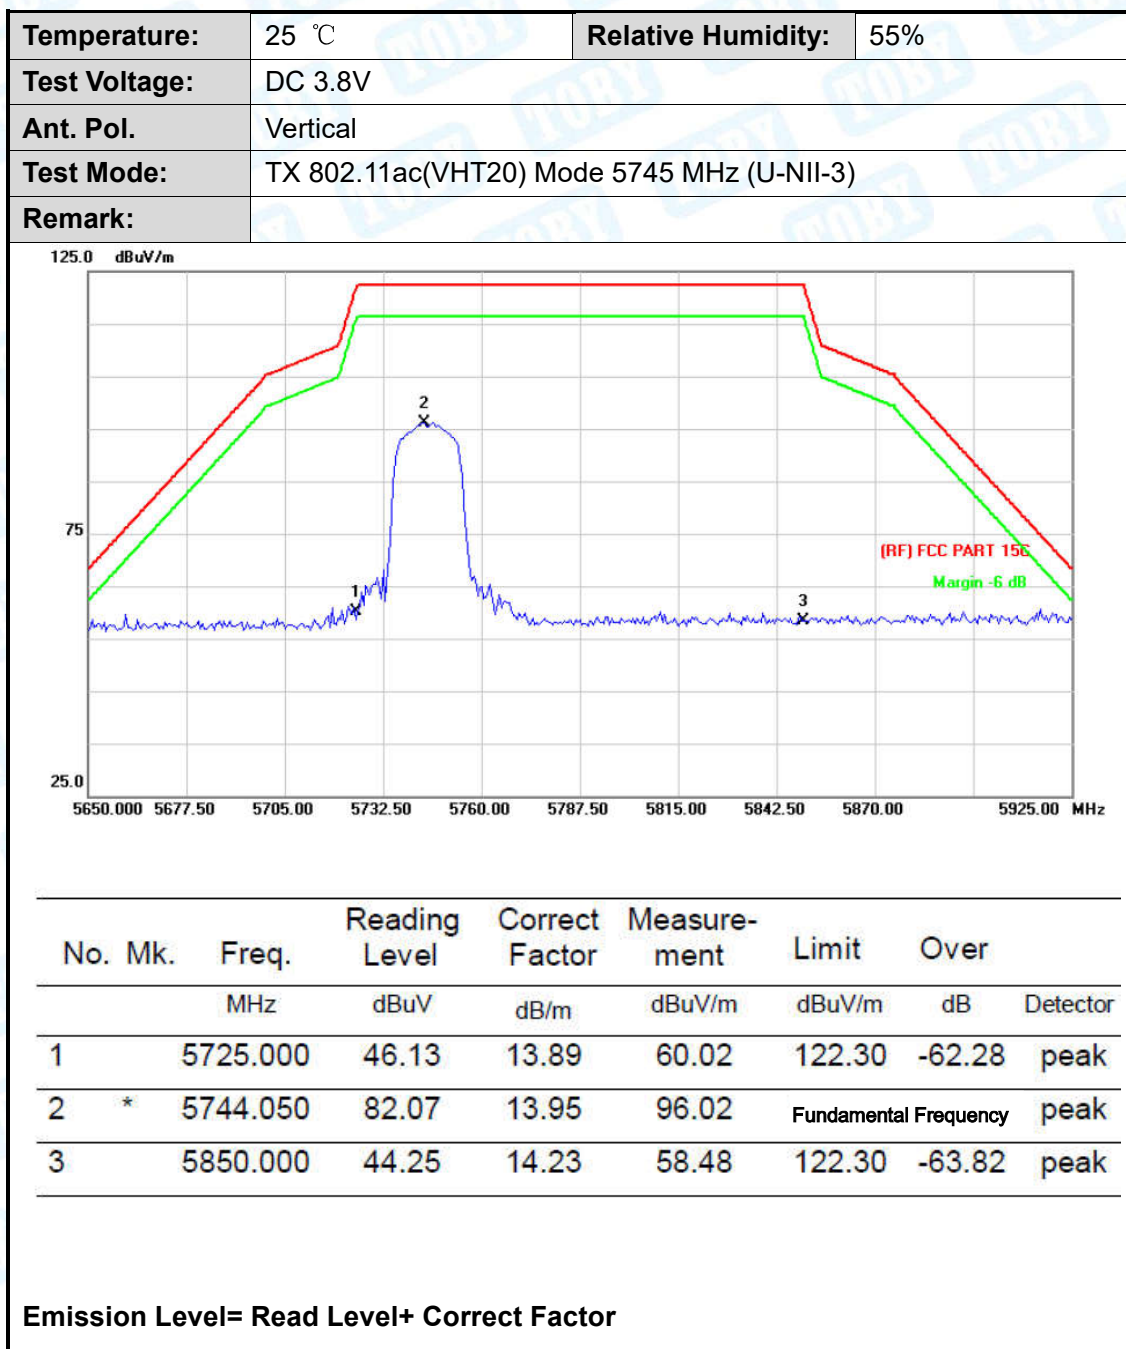


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

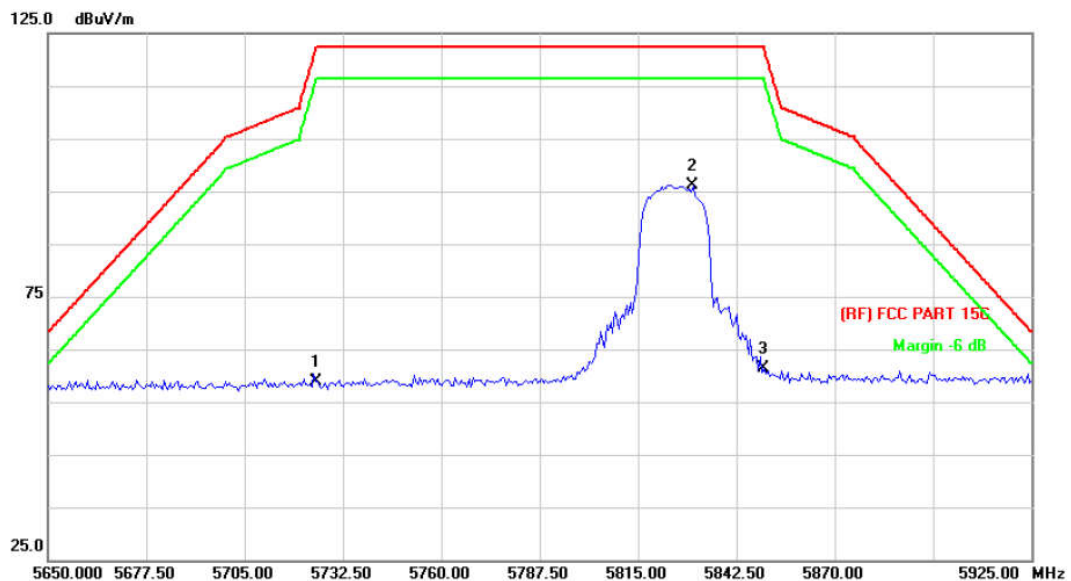

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	45.00	13.89	58.89	122.30	-63.41	peak
2	*	5830.400	82.02	14.17	96.19	Fundamental Frequency		peak
3		5850.000	47.07	14.23	61.30	122.30	-61.00	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

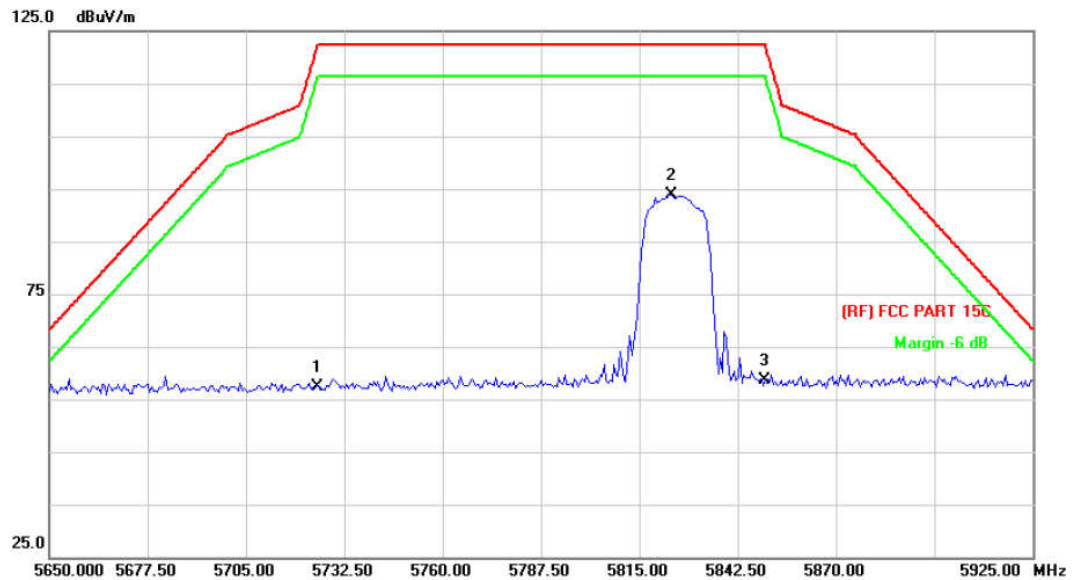

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.52	13.89	57.41	122.30	-64.89	peak
2	*	5823.800	79.70	14.16	93.86	Fundamental Frequency		peak
3		5850.000	44.39	14.23	58.62	122.30	-63.68	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

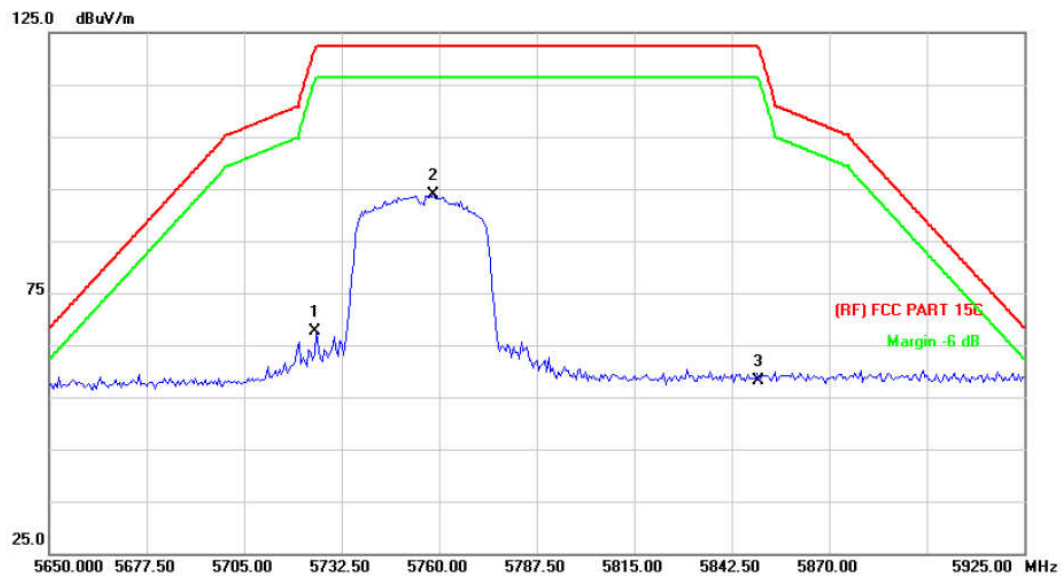

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	53.79	13.89	67.68	122.30	-54.62	peak
2	*	5758.350	80.02	13.97	93.99	Fundamental Frequency		peak
3		5850.000	43.96	14.23	58.19	122.30	-64.11	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

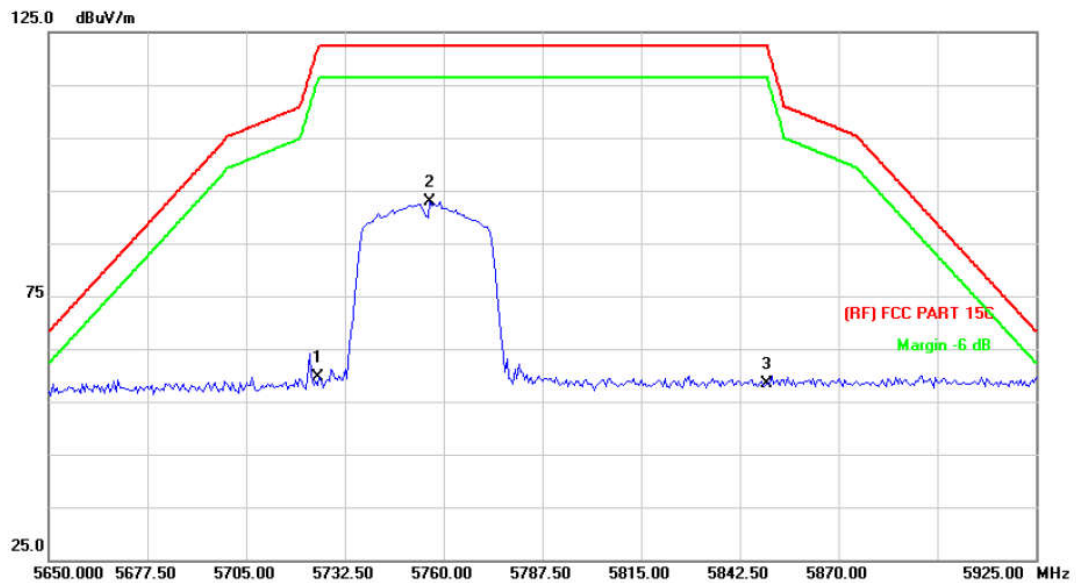

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	45.78	13.89	59.67	122.30	-62.63	peak
2	*	5756.150	79.02	13.97	92.99	Fundamental Frequency		peak
3		5850.000	44.17	14.23	58.40	122.30	-63.90	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

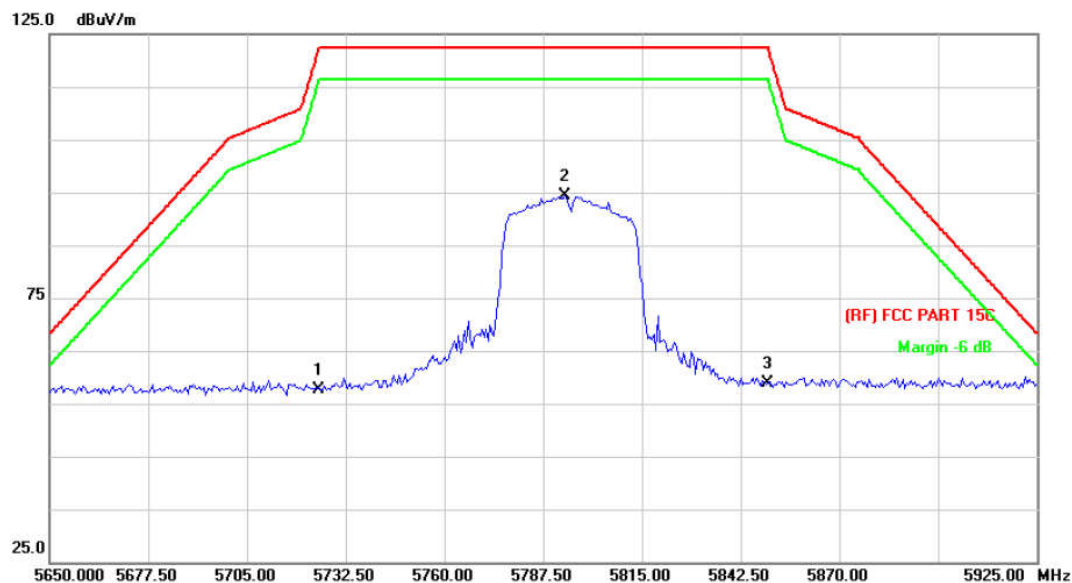

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.84	13.89	57.73	122.30	-64.57	peak
2	*	5793.550	80.35	14.08	94.43	Fundamental Frequency		peak
3		5850.000	44.73	14.23	58.96	122.30	-63.34	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

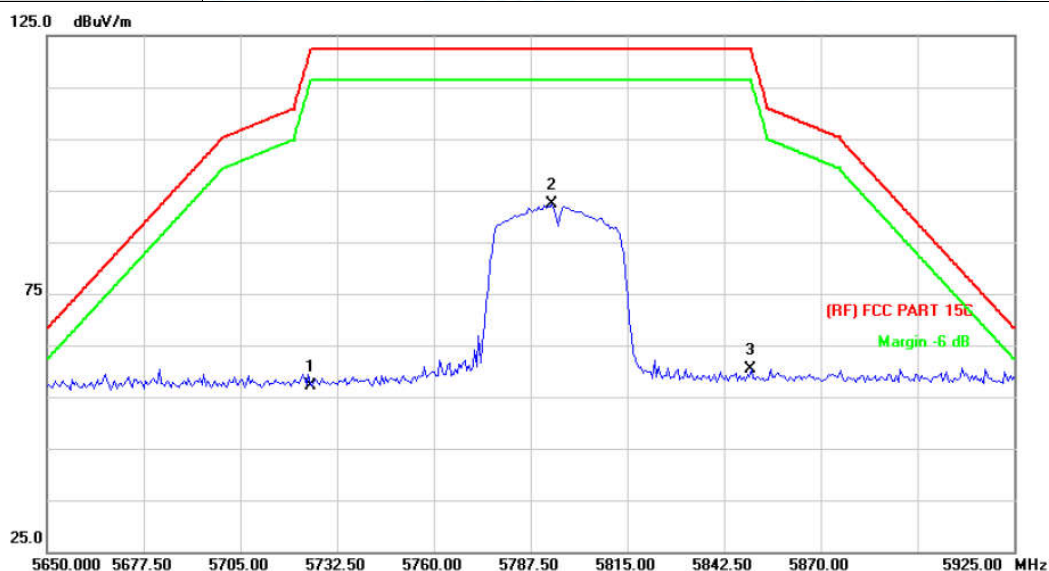

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.16	13.89	57.05	122.30	-65.25	peak
2	*	5793.550	78.26	14.08	92.34	Fundamental Frequency		peak
3		5850.000	46.18	14.23	60.41	122.30	-61.89	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

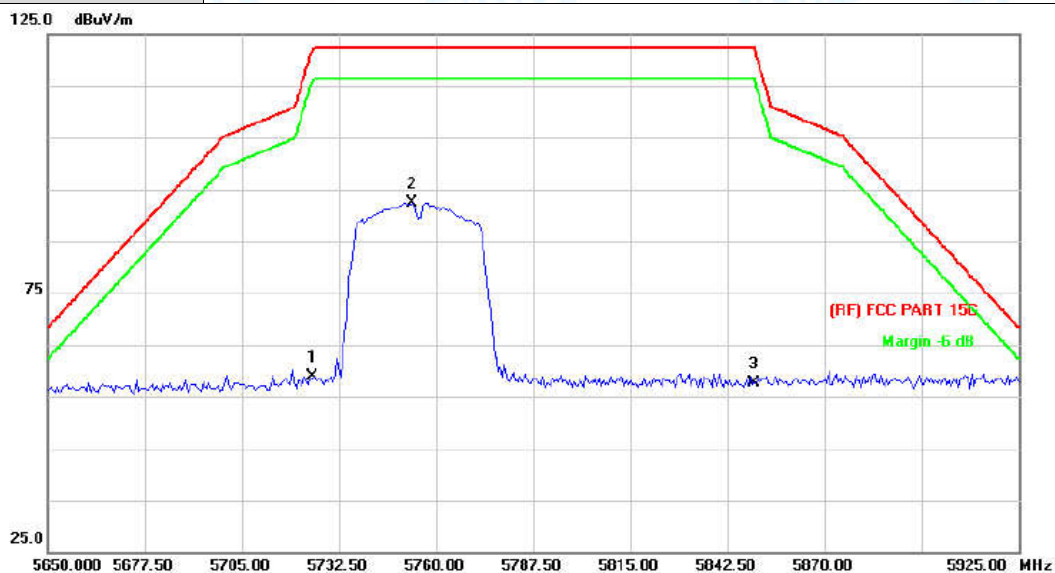

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	44.91	13.89	58.80	122.30	-63.50	peak
2	*	5753.400	78.44	13.97	92.41	Fundamental Frequency		peak
3		5850.000	43.28	14.23	57.51	122.30	-64.79	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

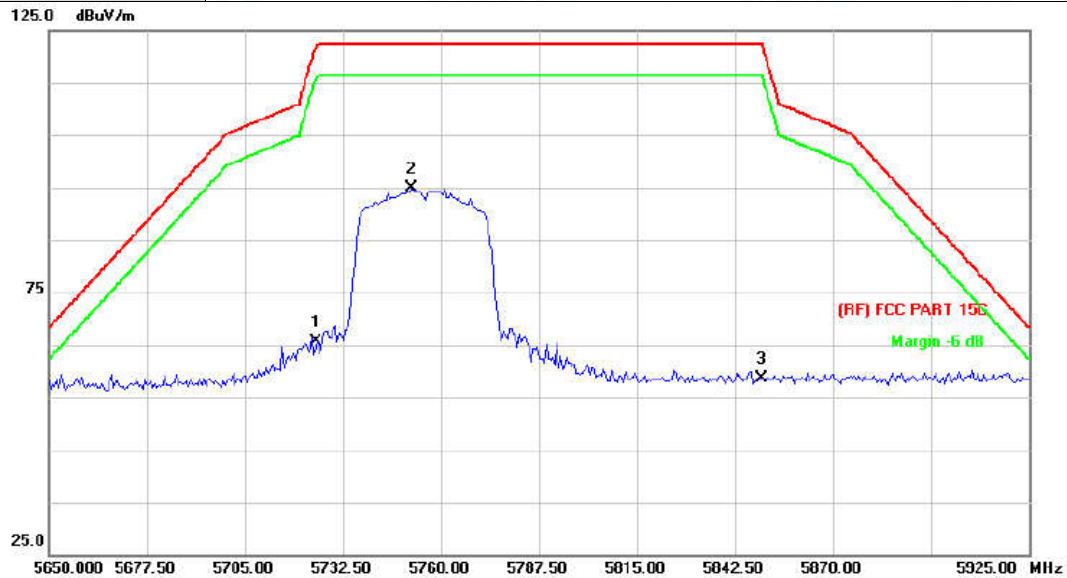


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.86	13.89	65.75	122.30	-56.55	peak
2	*	5751.750	80.98	13.96	94.94	Fundamental Frequency		peak
3		5850.000	44.49	14.23	58.72	122.30	-63.58	peak

Emission Level= Read Level+ Correct Factor

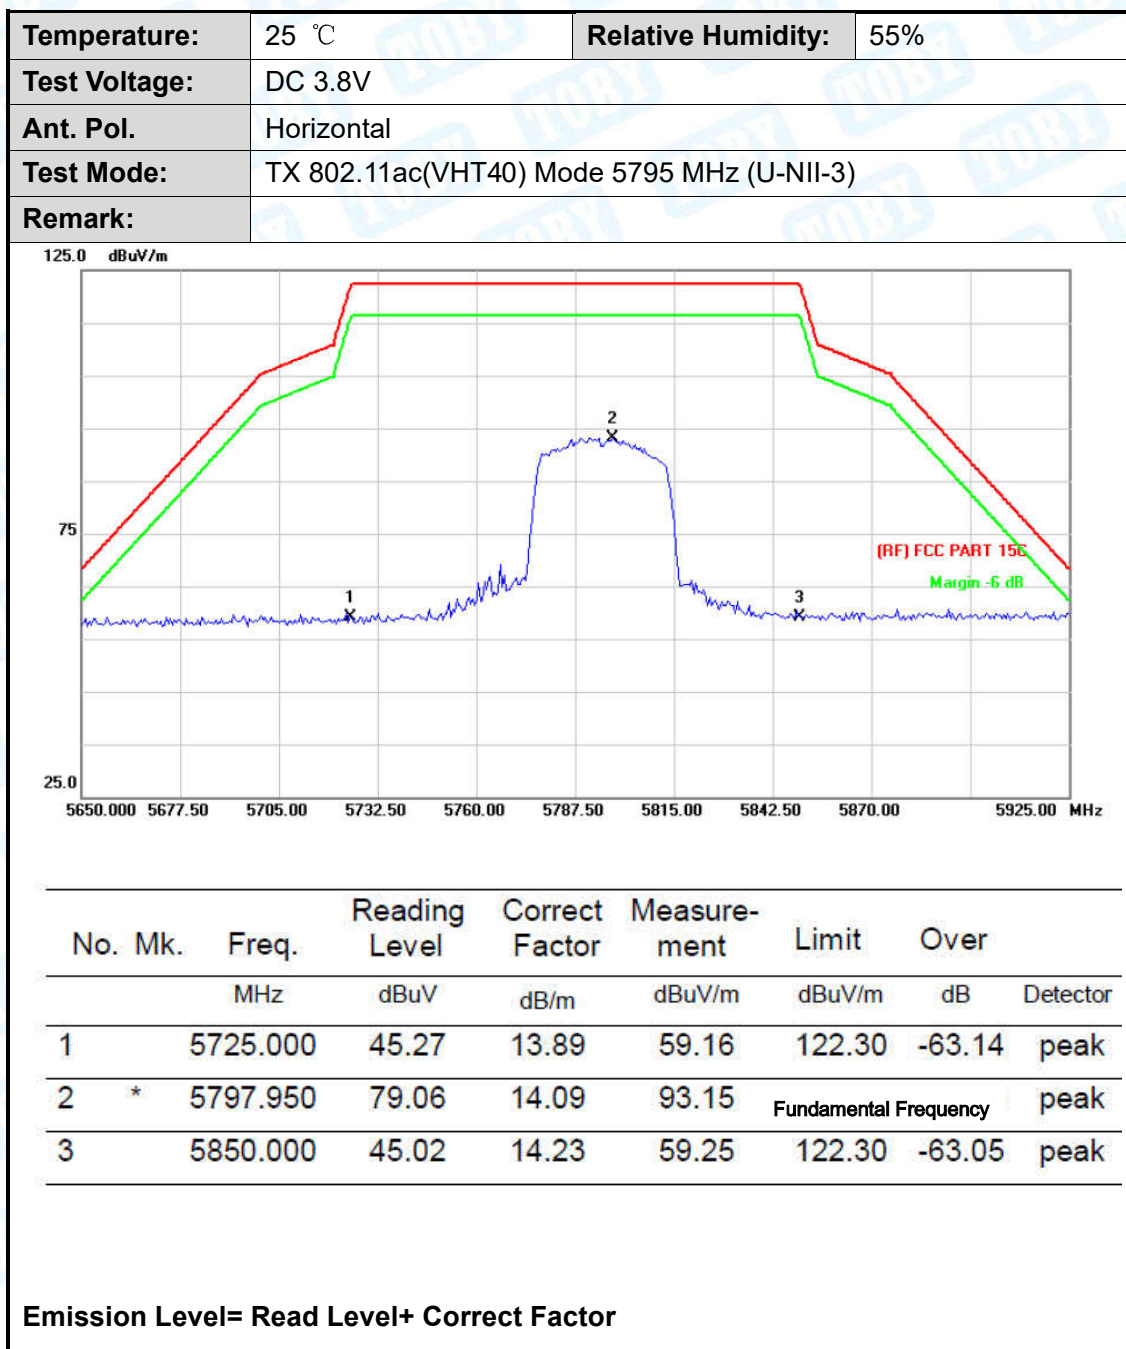


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

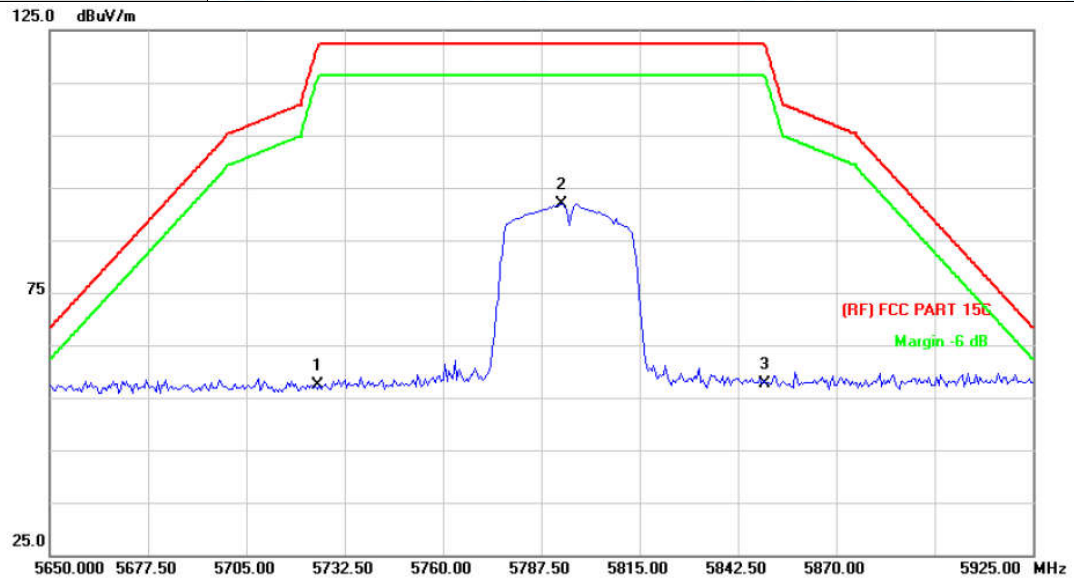

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.48	13.89	57.37	122.30	-64.93	peak
2	*	5793.000	77.80	14.08	91.88	Fundamental Frequency		peak
3		5850.000	43.29	14.23	57.52	122.30	-64.78	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

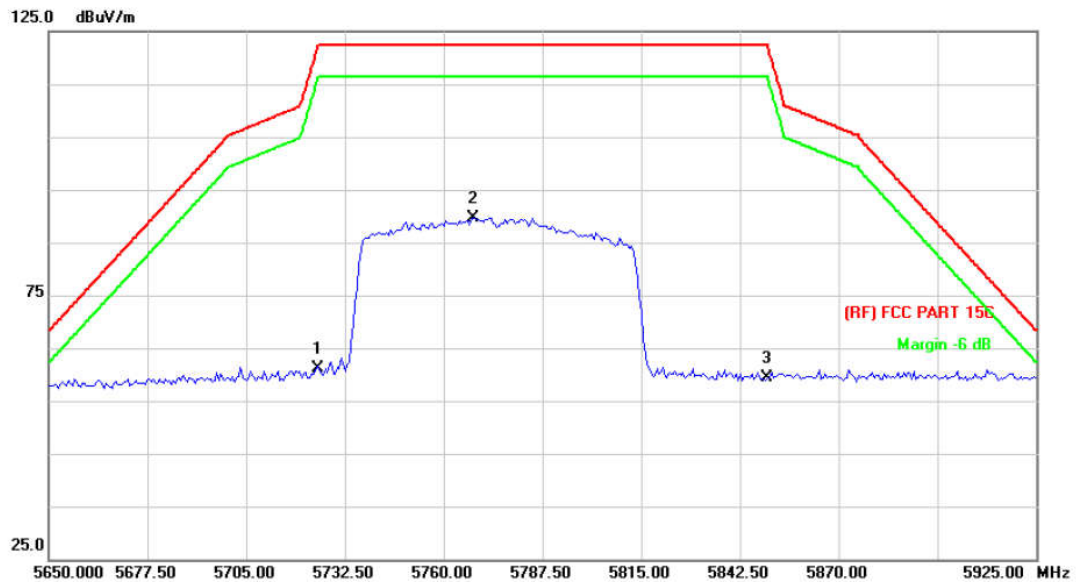

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.19	13.89	61.08	122.30	-61.22	peak
2	*	5768.250	75.67	14.01	89.68	Fundamental Frequency		peak
3		5850.000	45.16	14.23	59.39	122.30	-62.91	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

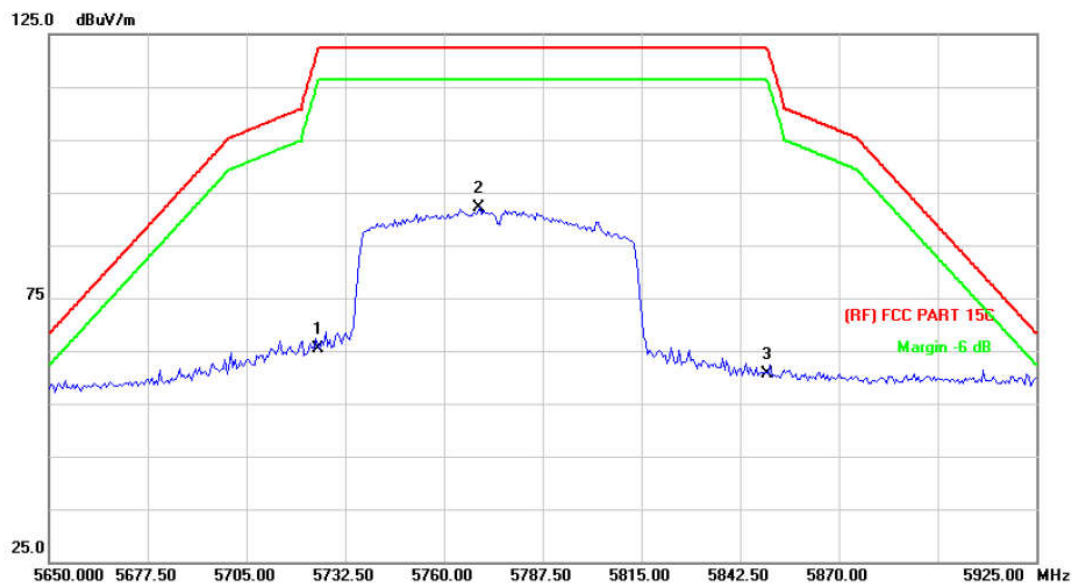

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.56	13.89	65.45	122.30	-56.85	peak
2	*	5769.900	78.00	14.02	92.02	Fundamental Frequency		peak
3		5850.000	46.49	14.23	60.72	122.30	-61.58	peak


Emission Level= Read Level+ Correct Factor

Attachment D--Bandwidth Test Data

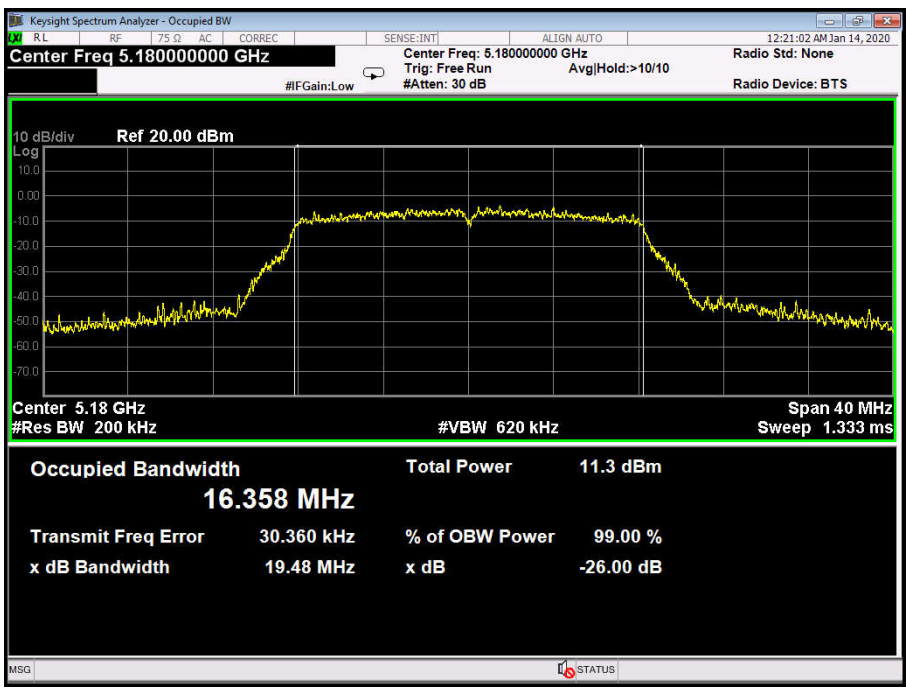Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11a Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.48	16.358
40	5200	19.93	16.401
48	5240	19.87	16.399
802.11a Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq: 5.180000000 GHz Span: 40 MHz #Res BW: 200 kHz #VBW: 620 kHz Sweep: 1.333 ms Occupied Bandwidth: 16.358 MHz Total Power: 11.3 dBm Transmit Freq Error: 30.360 kHz % of OBW Power: 99.00 % x dB Bandwidth: 19.48 MHz x dB: -26.00 dB			


802.11a Mode


5200 MHz

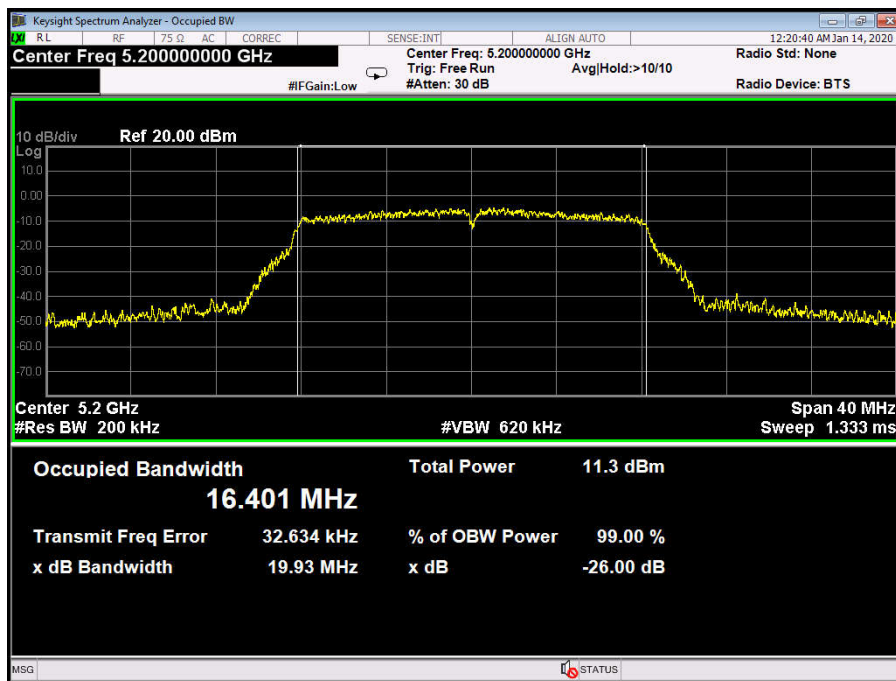

802.11a Mode

5240 MHz

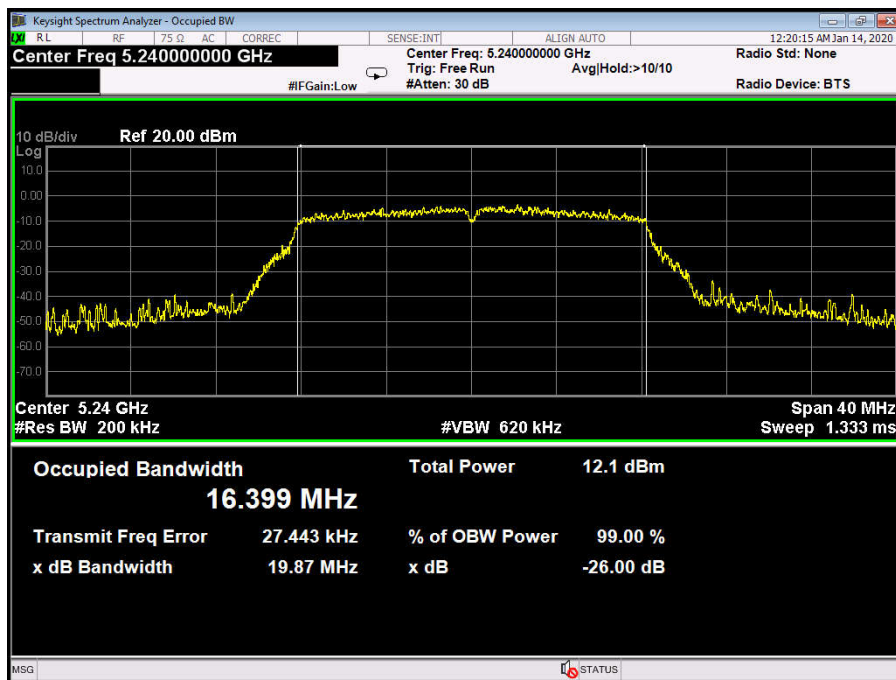

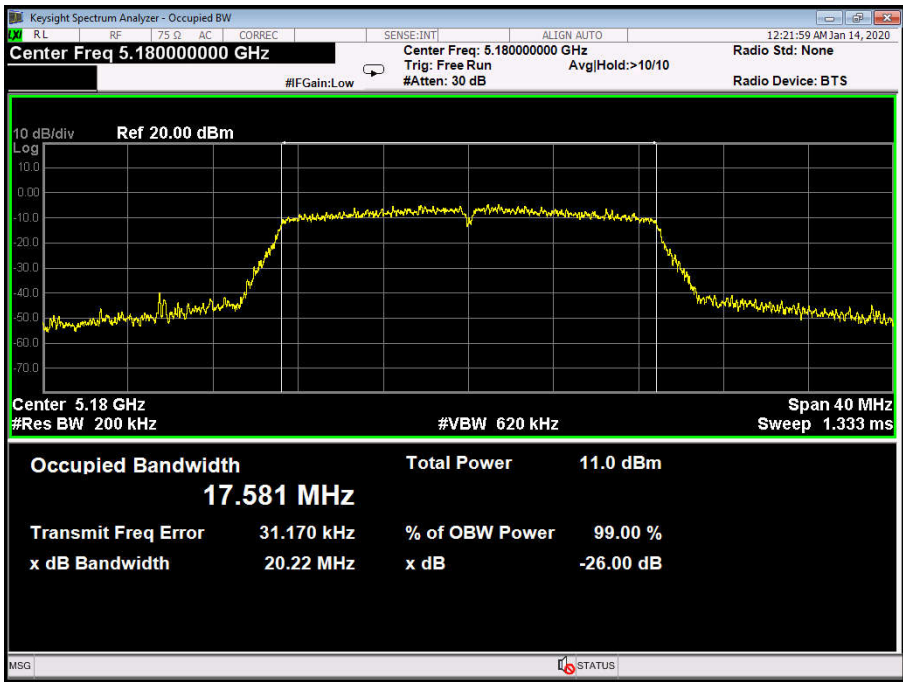Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.22	17.581
40	5200	20.06	17.563
48	5240	20.10	17.544
802.11n(HT20) Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.180000000 GHz Center Freq: 5.180000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 5.18 GHz #Res BW 200 kHz #VBW 620 kHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.581 MHz Total Power 11.0 dBm Transmit Freq Error 31.170 kHz % of OBW Power 99.00 % x dB Bandwidth 20.22 MHz x dB -26.00 dB			