


Quectel Wireless Solutions Company Limited

GSM/GPRS Module

Main Model:M50

December 12, 2015

Report No.: 12050082-1-FCC-H
(This report supersedes NONE)

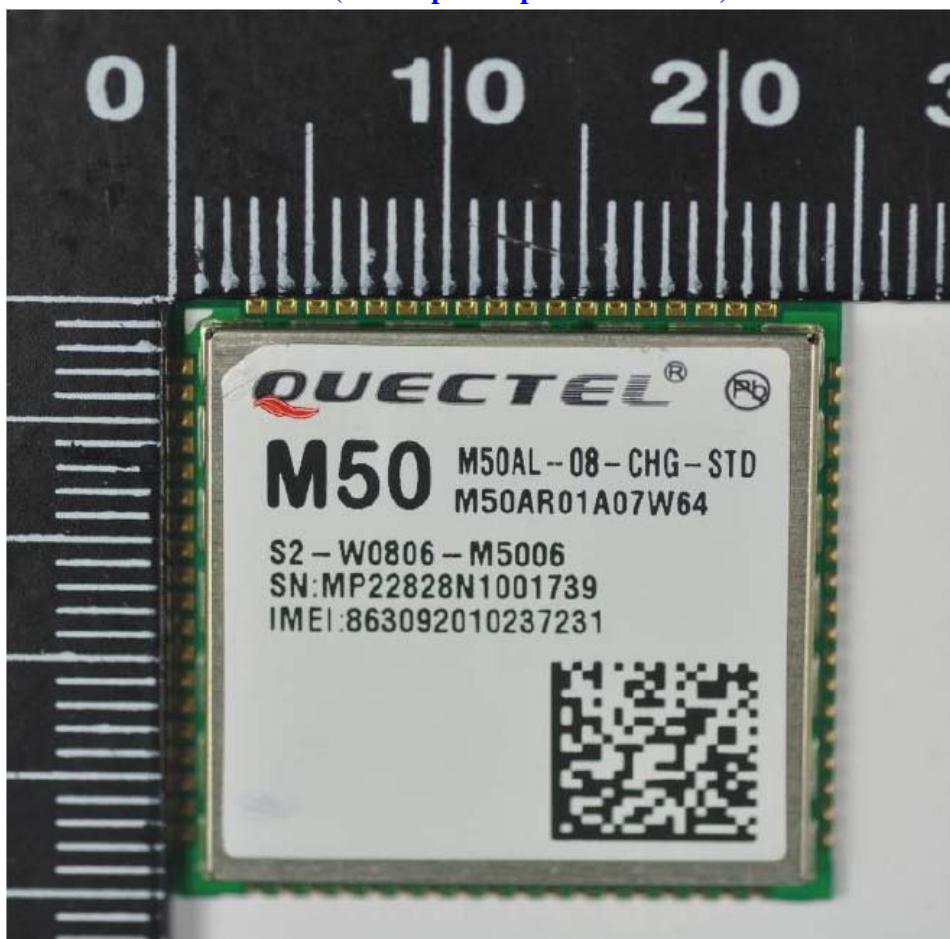

Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Winnie Zhang Compliance Engineer	David Huang Technical Manager	

**This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.**

RF Exposure Report

SIEMIC, Inc.
Accessing global markets

To: FCC 2.1091: 2014

**SIEMIC, INC.**

Accessing global markets

Title: RF Exposure Report for GSM/GPRS Module
Model: M50
To: FCC 2.1091: 2014

Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 2 of 13
www.siemic.com.cn

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless , Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom



SIEMIC, INC.

Accessing global markets

Title: RF Exposure Report for GSM/GPRS Module
Model: M50
To: FCC 2.1091: 2014

Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 3 of 13
www.siemic.com.cn

This page has been left blank intentionally.



SIEMIC, INC.

Accessing global markets

Title: RF Exposure Report for GSM/GPRS Module
Model: M50
To: FCC 2.1091: 2014

Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 4 of 13
www.siemic.com.cn

CONTENTS

1. EXECUTIVE SUMMARY & EUT INFORMATION.....	5
2. TECHNICAL DETAILS.....	7
3. MAXIMUM PERMISSIBLE EXPOSURE (MPE)	8
FCC §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8

**SIEMIC, INC.**

Accessing global markets

Title:
Model:
To:**RF Exposure Report for GSM/GPRS Module**
M50
FCC 2.1091: 2014**Report No:** 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 5 of 13
www.siemic.com.cn

1. EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programme was to demonstrate compliance of the Quectel Wireless Solutions Company Limited, GSM/GPRS Module and model: M50 against the current Stipulated Standards. The GSM/GPRS Module has demonstrated compliance with the FCC 2.1091: 2014.

EUT Information

EUT Description	: GSM/GPRS Module
Model	: M50
Serial Model	N/A
Antenna Gain	: GSM 850: 0.5 dBi PCS 1900: 2 dBi
Operating info	D C 4V, 0.5A
Support adapter info	SWITCHING POWER SUPPLY MODEL: P-050B : INPUT: 100V-240V, 50/60Hz, 0.3A OUTPUT: 5.0V-2.0A P/N: B2152-0945
Maximum Conducted Peak Power to Antenna	: GSM850: 31.84 dBm PCS1900: 29.27 dBm
Maximum Radiated ERP/EIRP	: GSM850: 29.94 dBm / ERP PCS1900: 27.32 dBm / EIRP
Classification Per Stipulated Test Standard	: FCC 2.1091: 2014

**SIEMIC, INC.**

Accessing global markets

Title: RF Exposure Report for GSM/GPRS Module
Model: M50
To: FCC 2.1091: 2014

Report No: 12050082-1-FCC-H**Issue Date:** December 12, 2015**Page:** 6 of 13www.siemic.com.cn

Revision Number	Report Number	Description of Revision	Date of Revision
0	12050068-FCC-R1	Original Report	Augsut 15, 2012
1	12050082-FCC-R1	Amended Report	November 09, 2012
2	12050082-1-FCC-H	Amended Report	December 12, 2015

Note: This is the amended report application (12050082-1-FCC-H) of the device, the original submission (12050082-FCC-R1) was granted on November 09, 2012. The difference between the original device and the current one is only for different names. So we use all the test date of original report.



SIEMIC, INC.

Accessing global markets

Title:
Model:
To:

RF Exposure Report for GSM/GPRS Module
M50
FCC 2.1091: 2014

Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 7 of 13
www.siemic.com.cn

2. TECHNICAL DETAILS

Purpose	Compliance testing of GSM/GPRS Module with stipulated standard
Applicant / Client	Quectel Wireless Solutions Company Limited Room 501, Building 13, No.99 TianZhou Road, Xuhui District, Shanghai
Manufacturer	Quectel Wireless Solutions Company Limited Room 501, Building 13, No.99 TianZhou Road, Xuhui District, Shanghai
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1, Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: info@siemic.com
Test report reference number	12050082-1-FCC-H
Date EUT received	July 30, 2012
Standard applied	FCC 2.1091: 2014
Dates of test	August 13, 2012 to August 14, 2012
No of Units	#1
Equipment Category	PCB
Trade Name	Quectel
RF Operating Frequency (ies)	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz
Number of Channels	299CH (PCS1900) and 124CH (GSM850)
Modulation	GSM / GPRS: GMSK
GPRS Multi-slot class	8/10/12
FCC ID	XMR201211M50

**SIEMIC, INC.**

Accessing global markets

Title:
Model:
To:**RF Exposure Report for GSM/GPRS Module**
M50
FCC 2.1091: 2014**Report No:** 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 8 of 13
www.siemic.com.cn

3. MAXIMUM PERMISSIBLE EXPOSURE (MPE)

FCC §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density



SIEMIC, INC.

Accessing global markets

Title: RF Exposure Report for GSM/GPRS Module
Model: M50
To: FCC 2.1091: 2014

Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 9 of 13
www.siemic.com.cn

Test Result

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator,
the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

**SIEMIC, INC.**

Accessing global markets

Title:
Model:
To:RF Exposure Report for GSM/GPRS Module
M50
FCC 2.1091: 2014Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 10 of 13
www.siemic.com.cn**GSM Mode:**

Burst Average Power (dBm);									
Band	GSM850				PCS1900				
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant	
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/	
GSM Voice (1 uplink),GMSK	31.79	31.84	31.82	32.5±1	29.17	29.27	29.24	29.5±1	
GPRS Multi-Slot Class 8 (1 uplink),GMSK	31.75	31.75	31.81	32.5±1	29.11	29.21	29.20	29.5±1	
GPRS Multi-Slot Class 10 (2 uplink) GMSK	31.80	31.82	31.83	32.5±1	29.13	29.23	29.24	29.5±1	
GPRS Multi-Slot Class 12 (4 uplink) GMSK	29.75	29.77	29.83	29.5±1	29.10	29.22	29.21	29.5±1	

Remark :

GPRS, CS1 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link





SIEMIC, INC.

Accessing global markets

Title:
Model:
To:

RF Exposure Report for GSM/GPRS Module
M50
FCC 2.1091: 2014

Report No: 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 12 of 13
www.siemic.com.cn

GSM850

For the antenna manufacturer provide only used limited to ERP/EIRP or radiated spurious emission test. The MPE evaluation as below:

Maximum output power at antenna input terminal: 27.5 dBm

Maximum output power at antenna input terminal: 562.34 (mW)

Prediction distance: >20 (cm)

Predication frequency: 824.2 MHz Low frequency

Antenna Gain (typical): 0.5 (dBi)

Antenna Gain (typical): 1.122 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.13(mW/cm²)

MPE limit for general population exposure at prediction frequency: 0.55(mW/cm²)

0.13(mW/cm²) < 0.55 (mW/cm²)

PCS1900

For the antenna manufacturer provide only used limited to ERP/EIRP or radiated spurious emission test. The MPE evaluation as below:

Maximum output power at antenna input terminal: 27.5(dBm)

Maximum output power at antenna input terminal: 562.34 (mW)

Prediction distance: >20 (cm)

Predication frequency: 1880 (MHz) High frequency

Antenna Gain (typical): 2 (dBi)

Antenna Gain (typical): 1.585 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.18(mW/cm²)

MPE limit for general population exposure at prediction frequency: 1.0 (mW/cm²)

0.18(mW/cm²) < 1.0 (mW/cm²)

**SIEMIC, INC.**

Accessing global markets

Title:
Model:
To:**RF Exposure Report for GSM/GPRS Module**
M50
FCC 2.1091: 2014**Report No:** 12050082-1-FCC-H
Issue Date: December 12, 2015
Page: 13 of 13
www.siemic.com.cn

Additional: (For Max allowed antenna calculate)

Step 1 ERP/EIRP calculate:

Frequency bands	Max Turn-up Conducted power (dBm)	ERP/EIRP Limit (dBm)	Margin (dB)
GSM 850	33.5	38.45	4.95
PCS 1900	30.5	33.00	2.5

Step 2 MPE calculate:

Frequency bands	Max Turn-up Conducted Source Based time Average Power (dBm)	Max Turn-up Conducted Source Based time Average Power (mw)	Distance (cm)	Power Density Limit (mW/cm ²)	Max allow antenna gain (dBi)
GSM 850	27.5	562.34	20	0.549	6.91
PCS 1900	27.5	562.34	20	1	8.93

Step 3:

If meet above step 1 and 2, the Max allows antenna gain show is below:

Frequency bands	Max allow antenna gain (dBi)
GSM 850	4.95
PCS 1900	2.5

Note:

Single Modular Approval.

Output power is conducted. This device is to be used in mobile or fixed applications only. Antenna gain including cable loss must not exceed 4.95 dBi of GSM 850 and 2.5 dBi of PCS 1900, for the purpose of satisfying the requirements of 2.1043 and 2.1091. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operated in conjunction with any antenna or transmitter not described under this FCC ID. The final product operating with this transmitter must include operating instructions and antenna installation instructions, for end-users and installers to satisfy RF exposure compliance requirements. Compliance of this device in all final product configurations is the responsibility of the Grantee. Installation of this device into specific final products may require the submission of a Class II permissive change application containing data pertinent to RF Exposure, spurious emissions, ERP/EIRP, and host/module authentication, or new application if appropriate. Installation of this device into specific final products may require the submission of a Class II permissive change application containing data pertinent to RF Exposure, spurious emissions, ERP/EIRP, and host/module authentication, or new application if appropriate.