

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),

RBW is set to 10 kHz (0.15 MHz~ 30 MHz),


RBW is set to 100 kHz (30MHz~1000 MHz),

RBW is set to 1000 kHz (above 1000MHz),

Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

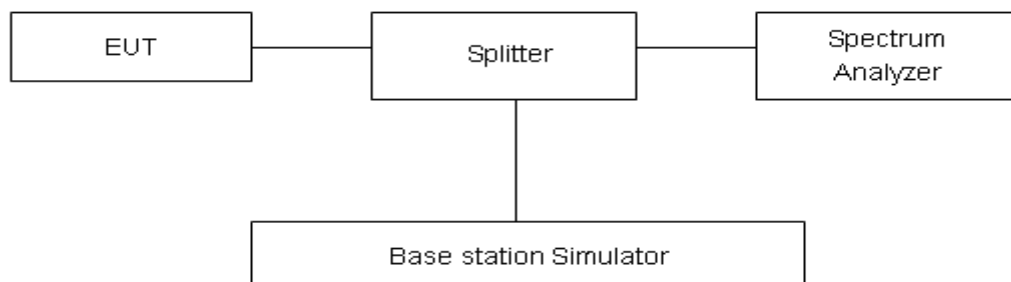

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


NB-IOT Band 2 CH-Low 9kHz~20GHz

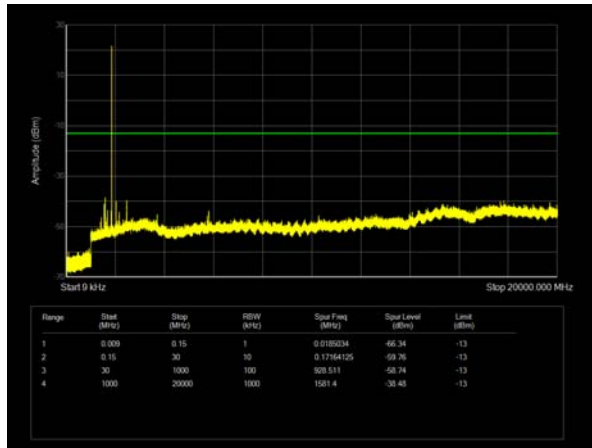

NB-IOT Band 25 CH-Low 9kHz~26GHz

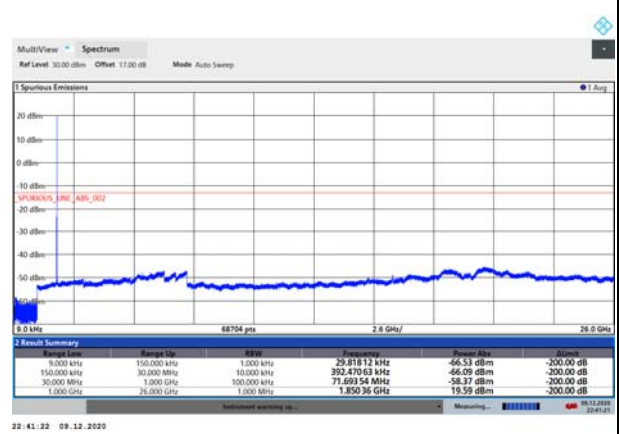


NB-IOT Band 2 CH-Middle 9kHz~20GHz

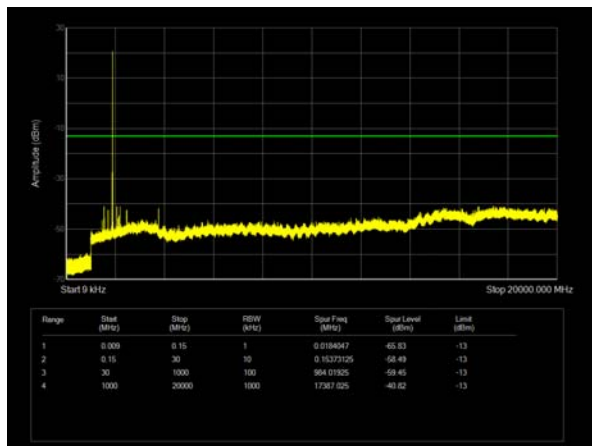


NB-IOT Band 25 CH-Middle 9kHz~26GHz



NB-IOT Band 2 CH-High 9kHz~20GHz

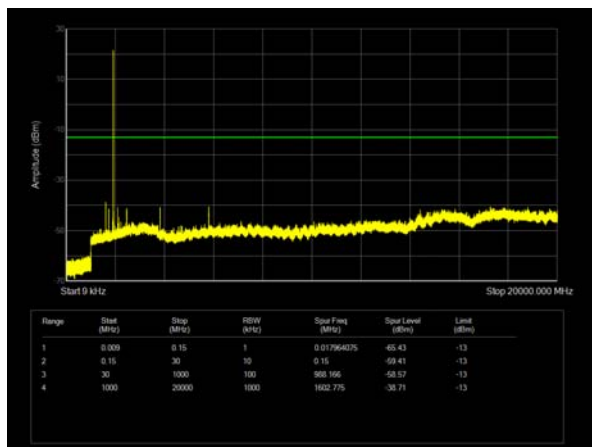

NB-IOT Band 25 CH-High 9kHz~26GHz

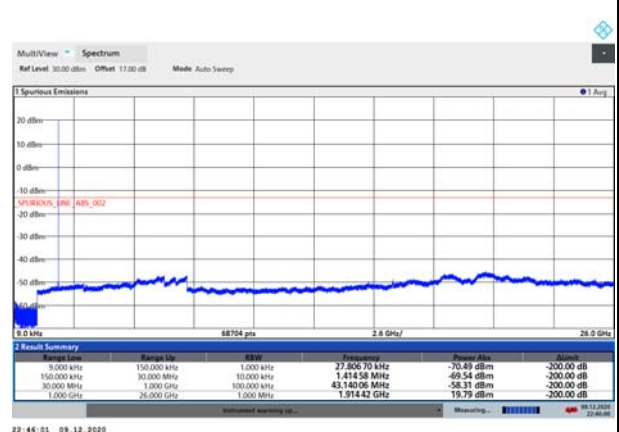



LTE Band 2 1.4MHz CH-Low 9kHz~20GHz



19:57:56 25.12.2020

LTE Band 2 3MHz CH-Low 9kHz~20GHz



19:02:49 25.12.2020

LTE Band 2 1.4MHz CH-Middle 9kHz~20GHz




19:01:25 25.12.2020

LTE Band 2 3MHz CH-Middle 9kHz~20GHz




19:03:34 25.12.2020

LTE Band 2 1.4MHz CH-High 9kHz~20GHz

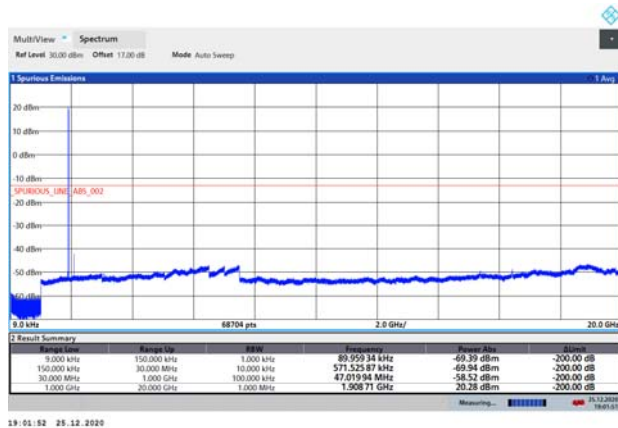

19:01:52 25.12.2020


LTE Band 2 3MHz CH-High 9kHz~20GHz

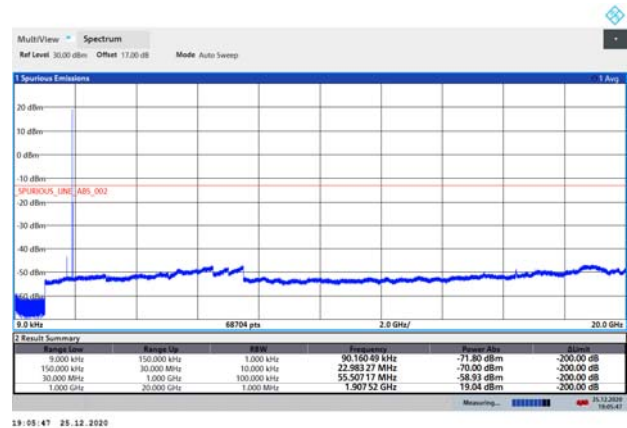

19:05:47 25.12.2020




LTE Band 2 5MHz CH-Low 9kHz~20GHz

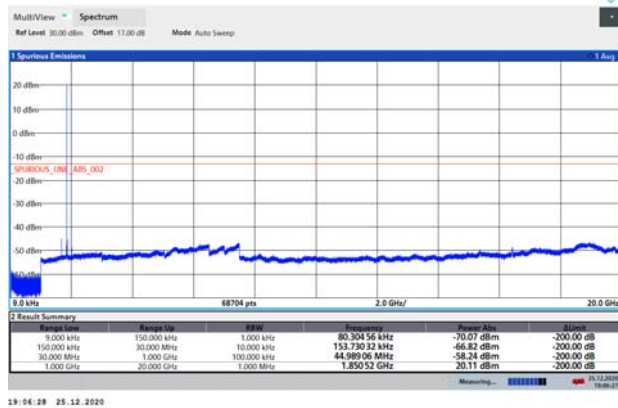


19:04:29 25.12.2020

LTE Band 2 10MHz CH-Low 9kHz~20GHz

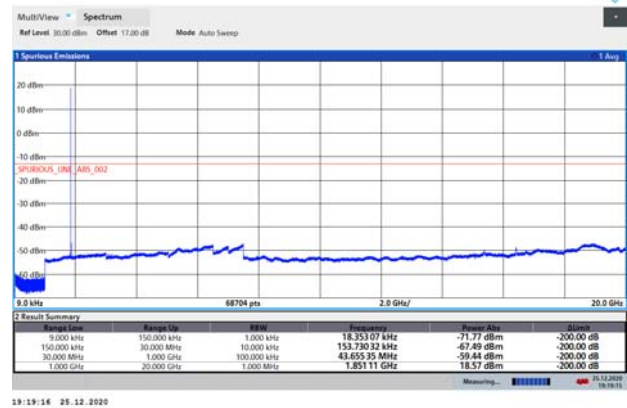


19:19:16 25.12.2020

LTE Band 2 5MHz CH-Middle 9kHz~20GHz

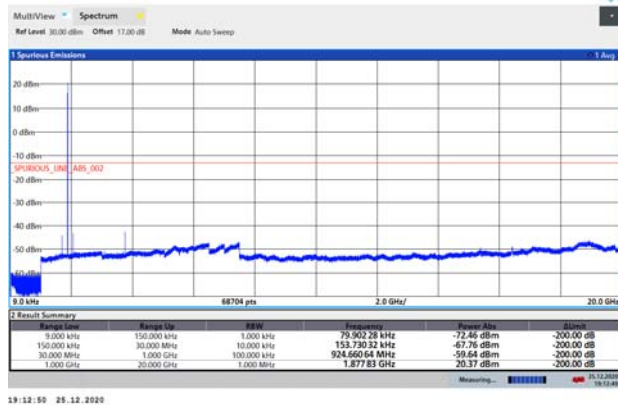


19:12:50 25.12.2020

LTE Band 2 10MHz CH-Middle 9kHz~20GHz

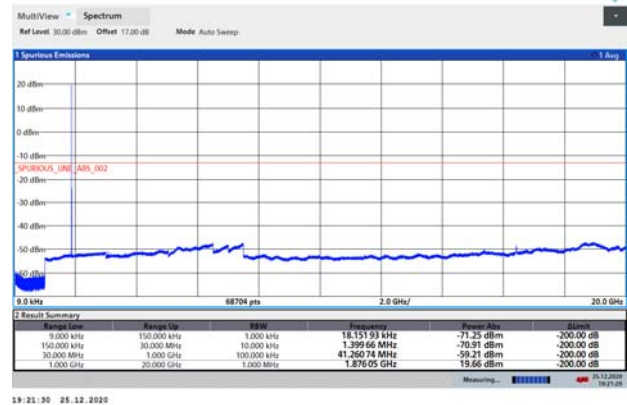


19:21:30 25.12.2020

LTE Band 2 5MHz CH-High 9kHz~20GHz

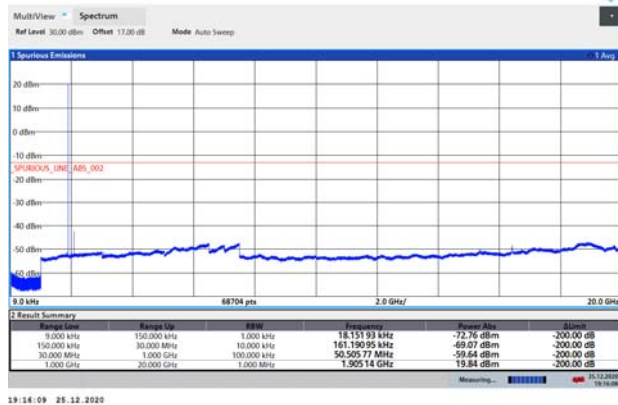

19:14:09 25.12.2020


LTE Band 2 10MHz CH-High 9kHz~20GHz

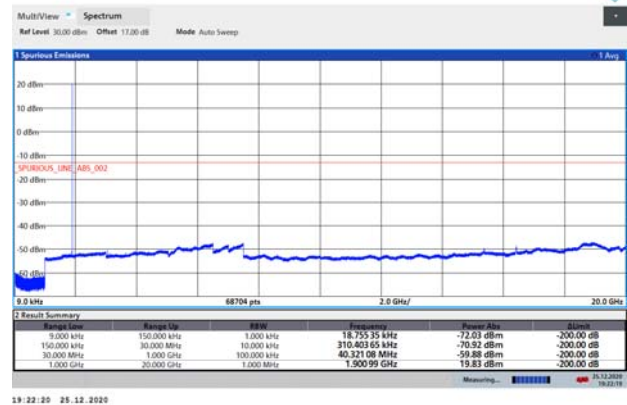

19:22:20 25.12.2020




LTE Band 2 15MHz CH-Low 9kHz~20GHz

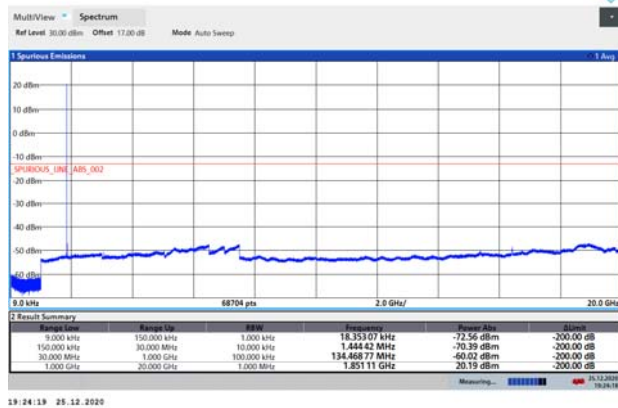


19:24:19 25.12.2020

LTE Band 2 20MHz CH-Low 9kHz~20GHz

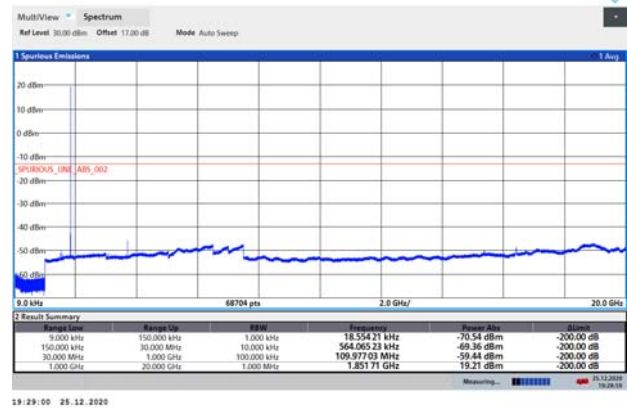


19:29:00 25.12.2020

LTE Band 2 15MHz CH-Middle 9kHz~20GHz

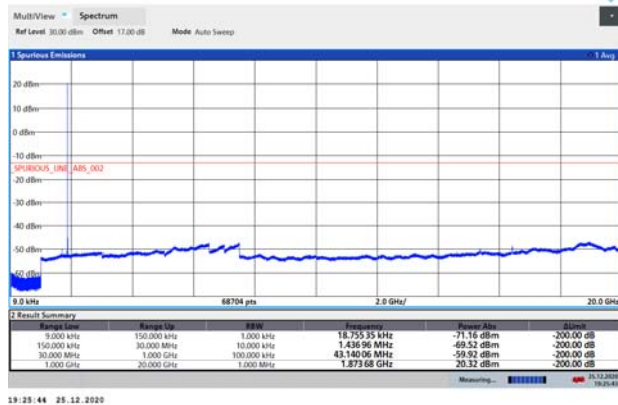


19:25:44 25.12.2020

LTE Band 2 20MHz CH-Middle 9kHz~20GHz

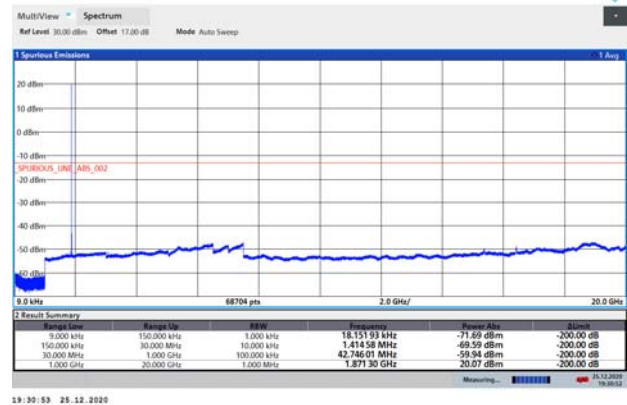


19:30:53 25.12.2020

LTE Band 2 15MHz CH-High 9kHz~20GHz

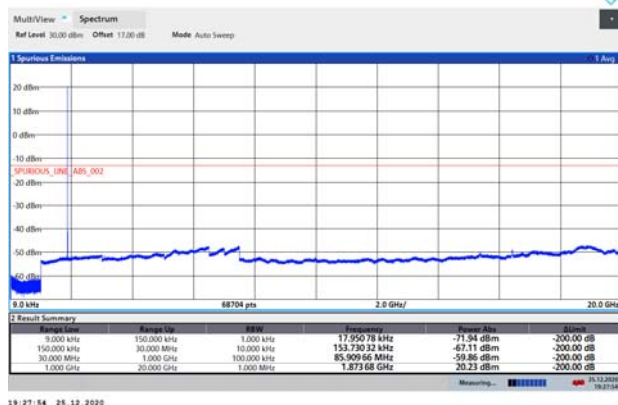

19:27:54 25.12.2020


LTE Band 2 20MHz CH-High 9kHz~20GHz

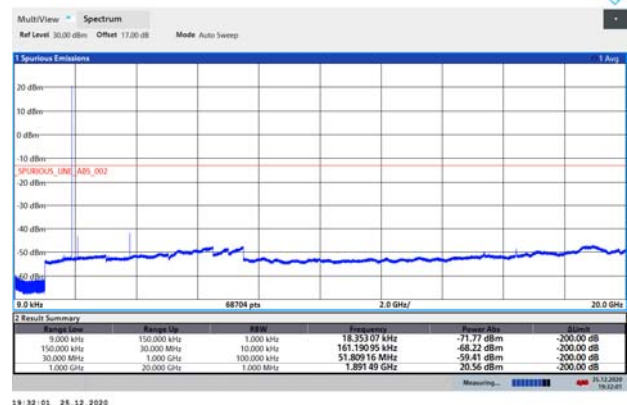

19:32:01 25.12.2020




LTE Band 25 1.4MHz CH-Low 9kHz~20GHz

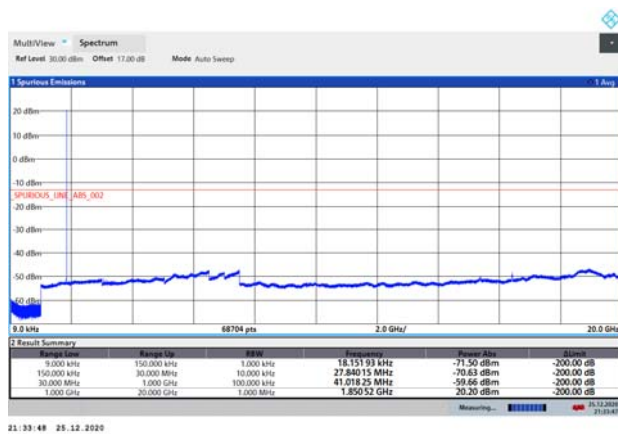

21:39:48 25.12.2020

LTE Band 25 3MHz CH-Low 9kHz~20GHz

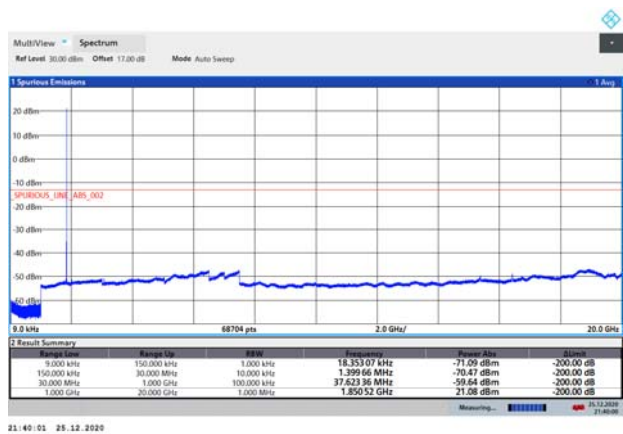


21:40:01 25.12.2020

LTE Band 25 1.4MHz CH-Middle 9kHz~20GHz



21:39:45 25.12.2020

LTE Band 25 3MHz CH-Middle 9kHz~20GHz

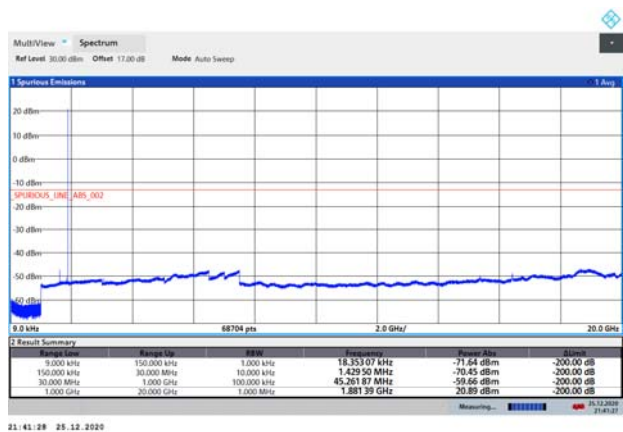


21:41:28 25.12.2020

LTE Band 25 1.4MHz CH-High 9kHz~20GHz



21:37:32 25.12.2020


LTE Band 25 3MHz CH-High 9kHz~20GHz

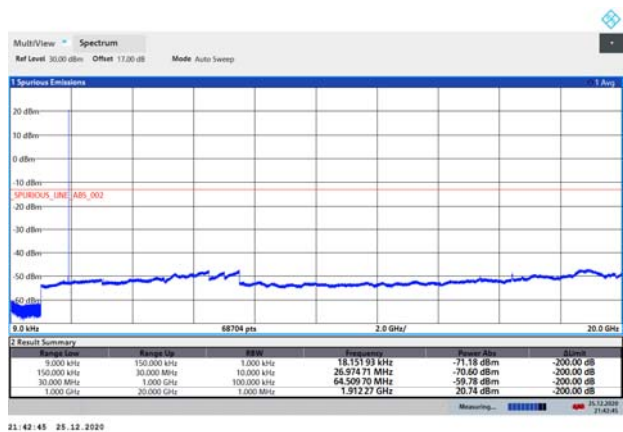

21:42:45 25.12.2020




LTE Band 25 5MHz CH-Low 9kHz~20GHz

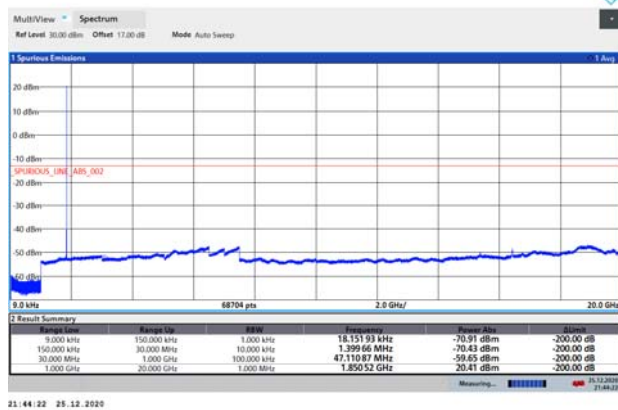


21:44:22 25.12.2020

LTE Band 25 10MHz CH-Low 9kHz~20GHz

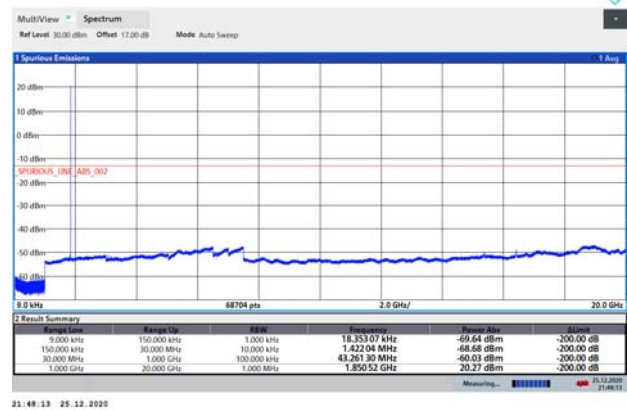


21:48:19 25.12.2020

LTE Band 25 5MHz CH-Middle 9kHz~20GHz

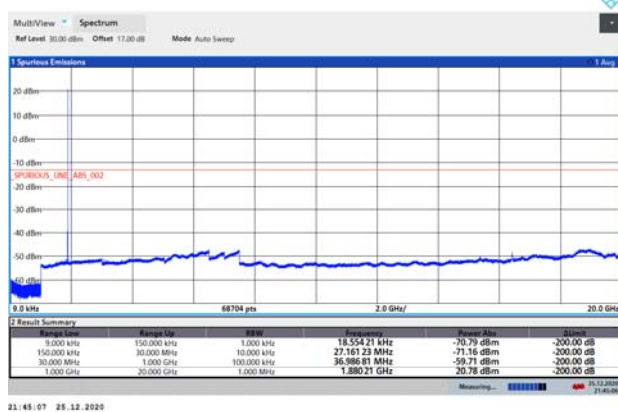


21:45:07 25.12.2020

LTE Band 25 10MHz CH-Middle 9kHz~20GHz

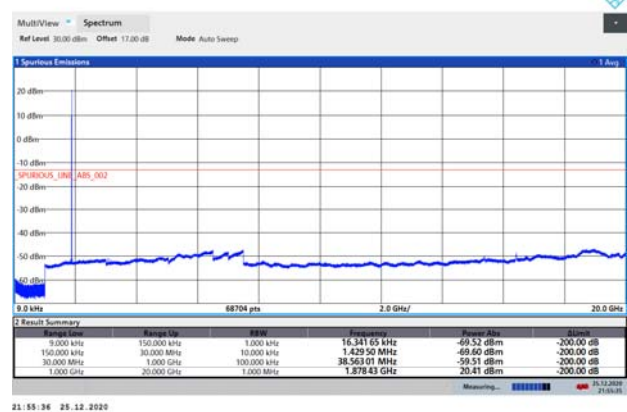


21:55:36 25.12.2020

LTE Band 25 5MHz CH-High 9kHz~20GHz

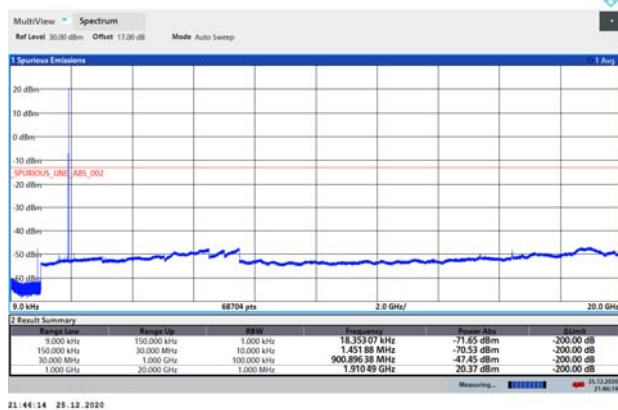

21:44:14 25.12.2020


LTE Band 25 10MHz CH-High 9kHz~20GHz

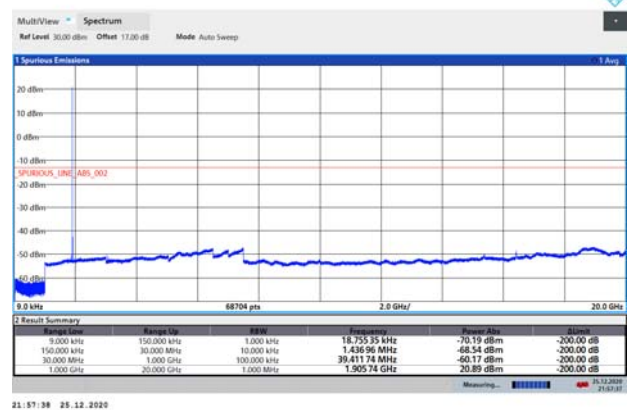

21:57:38 25.12.2020




LTE Band 25 15MHz CH-Low 9kHz~20GHz

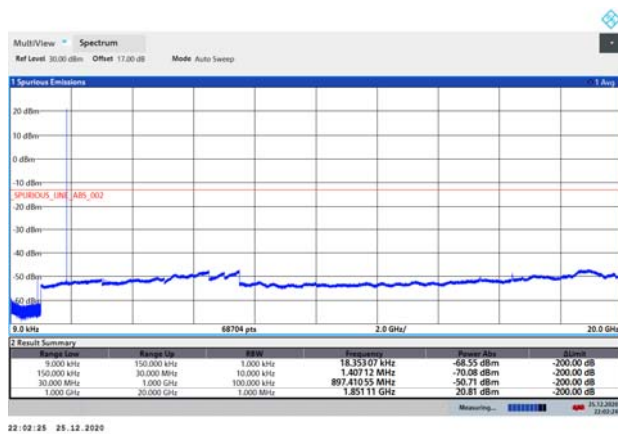

22:02:28 25.12.2020

LTE Band 25 20MHz CH-Low 9kHz~20GHz

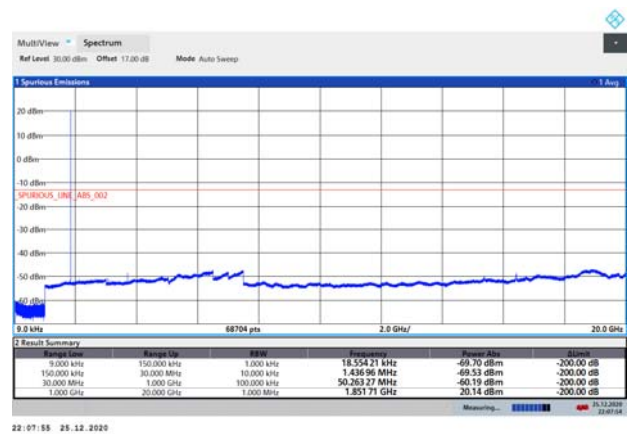

22:07:55 25.12.2020

LTE Band 25 15MHz CH-Middle 9kHz~20GHz




22:04:24 25.12.2020

LTE Band 25 20MHz CH-Middle 9kHz~20GHz



22:09:18 25.12.2020

LTE Band 25 15MHz CH-High 9kHz~20GHz

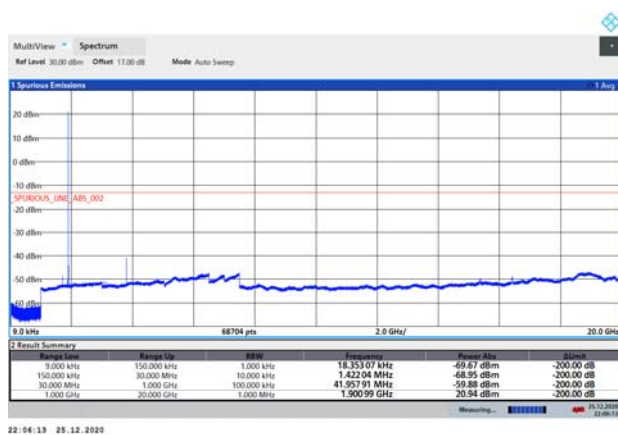

22:04:13 25.12.2020

LTE Band 25 20MHz CH-High 9kHz~20GHz



22:10:11 25.12.2020

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz-150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

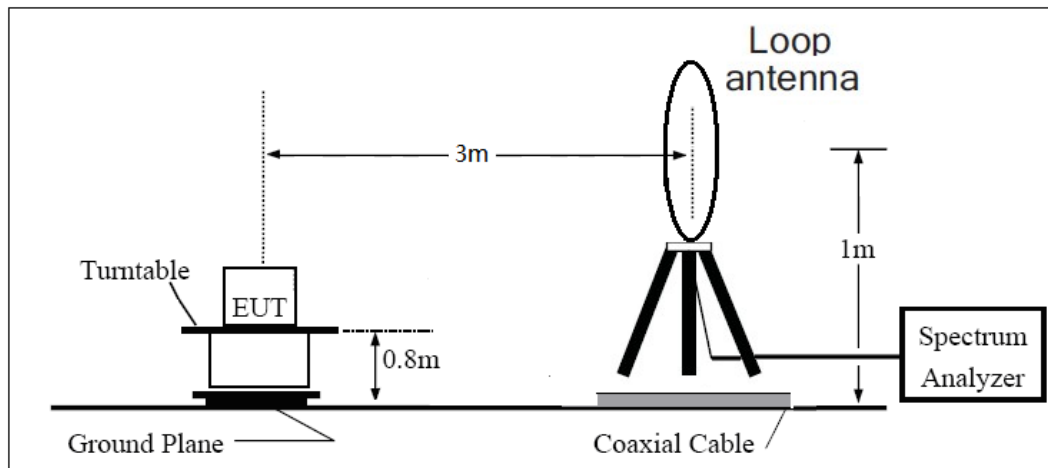

30MHz ~ 1GHz

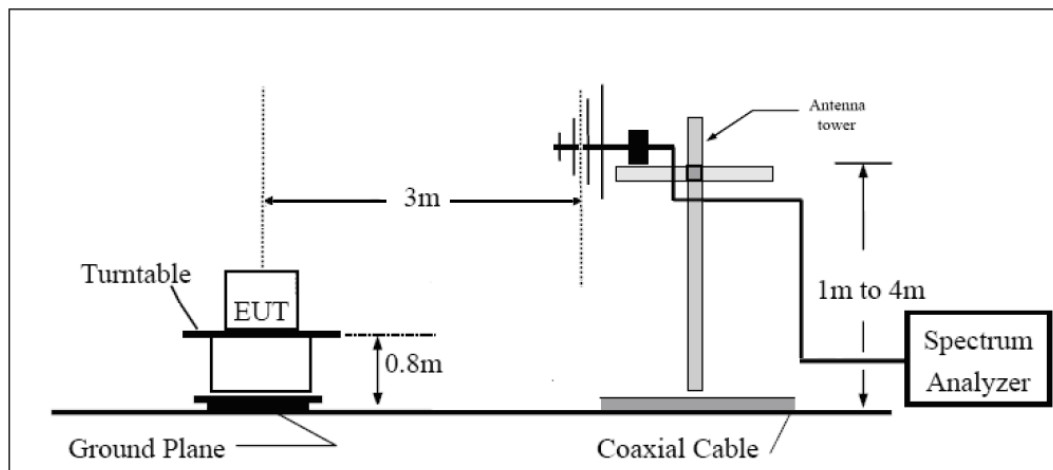

Above 1GHz

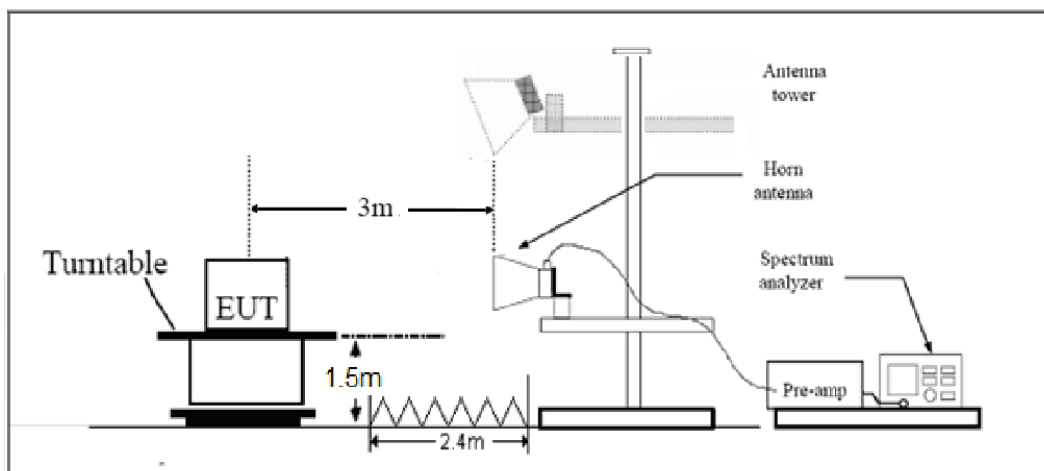



Note: Area side: 2.4mX3.6m

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

NB-IOT Band 2 3.75kHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.2	-38.01	5.10	11.05	Horizontal	-32.06	-13.00	19.06	90
3	5550.3	-24.62	5.42	12.65	Horizontal	-17.39	-13.00	4.39	45
4	7400.4	-58.22	6.70	13.85	Horizontal	-51.07	-13.00	38.07	270
5	9250.5	-53.36	7.01	14.75	Horizontal	-45.62	-13.00	32.62	0
6	11100.6	-51.69	7.48	15.95	Horizontal	-43.22	-13.00	30.22	0
7	12950.7	-52.82	7.51	16.55	Horizontal	-43.78	-13.00	30.78	315
8	14800.8	-51.62	8.24	15.35	Horizontal	-44.51	-13.00	31.51	135
9	16650.9	-48.39	8.41	14.95	Horizontal	-41.85	-13.00	28.85	45
10	18501.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

NB-IOT Band 2 3.75kHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-38.32	5.10	11.05	Horizontal	-32.37	-13.00	19.37	90
3	5640.00	-24.62	5.42	12.65	Horizontal	-17.39	-13.00	4.39	45
4	7520.00	-55.99	6.70	13.85	Horizontal	-48.84	-13.00	35.84	45
5	9400.00	-53.58	7.01	14.75	Horizontal	-45.84	-13.00	32.84	315
6	11280.00	-52.49	7.48	15.95	Horizontal	-44.02	-13.00	31.02	0
7	13160.00	-52.79	7.51	16.55	Horizontal	-43.75	-13.00	30.75	45
8	15040.00	-50.14	8.24	15.35	Horizontal	-43.03	-13.00	30.03	45
9	16920.00	-44.88	8.41	14.95	Horizontal	-38.34	-13.00	25.34	270
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

NB-IOT Band 2 3.75kHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3819.8	-39.05	5.10	11.05	Horizontal	-33.10	-13.00	20.10	270
3	5729.7	-25.34	5.42	12.65	Horizontal	-18.11	-13.00	5.11	45
4	7639.6	-55.51	6.70	13.85	Horizontal	-48.36	-13.00	35.36	90
5	9549.5	-53.81	7.01	14.75	Horizontal	-46.07	-13.00	33.07	90
6	11459.4	-51.51	7.48	15.95	Horizontal	-43.04	-13.00	30.04	0
7	13369.3	-52.65	7.51	16.55	Horizontal	-43.61	-13.00	30.61	315
8	15279.2	-50.29	8.24	15.35	Horizontal	-43.18	-13.00	30.18	180
9	17189.1	-45.31	8.41	14.95	Horizontal	-38.77	-13.00	25.77	45
10	19099.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

NB-IOT Band 25 3.75kHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.20	-39.44	5.10	11.05	Horizontal	-33.49	-13.00	20.49	90
3	5550.30	-25.36	5.42	12.65	Horizontal	-18.13	-13.00	5.13	135
4	7400.40	-55.45	6.70	13.85	Horizontal	-48.30	-13.00	35.30	180
5	9250.50	-54.01	7.01	14.75	Horizontal	-46.27	-13.00	33.27	315
6	11100.60	-51.48	7.48	15.95	Horizontal	-43.01	-13.00	30.01	45
7	12950.70	-55.67	7.51	16.55	Horizontal	-46.63	-13.00	33.63	270
8	14800.80	-51.43	8.24	15.35	Horizontal	-44.32	-13.00	31.32	180
9	16650.90	-49.27	8.41	14.95	Horizontal	-42.73	-13.00	29.73	225
10	18501.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



NB-IOT Band 25 3.75kHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.00	-38.85	5.10	11.05	Horizontal	-32.90	-13.00	19.90	225
3	5647.50	-24.95	5.42	12.65	Horizontal	-17.72	-13.00	4.72	0
4	7530.00	-56.70	6.70	13.85	Horizontal	-49.55	-13.00	36.55	180
5	9412.50	-53.85	7.01	14.75	Horizontal	-46.11	-13.00	33.11	315
6	11295.00	-52.71	7.48	15.95	Horizontal	-44.24	-13.00	31.24	90
7	13177.50	-52.29	7.51	16.55	Horizontal	-43.25	-13.00	30.25	45
8	15060.00	-50.24	8.24	15.35	Horizontal	-43.13	-13.00	30.13	315
9	16942.50	-44.85	8.41	14.95	Horizontal	-38.31	-13.00	25.31	180
10	18825.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

NB-IOT Band 25 3.75kHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3829.80	-36.37	5.10	11.05	Horizontal	-30.42	-13.00	17.42	135
3	5744.70	-24.58	5.42	12.65	Horizontal	-17.35	-13.00	4.35	45
4	7659.60	-56.77	6.70	13.85	Horizontal	-49.62	-13.00	36.62	0
5	9574.50	-54.58	7.01	14.75	Horizontal	-46.84	-13.00	33.84	90
6	11489.40	-51.72	7.48	15.95	Horizontal	-43.25	-13.00	30.25	180
7	13404.30	-53.08	7.51	16.55	Horizontal	-44.04	-13.00	31.04	315
8	15319.20	-51.55	8.24	15.35	Horizontal	-44.44	-13.00	31.44	270
9	17234.10	-46.34	8.41	14.95	Horizontal	-39.80	-13.00	26.80	225
10	19149.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.00	-61.02	5.10	11.05	Horizontal	-55.07	-13.00	42.07	225
3	5638.88	-60.19	5.42	12.65	Horizontal	-52.96	-13.00	39.96	90
4	7520.00	-58.41	6.70	13.85	Horizontal	-51.26	-13.00	38.26	315
5	9400.00	-54.93	7.01	14.75	Horizontal	-47.19	-13.00	34.19	225
6	11280.00	-54.56	7.48	15.95	Horizontal	-46.09	-13.00	33.09	45
7	13160.00	-55.00	7.51	16.55	Horizontal	-45.96	-13.00	32.96	0
8	15040.00	-53.93	8.24	15.35	Horizontal	-46.82	-13.00	33.82	90
9	16920.00	-48.05	8.41	14.95	Horizontal	-41.51	-13.00	28.51	45
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.63	-61.84	5.10	11.05	Horizontal	-55.89	-13.00	42.89	315
3	5633.63	-60.40	5.42	12.65	Horizontal	-53.17	-13.00	40.17	45
4	7520.00	-57.61	6.70	13.85	Horizontal	-50.46	-13.00	37.46	315
5	9400.00	-56.01	7.01	14.75	Horizontal	-48.27	-13.00	35.27	0
6	11280.00	-55.03	7.48	15.95	Horizontal	-46.56	-13.00	33.56	315
7	13160.00	-54.18	7.51	16.55	Horizontal	-45.14	-13.00	32.14	45
8	15040.00	-53.36	8.24	15.35	Horizontal	-46.25	-13.00	33.25	315
9	16920.00	-47.97	8.41	14.95	Horizontal	-41.43	-13.00	28.43	90
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3742.13	-61.12	5.10	11.05	Horizontal	-55.17	-13.00	42.17	225
3	5613.38	-58.53	5.42	12.65	Horizontal	-51.30	-13.00	38.30	135
4	7484.63	-56.02	6.70	13.85	Horizontal	-48.87	-13.00	35.87	270
5	9400.00	-55.59	7.01	14.75	Horizontal	-47.85	-13.00	34.85	90
6	11280.00	-54.60	7.48	15.95	Horizontal	-46.13	-13.00	33.13	315
7	13160.00	-53.95	7.51	16.55	Horizontal	-44.91	-13.00	31.91	135
8	15040.00	-52.70	8.24	15.35	Horizontal	-45.59	-13.00	32.59	270
9	16920.00	-48.04	8.41	14.95	Horizontal	-41.50	-13.00	28.50	180
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 25 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.00	-46.76	5.10	11.05	Horizontal	-40.81	-13.00	27.81	90
3	5647.50	-58.89	5.42	12.65	Horizontal	-51.66	-13.00	38.66	225
4	7530.00	-55.92	6.70	13.85	Horizontal	-48.77	-13.00	35.77	315
5	9412.50	-53.29	7.01	14.75	Horizontal	-45.55	-13.00	32.55	270
6	11295.00	-52.35	7.48	15.95	Horizontal	-43.88	-13.00	30.88	135
7	13177.50	-51.99	7.51	16.55	Horizontal	-42.95	-13.00	29.95	270
8	15060.00	-50.66	8.24	15.35	Horizontal	-43.55	-13.00	30.55	135
9	16942.50	-44.96	8.41	14.95	Horizontal	-38.42	-13.00	25.42	45
10	18825.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 25 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.00	-48.29	5.10	11.05	Horizontal	-42.34	-13.00	29.34	90
3	5647.50	-59.95	5.42	12.65	Horizontal	-52.72	-13.00	39.72	135
4	7530.00	-56.96	6.70	13.85	Horizontal	-49.81	-13.00	36.81	225
5	9412.50	-53.37	7.01	14.75	Horizontal	-45.63	-13.00	32.63	180
6	11295.00	-52.63	7.48	15.95	Horizontal	-44.16	-13.00	31.16	315
7	13177.50	-52.14	7.51	16.55	Horizontal	-43.10	-13.00	30.10	45
8	15060.00	-50.53	8.24	15.35	Horizontal	-43.42	-13.00	30.42	180
9	16942.50	-44.77	8.41	14.95	Horizontal	-38.23	-13.00	25.23	270
10	18825.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 25 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3748.13	-46.10	5.10	11.05	Horizontal	-40.15	-13.00	27.15	45
3	5622.00	-56.04	5.42	12.65	Horizontal	-48.81	-13.00	35.81	270
4	7496.00	-56.31	6.70	13.85	Horizontal	-49.16	-13.00	36.16	180
5	9370.00	-53.66	7.01	14.75	Horizontal	-45.92	-13.00	32.92	315
6	11244.00	-51.82	7.48	15.95	Horizontal	-43.35	-13.00	30.35	225
7	13118.00	-52.92	7.51	16.55	Horizontal	-43.88	-13.00	30.88	135
8	14992.00	-49.78	8.24	15.35	Horizontal	-42.67	-13.00	29.67	90
9	16866.00	-43.73	8.41	14.95	Horizontal	-37.19	-13.00	24.19	0
10	18740.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
				2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
				2020-12-13	2021-12-12
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
				2020-12-10	2021-06-09
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.