




FCC RADIO TEST REPORT

FCC ID : XMR2021EM05G2
Equipment : LTE Module
Brand Name : Quectel Wireless Solutions Co., Ltd.
Model Name : EM05-G
Applicant : Quectel Wireless Solutions Co., Ltd
Building 5, Shanghai Business Park Phase III (Area B), No.1016
Tianlin Road, Minhang District, Shanghai, China, 20023
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.
No. 3188-1, Yungu Road (Hefei Export Processing Zone), Hefei
Economics & Technology Development Area, Anhui, CHINA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Quectel EM05-G tested inside of Lenovo Notebook Computer.

The product was received on May 11, 2023 and testing was performed from May 22, 2023 to May 25, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	9
2.4 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Result	10
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP	11
4 Radiated Test Items	12
4.1 Measuring Instruments.....	12
4.2 Test Setup	12
4.3 Test Result of Radiated Test.....	13
4.4 Field Strength of Spurious Radiation Measurement	14
5 List of Measuring Equipment.....	15
6 Measurement Uncertainty	16
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG2N1103-04A	01	Initial issue of report	Jun. 05, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	Not Required	-
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Not Required	-
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Not Required	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	31.49 dB under the limit at 7630.000 MHz

Note:

- Not required means after assessing, test items are not necessary to carry out.
- This is a variant report by host changing Marketing name, Model name, CPU and Motherboard. All the test cases were performed on original report which can be referred to Sporton Report Number FG2N1103A. Based on the original report, only worst cases were verified.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo
Report Producer: Doris Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Module
Brand Name	Quectel Wireless Solutions Co., Ltd.
Model Name	EM05-G
FCC ID	XMR2021EM05G2
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Quectel EM05-G tested inside of Lenovo Notebook Computer.

The product was installed into Notebook Computer (Brand Name: Lenovo, Model Name: TP00135C) during test, and the host information was recorded in the following table.

Host Information	
Host 1	Host with Amphenol Taiwan Corporation Antenna
Host 2	Host with Speed Antenna

WWAN Antenna Information for Host				
Main Antenna	Manufacturer	AMPHENOL TAIWAN CORPORATION	Peak gain (dBi)	WCDMA Band II: -1.46 WCDMA Band IV: -0.03 WCDMA Band V: -1.18
	Part number	DC33001YA00	Type	PIFA
	Manufacturer	Speed	Peak gain (dBi)	WCDMA Band II: -1.46 WCDMA Band IV: -0.03 WCDMA Band V: -1.18
	Part number	DC33001Y900	Type	PIFA

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	WCDMA: Band V: 23.46 dBm Band II: 23.86 dBm Band IV: 23.66 dBm
Type of Modulation	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY (TAF Code: 1190)
Test Engineer	Cotty Hsu
Temperature (°C)	22.1~22.8
Relative Humidity (%)	53~55
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH16-HY
Test Engineer	Hao Qun, Gary Guo and Steven Wu
Temperature (°C)	20~25
Relative Humidity (%)	50~65

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Battery 1 and Sample 1.

2.2 Connection Diagram of Test System

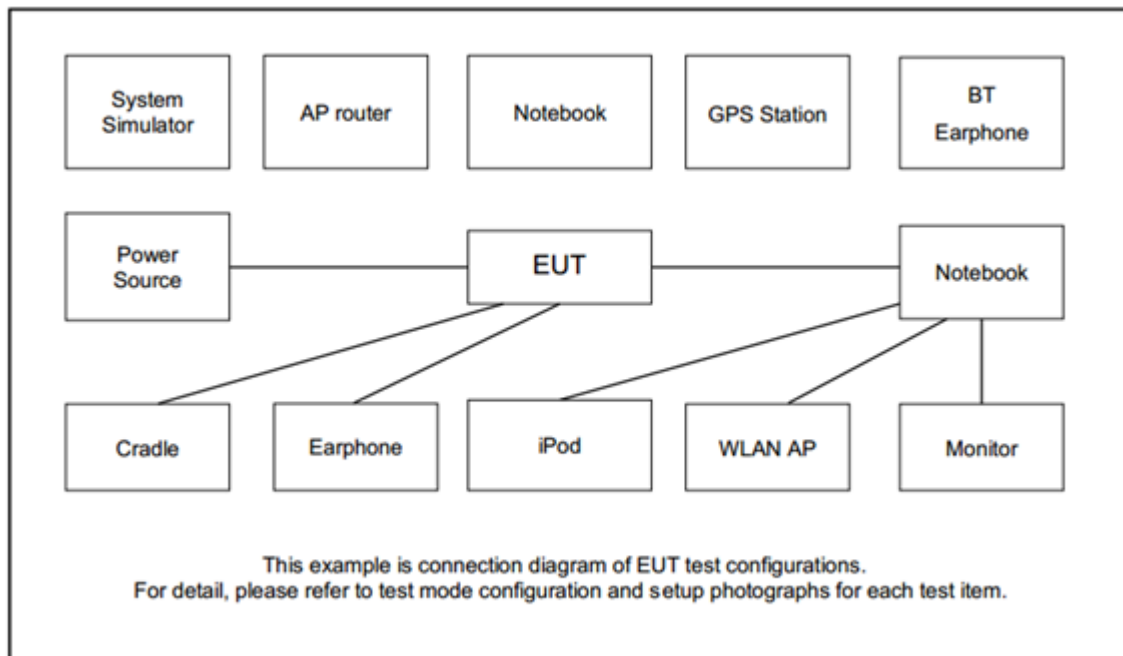

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Earphone	Lenove	TS300-01MS21-8S	N/A	Shielded, 1.2m	N/A
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

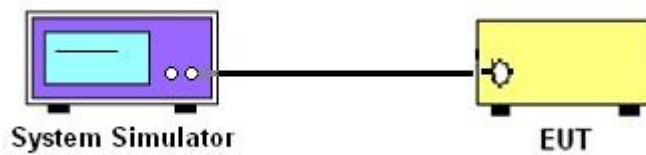

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

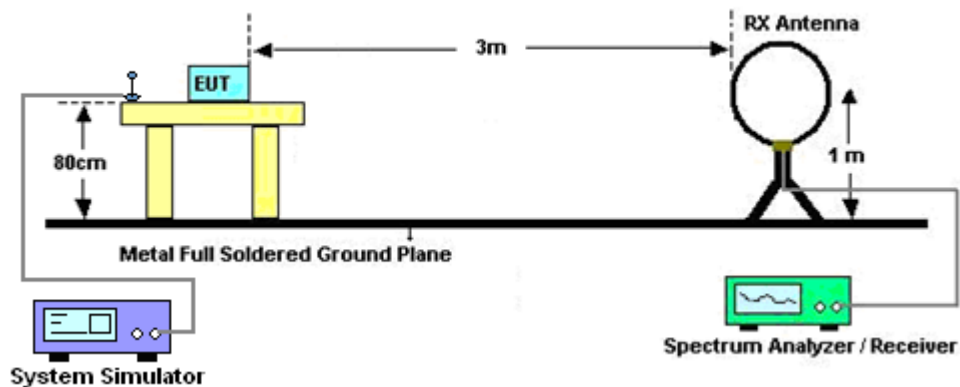


For radiated test from 30MHz to 1GHz

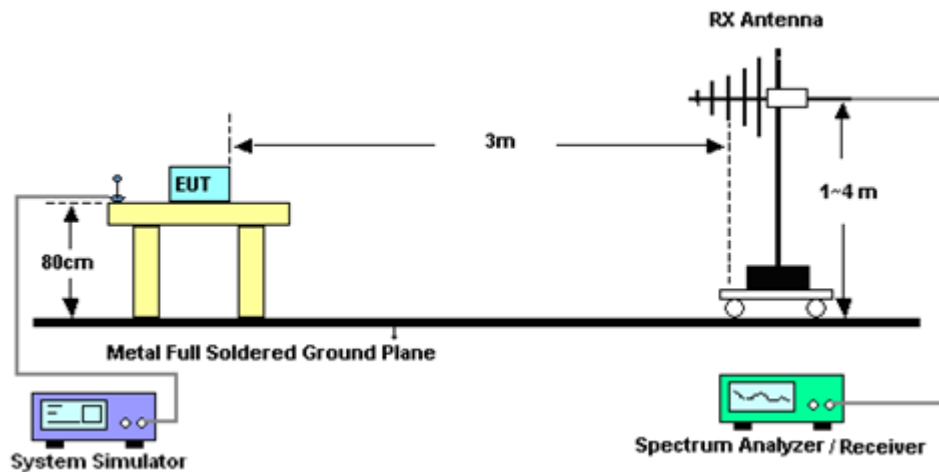

For radiated test from 1GHz to 18GHz

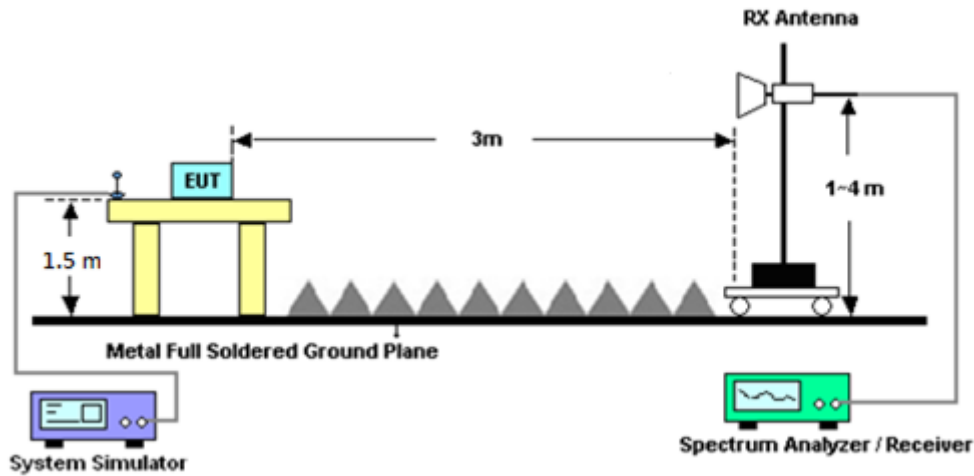

For radiated test above 18GHz

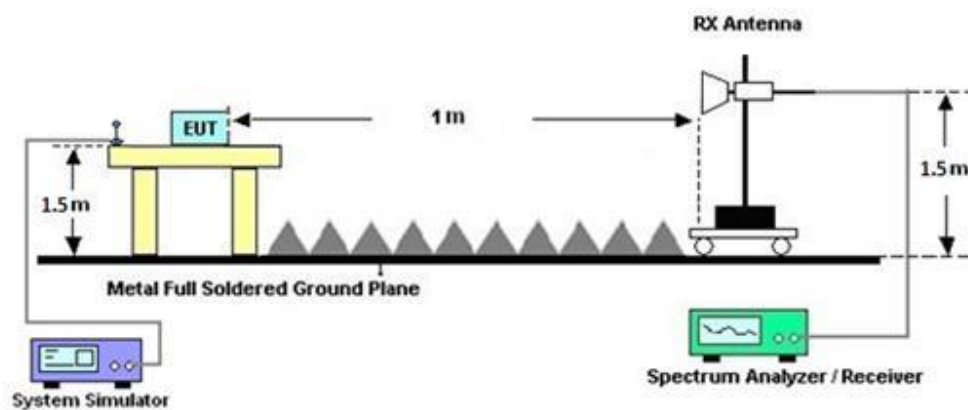

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna is substituted in place of the EUT and is driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	May 22, 2023~ May 25, 2023	Sep. 19, 2023	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2022	May 22, 2023~ May 25, 2023	Nov. 23, 2023	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00994	18GHz~40GHz	Nov. 04, 2022	May 22, 2023~ May 25, 2023	Nov. 03, 2023	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 22, 2022	May 22, 2023~ May 25, 2023	Jul. 21, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 28, 2022	May 22, 2023~ May 25, 2023	Jun. 27, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2.804 012/2	18~40G	Jan. 03, 2023	May 22, 2023~ May 25, 2023	Jan. 02, 2024	Radiation (03CH16-HY)
Signal Generator	Agilent	MG3694C	163401	0.1Hz~40GHz	Feb. 08, 2023	May 22, 2023~ May 25, 2023	Feb. 07, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 23, 2023	May 22, 2023~ May 25, 2023	Apr. 22, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz~1GHz	Oct. 08, 2022	May 22, 2023~ May 25, 2023	Oct. 07, 2023	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1G~18GHz	Aug. 09, 2022	May 22, 2023~ May 25, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 23, 2023	May 22, 2023~ May 25, 2023	Mar. 22, 2024	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Jul. 04, 2022	May 22, 2023~ May 25, 2023	Jul. 03, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1~18GHz	Dec. 26, 2022	May 22, 2023~ May 25, 2023	Dec. 25, 2023	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 09, 2022	May 22, 2023~ May 25, 2023	Dec. 08, 2023	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A	MY57290111	3Hz~26.5GHz	Dec. 15, 2022	May 22, 2023~ May 25, 2023	Dec. 14, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	805935/4	N/A	Aug. 09, 2022	May 22, 2023~ May 25, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	802434/4	N/A	Aug. 09, 2022	May 22, 2023~ May 25, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-5 757	N/A	Aug. 09, 2022	May 22, 2023~ May 25, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	May 22, 2023~ May 25, 2023	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	May 22, 2023~ May 25, 2023	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 22, 2023~ May 25, 2023	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 22, 2023~ May 25, 2023	N/A	Radiation (03CH16-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	May 23, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1~18GHz	Jan. 06, 2023	May 23, 2023	Jan. 05, 2024	Conducted (TH03-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.98 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.54 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.79 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -1.18 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.46	23.39	23.37	20.13	0.1030
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -1.46 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.80	23.58	23.86	22.40	0.1738
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -0.03 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.66	23.61	23.53	23.63	0.2307
Limit	EIRP < 1W			Result	Pass



Appendix B. Test Results of Radiated Test

Part 22H GSM 850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-58.46	-13	-45.46	-70.94	-64.38	0.95	9.02	H
	2479	-51.78	-13	-38.78	-68.25	-58.73	1.06	10.16	H
	3305	-55.49	-13	-42.49	-75.49	-63.24	1.11	11.01	H
									H
									H
									H
	1652	-60.53	-13	-47.53	-73.01	-66.45	0.95	9.02	V
	2479	-52.72	-13	-39.72	-69.14	-59.67	1.06	10.16	V
	3305	-55.86	-13	-42.86	-75.71	-63.61	1.11	11.01	V
									V
									V
									V
Middle	1672	-56.74	-13	-43.74	-69.29	-62.90	0.95	9.26	H
	2509	-50.11	-13	-37.11	-66.74	-57.12	1.06	10.22	H
	3345	-55.77	-13	-42.77	-75.81	-63.61	1.10	11.09	H
									H
									H
									H
	1672	-57.13	-13	-44.13	-69.70	-63.29	0.95	9.26	V
	2509	-46.73	-13	-33.73	-63.27	-53.74	1.06	10.22	V
	3345	-55.87	-13	-42.87	-75.81	-63.71	1.10	11.09	V
									V
									V
									V



Highest	1693	-55.12	-13	-42.12	-67.72	-61.53	0.95	9.52	H
	2539	-51.73	-13	-38.73	-68.60	-58.79	1.07	10.28	H
	3386	-55.73	-13	-42.73	-75.80	-63.66	1.09	11.17	H
									H
									H
									H
	1693	-59.57	-13	-46.57	-72.23	-65.98	0.95	9.52	V
	2539	-52.97	-13	-39.97	-69.69	-60.03	1.07	10.28	V
	3386	-55.75	-13	-42.75	-75.77	-63.68	1.09	11.17	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part 24E GSM 1900**

GSM 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-51.63	-13	-38.63	-73.33	-59.93	1.23	11.68	H
	5557	-49.50	-13	-36.50	-76.26	-57.73	1.63	12.01	H
	7409	-44.89	-13	-31.89	-76.01	-51.75	1.93	10.94	H
									H
									H
									H
									H
	3704	-51.23	-13	-38.23	-72.92	-59.53	1.23	11.68	V
	5557	-50.67	-13	-37.67	-77.43	-58.90	1.63	12.01	V
	7409	-45.00	-13	-32.00	-75.89	-51.86	1.93	10.94	V
									V
									V
									V
									V
Middle	3760	-48.29	-13	-35.29	-70.37	-56.31	1.27	11.44	H
	5640	-50.15	-13	-37.15	-77.30	-58.38	1.64	12.02	H
	7520	-44.67	-13	-31.67	-75.77	-52.00	1.94	11.42	H
									H
									H
									H
									H
	3760	-49.53	-13	-36.53	-71.59	-57.55	1.27	11.44	V
	5640	-50.15	-13	-37.15	-77.17	-58.38	1.64	12.02	V
	7520	-44.80	-13	-31.80	-75.74	-52.13	1.94	11.42	V
									V
									V
									V
									V



Highest	3815	-45.75	-13	-32.75	-68.17	-53.39	1.32	11.11	H
	5722	-49.73	-13	-36.73	-77.21	-57.54	1.66	11.61	H
	7630	-44.49	-13	-31.49	-75.69	-51.78	1.94	11.38	H
									H
									H
									H
									H
	3815	-47.11	-13	-34.11	-69.49	-54.75	1.32	11.11	V
	5722	-49.99	-13	-36.99	-77.25	-57.80	1.66	11.61	V
	7630	-44.86	-13	-31.86	-75.80	-52.15	1.94	11.38	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part 27L WCDMA 1700**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-45.10	-13	-32.10	-66.00	-53.11	1.09	11.25	H
	5137	-50.60	-13	-37.60	-77.43	-58.18	1.55	11.27	H
	6849	-45.73	-13	-32.73	-76.20	-52.73	1.85	11.00	H
									H
									H
									H
									H
	3424	-46.23	-13	-33.23	-67.14	-54.24	1.09	11.25	V
	5137	-50.78	-13	-37.78	-77.41	-58.36	1.55	11.27	V
	6849	-46.59	-13	-33.59	-76.12	-53.59	1.85	11.00	V
									V
									V
									V
									V
Middle	3465	-49.44	-13	-36.44	-70.36	-57.54	1.08	11.33	H
	5197	-50.47	-13	-37.47	-77.16	-58.15	1.56	11.39	H
	6930	-45.74	-13	-32.74	-76.29	-52.77	1.86	11.04	H
									H
									H
									H
									H
	3465	-48.77	-13	-35.77	-69.79	-56.87	1.08	11.33	V
	5197	-50.15	-13	-37.15	-76.75	-57.83	1.56	11.39	V
	6930	-46.50	-13	-33.50	-76.21	-53.53	1.86	11.04	V
									V
									V
									V
									V



Highest	3505.2	-54.13	-13	-41.13	-75.08	-62.31	1.07	11.40	H
	5257.8	-50.36	-13	-37.36	-77.11	-58.07	1.57	11.43	H
	7010.4	-45.80	-13	-32.80	-76.46	-52.86	1.87	11.08	H
									H
									H
									H
									H
	3505.2	-53.18	-13	-40.18	-74.29	-61.36	1.07	11.40	V
	5257.8	-50.59	-13	-37.59	-77.26	-58.30	1.57	11.43	V
	7010.4	-46.16	-13	-33.16	-76.08	-53.22	1.87	11.08	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.