

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600057202  
Rev.: 02  
Page: 1 of 32

# TEST REPORT

**Application No.:** SUCR2506000572AT  
**Applicant:** Quectel Wireless Solutions Co., Ltd.  
**Address of Applicant:** Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233  
**Manufacturer:** Quectel Wireless Solutions Co., Ltd.  
**Address of Manufacturer:** Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233  
**EUT Description:** Multi-mode Smart LTE Module  
**Model No.:** SC206E-NA  
**Trade Mark:** Quectel  
**FCC ID:** XMR2022SC206ENA  
**Standards:** FCC 47 CFR Part 2, Subpart J  
FCC 47 CFR Part 15, Subpart C  
**Date of Receipt:** June 20, 2025  
**Date of Test:** July 14, 2025  
**Date of Issue:** July 24, 2025

|                      |               |
|----------------------|---------------|
| <b>Test Result :</b> | <b>PASS *</b> |
|----------------------|---------------|

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Docment>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)**

**Version**

| <i>Revision Record</i> |                    |               |               |
|------------------------|--------------------|---------------|---------------|
| <i>Version</i>         | <i>Description</i> | <i>Date</i>   | <i>Remark</i> |
| 01                     | Original           | July 24, 2025 | /             |
|                        |                    |               |               |
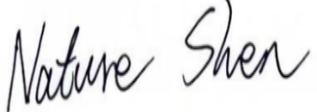
|                                 |  |   |  |
|---------------------------------|--|---|--|
| <b>Authorized for issue by:</b> |  |   |  |
| <b>Tested By</b>                |  | <br>Nature Shen  |  |
|                                 |  | <hr/> Nature Shen / Project Manager   |  |
| <b>Approved By</b>              |  | <br>Cloud Peng |  |
|                                 |  | <hr/> Cloud Peng/Technical Manager  |  |

## Contents

|   |           |
|---|-----------|
| <b>Version</b> .....  | <b>2</b>  |
| <b>1</b> <b>Test Summary</b> .....  | <b>4</b>  |
| <b>2</b> <b>General Information</b> .....   | <b>5</b>  |
| 2.1      Details of Client .....  | 5         |
| 2.2      Test Location.....   | 5         |
| 2.3      Test Facility .....  | 5         |
| 2.4      General Description of EUT .....   | 6         |
| 2.5      Test Environment .....   | 8         |
| 2.6      Description of Support Units.....  | 8         |
| <b>3</b> <b>Equipment List</b> .....  | <b>9</b>  |
| <b>4</b> <b>Measurement Uncertainty (95% confidence levels, k=2)</b> .....            | <b>11</b> |
| <b>5</b> <b>Test results and Measurement Data</b> .....                               | <b>12</b> |
| 5.1      Antenna Requirement .....  | 12        |
| 5.2      Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence |           |
| 13  |           |
| 5.3      AC Power Line Conducted Emissions.....                                       | 15        |
| 5.4      Conducted Output Power .....   | 19        |
| 5.5      Radiated Spurious Emissions .....  | 20        |
| 5.6      Restricted bands around fundamental frequency.....                           | 23        |
| <b>6</b> <b>Photographs - Setup Photos</b> .....                                      | <b>25</b> |
| <b>7</b> <b>Appendix</b> .....  | <b>26</b> |

## 1 Test Summary

| Test Item   | FCC Rule No.                | Test Method                                | Test Result | Result                                 |
|---|-----------------------------|--|-------------|--|
| Antenna Requirement   | 15.203/15.247(b)            | --   | Clause 5.1  |  |
| AC Power Line Conducted Emission                                  | 15.207                      | ANSI C63.10 (2013) Section 6.2             | Clause 5.3  | Reference report<br>SUCR250600057102   |
| Conducted Peak Output Power                                       | 15.247 (b)(1)               | ANSI C63.10 (2013) Section 11.9.2.3        | Clause 5.4  |  |
| 20dB Emission Bandwidth & 99% Occupied Bandwidth                  | 15.247 (a)(1)               | ANSI C63.10 (2013) Section 6.9.2/6.9.3     | Clause 5.5  |  |
| Carrier Frequencies Separation                                    | 15.247 (a)(1)               | ANSI C63.10 (2013) Section 7.8.2           | Clause 5.6  |  |
| Hopping Channel Number  | 15.247 (a)(1)               | ANSI C63.10 (2013) Section 7.8.3           | Clause 5.7  | Reference report<br>SEWM2209000164RG02 |
| Dwell Time  | 15.247 (a)(1)               | ANSI C63.10 (2013) Section 7.8.4           | Clause 5.8  |  |
| Band-edge for RF Conducted Emissions                              | 15.247(d)                   | ANSI C63.10 (2013) Section 7.8.7.2         | Clause 5.9  |  |
| RF Conducted Spurious Emissions                                   | 15.247(d)                   | ANSI C63.10 (2013) Section 7.8.7.1         | Clause 5.10 |  |
| Radiated Spurious emissions                                       | 15.247(d);<br>15.205/15.209 | ANSI C63.10 (2013) Section 6.4 / 6.5 / 6.6 | Clause 5.11 | Reference report<br>SUCR250600057102   |
| Restricted bands around fundamental frequency (Radiated Emission) | 15.247(d);<br>15.205/15.209 | ANSI C63.10 (2013) Section 7.8.8.3         | Clause 5.12 |  |

**Remark:**

This test report (Report No.: SUCR250600057202 issue on 2025/07/24) is a variant report based on the original test report (Report No.: SEWM2209000164RG02 issue on 2022/09/07), the detailed difference are referred to the model difference declaration letter from client, according to the difference, only Power and worstcase RSE are verified.

Because this FCC ID is a change in FCC ID application, this C2PC report is also leveraged from the C2PC of original FCC ID (FCC ID:XMR2022SC200ENA), all the test results are leveraged from the C2PC of original FCC ID report(Report No.: SUCR250600057102 issue on 2025/07/21) .

## 2 General Information

### 2.1 Details of Client

|                          |   |
|--------------------------|---|
| Applicant:               | Quectel Wireless Solutions Co., Ltd.  |
| Address of Applicant:    | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |
| Manufacturer:            | Quectel Wireless Solutions Co., Ltd.  |
| Address of Manufacturer: | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |

### 2.2 Test Location

|                |  |
|----------------|--|
| Company:       | SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.   |
| Address:       | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone |
| Post code:     | 215000   |
| Test engineer: | King-p.Li  |

### 2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

## 2.4 General Description of EUT

|                       |   |
|-----------------------|---|
| Hardware Version:     | LPDDR4X: R1.0   |
| Software Version:     | SC206ENANAR60A03  |
| Operation Frequency:  | 2400MHz~2483.5MHz<br>fc = 2402 MHz + N * 1 MHz, where:<br>-fc = "Operating Frequency" in MHz,<br>-N = "Channel Number" with the range from 0 to 78. |
| Bluetooth version:    | Bluetooth V5.0  |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS)   |
| Modulation Type:      | GFSK, $\pi/4$ DQPSK, 8DPSK  |
| Number of Channel:    | 79  |
| Hopping Channel Type: | Adaptive Frequency Hopping systems  |
| Antenna Type:         | <input checked="" type="checkbox"/> External, <input type="checkbox"/> Integrated   |
| Antenna Gain*:        | <input checked="" type="checkbox"/> Provided by client<br>0.47dBi(Ant0)   |
| RF Cable*:            | <input checked="" type="checkbox"/> Provided by client<br>0.5dB   |

Note: \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

**Operation Frequency of each channel**

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|---------|-----------|
| 0       | 2402MHz   | 20      | 2422MHz   | 40      | 2442MHz   | 60      | 2462MHz   |
| 1       | 2403MHz   | 21      | 2423MHz   | 41      | 2443MHz   | 61      | 2463MHz   |
| 2       | 2404MHz   | 22      | 2424MHz   | 42      | 2444MHz   | 62      | 2464MHz   |
| 3       | 2405MHz   | 23      | 2425MHz   | 43      | 2445MHz   | 63      | 2465MHz   |
| 4       | 2406MHz   | 24      | 2426MHz   | 44      | 2446MHz   | 64      | 2466MHz   |
| 5       | 2407MHz   | 25      | 2427MHz   | 45      | 2447MHz   | 65      | 2467MHz   |
| 6       | 2408MHz   | 26      | 2428MHz   | 46      | 2448MHz   | 66      | 2468MHz   |
| 7       | 2409MHz   | 27      | 2429MHz   | 47      | 2449MHz   | 67      | 2469MHz   |
| 8       | 2410MHz   | 28      | 2430MHz   | 48      | 2450MHz   | 68      | 2470MHz   |
| 9       | 2411MHz   | 29      | 2431MHz   | 49      | 2451MHz   | 69      | 2471MHz   |
| 10      | 2412MHz   | 30      | 2432MHz   | 50      | 2452MHz   | 70      | 2472MHz   |
| 11      | 2413MHz   | 31      | 2433MHz   | 51      | 2453MHz   | 71      | 2473MHz   |
| 12      | 2414MHz   | 32      | 2434MHz   | 52      | 2454MHz   | 72      | 2474MHz   |
| 13      | 2415MHz   | 33      | 2435MHz   | 53      | 2455MHz   | 73      | 2475MHz   |
| 14      | 2416MHz   | 34      | 2436MHz   | 54      | 2456MHz   | 74      | 2476MHz   |
| 15      | 2417MHz   | 35      | 2437MHz   | 55      | 2457MHz   | 75      | 2477MHz   |
| 16      | 2418MHz   | 36      | 2438MHz   | 56      | 2458MHz   | 76      | 2478MHz   |
| 17      | 2419MHz   | 37      | 2439MHz   | 57      | 2459MHz   | 77      | 2479MHz   |
| 18      | 2420MHz   | 38      | 2440MHz   | 58      | 2460MHz   | 78      | 2480MHz   |
| 19      | 2421MHz   | 39      | 2441MHz   | 59      | 2461MHz   |         |           |

**Remark:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel                   | Frequency |
|---------------------------|-----------|
| The Lowest channel(CH0)   | 2402MHz   |
| The Middle channel(CH39)  | 2441MHz   |
| The Highest channel(CH78) | 2480MHz   |

## 2.5 Test Environment

| Environment Parameter | 101.0 kPa Selected Values During Tests |            |
|-----------------------|--|------------|
| Relative Humidity     | 44~60 % RH Ambient                     |            |
| Value                 | Temperature(°C)                        | Voltage(V) |
| NTNV                  | 22~25                                  | 3.8        |
| LTVN                  | -35                                    | 3.8        |
| HTVN                  | 75                                     | 3.8        |

Remark:  
NV: Normal Voltage  
NT: Normal Temperature  
LT: Low Extreme Test Temperature  
HT: High Extreme Test Temperature

## 2.6 Description of Support Units

| Description  | Manufacturer | Model No.   |
|--------------|--------------|-------------|
| Mother board | Quectel      | EVB-G2_V1.3 |

Remark: all above the information of table are provided by client.

### 3 Equipment List

| RF Test Equipment                   |               |                                  |               |            |              |
|-------------------------------------|---------------|----------------------------------|---------------|------------|--------------|
| Equipment                           | Manufacturer  | Model No.                        | Inventory No. | Cal Date   | Cal Due Date |
| Shielding Room                      | Brilliant-emc | N/A                              | SUWI-04-08-01 | 11/9/2022  | 11/8/2025    |
| Temperature and humidity meter      | MingGao       | TH101B                           | SUWI-01-01-07 | 2/13/2025  | 2/12/2026    |
| Measurement Software                | Tonscend      | TST272 V2.0                      | SUWI-03-55-03 | NCR        | NCR          |
| Signal Analyzer                     | ROHDE&SCHWARZ | FSW43                            | SUWI-01-02-04 | 1/20/2025  | 1/19/2026    |
| Temperature Chamber                 | ESPEC         | SU-242                           | SUWI-01-13-02 | 5/7/2025   | 5/6/2026     |
| Wideband Radio Communication Tester | ROHDE&SCHWARZ | CMW500                           | SUWI-01-16-05 | 1/21/2025  | 1/20/2026    |
| DC Power Supply                     | HYELEC        | HY3005B                          | SUWI-01-18-01 | 1/15/2025  | 1/14/2026    |
| Power meter                         | Anritsu       | ML2495A                          | SUWI-01-31-01 | 11/19/2024 | 11/18/2025   |
| Pulse power sensor                  | Anritsu       | MA2411B                          | SUWI-01-32-01 | 11/19/2024 | 11/18/2025   |
| MXG Vector signal generator         | KEYSIGHT      | N5182B                           | SUWI-01-38-01 | 1/15/2025  | 1/14/2026    |
| Router                              | ASUS          | GT-AXE11000(FCC ID MSQ-RTAXJF00) | SUWI-03-14-02 | NCR        | NCR          |
| Signal Analyzer                     | KEYSIGHT      | N9020A                           | SUWI-01-02-07 | 11/19/2024 | 11/18/2025   |

| <b>CE Test System</b>          |                     |                  |                      |                 |                     |
|--------------------------------|---------------------|------------------|----------------------|-----------------|---------------------|
| <b>Equipment</b>               | <b>Manufacturer</b> | <b>Model No.</b> | <b>Inventory No.</b> | <b>Cal Date</b> | <b>Cal Due Date</b> |
| Test receiver                  | ROHDE&SCHWARZ       | ESR7             | SUWI-01-10-01        | 1/15/2025       | 1/14/2026           |
| Temperature and humidity meter | MingGao             | TH101B           | SUWI-01-01-06        | 2/13/2025       | 2/12/2026           |
| Artificial network             | ROHDE&SCHWARZ       | ENV216           | SUWI-01-19-03        | 5/8/2025        | 5/7/2026            |
| Artificial network             | ROHDE&SCHWARZ       | ENV216           | SUWI-01-19-04        | 5/8/2025        | 5/7/2026            |
| Measurement Software           | Tonscend            | JS32-CE 4.0.0.2  | SUWI-02-09-05        | NCR             | NCR                 |

| <b>RSE Test Equipment</b>      |                            |                  |                      |                 |                     |
|--------------------------------|----------------------------|------------------|----------------------|-----------------|---------------------|
| <b>Equipment</b>               | <b>Manufacturer</b>        | <b>Model No.</b> | <b>Inventory No.</b> | <b>Cal Date</b> | <b>Cal Due Date</b> |
| Semi-Anechoic Chamber          | Brilliant-emc              | N/A              | SUWI-04-02-01        | 6/3/2023        | 6/2/2026            |
| Temperature and humidity meter | MingGao                    | TH101B           | SUWI-01-01-05        | 2/13/2025       | 2/12/2026           |
| Signal Analyzer                | ROHDE&SCHWARZ              | FSW43            | SUWI-01-02-04        | 1/20/2025       | 1/19/2026           |
| Signal Analyzer                | KEYSIGHT                   | N9020A           | SUWI-01-02-07        | 11/21/2024      | 11/20/2025          |
| Test receiver                  | ROHDE&SCHWARZ              | ESR7             | SUWI-01-10-01        | 1/15/2025       | 1/14/2026           |
| Receiving antenna              | SCHWRZBECK MESS-ELEKTRONIK | VULB 9163        | SUWI-01-11-01        | 5/7/2025        | 5/6/2027            |
| Receiving antenna              | SCHWRZBECK MESS-ELEKTRONIK | BBHA 9120D       | SUWI-01-11-02        | 5/7/2025        | 5/6/2027            |
| Receiving antenna              | SCHWRZBECK MESS-ELEKTRONIK | BBHA 9170        | SUWI-01-11-03        | 5/7/2025        | 5/6/2027            |
| Active Loop Antenna            | SCHWRZBECK MESS-ELEKTRONIK | FMZB 1519B       | SUWI-01-21-01        | 5/7/2025        | 5/6/2027            |
| Amplifier                      | Tonscend                   | TAP9K3G32        | SUWI-01-14-06        | 11/19/2024      | 11/24/2025          |
| Amplifier                      | Tonscend                   | TAP01018050      | SUWI-01-14-04        | 11/19/2024      | 11/24/2025          |
| Amplifier                      | Tonscend                   | TAP30M7G30       | SUWI-01-14-05        | 11/19/2024      | 11/24/2025          |
| Measurement Software           | Tonscend                   | JS32-RE V4.0.0.0 | SUWI-02-09-04        | NCR             | NCR                 |

Remark: NCR=No Calibration Requirement.

**4 Measurement Uncertainty (95% confidence levels, k=2)**

| No. | Item                      | Measurement Uncertainty    |
|-----|---------------------------|----------------------------|
| 1   | Total RF power, conducted | ±0.54dB                    |
| 2   | Conduction Emission       | ± 2.90dB (150kHz to 30MHz) |
| 3   | Radiated Emission         | ± 3.13dB (9k -30MHz)       |
|     |                           | ± 4.88dB (30M -1GHz)       |
|     |                           | ± 4.75dB (1GHz to 18GHz)   |
|     |                           | ± 4.77dB (Above 18GHz)     |

Remark:  
The  $U_{lab}$  (lab Uncertainty) is less than  $U_{cisp/ETSI}$  (CISPR/ETSI Uncertainty), so the test results  
– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;  
– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

|  |  |
|--|--|
| <b>Standard requirement:</b>   | 47 CFR Part 15C Section 15.203 /247(b)   |
| 15.203 requirement:  | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.   |
| 15.247(b) (4) requirement:   | The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. |
| The antenna is external on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.47dBi.   |  |
| <i>Note:</i>   |  |
| <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i>   |  |
| <i>Remark:</i>   |  |
| <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i> |  |

## 5.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

### 5.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

### 5.2.2 Conclusion

#### Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.


> Number of shift register stages: 9

> Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

> Longest sequence of zeros: 8 (non-inverted signal)


Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

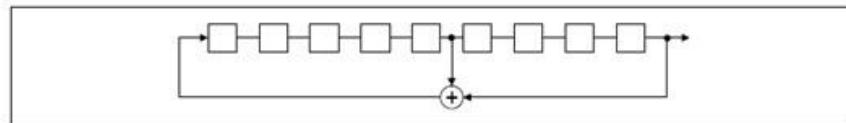

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

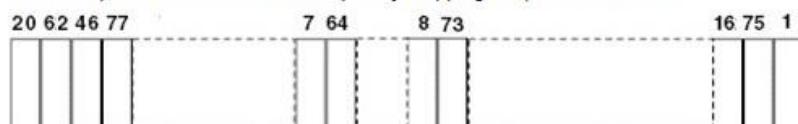

Each frequency used equally on the average by each transmitter.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600057202  
Rev.: 02  
Page: 14 of 32

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):


According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the RF system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

### 5.3 AC Power Line Conducted Emissions


|  |   |           |              |
|--|---|-----------|--------------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207  |           |              |
| Test Method:                                     | ANSI C63.10: 2013 Section 6.2   |           |              |
| Test Frequency Range:                            | 150kHz to 30MHz   |           |              |
| Receiver Setup:                                  | RBW = 9kHz, VBW = 30kHz   |           |              |
| Limit:   | Frequency range (MHz)   |           | Limit (dBuV) |
|  |   |           | Quasi-peak   |
|  | 0.15-0.5  | 66 to 56* | 56 to 46*    |
|  | 0.5-5   | 56        | 46           |
|  | 5-30  | 60        | 50           |
| * Decreases with the logarithm of the frequency. |   |           |              |
| Test Procedure:                                  | <ol style="list-style-type: none"><li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li><li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li><li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li><li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li></ol> <p>In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p> |           |              |
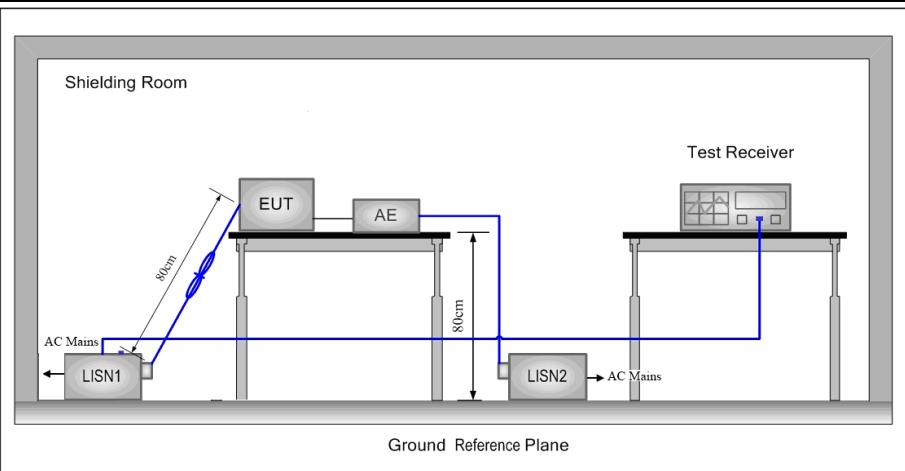
|                   |  |
|-------------------|--|
| Test Setup:       |    |
| Test Mode:        | Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.<br>Charge + Transmitting mode.                                  |
| Final Test Mode:  | Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case.<br>Charge + Transmitting mode<br>Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 3 for details.  |
| Test Results:     | Pass   |

## Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

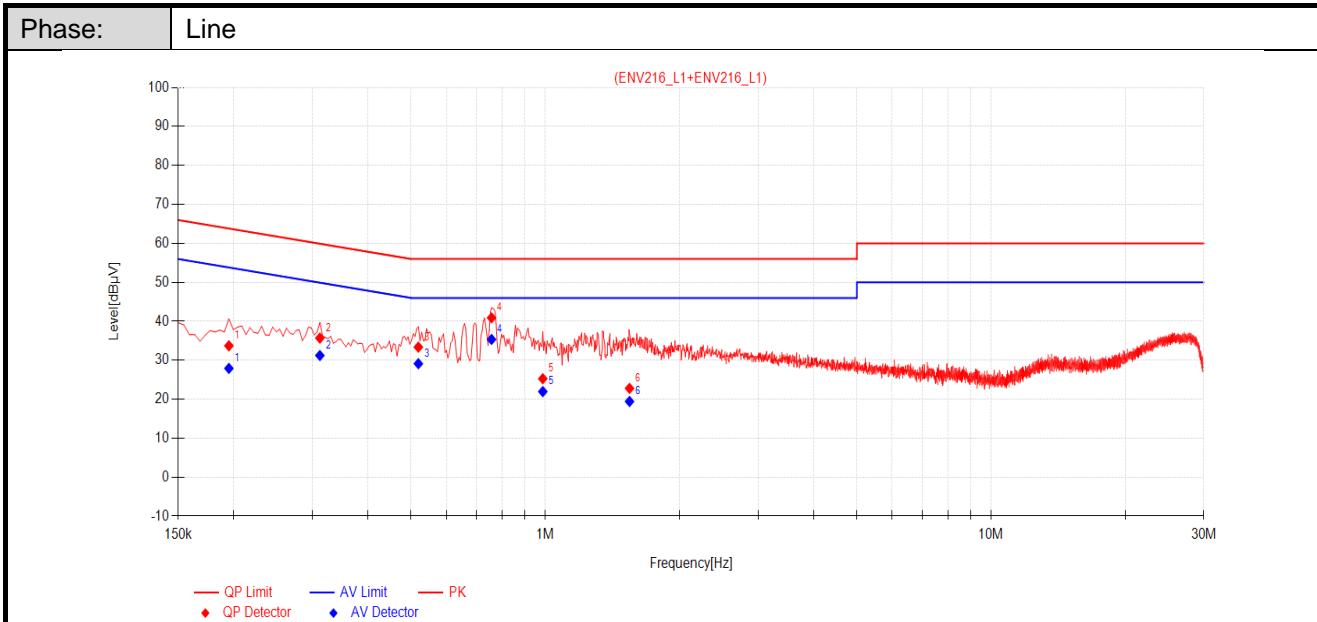

| Final Data List |                 |             |                   |                 |                 |                |                   |                 |                 |                |         |  |
|-----------------|-----------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|---------|--|
| NO.             | Frequency [MHz] | Factor [dB] | QP Reading [dBμV] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict |  |
| 1               | 0.1950          | 10.07       | 23.64             | 33.71           | 63.82           | 30.11          | 17.85             | 27.92           | 53.82           | 25.90          | PASS    |  |
| 2               | 0.3120          | 10.07       | 25.63             | 35.70           | 59.92           | 24.22          | 21.15             | 31.22           | 49.92           | 18.70          | PASS    |  |
| 3               | 0.5190          | 10.08       | 23.30             | 33.38           | 56.00           | 22.62          | 19.04             | 29.12           | 46.00           | 16.88          | PASS    |  |
| 4               | 0.7575          | 10.05       | 30.85             | 40.90           | 56.00           | 15.10          | 25.30             | 35.35           | 46.00           | 10.65          | PASS    |  |
| 5               | 0.9870          | 9.95        | 15.32             | 25.27           | 56.00           | 30.73          | 12.01             | 21.96           | 46.00           | 24.04          | PASS    |  |
| 6               | 1.5450          | 9.89        | 12.89             | 22.78           | 56.00           | 33.22          | 9.54              | 19.43           | 46.00           | 26.57          | PASS    |  |

## Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value =Reading[dBμV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBμV] – Value[dBμV]

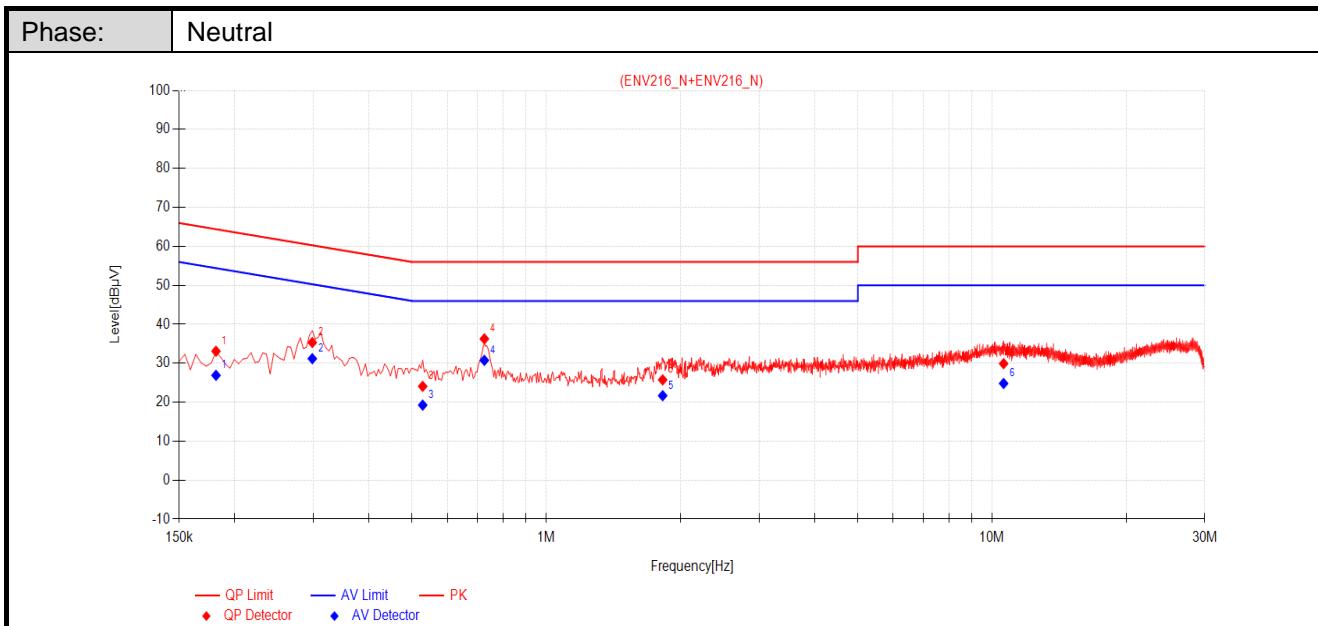


| Final Data List |                 |             |                   |                 |                 |                |                   |                 |                 |                |         |  |
|-----------------|-----------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|---------|--|
| NO.             | Frequency [MHz] | Factor [dB] | QP Reading [dBμV] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Reading [dBμV] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Verdict |  |
| 1               | 0.1815          | 10.08       | 23.01             | 33.09           | 64.42           | 31.33          | 16.82             | 26.90           | 54.42           | 27.52          | PASS    |  |
| 2               | 0.2985          | 10.05       | 25.28             | 35.33           | 60.28           | 24.95          | 21.13             | 31.18           | 50.28           | 19.10          | PASS    |  |
| 3               | 0.5280          | 10.06       | 14.02             | 24.08           | 56.00           | 31.92          | 9.20              | 19.26           | 46.00           | 26.74          | PASS    |  |
| 4               | 0.7260          | 10.07       | 26.20             | 36.27           | 56.00           | 19.73          | 20.68             | 30.75           | 46.00           | 15.25          | PASS    |  |
| 5               | 1.8240          | 9.92        | 15.82             | 25.74           | 56.00           | 30.26          | 11.77             | 21.69           | 46.00           | 24.31          | PASS    |  |
| 6               | 10.6170         | 9.79        | 20.12             | 29.91           | 60.00           | 30.09          | 15.02             | 24.81           | 50.00           | 25.19          | PASS    |  |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Value =Reading[dBμV] + Factor(Lisn factor[dB] + cable loss[dB]).
3. Margin = Limit[dBμV] – Value[dBμV]

## 5.4 Conducted Output Power
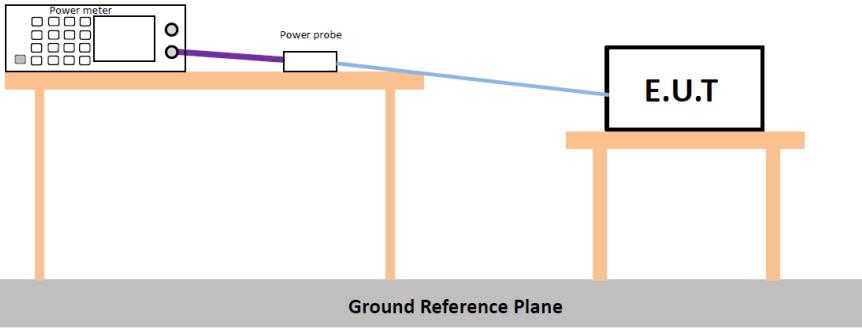
|   |   |
|---|---|
| Test Requirement:                           | 47 CFR Part 15C Section 15.247 (b)(1)   |
| Test Method:                                | ANSI C63.10:2013 Section 11.9.2.3   |
| Test Setup:                                 |  <p>* Test with power meter (Detector function: Peak)</p>   |
| Test Instruments:                           | Refer to section 3 for details  |
| Exploratory Test Mode:                      | Non-hopping transmitting with all kind of modulation and all kind of data type.   |
| Final Test Mode:                            | Through Pre-scan, find the<br>DH5 of data type is the worst case of GFSK modulation type,<br>2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type,<br>3-DH5 of data type is the worst case of 8DPSK modulation type. |
| Limit:                                      | For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.                 |
| Test Results:                               | Pass  |
| The detailed test data see: <b>Appendix</b> |   |

## 5.5 Radiated Spurious Emissions

|   |  |                                  |                |            |                          |
|---|--|----------------------------------|----------------|------------|--------------------------|
| Test Requirement:   | 47 CFR Part 15C Section 15.209 and 15.205        |                                  |                |            |                          |
| Test Method:  | ANSI C63.10 :2013 Section 6.4 / 6.5 / 6.6        |                                  |                |            |                          |
| Test Site:  | Measurement Distance: 3m (Semi-Anechoic Chamber) |                                  |                |            |                          |
| Limit:  | Frequency  | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|   | 0.009MHz-0.490MHz                                | 2400/F(kHz)                      | -              | -          | 300                      |
|   | 0.490MHz-1.705MHz                                | 24000/F(kHz)                     | -              | -          | 30                       |
|   | 1.705MHz-30MHz                                   | 30                               | -              | -          | 30                       |
|   | 30MHz-88MHz                                      | 100                              | 40.0           | Quasi-peak | 3                        |
|   | 88MHz-216MHz                                     | 150                              | 43.5           | Quasi-peak | 3                        |
|   | 216MHz-960MHz                                    | 200                              | 46.0           | Quasi-peak | 3                        |
|   | 960MHz-1GHz                                      | 500                              | 54.0           | Quasi-peak | 3                        |
| Above 1GHz  |  |                                  |                |            | Average                  |
| Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |  |                                  |                |            |                          |

### Test Setup:

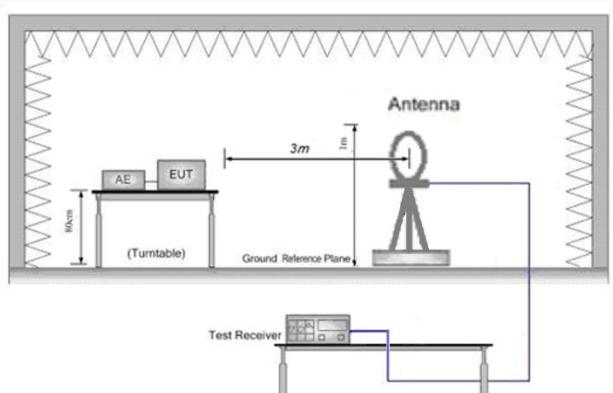


Figure 1. Below 30MHz

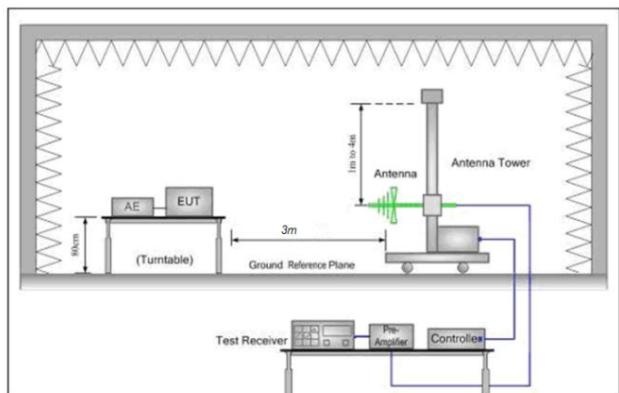


Figure 2. 30MHz to 1GHz

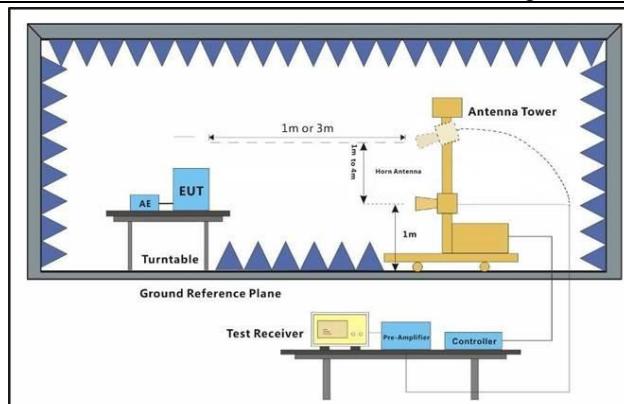


Figure 3. Above 1 GHz

|                        |  |
|------------------------|--|
| Test Procedure:        | <ol style="list-style-type: none"><li>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation<br/>(Distance from antenna to EUT is 1m for measurements &gt;18GHz).</li><li>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>g. Test the EUT in the lowest channel, the middle channel ,the Highest channel.</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li><li>j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported</li><li>k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed.</li><li>l. At a measurement distance of 1 meter the limit line was increased by <math>20 \times \log(3/1) = 9.54</math> dB.</li></ol> |
| Test Configuration:    | <p>Measurements Below 1000MHz</p> <ul style="list-style-type: none"><li>• RBW = 120 kHz</li><li>• VBW = 300 kHz</li><li>• Detector = Peak</li><li>• Trace mode = max hold</li></ul> <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW <math>\geq</math> 3 MHz</li><li>• Detector = Peak</li><li>• Sweep time = auto</li><li>• Trace mode = max hold</li></ul> <p>Average Measurements Above 1000MHz</p> <p>Use duty cycle correction factor method per 15.35(c).</p> <p>Duty cycle = On time / 100 milliseconds</p> <p>On time = <math>N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{N-1} \cdot L_{N-1} + N_N \cdot L_N</math></p> <p>Where <math>N_1</math> is number of type 1 pulses, <math>L_1</math> is length of type 1 pulses, etc.</p> <p>Average Value = Peak Value + <math>20 \times \log(\text{Duty cycle})</math>.</p>  |
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type<br>Charge + Transmitting mode.   |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.   |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600057202

Rev.: 02

Page: 22 of 32

|   |  |
|---|--|
|   | <p>Pretest the EUT at Charge + Transmitting mode<br/>For below 1GHz part, through pre-scan, the worst case is the lowest channel.<br/>Only the worst case is recorded in the report.</p> |
| Instruments Used:                           | Refer to section 3 for details   |
| Test Results:                               | Pass   |
| The detailed test data see: <b>Appendix</b> |  |

## 5.6 Restricted bands around fundamental frequency

|                   |  |                |               |
|-------------------|--|----------------|---------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205        |                |               |
| Test Method:      | ANSI C63.10: 2013 Section 7.8.8.3                |                |               |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber) |                |               |
| Limit:            | Frequency  | Limit (dBuV/m) | Remark        |
|                   | 30MHz-88MHz                                      | 40.0           | Quasi-peak    |
|                   | 88MHz-216MHz                                     | 43.5           | Quasi-peak    |
|                   | 216MHz-960MHz                                    | 46.0           | Quasi-peak    |
|                   | 960MHz-1GHz                                      | 54.0           | Quasi-peak    |
|                   | Above 1GHz                                       | 54.0           | Average Value |
|                   |  | 74.0           | Peak Value    |

### Test Setup:

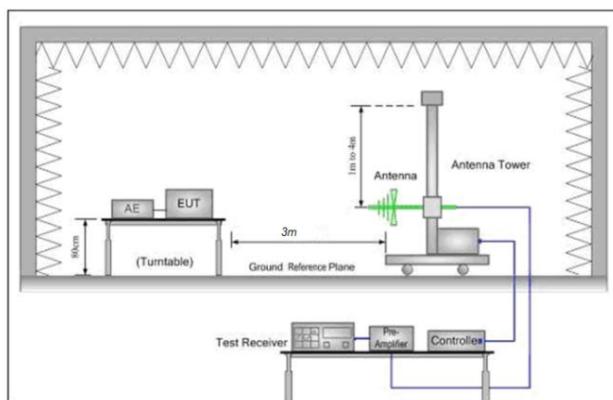


Figure 1. 30MHz to 1GHz

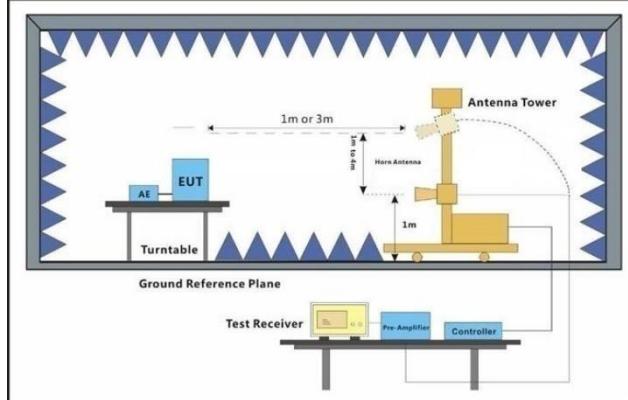


Figure 2. Above 1 GHz

|                 |   |
|-----------------|---|
| Test Procedure: | <ol style="list-style-type: none"> <li>For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>Test the EUT in the lowest channel, the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for</li> </ol> |
|-----------------|---|

|   |  |
|---|--|
|   | Transmitting mode, And found the X axis positioning which it is worse case.<br>j. Repeat above procedures until all frequencies measured was complete.   |
| Test Configuration:                         | Measurements Below 1000MHz <ul style="list-style-type: none"><li>• RBW = 120 kHz</li><li>• VBW = 300 kHz</li><li>• Detector = Peak</li><li>• Trace mode = max hold</li></ul> Peak Measurements Above 1000 MHz <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW <math>\geq</math> 3 MHz</li><li>• Detector = Peak</li><li>• Sweep time = auto</li><li>• Trace mode = max hold</li></ul> Average Measurements Above 1000MHz<br>Use duty cycle correction factor method per 15.35(c).<br>Duty cycle = On time / 100 milliseconds<br>On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{N-1} \cdot L_{N-1} + N_N \cdot L_N$<br>Where $N_1$ is number of type 1 pulses, $L_1$ is length of type 1 pulses, etc.<br>Average Value = Peak Value + $20 \cdot \log(\text{Duty cycle})$ . |
| Exploratory Test Mode:                      | Non-hopping transmitting mode with all kind of modulation and all kind of data type<br>Charge + Transmitting mode.   |
| Final Test Mode:                            | Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.<br>Pretest the EUT at Charge + Transmitting mode,<br>Only the worst case is recorded in the report.   |
| Instruments Used:                           | Refer to section 3 for details   |
| Test Results:                               | Pass   |
| The detailed test data see: <b>Appendix</b> |  |

## **6 Photographs - Setup Photos**

Refer to Appendix A.2 BT&WLAN Setup Photos.

## 7 Appendix

### Maximum conducted output power


#### Test Result Peak

| Test Mode | Antenna | Frequency[MHz] | Conducted Peak Power[dBm] | Conducted Limit[dBm] | Verdict |
|-----------|---------|----------------|---------------------------|----------------------|---------|
| DH5       | Ant0    | 2402           | 7.17                      | ≤30.00               | PASS    |
|           |         | 2441           | 8.34                      | ≤30.00               | PASS    |
|           |         | 2480           | 8.93                      | ≤30.00               | PASS    |
| 2DH5      | Ant0    | 2402           | 8.08                      | ≤20.97               | PASS    |
|           |         | 2441           | 9.21                      | ≤20.97               | PASS    |
|           |         | 2480           | 9.85                      | ≤20.97               | PASS    |
| 3DH5      | Ant0    | 2402           | 8.17                      | ≤20.97               | PASS    |
|           |         | 2441           | 9.36                      | ≤20.97               | PASS    |
|           |         | 2480           | 9.85                      | ≤20.97               | PASS    |


## Radiated Spurious Emissions

### Radiated emission below 1GHz

#### Worst case Mode: BT2.0\_ Channel 78

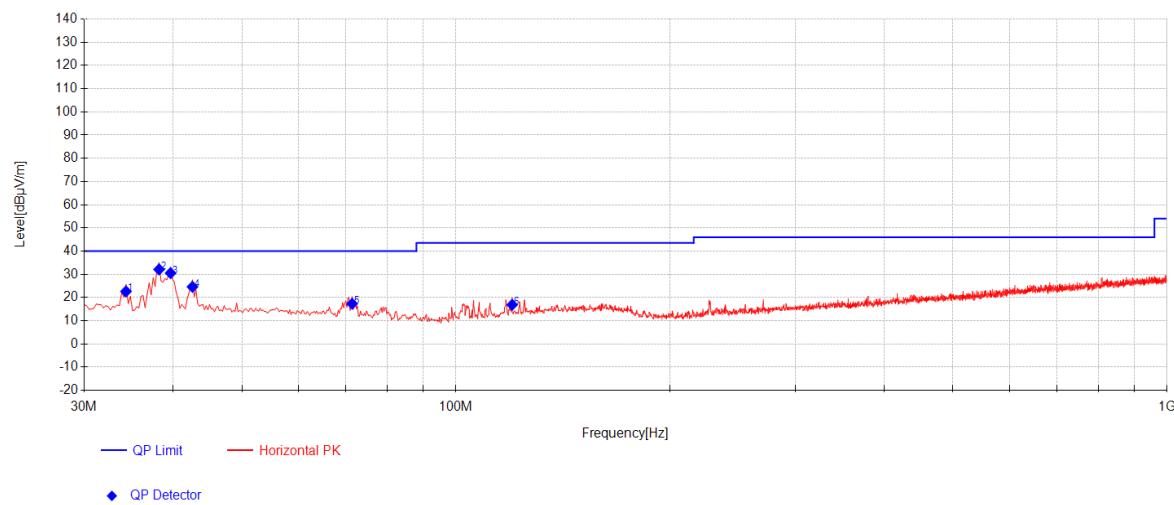

| Final Data List |                 |                      |           |             |                         |                         |                |             |           |            |
|-----------------|-----------------|----------------------|-----------|-------------|-------------------------|-------------------------|----------------|-------------|-----------|------------|
| NO.             | Frequency [MHz] | Reading [dB $\mu$ V] | AF [dB/m] | Factor [dB] | QP Value [dB $\mu$ V/m] | QP Limit [dB $\mu$ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1               | 34.365          | 38.61                | 18.20     | -34.18      | 22.63                   | 40.00                   | 17.37          | 225         | 6         | Horizontal |
| 2               | 38.245          | 47.69                | 18.60     | -34.18      | 32.11                   | 40.00                   | 7.89           | 236         | 76        | Horizontal |
| 3               | 39.7            | 45.96                | 18.74     | -34.18      | 30.52                   | 40.00                   | 9.48           | 147         | 76        | Horizontal |
| 4               | 42.61           | 40.02                | 18.76     | -34.18      | 24.60                   | 40.00                   | 15.40          | 258         | 123       | Horizontal |
| 5               | 71.4675         | 35.18                | 16.15     | -34.00      | 17.33                   | 40.00                   | 22.67          | 199         | 309       | Horizontal |
| 6               | 119.9675        | 33.78                | 16.79     | -33.71      | 16.87                   | 43.50                   | 26.63          | 205         | 210       | Horizontal |

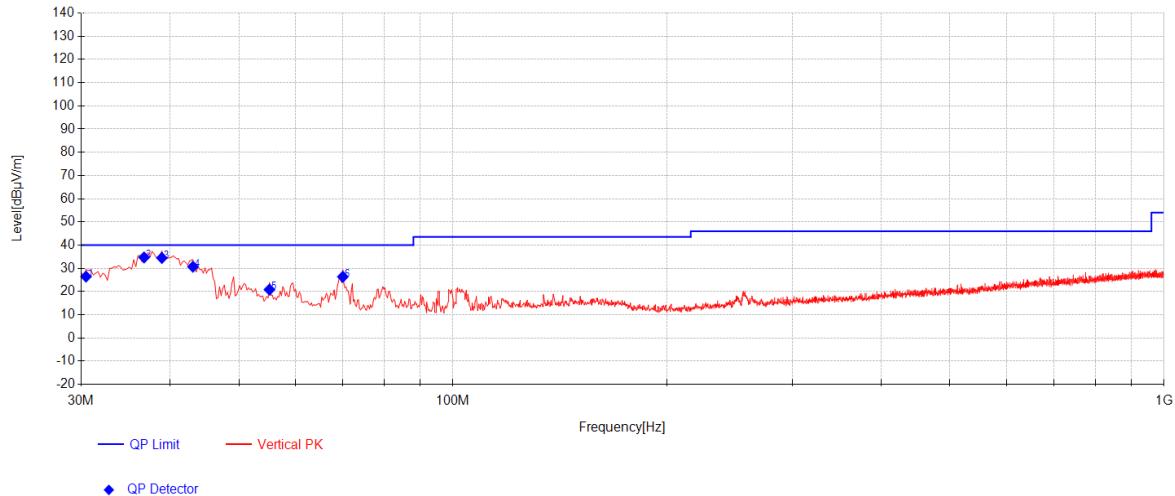


| Final Data List |                 |                      |           |             |                         |                         |                |             |           |          |
|-----------------|-----------------|----------------------|-----------|-------------|-------------------------|-------------------------|----------------|-------------|-----------|----------|
| NO.             | Frequency [MHz] | Reading [dB $\mu$ V] | AF [dB/m] | Factor [dB] | QP Value [dB $\mu$ V/m] | QP Limit [dB $\mu$ V/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1               | 30.485          | 42.48                | 18.15     | -34.18      | 26.45                   | 40.00                   | 13.55          | 196         | 360       | Vertical |
| 2               | 36.79           | 50.41                | 18.46     | -34.18      | 34.69                   | 40.00                   | 5.31           | 235         | 49        | Vertical |
| 3               | 38.9725         | 50.06                | 18.60     | -34.18      | 34.48                   | 40.00                   | 5.52           | 187         | 357       | Vertical |
| 4               | 43.095          | 46.06                | 18.80     | -34.18      | 30.68                   | 40.00                   | 9.32           | 224         | 211       | Vertical |
| 5               | 55.22           | 36.79                | 18.20     | -34.14      | 20.85                   | 40.00                   | 19.15          | 199         | 195       | Vertical |
| 6               | 70.0125         | 44.17                | 16.20     | -34.01      | 26.36                   | 40.00                   | 13.64          | 223         | 347       | Vertical |

**Remark:**


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
 

Value = Reading(dB $\mu$ V) + AF(dB/m) + Factor(dB):  
 AF = Antenna Factor(dB/m)  
 Factor = Cable Factor(dB) - Preamplifier gain(dB)  
 Margin = Limit(dB $\mu$ V/m) – Value(dB $\mu$ V/m)
- 2) All channels have been tested, but only the worst case data displayed in this report.

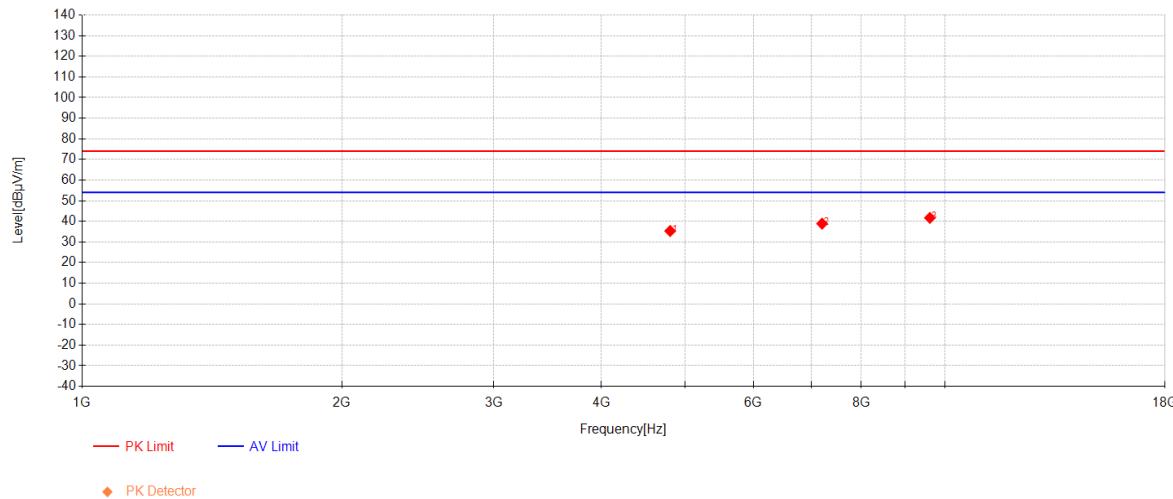**Transmitter emission Above 1GHz****BT2.0\_Channel 78**

| Data List |                 |                      |           |             |                      |                      |             |            |
|-----------|-----------------|----------------------|-----------|-------------|----------------------|----------------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dB $\mu$ V] | AF [dB/m] | Factor [dB] | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] | Polarity   |
| 1         | 4804            | 44.06                | 32.77     | -41.49      | 35.34                | 74.00                | 38.66       | Horizontal |
| 2         | 7206            | 40.66                | 36.25     | -38.02      | 38.89                | 74.00                | 35.11       | Horizontal |
| 3         | 9608            | 37.36                | 37.78     | -33.45      | 41.69                | 74.00                | 32.31       | Horizontal |

## BT2.0\_Channel 78

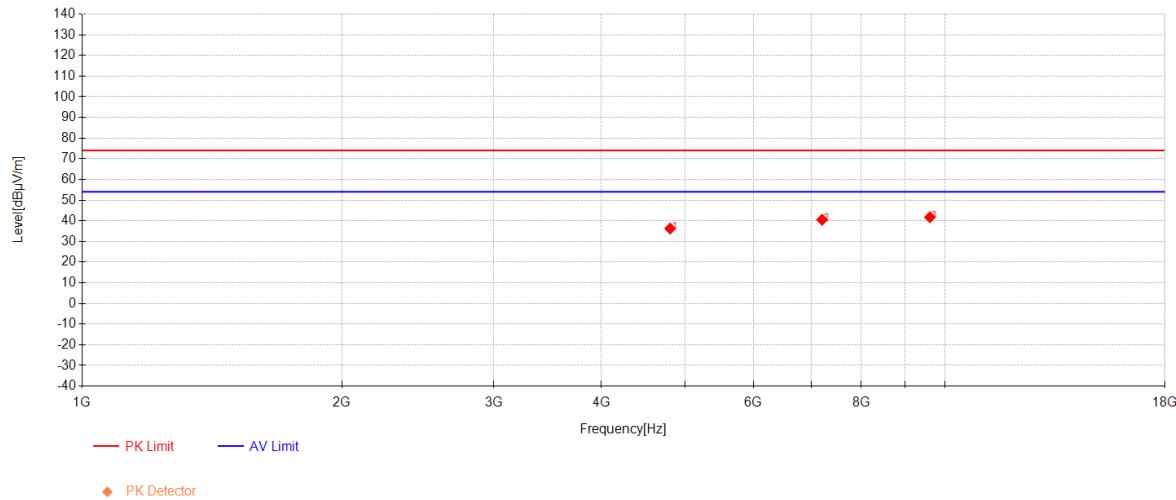

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4804            | 44.97          | 32.77     | -41.49      | 36.25          | 74.00          | 37.75       | Vertical |
| 2         | 7206            | 42.29          | 36.25     | -38.02      | 40.52          | 74.00          | 33.48       | Vertical |
| 3         | 9608            | 37.39          | 37.78     | -33.45      | 41.72          | 74.00          | 32.28       | Vertical |


## Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
 
$$\text{Level} = \text{Reading(dBμV)} + \text{AF(dB/m)} + \text{Factor(dB)}$$


$$\text{AF} = \text{Antenna Factor(dB/m)}$$

$$\text{Factor} = \text{Cable Factor(dB)} - \text{Preamplifier gain(dB)}$$

$$\text{Margin} = \text{Limit(dBμV/m)} - \text{Level(dBμV/m)}$$
- 2) All channels have been tested, but only the worst case data displayed in this report.

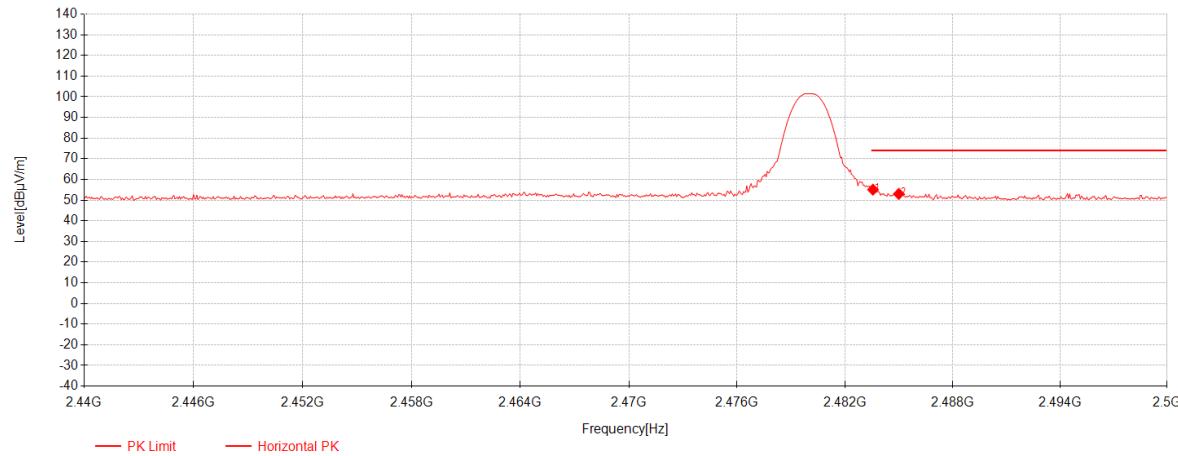**Restricted bands around fundamental frequency****BT2.0\_Channel 78****Data List**

| NO. | Frequency [MHz] | Reading [dB $\mu$ V] | AF [dB/m] | Factor [dB] | Level [dB $\mu$ V/m] | Limit [dB $\mu$ V/m] | Margin [dB] | Polarity   |
|-----|-----------------|----------------------|-----------|-------------|----------------------|----------------------|-------------|------------|
| 1   | 2483.56         | 50.97                | 27.36     | -23.27      | 55.06                | 74.00                | 18.94       | Horizontal |
| 2   | 2485            | 48.91                | 27.37     | -23.27      | 53.01                | 74.00                | 20.99       | Horizontal |

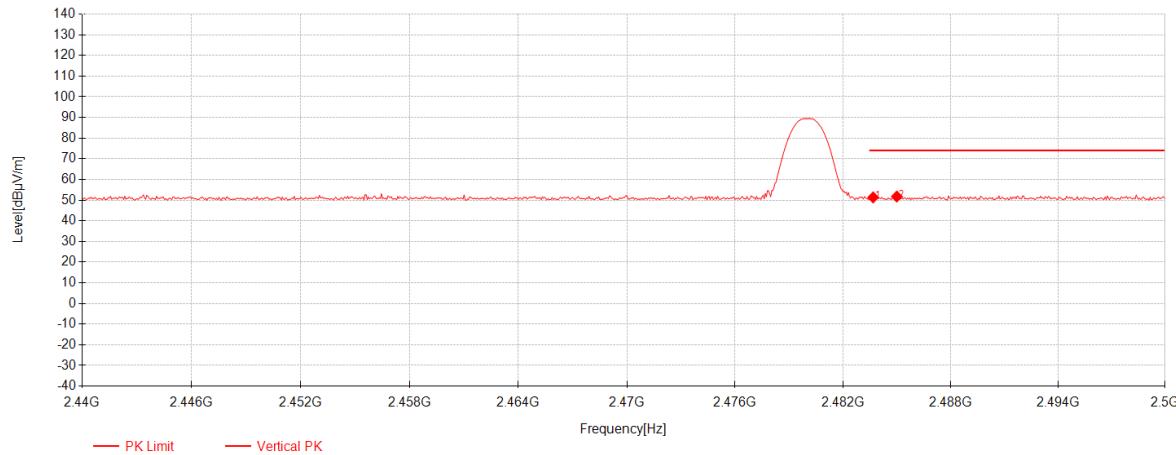**BT2.0\_Channel 78****Data List**

| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Polarity |
|-----|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| 1   | 2483.68         | 47.23          | 27.36     | -23.27      | 51.32          | 74.00          | 22.68       | Vertical |
| 2   | 2485            | 47.64          | 27.37     | -23.27      | 51.74          | 74.00          | 22.26       | Vertical |

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading(dBµV) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dBµV/m) – Level(dBµV/m)

---End of Report---