

TEST REPORT

Applicant: Quectel Wireless Solutions Co., Ltd.

EUT Description: LTE Cat 1 bis Module

Model: EG912U-GL

Brand: QUECTEL

FCC ID: XMR2023EG912UGL2

Standards: FCC CFR Title 47 Part 2

FCC CFR Title 47 Part 22

FCC CFR Title 47 Part 24

FCC CFR Title 47 Part 27

FCC CFR Title 47 Part 90

Date of Receipt: 2025/07/29

Date of Test: 2025/07/29 to 2025/08/20 (FCC ID: XMR2023EG912UGL (Lead Model))

2025/07/29 to 2025/08/20 (FCC ID: XMR2023EG912UGL2 (This Model))

Date of Issue: 2025/08/20

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



A handwritten signature in black ink that appears to read "Jim Huang".

Jim Huang
Approved By:

A handwritten signature in black ink that appears to read "Carey Chen".

Carey Chen
Reviewed By:

Revision History

Rev.	Issue Date	Description	Revised by
01	2025/08/20	Original	Carey Chen

Summary of Test Results

FCC Part	Test Band	Test Item	Test Result
§2.1046 §22.913(a)(5) §27.50(b)(9) §27.50(c)(10)	LTE Band 5/26(824 ~ 849MHz) LTE Band 13 LTE Band 12/17	Effective Radiated Power	Pass*
§2.1046 §24.232(c) §27.50(d)(4) §27.50(h)(2)	LTE Band 2/25 LTE Band 4/66 LTE Band 7/38/41	Effective Isotropic Radiated Power	Pass*
§2.1046 §90.635(b)	LTE Band 26(814 ~ 824MHz)	Transmitter Conducted Output Power	Pass*
§2.1046 §22.913(a)(5)	GSM850	Effective Radiated Power	Pass
§2.1046 §24.232(c)	GSM1900	Effective Isotropic Radiated Power	Pass
§22.913(d) §24.232(d) §27.50(d)(5)	GSM850/LTE Band 5/26(824 ~ 849MHz) GSM1900/LTE Band 2/25 Others Band	Peak-Average Ratio	Pass
§2.1049	All Band	Occupied Bandwidth	Pass
§2.1051 §90.691(a)	LTE Band 26(814 ~ 824MHz)	Emission Mask	Pass
§2.1051 §22.917(a) §24.238(a) §27.53(c) §27.53(g) §27.53(h) §27.53(m)	GSM850/LTE Band 5/26(824 ~ 849MHz) GSM1900/LTE Band 2/25 LTE Band 13 LTE Band 12/17 LTE Band 4/66 LTE Band 7/38/41	Band Edge	Pass
§2.1051 §22.917(a) §24.238(a) §27.53(c) §27.53(g) §27.53(h) §27.53(m) §90.691	GSM850/LTE Band 5/26(824 ~ 849MHz) GSM1900/LTE Band 2/25 LTE Band 13 LTE Band 12/17 LTE Band 4/66 LTE Band 7/38/41 LTE Band 26(814 ~ 824MHz)	Spurious Emission at Antenna Terminals	Pass
§2.1053 §22.917(a) §24.238(a) §27.53(c)&(f) §27.53(g) §27.53(h) §27.53(m) §90.691	GSM850/LTE Band 5/26(824 ~ 849MHz) GSM1900/LTE Band 2/25 LTE Band 13 LTE Band 12/17 LTE Band 4/66 LTE Band 7/38/41 LTE Band 26(814 ~ 824MHz)	Field Strength of Spurious Radiation	Pass*
§2.1055		Frequency Stability	Pass

FCC Part	Test Band	Test Item	Test Result
§22.355	GSM850/LTE Band 5/26(824 ~ 849MHz)		
§24.235	GSM1900/LTE Band 2/25		
§27.54	Others Band		
§90.213	LTE Band 26(814 ~ 824MHz)		

Remark:

1. Pass: Refer to FCC ID: XMR2023EG912UGL (Lead Model), Detailed data reference Report No.: TCWA25070058401.
2. PASS*: There is FCC ID: XMR2023EG912UGL2 (This Model) spot check data.

Table of Contents

1	General Description	6
1.1	Lab Information	6
1.1.1	Testing Location	6
1.1.2	Test Facility / Accreditations	6
1.2	Client Information	6
1.2.1	Applicant	6
1.2.2	Manufacturer	6
1.3	Product Information	7
1.4	Reuse Of Test Data	9
1.4.1	Introduction	9
1.4.2	Device Differences	9
1.4.3	Spot Check Verification Data	9
2	Test Configuration	11
2.1	Test Channel	11
2.2	Test Mode	15
2.3	Support Unit used in test	15
2.4	Test Environment	15
2.5	Test RF Cable	15
2.6	Modifications	15
2.7	Test Setup Diagram	16
2.7.1	Conducted Configuration	16
2.7.2	Radiated Configuration	17
3	Equipment and Measurement Uncertainty	18
3.1	Test Equipment List	18
3.2	Measurement Uncertainty	19
4	Test Results	20
4.1	Output Power (ERP / EIRP / Conducted Power)	20
4.2	Field Strength of Spurious Radiation	22
5	Test Setup Photos	24

1 General Description

1.1 Lab Information

1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014

Tel.: +86-755-27212361

Contact Email: info@towewireless.com

1.1.2 Test Facility / Accreditations

A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0152

Company Number: 31000

1.2 Client Information

1.2.1 Applicant

Applicant:	Quectel Wireless Solutions Co., Ltd.
Address:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China.

1.2.2 Manufacturer

Manufacturer:	Quectel Wireless Solutions Co., Ltd.
Address:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China.

1.3 Product Information

EUT Description:	LTE Cat 1 bis Module		
Model:	EG912U-GL		
Brand:	QUECTEL		
Hardware Version:	R1.1		
Software Version:	EG912UGLAAR03A18M08		
Power Class:	Class 3: All		
IMEI:	RF Conducted	869487066717181	
	RSE	869487066707885	
Device Capabilities:			
Modulation Type:	GSM:	<input checked="" type="checkbox"/> GSM/GPRS: GMSK, <input type="checkbox"/> EGPRS: 8PSK	
	LTE:	<input checked="" type="checkbox"/> QPSK, <input checked="" type="checkbox"/> 16QAM, <input type="checkbox"/> 64QAM, <input type="checkbox"/> 256QAM	
Operation Frequency Range:	Band	TX Frequency	RX Frequency
	GSM 850	824 ~ 849 MHz	869 ~ 894 MHz
	PCS 1900	1850 ~ 1910 MHz	1930 ~ 1990 MHz
	LTE Band 2	1850 ~ 1910 MHz	1930 ~ 1990 MHz
	LTE Band 4	1710 ~ 1755 MHz	2110 ~ 2155 MHz
	LTE Band 5	824 ~ 849 MHz	869 ~ 894 MHz
	LTE Band 7	2500 ~ 2570 MHz	2620 ~ 2690 MHz
	LTE Band 12	699 ~ 716 MHz	729 ~ 746 MHz
	LTE Band 13	777 ~ 787 MHz	746 ~ 756 MHz
	LTE Band 17	704 ~ 716 MHz	734 ~ 746 MHz
	LTE Band 25	1850 ~ 1915MHz	1930 ~ 1995 MHz
	LTE Band 26 (814 ~ 824 MHz)	814 ~ 824MHz	859 ~ 869 MHz
	LTE Band 26 (824 ~ 849 MHz)	824 ~ 849 MHz	869 ~ 894 MHz
	LTE Band 38	2570 ~ 2620 MHz	2570 ~ 2620 MHz
	LTE Band 41	2496 ~ 2690MHz	2496 ~ 2690MHz
	LTE Band 66	1710 ~ 1780 MHz	2110 ~ 2180 MHz
Antenna Type:	<input checked="" type="checkbox"/> External, <input type="checkbox"/> Integrated		
Antenna Gain:	Band	Ant (dBi)	
	GSM 850	2.53	
	PCS 1900	1.59	
	LTE Band 2	1.59	
	LTE Band 4	2	
	LTE Band 5	2.53	
	LTE Band 7	3	
	LTE Band 12	3.95	
	LTE Band 13	4.45	
	LTE Band 17	3.95	
	LTE Band 25	1.59	

	LTE Band 26	2.53
	LTE Band 38	3
	LTE Band 41	3
	LTE Band 66	2

Remark: The above EUT's information was declared by applicant, please refer to the specifications or user manual for more detailed description.

1.4 Reuse Of Test Data

1.4.1 Introduction

According to the manufacturer the major change between FCC ID: XMR2023EG912UGL (Lead Model), and FCC ID: XMR2023EG912UGL2 (This Model) is changing band configuration by software, The FCC ID: XMR2023EG912UGL (Lead Model) conducted test data shall remain representative of FCC ID: XMR2023EG912UGL2 (This Model) so, FCC ID: XMR2023EG912UGL2 (This Model) leverages conducted test data from FCC ID: XMR2023EG912UGL (Lead Model).

1.4.2 Device Differences

The equipment under test (EUT) in this filing FCC ID: XMR2023EG912UGL2 (This Model) and the reference device certified under FCC ID: XMR2023EG912UGL (Lead Model) share a common design. The components used for WWAN, including antennas and output power are identical between the EUT and reference device.

1.4.3 Spot Check Verification Data

In this filing, the worst-case data and spot checks were tested on the EUT as noted below, against the reference device. All the necessary test cases were performed to verify the variant EUT is still in compliance with the spot checked results to the reference device and was performed using the guidance of ANSI C63.10:2020.

According to KBD 484596 Referencing Test Data v03, Spot checks of the following tests were performed:

Spot check Items	Band	Reference (XMR2023EG912UGL) Worst-case	Variant Test (XMR2023EG912UGL2)	dB Difference	Spot-Check Parameters	Pass Criterion
Effective (Isotropic) Radiated Power	Band2	25.61dBm	25.13dBm	$d_{dB}=0.48dB$	$C_{dB}=33dBm$ $M_{dB}= C_{dB} - R_{dB} =7.39dB$ $d_{dBmax}(M_{dB})=3.37dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band4	26.45dBm	26.27dBm	$d_{dB}=0.18dB$	$C_{dB}=30dBm$ $M_{dB}= C_{dB} - R_{dB} =3.55dB$ $d_{dBmax}(M_{dB})=3.18dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band5	24.14dBm	24.06dBm	$d_{dB}=0.08dB$	$C_{dB}=38.45dBm$ $M_{dB}= C_{dB} - R_{dB} =14.31dB$ $d_{dBmax}(M_{dB})=3.72dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band7	27.09dBm	26.71dBm	$d_{dB}=0.38dB$	$C_{dB}=33dBm$ $M_{dB}= C_{dB} - R_{dB} =5.91dB$ $d_{dBmax}(M_{dB})=3.30dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band12	26.52dBm	25.58dBm	$d_{dB}=0.94dB$	$C_{dB}=34.77dBm$ $M_{dB}= C_{dB} - R_{dB} =8.25dB$ $d_{dBmax}(M_{dB})=3.41dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band13	25.56dBm	25.71dBm	$d_{dB}=0.15dB$	$C_{dB}=44.77dBm$ $M_{dB}= C_{dB} - R_{dB} =19.21dB$ $d_{dBmax}(M_{dB})=3.96dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band17	26.36dBm	25.49dBm	$d_{dB}=0.87dB$	$C_{dB}=34.77dBm$ $M_{dB}= C_{dB} - R_{dB} =8.41dB$ $d_{dBmax}(M_{dB})=3.42dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band25	26.04dBm	25.77dBm	$d_{dB}=0.27dB$	$C_{dB}=33dBm$ $M_{dB}= C_{dB} - R_{dB} =6.96dB$ $d_{dBmax}(M_{dB})=3.35dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band26 (824-849)	24.54dBm	24.1dBm	$d_{dB}=0.44dB$	$C_{dB}=38.45dBm$ $M_{dB}= C_{dB} - R_{dB} =13.91dB$ $d_{dBmax}(M_{dB})=3.70dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band38	27.04dBm	27.05dBm	$d_{dB}=0.01dB$	$C_{dB}=33dBm$ $M_{dB}= C_{dB} - R_{dB} =5.96dB$ $d_{dBmax}(M_{dB})=3.30dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band41	27.4dBm	26.92dBm	$d_{dB}=0.48dB$	$C_{dB}=33dBm$ $M_{dB}= C_{dB} - R_{dB} =5.6dB$ $d_{dBmax}(M_{dB})=3.28dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
	Band66	25.91dBm	25.05dBm	$d_{dB}=0.86dB$	$C_{dB}=30dBm$ $M_{dB}= C_{dB} - R_{dB} =4.09dB$ $d_{dBmax}(M_{dB})=3.20dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
Transmitter Conducted Output Power	Band26 (814-824)	25.1dBm	24.84dBm	$d_{dB}=0.26dB$	$C_{dB}=50dBm$ $M_{dB}= C_{dB} - R_{dB} =24.9dB$ $d_{dBmax}(M_{dB})=4.25dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass
Field Strength of Spurious Radiation	Band41	$R_{dB}=-42.21dBm$	$V_{dB}=-43.88dBm$	$d_{dB}=1.67dB$	$C_{dB}=-25dBm$ $M_{dB}= C_{dB} - R_{dB} =17.21dB$ $d_{dBmax}(M_{dB})=3.86dB$	$d_{dB} < d_{dBmax}(M_{dB})$ Pass

Note:

R_{dB} : is the corresponding reference measurement level in dB for the lead model.

V_{dB} : is the variant spot-check level in dB.

d_{dB} : is the deviation data.

C_{dB} : is the compliance threshold.

M_{dB} : is the margin in dB from the compliance limit.

d_{dBmax} : is the maximum deviation d_{dB} .

2 Test Configuration

2.1 Test Channel

Band	TX Frequency			RX Frequency		
	Range	Channel	Frequency	Range	Channel	Frequency
GSM 850	Low	128	824.2 MHz	Low	128	869.2 MHz
	Middle	190	836.6 MHz	Middle	190	881.6 MHz
	High	251	848.8 MHz	High	251	893.8 MHz
PCS 1900	Low	512	1850.2 MHz	Low	512	1930.2 MHz
	Middle	661	1880.0 MHz	Middle	661	1960.0 MHz
	High	810	1909.8 MHz	High	810	1989.8 MHz

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
LTE Band 2	1.4MHz	Low	18607	1850.7 MHz	Low	607	1930.7 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19193	1909.3 MHz	High	1193	1989.3 MHz
	3MHz	Low	18615	1851.5 MHz	Low	615	1931.5 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19185	1908.5 MHz	High	1185	1988.5 MHz
	5MHz	Low	18625	1852.5 MHz	Low	625	1932.5 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19175	1907.5 MHz	High	1175	1987.5 MHz
	10MHz	Low	18650	1855 MHz	Low	650	1935 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19150	1905 MHz	High	1150	1985 MHz
	15MHz	Low	18675	1857.5 MHz	Low	675	1937.5 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19125	1902.5 MHz	High	1125	1982.5 MHz
	20MHz	Low	18700	1860 MHz	Low	700	1940 MHz
		Middle	18900	1880 MHz	Middle	900	1960 MHz
		High	19100	1900 MHz	High	1100	1980 MHz
LTE Band 4	1.4MHz	Low	19957	1710.7 MHz	Low	1957	2110.7 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20393	1754.3 MHz	High	2393	2154.3 MHz
	3MHz	Low	19965	1711.5 MHz	Low	1965	2111.5 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20385	1753.5 MHz	High	2385	2153.5 MHz
	5MHz	Low	19975	1712.5 MHz	Low	1975	2112.5 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20375	1752.5 MHz	High	2375	2152.5 MHz
	10MHz	Low	20000	1715 MHz	Low	2115	2115 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20350	1750 MHz	High	2350	2150 MHz
	15MHz	Low	20025	1717.5 MHz	Low	2025	2117.5 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20325	1747.5 MHz	High	2325	2147.5 MHz
	20MHz	Low	20050	1720 MHz	Low	2050	2120 MHz
		Middle	20175	1732.5 MHz	Middle	2175	2132.5MHz
		High	20300	1745 MHz	High	2300	2145 MHz
LTE Band 5	1.4MHz	Low	20407	824.7 MHz	Low	2407	869.7 MHz
		Middle	20525	836.5 MHz	Middle	2525	881.5 MHz
		High	20643	848.3 MHz	High	2643	893.3 MHz
	3MHz	Low	20415	825.5 MHz	Low	2415	870.5 MHz
		Middle	20525	836.5 MHz	Middle	2525	881.5 MHz
		High	20635	847.5 MHz	High	2635	892.5 MHz
	5MHz	Low	20425	826.5 MHz	Low	2425	871.5 MHz

Band	Bandwidth	TX Frequency			RX Frequency				
		Range	Channel	Frequency	Range	Channel	Frequency		
LTE Band 7	10MHz	Middle	20525	836.5 MHz	Middle	2525	881.5 MHz		
		High	20625	846.5 MHz	High	2625	891.5 MHz		
		Low	20450	829 MHz	Low	2450	874 MHz		
	10MHz		20525	836.5 MHz		2525	881.5 MHz		
			20600	844 MHz		2600	889 MHz		
	5MHz	Low	20775	2502.5 MHz	Low	2775	2622.5 MHz		
LTE Band 12			21100	2535 MHz		3100	2655 MHz		
			21425	2567.5 MHz		3425	2687.5 MHz		
10MHz			20800	2505 MHz	Low	2800	2625 MHz		
			21100	2535 MHz		3100	2655 MHz		
			21400	2565 MHz		3400	2685 MHz		
15MHz	Low	20825	2507.5 MHz	Low	2825	2627.5 MHz			
		21100	2535 MHz		3100	2655 MHz			
		21375	2562.5 MHz		3375	2682.5 MHz			
20MHz	Low	20850	2510 MHz	Low	2850	2630 MHz			
		21100	2535 MHz		3100	2655 MHz			
		21350	2560 MHz		3350	2680 MHz			
LTE Band 13	1.4MHz	Low	23017	699.7 MHz	Low	5017	729.7 MHz		
			23095	707.5 MHz		5095	737.5 MHz		
			23173	715.3 MHz		5173	745.3 MHz		
	3MHz	Low	23025	700.5 MHz	Low	5025	730.5 MHz		
			23095	707.5 MHz		5095	737.5 MHz		
			23165	714.5 MHz		5165	744.5 MHz		
	5MHz	Low	23035	701.5 MHz	Low	5035	731.5 MHz		
			23095	707.5 MHz		5095	737.5 MHz		
			23155	713.5 MHz		5155	743.5 MHz		
LTE Band 17	10MHz	Low	23060	704 MHz	Low	5060	734 MHz		
			23095	707.5 MHz		5095	737.5 MHz		
			23130	711 MHz		5130	741 MHz		
	5MHz	Low	23205	779.5 MHz	Low	5205	748.5 MHz		
			23230	782 MHz		5230	751 MHz		
			23255	784.5 MHz		5255	753.5 MHz		
LTE Band 25	10MHz	Low	23230	782 MHz	Low	5230	751 MHz		
			23230	782 MHz		5230	751 MHz		
			23230	782 MHz		5230	751 MHz		
	5MHz	Low	23755	706.5 MHz	Low	5755	736.5 MHz		
			23790	710 MHz	Middle	5790	740 MHz		
			23825	713.5 MHz		5825	743.5 MHz		
	10MHz	Low	23780	709 MHz	Low	5780	739 MHz		
			23790	710 MHz		5790	740 MHz		
			23800	711 MHz		5800	741 MHz		
	1.4MHz	Low	26047	1850.7 MHz	Low	8047	1930.7 MHz		
			26365	1882.5 MHz		8365	1962.5 MHz		
			26683	1914.3 MHz		8683	1994.3 MHz		
	3MHz	Low	26055	1851.5 MHz	Low	8055	1931.5 MHz		
			26365	1882.5 MHz		8365	1962.5 MHz		
			26675	1913.5 MHz		8675	1993.5 MHz		
	5MHz	Low	26065	1852.5 MHz	Low	8065	1932.5 MHz		
			26365	1882.5 MHz		8365	1962.5 MHz		
			26665	1912.5 MHz		8665	1992.5 MHz		
	10MHz	Low	26090	1855 MHz	Low	8090	1935 MHz		
			26365	1882.5 MHz		8365	1962.5 MHz		
			26640	1910 MHz		8640	1990 MHz		
	15MHz	Low	26115	1857.5 MHz	Low	8115	1937.5 MHz		
			26365	1882.5 MHz	Middle	8365	1962.5 MHz		
			26615	1907.5 MHz		8615	1987.5 MHz		

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
LTE Band 26 (814-824)	20MHz	Low	26140	1860 MHz	Low	8140	1940 MHz
		Middle	26365	1882.5 MHz	Middle	8365	1962.5 MHz
		High	26590	1905 MHz	High	8590	1985 MHz
	1.4MHz	Low	26697	814.7 MHz	Low	8697	859.7 MHz
		Middle	26740	819 MHz	Middle	8740	864MHz
		High	26783	823.3 MHz	High	8783	868.3 MHz
	3MHz	Low	26705	815.5 MHz	Low	8705	860.5 MHz
		Middle	26740	819 MHz	Middle	8740	864MHz
		High	26775	822.5 MHz	High	8775	867.5 MHz
	5MHz	Low	26715	816.5 MHz	Low	8715	861.5 MHz
		Middle	26740	819 MHz	Middle	8740	864MHz
		High	26765	821.5 MHz	High	8765	866.5 MHz
	10MHz	Low	26740	819 MHz	Low	8740	864MHz
		Middle	26740	819 MHz	Middle	8740	864MHz
		High	26740	819 MHz	High	8740	864MHz
LTE Band 26 (824-849)	1.4MHz	Low	26797	824.7 MHz	Low	8797	869.7 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	27033	848.3 MHz	High	9033	893.3 MHz
	3MHz	Low	26805	825.5 MHz	Low	8805	870.5 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	27025	847.5 MHz	High	9025	892.5 MHz
	5MHz	Low	26815	826.5 MHz	Low	8815	871.5 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	27015	846.5 MHz	High	9015	891.5 MHz
	10MHz	Low	26840	829 MHz	Low	8840	844 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	26990	844 MHz	High	8990	889 MHz
	15MHz	Low	26865	831.5 MHz	Low	8865	876.5 MHz
		Middle	26915	836.5 MHz	Middle	8915	881.5 MHz
		High	26965	841.5 MHz	High	8965	886.5 MHz
LTE Band 38	5MHz	Low	37775	2572.5 MHz	Low	37775	2572.5 MHz
		Middle	38000	2595 MHz	Middle	38000	2595 MHz
		High	38225	2617.5 MHz	High	38225	2617.5 MHz
	10MHz	Low	37800	2575 MHz	Low	37800	2575 MHz
		Middle	38000	2595 MHz	Middle	38000	2595 MHz
		High	38200	2615 MHz	High	38200	2615 MHz
	15MHz	Low	37825	2577.5 MHz	Low	37825	2577.5 MHz
		Middle	38000	2595 MHz	Middle	38000	2595 MHz
		High	38175	2612.5 MHz	High	38175	2612.5 MHz
	20MHz	Low	37850	2580 MHz	Low	37850	2580 MHz
		Middle	38000	2595 MHz	Middle	38000	2595 MHz
		High	38150	2610 MHz	High	38150	2610 MHz
LTE Band 41 (2496-2690)	5MHz	Low	39675	2498.5 MHz	Low	39675	2498.5 MHz
		Middle	40620	2593 MHz	Middle	40620	2593 MHz
		High	41565	2687.5 MHz	High	41565	2687.5 MHz
	10MHz	Low	39700	2501 MHz	Low	39700	2501 MHz
		Middle	40620	2593 MHz	Middle	40620	2593 MHz
		High	41540	2685 MHz	High	41540	2685 MHz
	15MHz	Low	39725	2503.5 MHz	Low	39725	2503.5 MHz
		Middle	40620	2593 MHz	Middle	40620	2593 MHz
		High	41515	2682.5 MHz	High	41515	2682.5 MHz
	20MHz	Low	39750	2506 MHz	Low	39750	2506 MHz
		Middle	40620	2593 MHz	Middle	40620	2593 MHz
		High	41490	2680 MHz	High	41490	2680 MHz
	1.4MHz	Low	131979	1710.7 MHz	Low	66443	2110.7 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz

Band	Bandwidth	TX Frequency			RX Frequency		
		Range	Channel	Frequency	Range	Channel	Frequency
3MHz	3MHz	High	132665	1779.3 MHz	High	67129	2179.3 MHz
		Low	131987	1711.5 MHz	Low	66451	2111.5 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132657	1778.5MHz	High	67121	2178.5MHz
5MHz	5MHz	Low	131997	1712.5 MHz	Low	66461	2112.5 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132647	1777.5 MHz	High	67111	2177.5 MHz
10MHz	10MHz	Low	132022	1715 MHz	Low	66486	2115 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132622	1775 MHz	High	67086	2175 MHz
15MHz	15MHz	Low	132047	1717.5 MHz	Low	66511	2117.5 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132597	1772.5 MHz	High	67061	2172.5 MHz
20MHz	20MHz	Low	132072	1720 MHz	Low	66536	2120 MHz
		Middle	132322	1745 MHz	Middle	66786	2145MHz
		High	132572	1770 MHz	High	67036	2170 MHz

2.2 Test Mode

Test Mode	Description
TM 1	EUT communication with simulated station in GMSK mode
TM 2	EUT communication with simulated station in LTE/QPSK mode
TM 3	EUT communication with simulated station in LTE/16QAM mode

2.3 Support Unit used in test

Description	Manufacturer	Model	Serial Number
Development Board*	QUECTEL	EG912U-GL-TE-A	D1Y25F61V000070
Development Board*	QUECTEL	UMTS<E-EVB	MP825E80C000107

Remark: *the information are provided by applicant.

2.4 Test Environment

Temperature:	Normal: 15°C ~ 35°C
Relative Humidity	45 ~ 56 % RH Ambient
Voltage:	Nominal: 3.8 Vdc, Extreme: Low 3.3 Vdc, High 4.3 Vdc

2.5 Test RF Cable

For all conducted test items: The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

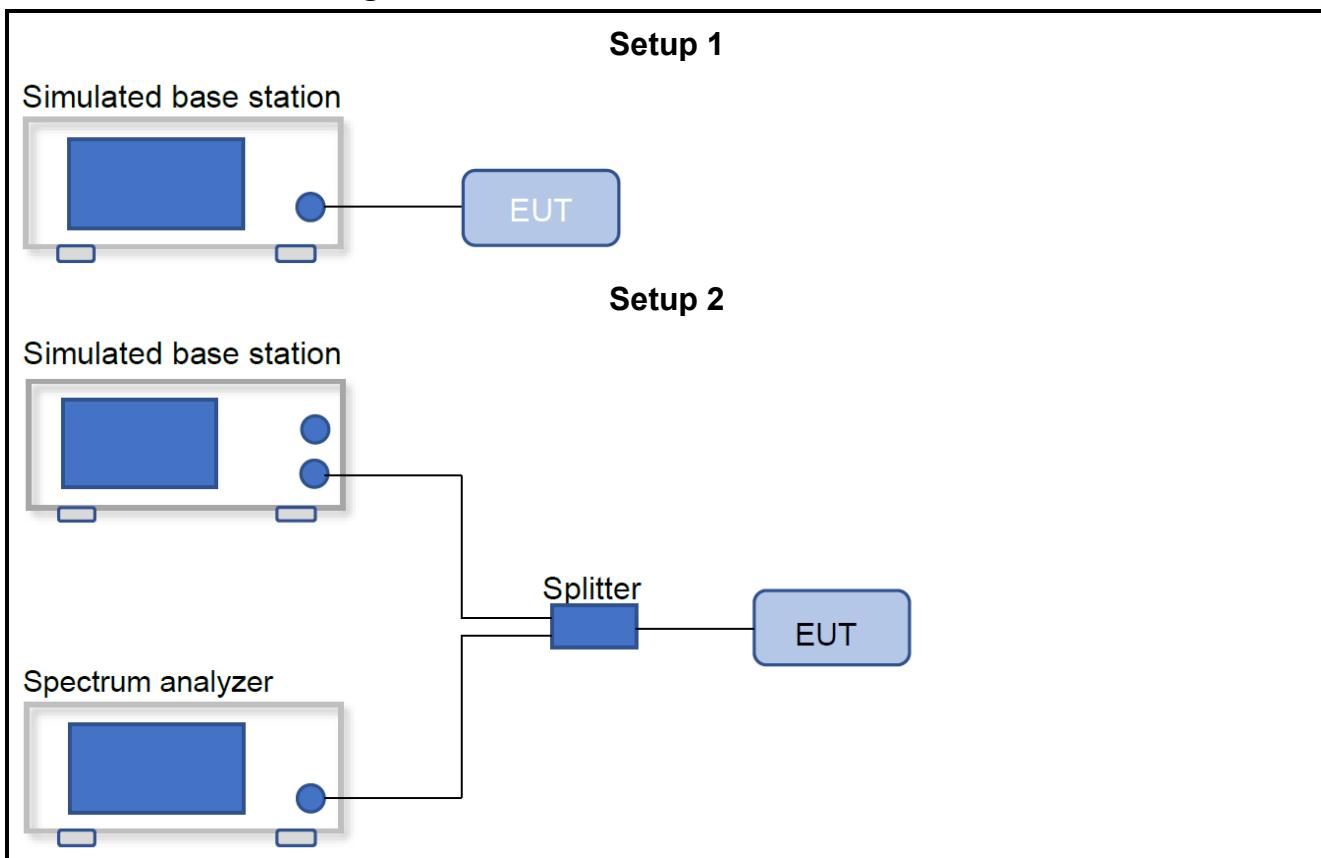
Offset = RF cable loss + attenuator factor.

2.6 Modifications

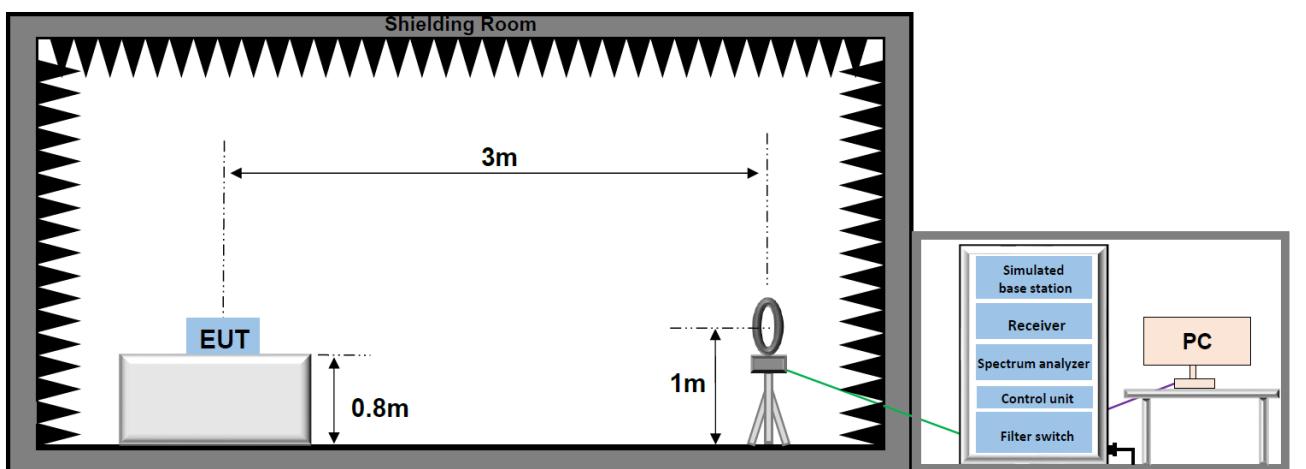
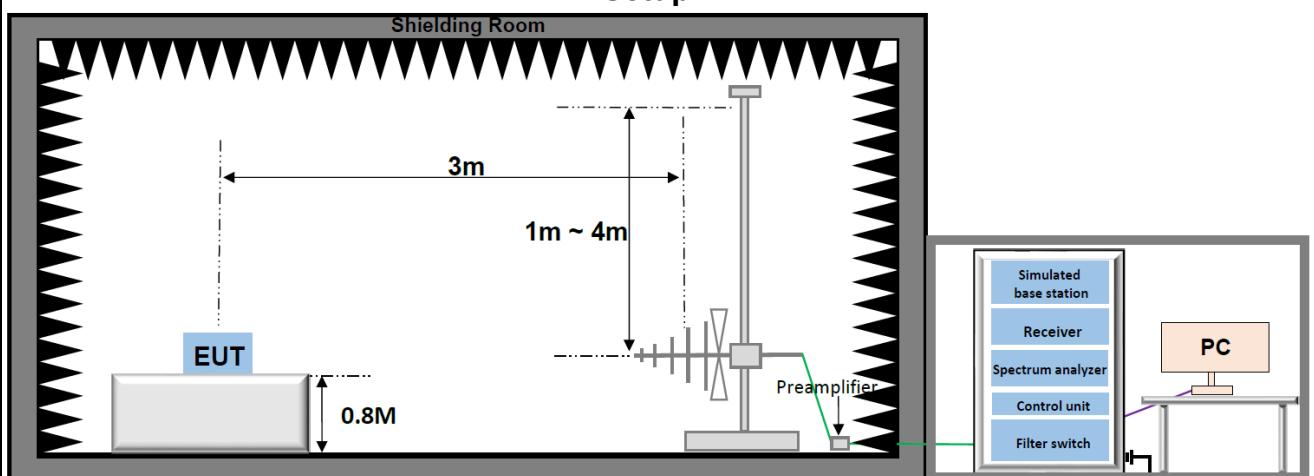
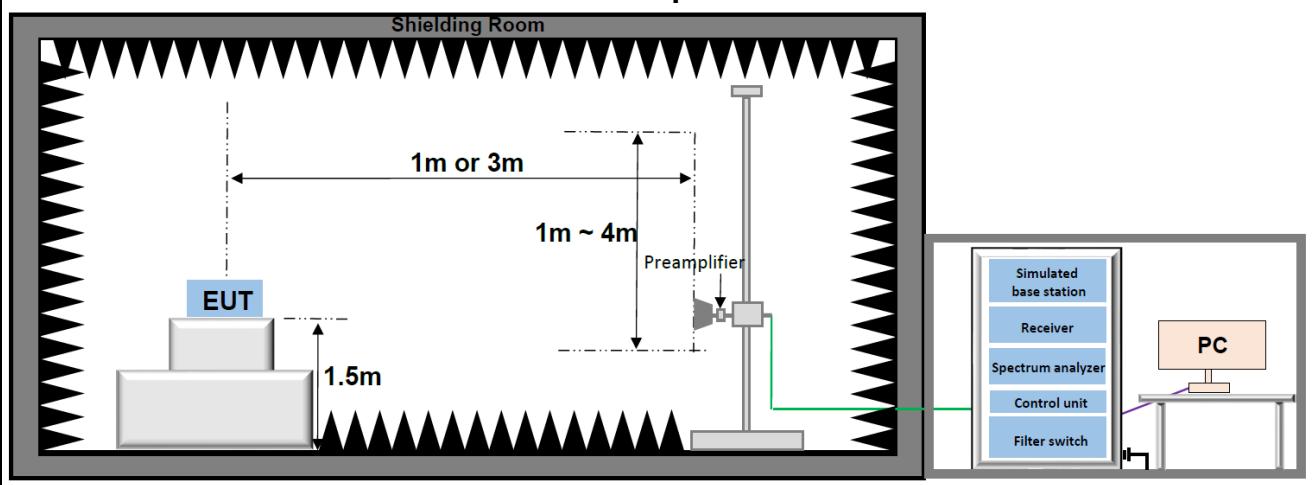
No modifications were made during testing.

2.7 Test Setup Diagram

2.7.1 Conducted Configuration



2.7.2 Radiated Configuration

Setup 1**Setup 2****Setup 3**

3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable recognized national standards.

3.1 Test Equipment List

RF Conducted 04					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Radio Communication Analyzer	Anritsu	MT8821C	6262170436	2025/03/14	2026/03/13
Signal Analyzer	Keysight	N9020A	US46220152	2025/03/14	2026/03/13
Signal Generator	Keysight	N5182A	MY49060761	2025/03/11	2026/03/10
Signal Generator	R&S	SMR20	101691	2025/03/11	2026/03/10
Hygrometer	BingYu	HTC-1	N/A	2025/05/29	2027/05/28
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
Band Reject Filter Group	Tonscend	JS0806-F	23B806F0662	N/A	N/A
RF Control Unit	Tonscend	JS0806-1	22L8060650	N/A	N/A
Measurement Software	Tonscend	TS1120 V3.1.46	10636	N/A	N/A

Radiated Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Biconic Logarithmic Periodic Antennas	Schwarzbeck	VULB9163	1643	2023/06/25	2026/06/24
Double-Ridged Horn Antennas	Schwarzbeck	BBHA 9120D	2809	2023/06/25	2026/06/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	1290	2023/06/25	2026/06/24
Loop Antenna	Schwarzbeck	FMZB 1519C	1519C-028	2023/06/29	2026/06/28
Signal Analyzer	Keysight	N9020A	MY49100252	2025/03/11	2026/03/10
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
Wideband Radio Communication Tester	R&S	CMW500	150645	2025/03/11	2026/03/10
Low Noise Amplifier	Tonscend	TAP9K3G40	AP23A8060273	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP01018050	AP22G806258	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP18040048	AP22G806247	2025/03/11	2027/03/10
Hygrometer	BINGYU	HTC-1	N/A	2025/07/25	2026/07/26
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A

3.2 Measurement Uncertainty

Parameter	U_{lab}
Frequency error	50.30Hz
Output Power	0.76dB
Conducted spurious emissions	2.22dB
Radiated Emissions(9kHz~30MHz)	2.40dB
Radiated Emissions(30MHz~1000MHz)	4.66dB
Radiated Emissions(1GHz~18GHz)	5.42dB
Radiated Emissions(18GHz~40GHz)	5.46dB

Uncertainty figures are valid to a confidence level of 95%

4 Test Results

4.1 Output Power (ERP / EIRP / Conducted Power)

Limits

FCC Part	Test Band	Limit
§22.913(a)(5)	LTE Band 5/26(824 ~ 849MHz)	The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.
§24.232(c)	LTE Band 2/25	Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.
§27.50(h)(2)	LTE Band 7/38/41	Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power
§27.50(d)(4)	LTE Band 4/66	Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780MHz bands are limited to 1watt EIRP. Fixed stations operating in the 1710-1755MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.
§27.50(c)(10)	LTE Band 12/17	Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3watts ERP.
§27.50(b)(9)	LTE Band 13	Control stations and mobile stations transmitting in the 746–757 MHz, 776–788 MHz, and 805–806 MHz bands and fixed stations transmitting in the 787–788 MHz and 805–806 MHz bands are limited to 30 watts ERP.
§90.635(b)	LTE Band 26(814~824MHz)	The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

Test Procedure

KDB 971168 D01 V03r01 Section 5.2.1, for Conducted Output Power

KDB 971168 D01 V03r01 Section 5.2, for Effective (Isotropic) Radiated Power

Test Settings

Conducted Output Power:

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated base station. The simulated station was set to force the EUT to its maximum power setting, Transmitter output power was read off in dBm, read values have added cable loss and attenuation.

Radiated Power:

The formula for calculating ERP/EIRP based on conduction power is as follows:

EIRP (dBm) = Conducted Power (dBm) + antenna gain (dBi)

ERP=EIRP - 2.15dB

Test Setup

Refer to section 2.7.1 Setup 1

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Results

The detailed test data see: **Spot Check Verification Data**.

4.2 Field Strength of Spurious Radiation

Limits

FCC part	Test Band	Limit
§2.1053 §22.917(a) §24.238(a) §27.53(g) §27.53(h)	GSM850/LTE Band 5/26(824 ~ 849MHz) GSM1900/LTE Band 2/25 LTE Band 12/17 LTE Band 4/66	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
§27.53(c)(f)	LTE Band 13	On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB; For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.
§27.53(m)	LTE Band 7/38/41	All frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
§90.691	LTE Band 26(814~824MHz)	The power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ decibels or 80 decibels, whichever is the lesser attenuation.

Test Procedure

KDB 971168 D01 V03r01 Section 7

Test Settings

1. For radiated emissions measurements performed at frequencies less than or equal to 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the reference ground plane.
2. For radiated emissions measurements performed at frequencies above 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 150cm above the ground plane.
3. Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1m to 4m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e, field strength or received power), when orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25cm.
4. For each suspected emission, the EUT was ranged its worst case and then tune the antenna tower(from 1~4m) and turntable(from 0~360°) find the maximum reading. Preamplifier and a high pass filter are used for the test in order get better signal level comply with the guidelines.
5. The simulated base station was set to force the EUT to its maximum transmitting power.
6. spectrum analyzer setting:

Measurements 9kHz ~150kHz: RBW = 300Hz; VBW \geq 3kHz; Detector = RMS

Measurements 150kHz ~30MHz: RBW = 10kHz; VBW \geq 30kHz; Detector = RMS

Measurements 30MHz~1000MHz: RBW = 100kHz or 1MHz; VBW \geq 1MHz or 3MHz; Detector = RMS

Measurements Above 1000MHz: RBW = 1 MHz; VBW \geq 3 MHz; Detector = RMS

7. The field strength is calculated by adding the Antenna Factor, Cable Factor. The basic equation with a sample calculation is as follows:

$E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level } (\text{dB}\mu\text{V}) + \text{Cable Loss } (\text{dB}) + \text{Antenna Factor } (\text{dB}/\text{m})$.

$E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level } (\text{dBm}) + 107 + \text{Cable Loss } (\text{dB}) + \text{Antenna Factor } (\text{dB}/\text{m})$.

$E(\text{dBuV}/\text{m}) = \text{EIRP}(\text{dBm}) - 20\log(D) + 104.8$; where D is the measurement distance(in the far field region) in m.

$\text{EIRP}(\text{dBm}) = E(\text{dB}\mu\text{V}/\text{m}) + 20\log(D) - 104.8$; where D is the measurement distance(in the far field region) in m.

So, from d: The measuring distance is usually at 3m, then $20\log(3)=9.5424$

Then, $\text{EIRP } (\text{dBm}) = E(\text{dB}\mu\text{V}/\text{m}) + 9.5424 - 104.8 = E(\text{dB}\mu\text{V}/\text{m}) - 95.2576$

8. Repeat above procedures until all frequencies measured was complete.

9. Measure and record the results in the test report.

Test notes

1. This device employs GSM, GPRS capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
3. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
4. Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 1GHz. the disturbance between 9kHz to 30MHz, 30MHz-1GHz and 18GHz to 40GHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be recorded, so only the harmonics had been displayed.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Test Setup

Refer to section 2.7.2 for details.

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result

The detailed test data see: **Spot Check Verification Data**.

5 Test Setup Photos

The detailed test data see: **Appendix-A WWAN Setup Photos**

~The End~