



802.11ax HE20 CH52

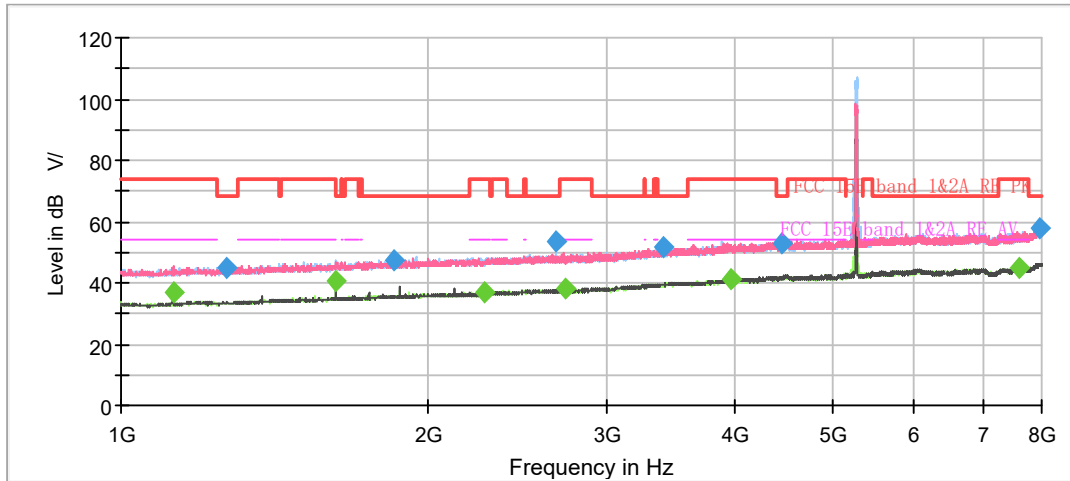

Radiates Emission from 1GHz to 8GHz
Note: The signal beyond the limit is carrier.

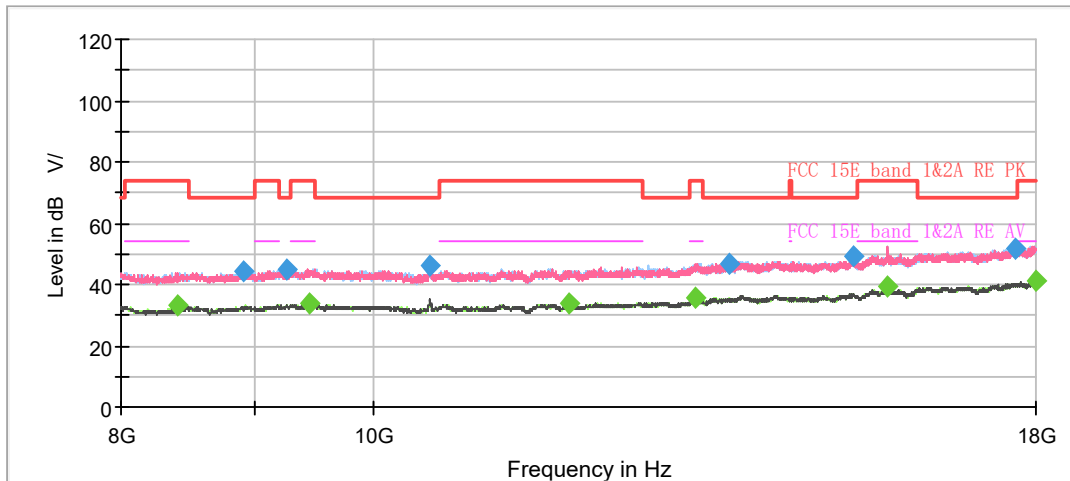


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.03	54.00	16.97	500.0	200.0	V	283.0	2.4
1266.875000	45.19	---	68.20	23.01	500.0	200.0	V	147.0	3.2
1624.750000	---	40.55	54.00	13.45	500.0	200.0	V	264.0	5.0
1854.000000	47.52	---	68.20	20.68	500.0	100.0	V	200.0	6.0
2269.625000	---	36.69	54.00	17.31	500.0	200.0	H	48.0	7.5
2673.875000	53.37	---	68.20	14.83	500.0	200.0	H	48.0	8.7
2733.375000	---	38.02	54.00	15.98	500.0	200.0	V	339.0	8.7
3408.000000	51.75	---	68.20	16.45	500.0	100.0	V	19.0	10.8
3971.500000	---	41.19	54.00	12.81	500.0	200.0	V	314.0	12.1
4447.500000	53.00	---	68.20	15.20	500.0	100.0	H	178.0	13.1
7601.875000	---	44.80	54.00	9.20	500.0	200.0	V	178.0	18.4
7960.625000	57.60	---	68.20	10.60	500.0	200.0	V	77.0	19.7


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH60

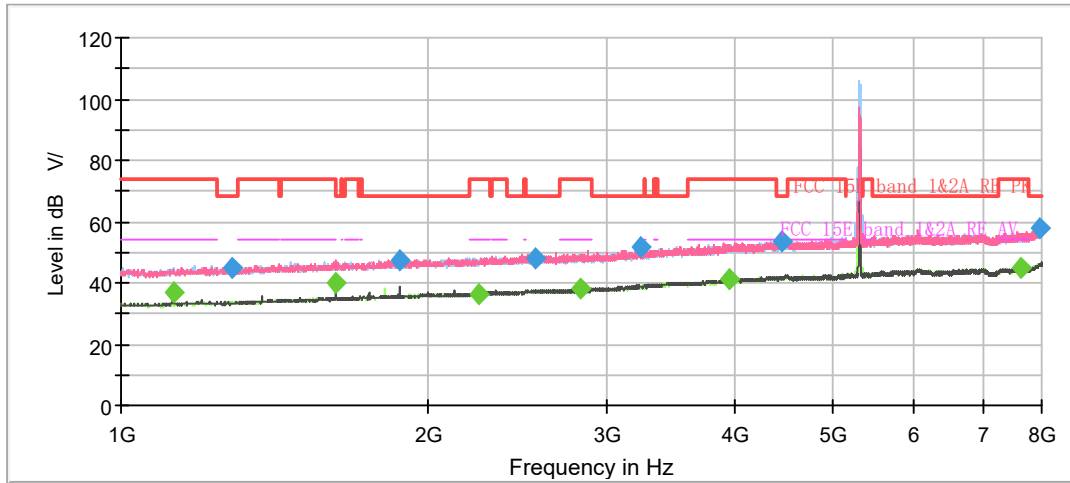

Radiates Emission from 1GHz to 8GHz
Note: The signal beyond the limit is carrier.

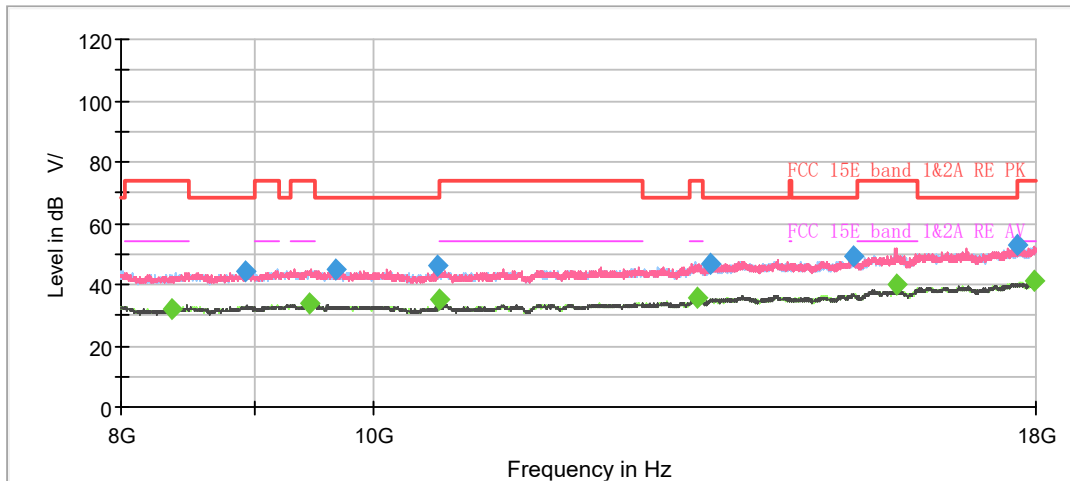


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.72	54.00	17.28	500.0	200.0	V	286.0	2.4
1286.125000	45.11	---	68.20	23.09	500.0	100.0	V	254.0	3.3
1624.750000	---	39.92	54.00	14.08	500.0	200.0	H	229.0	5.0
1875.000000	47.64	---	68.20	20.56	500.0	200.0	V	268.0	6.1
2247.750000	---	36.61	54.00	17.39	500.0	200.0	V	280.0	7.4
2550.500000	48.30	---	68.20	19.90	500.0	100.0	H	202.0	8.3
2819.125000	---	38.12	54.00	15.88	500.0	200.0	V	256.0	9.0
3238.250000	51.83	---	68.20	16.37	500.0	200.0	V	0.0	10.3
3952.250000	---	41.25	54.00	12.75	500.0	200.0	V	65.0	12.1
4448.375000	53.25	---	68.20	14.95	500.0	200.0	H	312.0	13.1
7640.375000	---	44.97	54.00	9.03	500.0	200.0	V	355.0	18.6
7970.250000	57.90	---	68.20	10.30	500.0	100.0	H	293.0	19.8


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH64

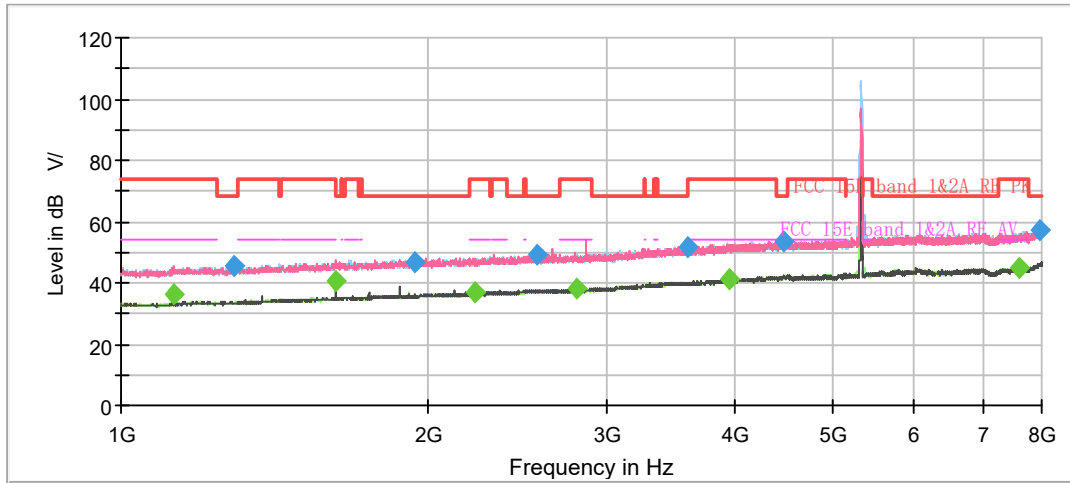

Radiates Emission from 1GHz to 8GHz
Note: The signal beyond the limit is carrier.

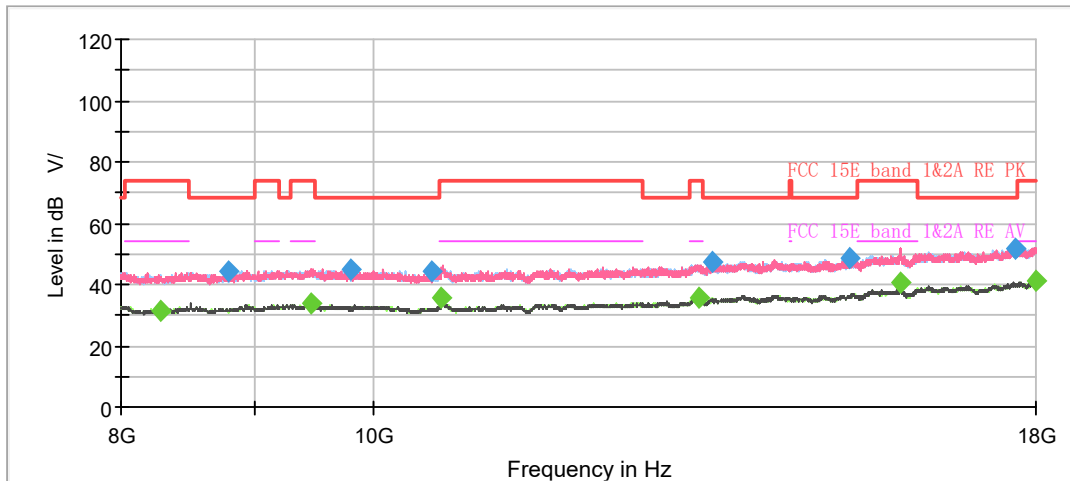


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.39	54.00	17.61	500.0	200.0	V	284.0	2.4
1288.750000	45.51	---	68.20	22.69	500.0	100.0	V	0.0	3.3
1624.750000	---	40.67	54.00	13.33	500.0	200.0	V	339.0	5.0
1938.875000	46.75	---	68.20	21.45	500.0	100.0	H	342.0	6.3
2226.750000	---	36.74	54.00	17.26	500.0	200.0	V	327.0	7.3
2555.750000	49.49	---	68.20	18.71	500.0	200.0	H	159.0	8.4
2797.250000	---	37.98	54.00	16.02	500.0	200.0	V	351.0	9.0
3591.750000	51.49	---	68.20	16.71	500.0	100.0	H	311.0	11.1
3945.250000	---	41.38	54.00	12.62	500.0	100.0	V	76.0	12.1
4474.625000	53.70	---	68.20	14.50	500.0	200.0	V	260.0	13.3
7614.125000	---	44.98	54.00	9.02	500.0	200.0	V	148.0	18.4
7959.750000	57.49	---	68.20	10.71	500.0	200.0	V	141.0	19.7


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH100

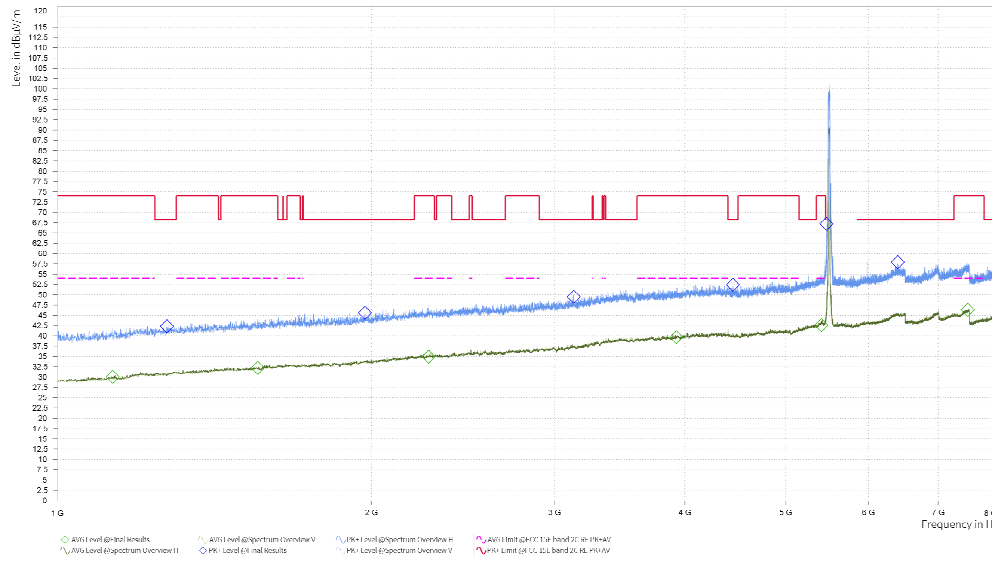

Radiates Emission from 1GHz to 8GHz

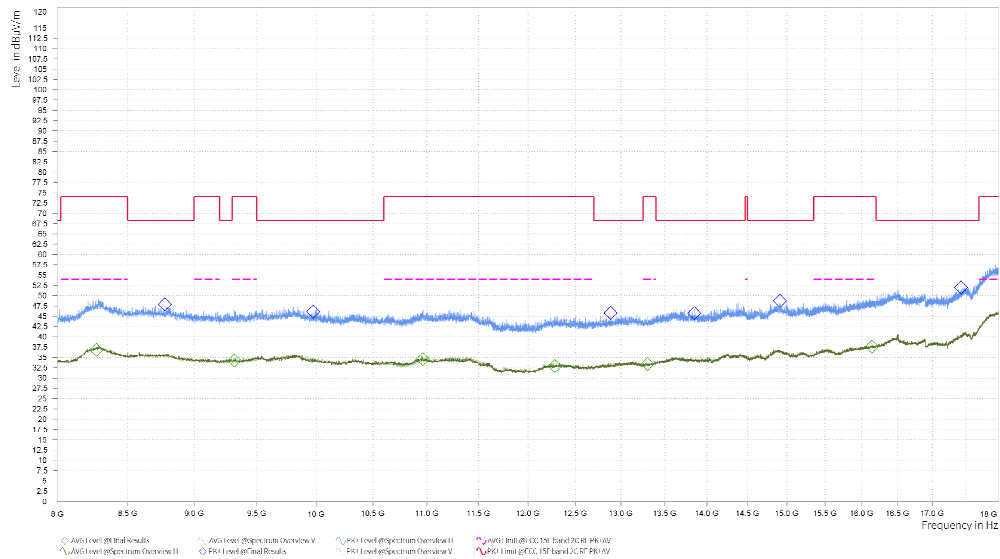


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Pol	Azimuth (deg)	Height (m)	Corr. (dB/m)
1,129.500	---	---	---	30.02	54.00	23.98	1.000	V	89.1	1.00	-5.69
1,273.000	42.32	68.20	25.88	---	---	---	1.000	H	125.3	1.00	-4.22
1,556.500	---	---	---	32.17	54.00	21.83	1.000	H	111.7	1.00	-2.17
1,972.125	45.55	68.20	22.65	---	---	---	1.000	H	33.7	2.00	0.49
2,270.500	---	---	---	34.90	54.00	19.10	1.000	V	133	2.00	2.01
3,128.000	49.45	68.20	18.75	---	---	---	1.000	H	316.6	2.00	4.75
3,925.125	---	---	---	39.66	54.00	14.34	1.000	V	199.3	1.00	7.11
4,448.375	52.39	68.20	15.81	---	---	---	1.000	H	7.5	1.00	8.15
5,408.250	---	---	---	42.59	54.00	11.41	1.000	V	133	2.00	11.61
5,468.625	67.21	68.20	0.99	---	---	---	1.000	V	171.8	1.00	10.77
6,403.125	57.89	68.20	10.31	---	---	---	1.000	H	82	2.00	13.25
7,474.125	---	---	---	46.28	54.00	7.72	1.000	V	105.7	2.00	13.22


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH116

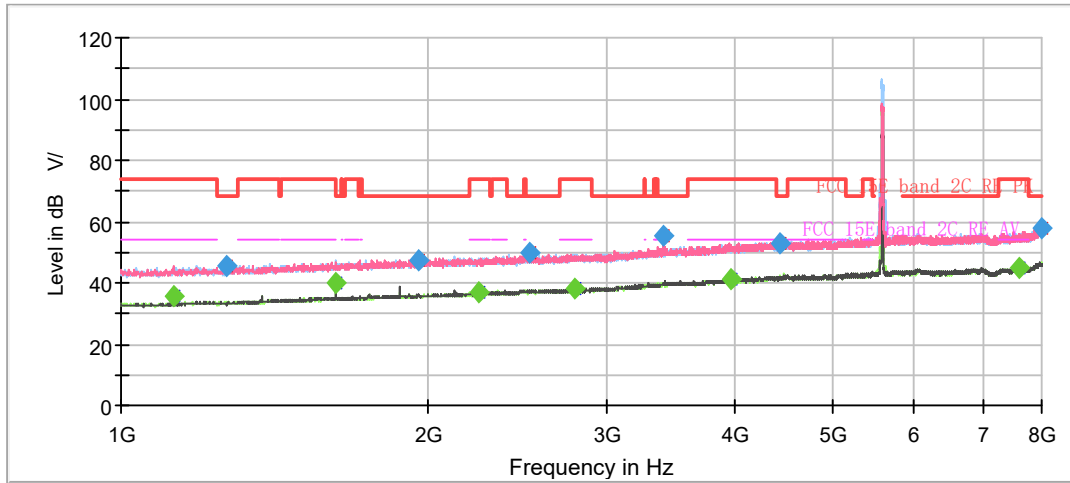

Radiates Emission from 1GHz to 8GHz
Note: The signal beyond the limit is carrier.

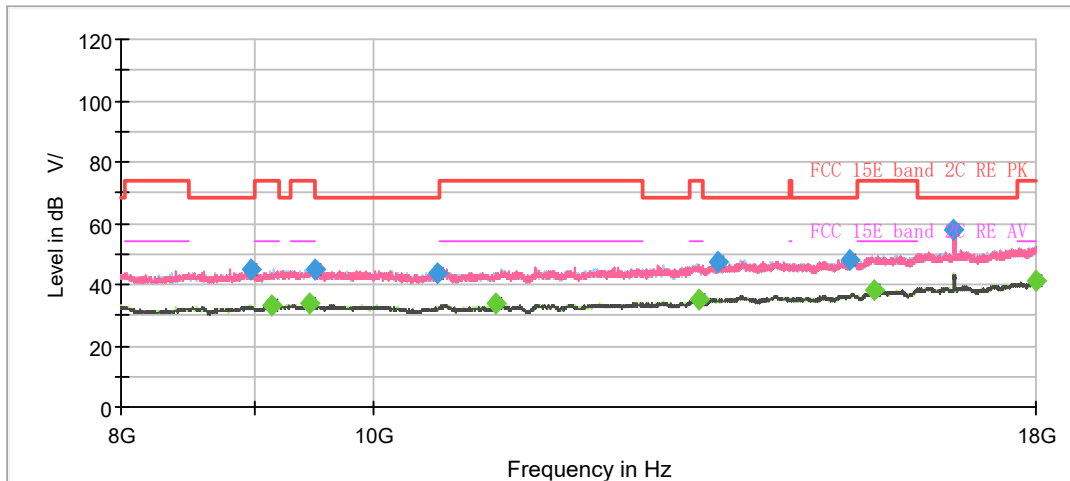


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	35.99	54.00	18.01	500.0	200.0	V	277.0	2.4
1270.375000	45.75	---	68.20	22.45	500.0	100.0	V	259.0	3.2
1624.750000	---	40.30	54.00	13.70	500.0	200.0	H	228.0	5.0
1954.625000	47.58	---	68.20	20.62	500.0	200.0	H	209.0	6.3
2246.000000	---	36.64	54.00	17.36	500.0	200.0	H	147.0	7.4
2512.875000	49.61	---	68.20	18.59	500.0	100.0	H	36.0	8.2
2791.125000	---	38.31	54.00	15.69	500.0	200.0	H	259.0	8.9
3399.250000	55.12	---	68.20	13.08	500.0	200.0	V	206.0	10.8
3972.375000	---	41.46	54.00	12.54	500.0	200.0	H	346.0	12.1
4432.625000	53.05	---	68.20	15.15	500.0	100.0	H	36.0	13.1
7608.000000	---	44.82	54.00	9.18	500.0	200.0	H	23.0	18.4
7998.250000	57.97	---	68.20	10.23	500.0	200.0	H	0.0	19.9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH140

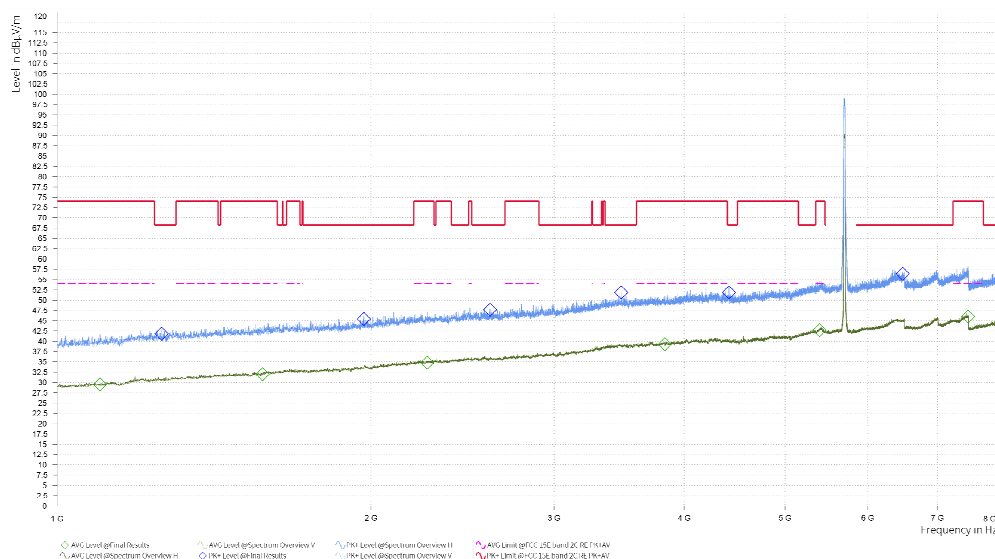

Radiates Emission from 1GHz to 8GHz




Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	MaxPeak Limit (dBμV/m)	MaxPeak Margin (dB)	Average (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)	Meas. Time (s)	Pol	Azimuth (deg)	Height (m)	Corr. (dB/m)
1,098.875	---	---	---	29.51	54.00	24.49	1.000	H	1.3	2.00	-6.03
1,259.000	41.85	68.20	26.35	---	---	---	1.000	V	247.7	1.00	-4.31
1,574.000	---	---	---	31.97	54.00	22.03	1.000	V	330.5	1.00	-1.95
1,969.500	45.40	68.20	22.80	---	---	---	1.000	H	186.7	1.00	0.47
2,266.125	---	---	---	34.81	54.00	19.19	1.000	H	262.8	1.00	1.97
2,603.000	47.63	68.20	20.57	---	---	---	1.000	H	88.6	2.00	3.01
3,478.875	51.86	68.20	16.34	---	---	---	1.000	V	205	2.00	6.44
3,832.375	---	---	---	39.29	54.00	14.71	1.000	H	54.2	2.00	6.99
4,415.125	51.83	68.20	16.37	---	---	---	1.000	H	19.9	2.00	8.23
5,394.250	---	---	---	42.67	54.00	11.33	1.000	V	4.9	2.00	11.35
6,482.750	56.40	68.20	11.80	---	---	---	1.000	H	150.8	2.00	12.88
7,491.625	---	---	---	45.98	54.00	8.02	1.000	H	116.1	2.00	13.16


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH144

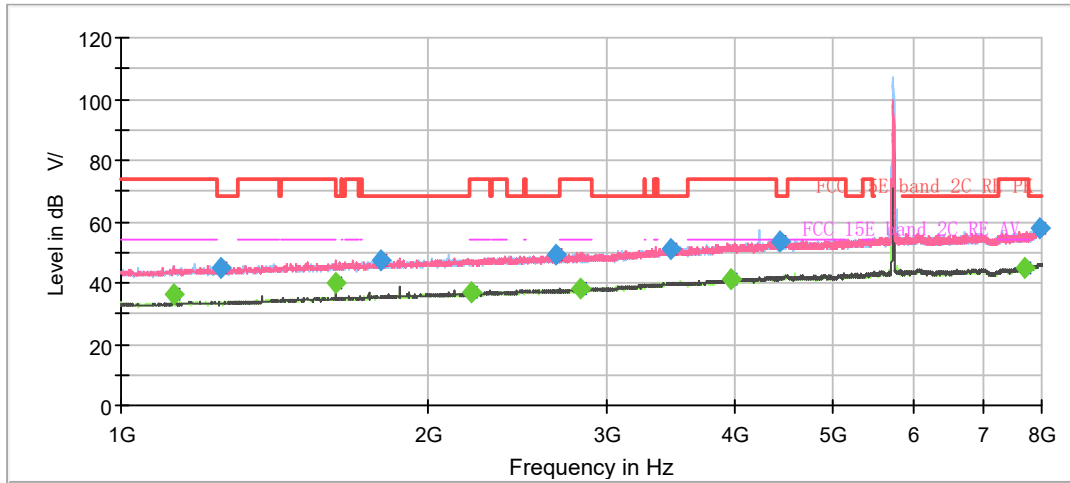

Radiates Emission from 1GHz to 8GHz
Note: The signal beyond the limit is carrier.

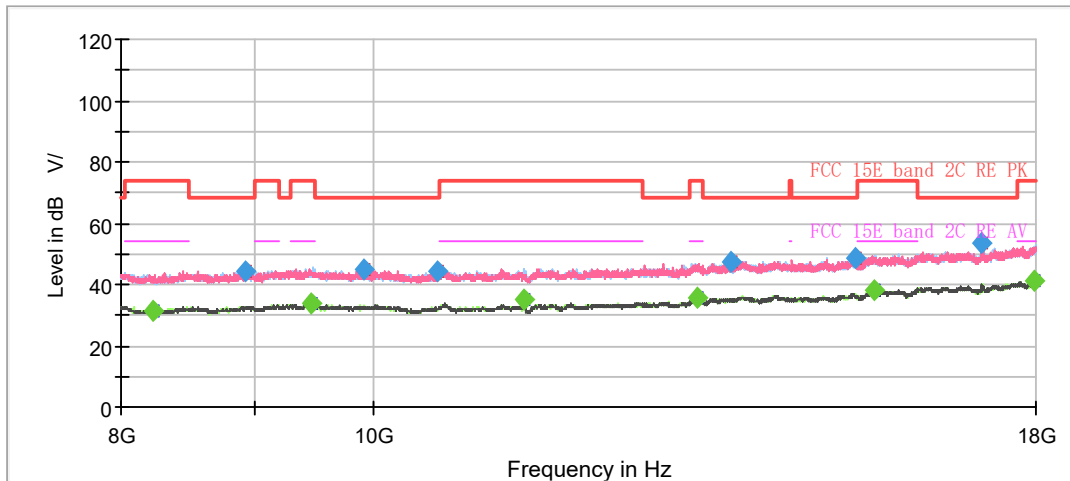


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.40	54.00	17.60	500.0	200.0	V	282.0	2.4
1254.625000	45.11	---	68.20	23.09	500.0	200.0	V	209.0	3.1
1624.750000	---	40.16	54.00	13.84	500.0	200.0	V	115.0	5.0
1797.125000	47.69	---	68.20	20.51	500.0	100.0	V	280.0	5.7
2201.375000	---	36.63	54.00	17.37	500.0	100.0	H	37.0	7.2
2670.375000	49.45	---	68.20	18.75	500.0	200.0	H	187.0	8.6
2827.875000	---	38.16	54.00	15.84	500.0	200.0	V	157.0	9.1
3457.000000	51.23	---	68.20	16.97	500.0	100.0	H	0.0	10.9
3972.375000	---	41.30	54.00	12.70	500.0	100.0	H	127.0	12.1
4421.250000	53.74	---	68.20	14.46	500.0	200.0	V	293.0	13.0
7701.625000	---	45.01	54.00	8.99	500.0	200.0	H	292.0	18.8
7963.250000	57.62	---	68.20	10.58	500.0	200.0	V	90.0	19.8


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax HE20 CH149

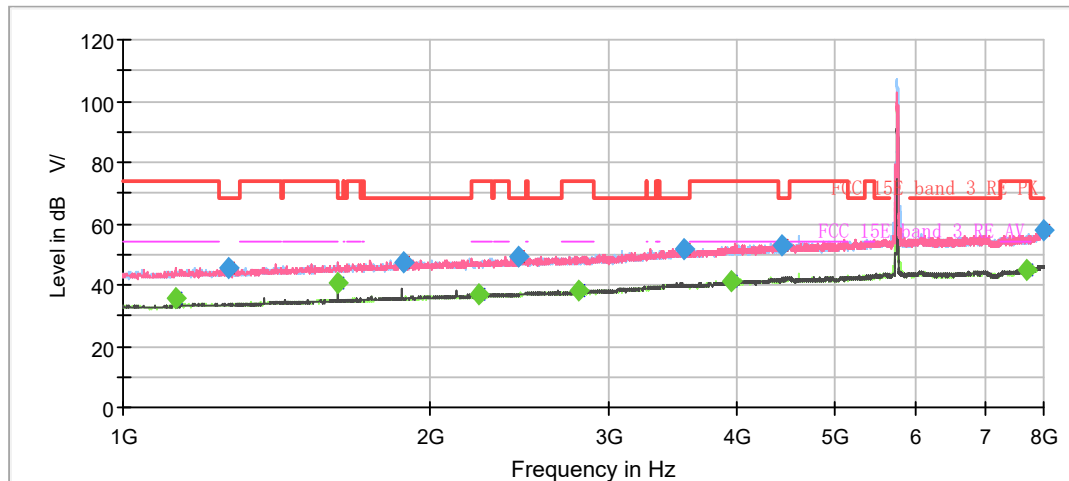

Radiates Emission from 1GHz to 8GHz
Note: The signal beyond the limit is carrier.

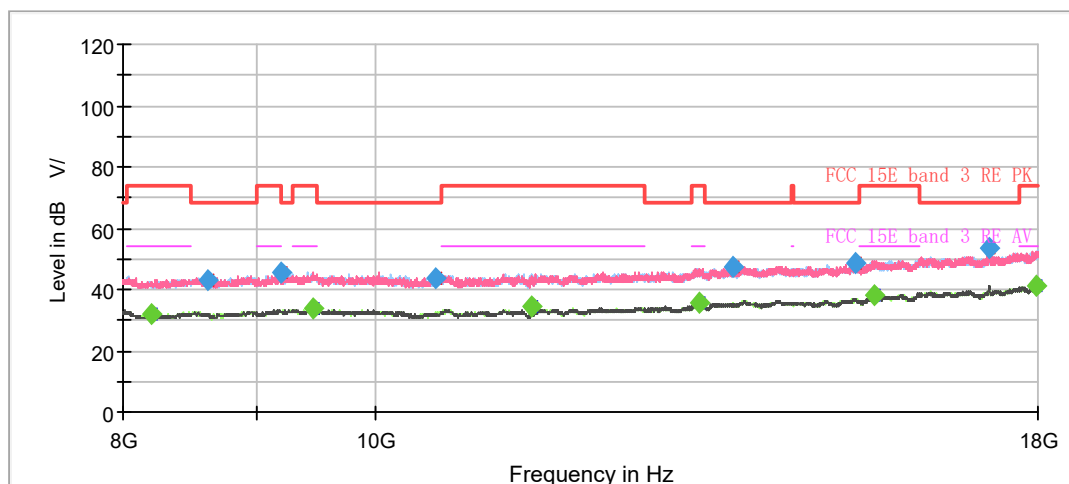

Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	35.97	54.00	18.03	500.0	200.0	V	276.0	2.4
1266.875000	45.40	---	68.20	22.80	500.0	200.0	H	344.0	3.2
1624.750000	---	40.65	54.00	13.35	500.0	200.0	V	153.0	5.0
1884.625000	47.52	---	68.20	20.68	500.0	200.0	H	327.0	6.1
2237.250000	---	36.74	54.00	17.26	500.0	200.0	H	198.0	7.4
2444.625000	49.47	---	68.20	18.73	500.0	200.0	V	190.0	8.1
2796.375000	---	37.86	54.00	16.14	500.0	200.0	V	196.0	9.0
3554.125000	51.89	---	68.20	16.31	500.0	200.0	V	184.0	11.1
3951.375000	---	41.28	54.00	12.72	500.0	100.0	H	57.0	12.1
4428.250000	53.16	---	68.20	15.04	500.0	200.0	V	276.0	13.1
7713.875000	---	44.88	54.00	9.12	500.0	100.0	V	343.0	18.9
7991.250000	58.13	---	68.20	10.07	500.0	100.0	V	187.0	19.9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average