

Report No.: SEWA2303000029RG02

Rev.: 01

Page: 1 of 61

### **TEST REPORT**

**Application No.:** SEWA2303000029RG

Applicant: Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Address of Applicant:

Road, Minhang District, Shanghai, China 200233

Manufacturer: Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Address of Manufacturer:

Road, Minhang District, Shanghai, China 200233

**EUT Description:** 5G Sub-6 GHz LGA Module

Model No.: RG620T-NA Trade Mark: Quectel

FCC ID: XMR2023RG620TNA

Standards: 47 CFR Part 2

> 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90

Date of Receipt: 2023/03/06

**Date of Test:** 2023/03/10 to 2023/04/23

Date of Issue: 2023/04/23

**Test Result:** PASS \*

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SEWA2303000029RG02

Rev.: Page: 2 of 61

### Version

Revision Record					
Version Chapter Date Modifier Remark					
01		2023/04/23		Original	

Prepared By	(Weller Liu) / Test Engineer
Checked By	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: Page: 3 of 61

### Content

1	Vers	sion	2
2	Tes	t Summary	5
	2.1	NR Band n5/ NR Band n26(824~849 MHz)	5
	2.2	NR Band n7/ NR Band n38/ NR Band n41	6
	2.3	NR Band n2/ NR Band n25	8
	2.4	NR Band n12	9
	2.9	NR Band n66/ NR Band n70	16
	2.10	NR Band n71	17
	2.11	NR Band n77/ NR Band n78	18
3	Gen	eral Information	20
	3.1	Client Information	20
	3.2	Test Location	20
	3.3	Test Facility	20
	3.4	General Description of EUT	21
	3.5	Test Mode	23
	3.6	Test Environment	23
	3.7	Description of Support Units	23
	3.8	Technical Specification	
	3.9	Test Frequencies	
		1 Reference test frequencies for NR operating band n2	
		2 Reference test frequencies for NR operating band n5	
		3 Reference test frequencies for NR operating band n7	
	3.9.		
		5 Reference test frequencies for NR operating band n13	
		6 Reference test frequencies for NR operating band n14	
		7 Reference test frequencies for NR operating band n25	
	3.9.		
	3.9.		
	3.9.		
	3.9.		
	3.9.	12 Reference test frequencies for NR operating band n66	39



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.:	SEWA2303000029RG02
-------------	--------------------

Rev.:	01	
Page:	4 of 6	

		rage. + cr or	
	3.9.13	Reference test frequencies for NR operating band n70	40
	3.9.14	Reference test frequencies for NR operating band n71	40
	3.9.15	Reference test frequencies for NR operating band n77	41
	3.9.16	Reference test frequencies for NR operating band n78	43
1	Descrip	tion of Tests	45
	4.1 Cor	nducted Output Power	45
	4.2 Effe	ective (Isotropic) Radiated Power of Transmitter	46
	4.3 EIR	RP Power Density	47
	4.4 Occ	cupied Bandwidth	48
	4.5 Bar	nd Edge at Antenna Terminals	49
	4.6 Spt	urious And Harmonic Emissions at Antenna Terminal	50
	4.7 Pea	ak-Average Ratio	51
	4.8 Fie	ld Strength of Spurious Radiation	52
	4.9 Fre	quency Stability / Temperature Variation	53
	4.10 Tes	st Setups	54
	4.10.1	Test Setup 1	54
	4.10.2	Test Setup 2	54
	4.10.3	Test Setup 3	55
	4.11 Tes	st Conditions	56
5	Main Te	est Instruments	58
3	Measur	ement Uncertainty	60
7	Append	ixes	61



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed verterial, and the subject of the Service printed verterial, and the subject of the Service printed verterial to the subject of the Service printed verterial to the Service printed verterial verterial

South of No.6 Flant, No.1, Rursheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区洞胜路1号的6月了房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 5 of 61

### 2 Test Summary

### 2.1 NR Band n5/ NR Band n26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Section 1 of Appendix B.27&B.34	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.27&B.34	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.27&B.34	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.27&B.34	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.27&B.34	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.27&B.34	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.27&B.34	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.27&B.34	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 3d days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 6 of 61

### 2.2 NR Band n7/ NR Band n38/ NR Band n41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.28&B.36&B.37	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.28&B.36&B.37	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.28&B.36&B.37	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.28&B.36&B.37	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de □ ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.28&B.36&B.37	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz 1 MHz  9 kHz 95 MHz XMHz 10th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.28&B.36&B.37	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz 1 MHz  9 kHz 95 MHz XMHz 10 <sup>th</sup> harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B.28&B.36&B.37	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CMD.Doccheck@sas.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: Page: 7 of 61

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.28&B.36&B.37	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com



Report No.: SEWA2303000029RG02

Rev.: Page: 8 of 61

#### 2.3 NR Band n2/ NR Band n25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.26&B.32	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.26&B.32	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.26&B.32	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.26&B.32	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.26&B.32	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.26&B.32	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.26&B.32	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.26&B.32	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 9 of 61

### 2.4 NR Band n12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.29	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.29	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.29	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.29	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.29	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.29	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.29	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.29	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.:

Page: 10 of 61

#### 2.5 NR Band n13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP≤3W.	Section 1 of Appendix B.30	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.30	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.30	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.30	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.30	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	<ul> <li>≤ -13 dBm/100 kHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> <li>On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.</li> <li>For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.</li> </ul>	Section 6 of Appendix B.30	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz.  For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.30	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.30	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

Page: 11 of 61

### 2.6 NR Band n14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §90.542(d)	ERP≤3W.	Section 1 of Appendix B.31	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.31	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.31	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.31	Pass
Emission Mask	§2.1051 §90.210(n)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	Section 5 of Appendix B.31	Pass
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769- 775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and	Section 6 of Appendix B.31	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 12 of 61

		raye.	12 01 01	
		portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10 log (P) dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.31	Pass
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 8 of Appendix B.31	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 9 of Appendix B.31	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.:

Page: 13 of 61

### 2.7 NR Band n26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B.33	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.33	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.33	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.33	Pass
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B.33	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of- band emissions	Section 6 of Appendix B.33	Pass
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of- band emissions	Section 7 of Appendix B.33	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.33	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

Page: 14 of 61

#### 2.8 NR Band n30

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(a)(3)	EIRP ≤ 50mW/1MHz EIRP ≤ 250mW/5MHz	Section 1 of Appendix B.35	Pass
Peak-Average Ratio		FCC: Limit≤13 dB	Section 2 of Appendix B.35	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.35	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.35	Pass
Band Edges Compliance	§2.1051, §27.53(a)(4)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.35	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(a)(4)	For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:  (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2324 and 2328 MHz and on all frequencies between 2328 and 2337 MHz;  (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;  (iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 61 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 +	Section 6 of Appendix B.35	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Decument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document control to erporduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND\_Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

Page: 15 of 61

		10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;(iii) By a factor of not less than 43 + 10 log (P) dB on all		
		frequencies between 2360 and 2365 MHz, and not less than 70 +		
		10 log (P) dB above 2365 MHz.		
Field Strength of Spurious Radiation	§2.1053, §27.53(a)(4)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.35	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the range of the operating frequency blocks	Section 8 of Appendix B.35	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 16 of 61

### 2.9 NR Band n66/ NR Band n70

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.38& B.39	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.38& B.39	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.38& B.39	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.38& B.39	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.38& B.39	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.38& B.39	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.38& B.39	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.38& B.39	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 17 of 61

### 2.10 NR Band n71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W	Section 1 of Appendix B.40	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.40	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.40	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.40	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.40	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.40	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.40	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the authorized bands of operation.	Section 8 of Appendix B.40	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.:

Page: 18 of 61

#### 2.11 NR Band n77/ NR Band n78

### 3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 1 of Appendix B.42& B.44	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.42& B.44	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.42& B.44	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.42& B.44	Pass
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed - 13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 5 of Appendix B.42& B.44	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.	Section 6 of Appendix B.42& B.44	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz	Section 7 of Appendix B.42& B.44	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.42& B.44	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND\_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 19 of 61

#### 3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 1 of Appendix B.41& B.43	Pass
Peak- Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB	Section 2 of Appendix B.41& B.43	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.41& B.43	Pass
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B.41& B.43	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 6 of Appendix B.41& B.43	Pass
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 7 of Appendix B.41& B.43	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/ frequency block.	Section 8 of Appendix B.41& B.43	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For open the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND-Occheck@sas.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

215000 t (86–512) 62992980 t (86–512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 20 of 61

### 3 General Information

#### 3.1 Client Information

Applicant: Quectel Wireless Solutions Co., Ltd.	
Address of Applicant:  Building 5, Shanghai Business Park Phase III (Area B), No.1016 T Road, Minhang District, Shanghai, China 200233	
Manufacturer: Quectel Wireless Solutions Co., Ltd.	
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

#### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.		
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone		
Post code:	215000		
Test engineer:	Weller Liu, Tizzy Song		

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### • FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed vorletaf, available on request or accessible at <a href="https://mew.sqs.com/en/lema-and-Conditions.aspx.and">https://mew.sqs.com/en/lema-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://mww.sqs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.tetniton">https://mww.sqs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.tetniton</a> in the description of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this lest report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWA2303000029RG02

Rev.:

Page: 21 of 61

### 3.4 General Description of EUT

EUT Description:	5G Sub-6 GHz LGA	Mod	lule			
Model No.:	RG620T-NA					
Trade Mark:	Quectel	Quectel				
Hardware Version:	R1.0					
Software Version:	RG620TNAAAR01A	\04G	55_OCPU			
IMEI:	RF Conducted	8	86107506000290	04		
IIVIEI.	RSE	8	86108506000374	46		
Feature:	UL 2*2 MIMO: NR B	Band	n38; NR Band n	41; NR Band	l n77; NR Band n78	
HPUE Power Class:	NR Band n38; NR B	Band	n41; NR Band n	77; NR Band	n78	
Antenna Type:	⊠ External, ☐ Int	egra	ted			
	NR Band n2:	0.73	BdBi (Ant1)			
	NR Band n5:	0.49	9dBi (Ant1)			
	NR Band n7:	1.42dBi (Ant1)				
	NR Band n12:	-8.65dBi (Ant7)				
	NR Band n13:	-10.95dBi (Ant7)				
	NR Band n14:	-10.95dBi (Ant7)				
	NR Band n25:	0.73dBi (Ant1)				
	NR Band n26:	0.49dBi (Ant1)				
	NR Band n30:	-3.06dBi (Ant1)				
Antenna Gain:	NR Band n38:	0.77dBi (Ant1) 1.69dBi (Ant7)			(Ant7)	
	NR Band n41:	1.42	2dBi (Ant1)	2.61dBi	(Ant7)	
	NR Band n66:	-0.2	0dBi (Ant1)			
	NR Band n70:	-0.8	0dBi (Ant1)			
	NR Band n71:	-9.3	4dBi (Ant7)			
	NR Band n77:	-3.4	8dBi (Ant0)	-3.48dBi	(Ant6)	
	NR Band n78:	-4.1	1dBi (Ant0)	-4.11dBi	(Ant6)	
Note:  The antenna gain are derived from the gain information report manufacturer.					tion report provided by the	
DE Oakla	0.8dB (Below 1GHz	)	1.0dB (1.0~2	.4GHz)	1.2dB (2.4~3.4GHz)	
RF Cable:	1.5dB (Above 3.4GH	Hz)	<b>-</b>			
Remark: As above information is pr suitability, reliability or/and				S is not liable	to the accuracy,	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 22 of 61

#### **MIMO Model:**

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

• For power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N<sub>ANT</sub>;

Array Gain =  $5 \log(N_{ANT}/N_{SS}=1)$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \ge 5$ .

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi

• If transmit signals are correlated, then

Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2 / N_{ANT}]$  dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

 If all transmit signals are completely uncorrelated, then
 Directional gain = 10 log[(10<sup>G1/10</sup> + 10<sup>G2/10</sup> + ... + 10<sup>GN/10</sup>)/N<sub>ANT</sub>] dBi

Band	ANT Gain1 (dBi)	ANT Gain2 (dBi)	Directional gain (dBi)
NR Band n38:	0.77	1.69	1.25
NR Band n41:	1.42	2.61	2.06
NR Band n77:	-3.48	-3.48	-3.48
NR Band n78:	-4.11	-4.11	-4.11



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed vorletaf, available on request or accessible at <a href="https://mew.sqs.com/en/lema-and-Conditions.aspx.and">https://mew.sqs.com/en/lema-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://mww.sqs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.tetniton">https://mww.sqs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.tetniton</a> in the description of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the seults shown in this lest report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWA2303000029RG02

Rev.:

Page: 23 of 61

### 3.5 Test Mode

Test Mode	Test Modes Description				
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation				
NR/TM2	NR system, DFT-s-QPSK modulation				
NR/TM3	NR system, DFT-s-16QAM modulation				
NR/TM4	NR system, DFT-s-64QAM modulation				
NR/TM5	NR system, DFT-s-256QAM modulation				
NR/TM6	NR/TM6 NR system, CP-QPSK modulation				
NR/TM7	NR system, CP-16QAM modulation				
NR/TM8	NR system, CP-64QAM modulation				
NR/TM9	NR/TM9 NR system, CP-256QAM modulation				
Remark: The test mode(s)	are selected according to relevant radio technology specifications.				

#### 3.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests			
Relative Humidity		44-46	6 % RH Ambient		
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	3.8		
LTLV		-30	3.3		
LTHV	LTHV		4.4		
HTLV	HTLV		3.3		
HTHV		50	4.4		
Remark:					
NV: Normal Voltage	NV: Normal Voltage LV: Low		HV: High Extreme Test Voltage		
NT: Normal Temperature	LT: Low	Extreme Test Temperature	HT: High Extreme Test Temperature		

### 3.7 Description of Support Units

Description	Manufacturer	Model No.			
Mother board	Quectel	N/A			
Remark: all above the information of table are provided by client.					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

Page: 24 of 61

### 3.8 Technical Specification

Characteristics	Description					
Radio System Type	⊠ SA ⊠ NSA					
	Band	TX	RX			
	NR Band n2	1850 to 1910 MHz	1930 to 1990 MHz			
	NR Band n5	824 to 849 MHz	869 to 894 MHz			
	NR Band n7	2500 to 2570 MHz	2620 to 2690 MHz			
	NR Band n12	699 to 716 MHz	729 to 746 MHz			
	NR Band n13	777 to 787 MHz	746 to 756 MHz			
	NR Band n14	788 to 798 MHz	758 to 768 MHz			
	NR Band n25	1850 to 1915MHz	1930 to 1995 MHz			
	NR Band n26 (814 to 824 MHz)	814 to 824MHz	859 to 869 MHz			
	NR Band n26 (824 to 849 MHz)	824 to 849 MHz	869 to 894 MHz			
	NR Band n30	2305 to 2315 MHz	2350 to 2360 MHz			
	NR Band n38	2570 to 2620 MHz	2570 to 2620 MHz			
	NR Band n41	2496 to 2690 MHz	2496 to 2690 MHz			
0	NR Band n66	1710 to 1780 MHz	2110 to 2180 MHz			
Supported Frequency Range	NR Band n70	1695 to 1710 MHz	1995 to 2020 MHz			
rango	NR Band n71	663 to 698 MHz	617 to 652 MHz			
	NR Band n77*	3700 to 3980 MHz	3700 to 3980 MHz			
	INN Ballu III I	3450 to 3550 MHz	3450 to 3550 MHz			
	NR Band n78*	3700 to 3800 MHz	3700 to 3800 MHz			
		3450 to 3550 MHz	3450 to 3550 MHz			
	NR CA:					
	CA_n2A-n5A; CA_n2A-n7A; CA_n2A-n12A; CA_n2A-n41A; CA_n2A-n66A;					
	CA_n2A-n71A; CA_n2A-n77A; CA_n2A-n78A; CA_n5A-n5A; CA_n5A-n7A;					
	CA_n5A-n12A; CA_n5A-n41A; CA_n5A-n66A; CA_n5A-n71A; CA_n5A-n77A;					
	CA_n5A-n78A; CA_n7A-n12A; CA_n7A-n25A; CA_n7A-n66A; CA_n7A-n71A;					
	CA_n7A-n77A; CA_n7A-n78A; CA_n12A-n25A; CA_n12A-n41A;					
	CA_n12A-n66A; CA	A_n12A-n77A; CA_n25A-n41A;	; CA_n25A-n66A;			
	CA_n25A-n71A; CA	A_n25A-n77A; CA_n25A-n78A;	; CA_n41A-n66A;			
	CA_n41A-n71A; CA	A_n41A-n77A; CA_n41A-n78A;	; CA_n66A-n71A;			
	CA_n66A-n77A; CA	A_n66A-n78A; CA_n71A-n77A;	; CA_n71A-n78A;			



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 25 of 61 ENDC: DC\_2A\_n2A; DC\_2A\_n5A; DC\_2A\_n7A; DC\_2A\_n12A; DC\_2A\_n25A; DC\_2A\_n30A; DC\_2A\_n38A; DC\_2A\_n41A; DC\_2A\_n66A; DC\_2A\_n71A; DC\_2A\_n77A; DC\_2A\_n78A; DC\_4A\_n2A; DC\_4A\_n7A; DC\_4A\_n38A; DC\_4A\_n41A; DC\_4A\_n66A; DC\_4A\_n71A; DC\_4A\_n78A; DC\_5A\_n2A; DC\_5A\_n5A; DC\_5A\_n7A; DC\_5A\_n30A; DC\_5A\_n38A; DC\_5A\_n41A; DC\_5A\_n66A; DC\_5A\_n71A; DC\_5A\_n77A; DC\_5A\_n78A; DC\_7A\_n2A; DC 7A n5A; DC 7A n7A; DC 7A n12A; DC 7A n25A; DC 7A n66A; DC\_7A\_n71A; DC\_7A\_n77A; DC\_7A\_n78A; DC\_12A\_n2A; DC\_12A\_n5A; DC 12A n7A; DC 12A n25A; DC 12A n30A; DC 12A n38A; DC 12A n41A; DC\_12A\_n66A; DC\_12A\_n77A; DC\_12A\_n78A; DC\_13A\_n2A; DC\_13A\_n5A; DC\_13A\_n7A; DC\_13A\_n25A; DC\_13A\_n66A; DC\_13A\_n77A; DC\_13A\_n78A; DC 14A n2A; DC 14A n30A; DC 14A n66A; DC 14A n77A; DC 25A n41A; DC\_25A\_n77A; DC\_25A\_n78A; DC\_26A\_n25A; DC\_26A\_n41A; DC 26A n78A; DC 30A n2A; DC 30A n5A; DC 30A n12A; DC 30A n66A; DC 30A n77A; DC 38A n78A; DC 41A n41A; DC 41A n77A; DC\_41A\_n78A; DC\_42A\_n77A; DC\_66A\_n2A; DC\_66A\_n5A; DC\_66A\_n7A; DC\_66A\_n12A; DC\_66A\_n25A; DC\_66A\_n30A; DC\_66A\_n38A; DC\_66A\_n41A; DC\_66A\_n66A; DC\_66A\_n71A; DC\_66A\_n77A; DC\_66A\_n78A; DC\_71A\_n2A; DC\_71A\_n7A; DC\_71A\_n25A; DC\_71A\_n38A; DC\_71A\_n41A; DC\_71A\_n66A; DC\_71A\_n78A; ENDC& NRCA Only test RSE, report only show worst mode. Note\*: Both NR Band n77 and NR Band n78 have the same frequency range 3450 MHz to 3550 MHz, and NR Band n78 was fully tested, NR Band n77 only test the items of Power. SCS 15kHz: NR Band n2 ⊠5 MHz ⊠10 MHz ⊠15 MHz ⊠20 MHz SCS 15kHz: NR Band n5 ⊠5 MHz ⊠10 MHz ⊠15 MHz ⊠20 MHz Supported Channel SCS 15kHz: NR Band n7 ⊠5 MHz ⊠10 MHz ⊠15 MHz ⊠20 MHz SCS 15kHz: NR Band n12



NR Band n13

Bandwidth

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condi

⊠10 MHz

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

⊠5 MHz

SCS 15kHz:

t (86-512) 62992980 t (86-512) 62992980

□

15 MHz

www.sgsgroup.com.cn



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 26 of 61

			ı ayc.	20 01 01	
		⊠5 MHz	⊠10 MHz		
	NR Band n14	SCS 15kHz:			
	NIX Dalid 1114	⊠5 MHz	⊠10 MHz		
	ND Dand 205	SCS 15kHz:			
	NR Band n25	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
	NR Band n26	SCS 15kHz:			
	(814-824)	⊠5 MHz	⊠10 MHz		
	NR Band n26	SCS 15kHz:			
	(824-849)	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		SCS 15kHz:			
	NR Band n30	⊠5 MHz	⊠10 MHz		
		SCS 30kHz:			
	NR Band n38	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠40 MHz
		SCS 30kHz:			
		⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠30 MHz
	NR Band n41	⊠40 MHz	⊠50 MHz	⊠60 MHz	⊠80 MHz
		⊠90 MHz	⊠100 MHz		
		SCS 15kHz:			
	NR Band n66	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		⊠25 MHz	⊠30 MHz	⊠40 MHz	
	ND D 1 70	SCS 15kHz:			
	NR Band n70	⊠5 MHz	⊠10 MHz	⊠15 MHz	
	ND D I 74	SCS 15kHz:			
	NR Band n71	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		SCS 30kHz			
	ND D I 77	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠40 MHz
	NR Band n77	⊠50 MHz	⊠60 MHz	⊠70 MHz	⊠80 MHz
		⊠90 MHz	⊠100 MHz		
		SCS 30kHz			
	ND D. J. 70	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠40 MHz
	NR Band n78	⊠50 MHz	⊠60 MHz	⊠70 MHz	⊠80 MHz
		⊠90 MHz	⊠100 MHz		
Designation of	NR Band n2	DFT-s-Pi/2- BPSK	CP-16QAM		
Emissions	THE DATE ITE	SCS 15kHz:			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

27 of 61 Page:

bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)  NR Band n5  NR Band n5  NR Band n7  NR Band n7  NR Band n7  NR Band n7  NR Band n12  NR Band n12  NR Band n13  NR Band n14  NR Band n15  NR Band n15  NR Band n16  NR Band n17  NR Band n17  NR Band n17  NR Band n18  NR Band n19  NR Band n19  NR Band n10  NR Band n20				Page:	27 of 61	
the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)  NR Band n5  NR Band n5  NR Band n7  NR Band n7  NR Band n7  NR Band n12  SCS 15kHz:  4M48G7D 4M48W7D  13M4G7D 14M2W7D  13M4G7D 14M2W7D  13M4G7D 14M2W7D  13M4G7D 14M2W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M46G7D 4M49W7D  13M4G7D 14M2W7D  13M4G7D 19M0W7D  SCS 15kHz:  4M48G7D 4M48W7D  13M4G7D 19M0W7D  SCS 15kHz:  4M48G7D 4M48W7D  13M4G7D 14M1W7D  SCS 15kHz:  4M48G7D 4M48W7D  SCS 15kHz:  4M48G7D 9M26W7D  13M4G7D 14M1W7D  SCS 15kHz:  4M48G7D 4M47W7D  SCS 15kHz:  4M48G7D 4M48W7D  SCS 15kHz:  4M48G7D 4M48W7D  SCS 15kHz:  4M48G7D 4M48W7D  SCS 15kHz:  13M4G7D 14M1W7D  SCS 15kHz:  13M4G7D 14M1W7D  SCS 15kHz:  13M4G7D 4M48W7D  8M90G7D 9M26W7D  SCS 15kHz:  13M4G7D 4M48W7D  8M95G7D 9M26W7D  SCS 15kHz:  13M4G7D 4M48W7D  13M4G7D 14M1W7D  13M4G7D 4M48W7D  13M4G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 14M1W7D  13M4G7D 14M1W7D  13M4G7D 14M1W7D  13M4G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 4M48W7D  8M95G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D	(Remark: the necessary		4M47G7D	4M48W7D		
the measured occupied bandwidths for each type of channel bandwidth configuration.)  NR Band n5  NR Band n5  NR Band n7  NR Band n7  NR Band n7  NR Band n7  NR Band n12  NR Band n13  NR Band n14  NR Band n14  NR Band n14  NR Band n15  NR Band n15  NR Band n16  NR Band n17  NR Band n18  NR Band n19  NR Band n19  NR Band n19  NR Band n19  NR Band n10  NR B			8M94G7D	9M31W7D		
type of channel bandwidth configuration.)  NR Band n5  NR Band n5  NR Band n5  NR Band n5  NR Band n7  NR Band n12  NR Band n12  NR Band n13  NR Band n13  NR Band n14  NR Band n15  NR Band n16  NR Band n17  NR Band n17  NR Band n18  NR Band n19  NR Band n20  (814 to 824 MHz)  NR Band n26 (824 to 849 MHz)			13M4G7D	14M2W7D		
bandwidth configuration.)  NR Band n5  8W94G7D 9M31W7D 13M4G7D 14M2W7D 17M9G7D 18M9W7D SCS 15kHz:  4M46G7D 4M49W7D 4M49W7D 17M9G7D 19M0W7D 17M9G7D 17M			17M9G7D	18M9W7D		
configuration.)  NR Band n5  8M94G7D 9M31W7D  13M4G7D 14M2W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M46G7D 4M49W7D  13M4G7D 14M2W7D  13M4G7D 14M2W7D  13M4G7D 14M2W7D  13M4G7D 19M0W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M94G7D 9M26W7D  13M4G7D 14M1W7D  SCS 15kHz:  4M48G7D 4M47W7D  8M90G7D 9M30W7D  SCS 15kHz:  NR Band n13  4M48G7D 4M47W7D  8M90G7D 9M30W7D  SCS 15kHz:  NR Band n25  8M95G7D 9M26W7D  3M46G7D 4M48W7D  8M90G7D 9M30W7D  SCS 15kHz:  NR Band n26  8M95G7D 9M26W7D  13M4G7D 14M1W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M95G7D 9M26W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M4G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M47W7D			SCS 15kHz:			
13M4G7D		NR Band n5	4M48G7D	4M48W7D		
17M9G7D	,		8M94G7D	9M31W7D		
SCS 15kHz:			13M4G7D	14M2W7D		
NR Band n7    MM5G7D			17M9G7D	18M9W7D		
NR Band n7    8M95G7D 9M31W7D     13M4G7D 14M2W7D     17M9G7D 19M0W7D     SCS 15kHz:			SCS 15kHz:			
13M4G7D 14M2W7D 17M9G7D 19M0W7D SCS 15kHz: 4M48G7D 4M48W7D 8M94G7D 9M26W7D 13M4G7D 14M1W7D SCS 15kHz: NR Band n13 4M48G7D 4M47W7D 8M90G7D 9M30W7D SCS 15kHz: NR Band n14 4M48G7D 4M48W7D 8M95G7D 9M26W7D SCS 15kHz: 4M48G7D 4M48W7D 8M95G7D 9M26W7D SCS 15kHz: 4M48G7D 4M48W7D 8M95G7D 9M28W7D 13M4G7D 14M1W7D 17M9G7D 18M9W7D SCS 15kHz: 4M48G7D 4M48W7D SCS 15kHz: 4M48G7D 4M48W7D SCS 15kHz: 4M47G7D 4M47W7D			4M46G7D	4M49W7D		
17M9G7D 19M0W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M94G7D 9M26W7D  13M4G7D 14M1W7D  SCS 15kHz:  NR Band n13 4M48G7D 4M47W7D  8M90G7D 9M30W7D  SCS 15kHz:  NR Band n14 4M48G7D 4M48W7D  8M95G7D 9M26W7D  SCS 15kHz:  NR Band n26 (814 to 824 MHz)  NR Band n26 (824 to 849 MHz)  12M48G7D 4M48W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M95G7D 9M26W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D		NR Band n7	8M95G7D	9M31W7D		
NR Band n12    SCS 15kHz:   4M48G7D			13M4G7D	14M2W7D		
NR Band n12    M4M48G7D			17M9G7D	19M0W7D		
NR Band n12  8M94G7D 9M26W7D  13M4G7D 14M1W7D  SCS 15kHz:  NR Band n13  4M48G7D 4M47W7D  8M90G7D 9M30W7D  SCS 15kHz:  NR Band n14  4M48G7D 4M48W7D  8M95G7D 9M26W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M95G7D 9M26W7D  SCS 15kHz:  4M48G7D 4M48W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  SCS 15kHz:  NR Band n26 (814 to 824 MHz)  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			SCS 15kHz:			
SM94G7D 9M26W7D   13M4G7D 14M1W7D   SCS 15kHz:		ND Daniel m40	4M48G7D	4M48W7D		
NR Band n13   SCS 15kHz:   4M48G7D		NK Ballu IIIZ	8M94G7D	9M26W7D		
NR Band n13  4M48G7D 4M47W7D  8M90G7D 9M30W7D  SCS 15kHz:  NR Band n14  4M48G7D 4M48W7D  8M95G7D 9M26W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  NR Band n26 (814 to 824 MHz)  NR Band n26 (824 to 849 MHz)  4M48G7D 4M47W7D  SCS 15kHz:  4M49G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			13M4G7D	14M1W7D		
NR Band n14   SCS 15kHz:			SCS 15kHz:			
SCS 15kHz:   4M48G7D		NR Band n13	4M48G7D	4M47W7D		
NR Band n14  4M48G7D 4M48W7D  8M95G7D 9M26W7D  SCS 15kHz:  4M48G7D 4M48W7D  8M95G7D 9M28W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			8M90G7D	9M30W7D		
NR Band n25   SCS 15kHz:   4M48G7D			SCS 15kHz:			
NR Band n25   SCS 15kHz:   4M48G7D		NR Band n14	4M48G7D	4M48W7D		
NR Band n25  NR Band n25  MR Band n26 (814 to 824 MHz)  NR Band n26 (824 to 849 MHz)  AM48G7D 4M48W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			8M95G7D	9M26W7D		
NR Band n25  8M95G7D 9M28W7D  13M4G7D 14M1W7D  17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			SCS 15kHz:			
13M4G7D 14M1W7D 17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			4M48G7D	4M48W7D		
17M9G7D 18M9W7D  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  NR Band n26 (824 to 849 MHz)  4M49G7D 4M47W7D		NR Band n25	8M95G7D	9M28W7D		
NR Band n26 (814 to 824 MHz)  NR Band n26 (824 to 849 MHz)  SCS 15kHz:  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D			13M4G7D	14M1W7D		
NR Band n26 (814 to 824 MHz)  4M47G7D 4M48W7D  8M90G7D 9M27W7D  SCS 15kHz:  NR Band n26 (824 to 849 MHz)  4M49G7D 4M47W7D			17M9G7D	18M9W7D		
(814 to 824 MHz)  (814 to 824 MHz)  8M90G7D 9M27W7D  SCS 15kHz:  4M49G7D 4M47W7D  4M49G7D 4M47W7D			SCS 15kHz:			
8M90G7D 9M27W7D  SCS 15kHz:  NR Band n26 (824 to 849 MHz)  4M49G7D 4M47W7D			4M47G7D	4M48W7D		
NR Band n26 (824 to 849 MHz) 4M49G7D 4M47W7D			8M90G7D	9M27W7D		
(824 to 849 MHz) 4W49G7D 4W47W7D			SCS 15kHz:			
			4M49G7D	4M47W7D		
8M92G7D 9M31W7D		(32 : 13 0 10 101112)	8M92G7D	9M31W7D		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 28 of 61

			. age.	
		13M4G7D	14M2W7D	
		17M8G7D	18M9W7D	
		SCS 15kHz:		
	NR Band n30	4M47G7D	4M48W7D	
		8M92G7D	9M27W7D	
		SCS 30kHz:		
		8M57G7D	8M60W7D	
	NR Band n38	12M8G7D	13M6W7D	
		17M9G7D	18M2W7D	
		35M9G7D	37M8W7D	
		SCS 30kHz:		
		8M95G7D	8M58W7D	
		12M9G7D	13M6W7D	
		17M8G7D	18M2W7D	
		26M8G7D	27M9W7D	
	NR Band n41	35M8G7D	37M9W7D	
		45M8G7D	47M4W7D	
		57M9G7D	57M8W7D	
		77M3G7D	77M4W7D	
		85M7G7D	87M4W7D	
		96M4G7D	97M4W7D	
		SCS 15kHz:		
		4M47G7D	4M47W7D	
		8M94G7D	9M30W7D	
	NR Band n66	13M4G7D	14M1W7D	
	NK Band 1100	17M9G7D	18M9W7D	
		22M9G7D	23M8W7D	
		28M6G7D	28M5W7D	
		38M6G7D	38M5W7D	
		SCS 15kHz:		
	ND Bond 570	4M48G7D	4M47W7D	
	NR Band n70	8M92G7D	9M28W7D	
		13M4G7D	14M2W7D	
	NR Band n71	SCS 15kHz:		
	INIX DAIIU II/ I	4M48G7D	4M47W7D	
			-	<del></del>



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.:

Page: 29 of 61

		1	Page:	29 01 61
		8M94G7D	9M29W7D	
		13M5G7D	14M1W7D	
		17M9G7D	18M9W7D	
		SCS 30kHz:		
		8M61G7D	8M59W7D	
		12M9G7D	13M6W7D	
		17M8G7D	18M2W7D	
	ND D and a 77	35M8G7D	37M9W7D	
	NR Band n77 (3700-3980 MHz)	45M7G7D	47M5W7D	
	,	57M9G7D	57M9W7D	
		64M3G7D	67M4W7D	
		77M1G7D	77M5W7D	
		85M7G7D	87M5W7D	
		96M4G7D	97M5W7D	
		SCS 30kHz:		
		8M58G7D	8M60W7D	
		12M9G7D	13M6W7D	
		17M8G7D	18M2W7D	
		35M8G7D	37M9W7D	
	NR Band n78 (3450-3550 MHz)	45M7G7D	47M6W7D	
	(0.000000000000000000000000000000000000	57M9G7D	57M8W7D	
		64M3G7D	67M4W7D	
		77M2G7D	77M5W7D	
		86M0G7D	87M5W7D	
		96M2G7D	97M4W7D	
		SCS 30kHz:		
		8M60G7D	8M60W7D	
		12M8G7D	13M6W7D	
		17M8G7D	18M3W7D	
	NR Band n78	35M8G7D	37M8W7D	
	(3700-3800 MHz)	45M8G7D	47M4W7D	
		57M9G7D	57M7W7D	
		64M2G7D	67M5W7D	
		77M1G7D	77M4W7D	
		85M7G7D	87M5W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.:

30 of 61 Page:

96M4G7D 97M5W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

31 of 61 Page:

### 3.9 Test Frequencies

### Reference test frequencies for NR operating band n2

3.9.1.1 Test frequencies for NR operating band n2 and SCS 15 kHz

CBW [MHz]	Range	<u> </u>	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	1932.5	386500	
	Downlink	Mid	1960	392000	15
5		High	1987.5	397500	
3	Uplink	Low	1852.5	370500	
		Mid	1880	376000	-
		High	1907.5	381500	
		Low	1935	387000	
	Downlink	Mid	1960	392000	15
10		High	1985	397000	
10	Uplink	Low	1855	371000	
		Mid	1880	376000	-
		High	1905	381000	
		Low	1937.5	387500	
	Downlink	Downlink Mid 1960 392000	392000	15	
15		High	1982.5	396500	
15		Low	1857.5	371500	
	Uplink	Mid	1880	376000	-
		High	1902.5	380500	
		Low	1940	388000	
	Downlink	Mid	1960	392000	15
20		High	1980	396000	
20		Low	1860	372000	
	Uplink	Mid	1880	376000	-
		High	1900	380000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: Page: 32 of 61

### Reference test frequencies for NR operating band n5

3.9.2.1 Test frequencies for NR operating band n5 and SCS 15 kHz

3.5.2.1 Test frequencies for NK operating band fits and 3CS 15 KHZ						
CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
		Low	871.5	174300		
	Downlink	Mid	881.5	176300	15	
5		High	891.5	178300		
3	Uplink	Low	826.5	165300		
		Mid	836.5	167300	-	
		High	846.5	169300		
		Low	874	174800		
	Downlink	Mid	881.5	176300	15	
10		High	889	177800		
10		Low	829	165800	-	
	Uplink	Mid	836.5	167300		
		High	844	168800		
		Low	876.5	175300	15	
	Downlink	Mid	881.5	176300		
15		High	886.5	177300		
15		Low	831.5	166300		
	Uplink	Mid	836.5	167300	-	
		High	841.5	168300		
		Low	879	175800		
Downlink 20	Downlink	Mid	881.5	176300	15	
		High	884	176800	ļ	
		Low	834	166800		
	Uplink	Mid	836.5	167300	1 -	
		High	839	167800		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: Page: 33 of 61

### Reference test frequencies for NR operating band n7

3.9.3.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Bandwidth [MHz]	Rang	е	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	2622.5	524500	
	Downlink	Mid	2655	531000	15
5		High	2687.5	537500	
5		Low	2502.5	500500	
	Uplink	Mid	2535	507000	
		High	2567.5	513500	
		Low	2625	525000	
	Downlink	Mid	2655	531000	15
10		High	2685	537000	
10	10 Uplink	Low	2505	501000	
		Mid	2535	507000	
		High	2565	513000	
		Low	2627.5	525500	
	Downlink	Mid	2655	531000	15
45		High	2682.5	536500	
15		Low	2507.5	501500	
	Uplink	Mid	2535	507000	
	·	High	2562.5	512500	
		Low	2630	526000	
20 Dov	Downlink	Mid	2655	531000	15
		High	2680	536000	
		Low	2510	502000	
	Uplink	Mid	2535	507000	
	•	High	2560	512000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: Page: 34 of 61

Reference test frequencies for NR operating band n12

3.9.4.1 Test frequencies for NR operating band n12 and SCS 15 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	731.5	146300	
		Mid	737.5	147500	15
5		High	743.5	148700	
3		Low	701.5	140300	
	Uplink	Mid	707.5	141500	
		High	713.5	142700	
	Downlink	Low	734	146800	
		Mid	737.5	147500	15
10		High	741	148200	
10	Uplink	Low	704	140800	
		Mid	707.5	141500	
		High	711	142200	
15	Downlink	Low	736.5	147300	
		Mid	737.5	147500	15
		High	738.5	147700	
		Low	706.5	141300	
	Uplink	Mid	707.5	141500	<b></b>
		High	708.5	141700	

Reference test frequencies for NR operating band n13

3.9.5.1 Test frequencies for NR operating band n13 and SCS 15 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
5	Downlink	Low	779.5	155900	15
		Mid	782	156400	
		High	784.5	156900	
		Low	748.5	149700	
	Uplink	Mid	751	150200	
		High	753.5	150700	
10		Low	1	1	
	Downlink	Mid	779.5	156400	15
		High	1	1	
		Low	1	1	
	Uplink	Mid	751	150200	
	·	High	1	1	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 35 of 61

3.9.6 Reference test frequencies for NR operating band n14 3.9.6.1 Test frequencies for NR operating band n14 and SCS 15 kHz

Bandwidth Range Carrier centre SS block SCS **Carrier centre** [MHz] [MHz] [ARFCN] [kHz] 760.5 Low 151200 Downlink 763 Mid 152600 15 765.5 High 153100 5 790.5 158100 Low Uplink Mid 793 158600 795.5 159100 High Low Downlink 763 152600 Mid 15 High 10 Low 152600 Uplink Mid 763 High

3.9.7 Reference test frequencies for NR operating band n25

3.9.7.1 Test frequencies for NR operating band n25 and SCS 15 kHz

3.9.7.1 Test frequencies for NR operating band n25 and 5C5 15 kHz						
CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
	Downlink	Low	1932.5	386500		
		Mid	1962.5	392500	15	
5		High	1992.5	398500		
5		Low	1852.5	370500		
	Uplink	Mid	1882.5	376500	-	
		High	1912.5	382500		
		Low	1935	387000		
	Downlink	Mid	1962.5	392500	15	
10		High	1990	398000		
10		Low	1855	371000		
	Uplink	Mid	1882.5	376500	-	
	·	High	1910	382000		
	Downlink	Low	1937.5	387500	15	
		Mid	1962.5	392500		
15		High	1987.5	397500		
15		Low	1857.5	371500		
	Uplink	Mid	1882.5	376500	-	
		High	1907.5	381500		
	Downlink	Low	1940	388000		
20		Mid	1962.5	392500	15	
		High	1985	397000	1	
20		Low	1860	372000		
	Uplink	Mid	1882.5	376500	-	
	-	High	1905	381000		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: Page: 36 of 61

### Reference test frequencies for NR operating band n26

### Test frequencies for NR operating band n26 and SCS 15 kHz

#### 814-824:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	861.5	172300	
	Downlink	Mid	864	172800	15
5		High	866.5	173300	
5		Low	816.5	163300	
	Uplink	Mid	819	163800	-
	·	High	821.5	164300	
		Low	1	1	
	Downlink	Mid	864	172800	15
10		High	1	/	
		Low	1	1	
	Uplink	Mid	819	163800	-
		High	1	1	

#### 824-849:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	871.5	174300	
5	Downlink	Mid	881.5	176300	15
		High	891.5	178300	
3		Low	826.5	165300	
	Uplink	Mid	836.5	167300	-
		High	846.5	169300	
		Low	874	174800	
	Downlink	Mid	881.5	176300	15
10		High	889	177800	
10	Uplink	Low	829	165800	-
		Mid	836.5	167300	
		High	844	168800	
	Downlink	Low	876.5	175300	15
		Mid	881.5	176300	
15		High	886.5	177300	
15		Low	831.5	166300	
	Uplink	Mid	836.5	167300	-
		High	841.5	168300	
	Downlink	Low	879	175800	
20		Mid	881.5	176300	15
		High	884	176800	
		Low	834	166800	
	Uplink	Mid	836.5	167300	_
	Оршк	High	839	167800	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: Page: 37 of 61

Reference test frequencies for NR operating band n30 Test frequencies for NR operating band n30 and SCS 15 kHz 3.9.9.1

**CBW** Range Carrier centre SS block SCS **Carrier centre** [MHz] [MHz] [ARFCN] [kHz] Low 2352.5 470500 Downlink 471000 Mid 2355 15 471500 2357.5 High 5 2307.5 461500 Low Uplink Mid 2310 462000 2312.5 462500 High 2355 471000 Low Downlink Mid 2355 471000 15 High 2355 471000 10 2310 462000 Low Uplink Mid 2310 462000 2310 High 462000

3.9.10 Reference test frequencies for NR operating band n38

3.9.10.1 Test frequencies for NR operating band n38 and SCS 30 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2575	515000	
10	&	Mid	2595	519000	30
	Uplink	High	2615	523000	
	Downlink	Low	2577.5	515500	
15	&	Mid	2595	519000	30
	Uplink	High	2612.5	522500	
	Downlink	Low	2580	516000	
20	&	Mid	2595	519000	30
	Uplink	High	2610	522000	
40	Downlink	Low	2590	518000	
	DOWIIIIK &	Mid	2595	519000	30
40	Uplink	High	2600	520000	] 30



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.: Page: 38 of 61

3.9.11 Reference test frequencies for NR operating band n41

3.9.11.1 Test frequencies for NR operating band n41 and SCS 30 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2501.01	500202	
10	&	Mid	2592.99	518598	30
	Uplink	High	2685	537000	
	Downlink	Low	2503.5	500700	
15	&	Mid	2592.99	518598	30
	Uplink	High	2682.48	536496	
	Downlink	Low	2506.02	501204	
20	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	
	Downlink	Low	2511	502200	
30	&	Mid	2592.99	518598	30
	Uplink	High	2675	535000	
	Downlink	Low	2516.01	503202	
40	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	1
	Downlink	Low	2521.02	504204	
50	&	Mid	2592.99	518598	30
	Uplink	High	2664.99	532998	
	Downlink	Low	2526	505200	
60	&	Mid	2592.99	518598	30
	Uplink	High	2659.98	531996	
	Downlink	Low	2536.02	507204	
80	&	Mid	2592.99	518598	30
	Uplink	High	2649.99	529998	
	Downlink	Low	2541	508200	
90	&	Mid	2592.99	518598	30
	Uplink	High	2644.98	528996	1
	Downlink	Low	2546.01	509202	
100	&	Mid	2592.99	518598	30
	Uplink	High	2640	528000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.: Page: 39 of 61

### 3.9.12 Reference test frequencies for NR operating band n66

3.9.12.1 Test frequencies for NR operating band n66 and SCS 15 kHz

CBW	requencies for NF Range		Carrier centre	Carrier centre	SS block SCS
[MHz]	Range		[MHz]	[ARFCN]	[kHz]
[1411 12]		Low	2112.5	422500	[KI IZ]
	Downlink	Mid	2145	429000	15
	DOWNIII	High	2177.5	435500	15
5		Low	1712.5	342500	
	Uplink	Mid	1745	349000	- <u>-</u>
	Оршик	High	1777.5	355500	
		Low	2115	423000	
	Downlink	Mid	2145	429000	15
	DOWNIII	High	2175	435000	-
10		Low	1715	343000	
	Uplink	Mid	1745	349000	_
	Оршик	High	1775	355000	=
		Low	2117.5	423500	
	Downlink	Mid	2145	429000	15
	DOWNIII	High	2172.5	434500	-
15		Low	1717.5	343500	
	Uplink	Mid	1745	349000	╡ _
	Оршик	High	1772.5	354500	_
		Low	2120	424000	
	Downlink	Mid	2145	429000	15
		High	2170	434000	- 13
20	Uplink	Low	1720	344000	
		Mid	1745	349000	-
		High	1770	354000	
		Low	2122.5	424500	15
	Downlink	Mid	2145	429000	
	DOWININ	High	2167.5	433500	-
25		Low	1722.5	344500	
	Uplink	Mid	1745	349000	_
	Op	High	1767.5	353500	
		Low	2125	425000	
	Downlink	Mid	2145	429000	15
	2011111111	High	2165	433000	-
30		Low	1725	345000	
	Uplink	Mid	1745	349000	1 -
	~F	High	1765	353000	1
		Low	2130	426000	
	Downlink	Mid	2145	429000	15
	DOWNIII	High	2160	432000	┪ 'ŏ
40			1730		
	I In Cont.	Low		346000	-
	Uplink	Mid	1745	349000	-
		High	1760	352000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 40 of 61

3.9.13 Reference test frequencies for NR operating band n70 3.9.13.1 Test frequencies for NR operating band n70 and SCS 15 kHz

Bandwidth Range Carrier centre SS block SCS **Carrier centre** [ARFCN] [MHz] [MHz] [kHz] Low 1997.5 399500 Downlink 2002.5 Mid 400500 15 2007.5 High 401500 5 1697.5 339500 Low Uplink Mid 1702.5 340500 1707.7 High 341500 2000 400000 Low Downlink Mid 2002.5 400500 15 High 2005 401000 10 1700 340000 Low Uplink 1702.5 340500 Mid High 1705 341000 Low Downlink 2002.5 400500 15 Mid High 15 Low Uplink Mid 1702.5 340500 High

3.9.14 Reference test frequencies for NR operating band n71 3.9.14.1 Test frequencies for NR operating band n71 and SCS 15 kHz

CBW [MHz]	Range	•	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	619.5	123900	
	Downlink	Mid	634.5	126900	15
5		High	649.5	129900	
5		Low	665.5	133100	
	Uplink	Mid	680.5	136100	-
		High	695.5	139100	
		Low	622	124400	
	Downlink	Mid	634.5	126900	15
10		High	647	129400	
10		Low	668	133600	
	Uplink	Mid	680.5	136100	-
		High	693	138600	
	Downlink	Low	624.5	124900	
		Mid	634.5	126900	15
15		High	644.5	128900	
15		Low	670.5	134100	
	Uplink	Mid	680.5	136100	-
	•	High	690.5	138100	
		Low	627	125400	
20	Downlink	Mid	634.5	126900	15
		High	642	128400	
20		Low	673	134600	
	Uplink	Mid	680.5	136100	-
		High	688	137600	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.: 01 Page: 41 of 61

3.9.15 Reference test frequencies for NR operating band n77 3.9.15.1 Test frequencies for NR operating band n77 and SCS 30 kHz

#### 3700-3980:

CBW [MHz]	Range	)	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3840	656000	30
	Uplink	High	3975	665000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3840	656000	30
	Uplink	High	3972.48	664832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3840	656000	30
	Uplink	High	3969.99	664666	
	Downlink	Low	3720	648000	
40	&	Mid	3840	656000	30
	Uplink	High	3960	664000	1
	Downlink	Low	3725.01	648334	
50	&	Mid	3840	656000	30
	Uplink	High	3954.99	663666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3840	656000	30
	Uplink	High	3949.98	663332	
	Downlink	Low	3735	649000	
70	&	Mid	3840	656000	30
	Uplink	High	3945	663000	1
	Downlink	Low	3740.01	649334	
80	&	Mid	3840	656000	30
	Uplink	High	3939.99	662666	
	Downlink	Low	3745.02	649668	
90	&	Mid	3840	656000	30
	Uplink	High	3934.98	662332	
	Downlink	Low	3750	650000	
100	&	Mid	3840	656000	30
	Uplink	High	3930	662000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pitot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

ade\_cone 215000 t (86-512) 62992980 邮编: 215000 t (86-512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.:

Page: 42 of 61

#### 3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	
50	&	Mid	3500.01	633334	30
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3485.01	632334	
70	&	Mid	3500.01	633334	30
	Uplink	High	3515.01	634334	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	
	Downlink	Low	3495	633000	
90	&	Mid	3500.01	633334	30
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions.frems-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.: Page: 43 of 61

3.9.16 Reference test frequencies for NR operating band n78 3.9.16.1 Test frequencies for NR operating band n78 and SCS 30 kHz

#### 3700-3800:

CBW [MHz]	Range	)	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3750	650000	30
	Uplink	High	3795	653000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3750	650000	30
	Uplink	High	3792.48	652832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3750	650000	30
	Uplink	High	3789.99	652666	
	Downlink	Low	3720	648000	
40	&	Mid	3750	650000	30
	Uplink	High	3780	652000	
	Downlink	Low	3725.01	648334	
50	&	Mid	3750	650000	30
	Uplink	High	3774.99	651666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3750	650000	30
	Uplink	High	3769.98	651332	
	Downlink	Low	3735	649000	
70	&	Mid	3750	650000	30
	Uplink	High	3765	651000	
	Downlink	Low	3740.01	649334	
80	&	Mid	3750	650000	30
	Uplink	High	3759.99	650666	
	Downlink	Low	3745.02	649668	
90	&	Mid	3750	650000	30
	Uplink	High	3754.98	650332	
	Downlink	Low	1	1	
100	&	Mid	3750	650000	30
	Uplink	High	1	1	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.:

Page: 44 of 61

#### 3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	
	Downlink	Low	3475.02	631668	
50	&	Mid	3500.01	633334	30
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3485.01	632334	
70	&	Mid	3500.01	633334	30
	Uplink	High	3515.01	634334	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	
	Downlink	Low	3495	633000	
90	&	Mid	3500.01	633334	30
	Uplink	High	3504.99	633666	
	Downlink	Low	\	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	1	\	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions.frems-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.:

45 of 61 Page:

### **Description of Tests**

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

www.sgsgroup.com.cn t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.:

Page: 46 of 61

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.:

47 of 61 Page:

### 4.3 EIRP Power Density

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.3

#### **Test Settings**

- 1. Set instrument center frequency to OBW center frequency.
- 2. Set span to at least 1.5 times the OBW.
- 3. Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4. Set VBW ≥ 3 × RBW.
- 5. Detector = RMS (power averaging).
- 6. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- 7. Sweep time = auto couple.
- 8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).





Report No.: SEWA2303000029RG02

01 Rev.:

Page: 48 of 61

### 4.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents as <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 49 of 61

### 4.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 3 days only.



Report No.: SEWA2303000029RG02

Rev.:

Page: 50 of 61

### 4.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings





Report No.: SEWA2303000029RG02

Rev.:

51 of 61 Page:

#### 4.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at <a href="http://www.sgs.com/en/Terms-and-coliditions/Terms-and-en-Document.aspx">http://www.sgs.com/en/Terms-and-coliditions/Terms-and-coliditi



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 52 of 61

### 4.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB $\mu$ V/m) = Measured amplitude level ( $\mu$ V/m) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB $\mu$ V/m) = Measured amplitude level (dB $\mu$ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Gocument cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of lea. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-75) 83071443,

South of No. 6 Plant, No. 1, Runsheng Road, Southou Industrial Park, Southou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业国区河胜路1号的6号厂房南部 単編: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn

Member of the SGS Group (SGS SA)



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 53 of 61

### 4.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



t (86-512) 62992980




Report No.: SEWA2303000029RG02


Rev.: 01 Page: 54 of 61

### 4.10 Test Setups

#### 4.10.1 Test Setup 1

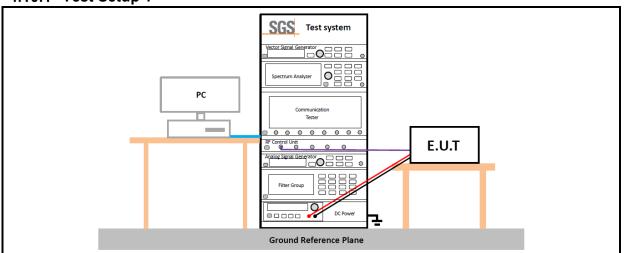

4.10.2 Test Setup 2

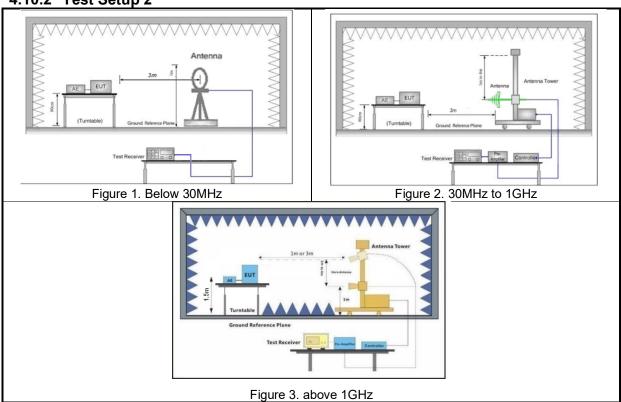



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx</a>. Attention is strawn the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of fills document is client and the structions, if any. The Company selection is structions, if any. The Company selection is structions, if any. The Company selection is structions of the company selection is structions. If any the company selection is structions of the company selection is structions. If any the company selection is structions of the company selection is structions of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulliset settent of lead. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing (Inseption reports certificates set lease contact us at telephone; 68-758) 830 7443.

\*\*Attention:\*\*To check the authenticity of testing (Inseption reports certificates cales contact us at telephone; 68-758) 830 7443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的/号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com




Report No.: SEWA2303000029RG02

Rev.: 01

Page: 55 of 61

### 4.10.3 Test Setup 3

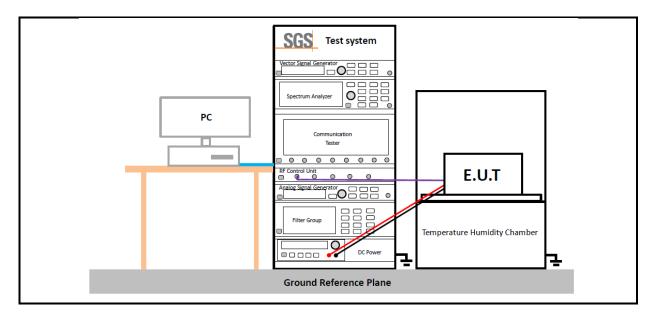



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWA2303000029RG02

Rev.:

Page: 56 of 61

#### 4.11 Test Conditions

	Transmit Output Power Data - Average Power, Spectral Density				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9				
	Peak-to-Average Ratio				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM5; NR/TM9				
	Modulation Characteristics				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	M (M= middle channel)				
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9				
	Bandwidth - Occupied Bandwidth				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9				
	Bandwidth - Emission Bandwidth				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9				
	Band Edges Compliance				
Test Case	Test Conditions				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions.frems-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWA2303000029RG02

Rev.:

Page: 57 of 61

Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 1  RF Channels (TX) L, H (L= low channel, H= high channel)  Test Mode NR/TM1; NR/TM6  Spurious Emission at Antenna Terminals  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 1  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Test Mode NR/TM1  Test Mode NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)  Test Mode NR/TM1; NR/TM6		1 age. 37 01 01			
RF Channels (TX) L, H (L= low channel, H= high channel)  Test Mode NR/TM1; NR/TM6  Spurious Emission at Antenna Terminals  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 1  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Test Mode NR/TM1  Test Mode Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Environment	Ambient Climate & Rated Voltage			
Test Mode  NR/TM1; NR/TM6  Spurious Emission at Antenna Terminals  Test Case  Test Conditions  Test Environment  Ambient Climate & Rated Voltage  Test Setup  RF Channels (TX)  L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode  NR/TM1  Field Strength of Spurious Radiation  Test Case  Test Conditions  Test Environment  Ambient Climate & Rated Voltage  Test Setup  Test Setup  Test Setup 2  RF Channels (TX)  NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case  Test Conditions  Test Setup  Test Setup 3  RF Channels (TX)  M (M= middle channel)	Test Setup	Test Setup 1			
Spurious Emission at Antenna Terminals  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 1  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Test Mode NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	RF Channels (TX)	L, H (L= low channel, H= high channel)			
Test Case Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 1  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Test Mode NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Mode	NR/TM1; NR/TM6			
Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 1  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Test Mode NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)		Spurious Emission at Antenna Terminals			
Test Setup Test Setup 1  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Case	Test Conditions			
RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Environment	Ambient Climate & Rated Voltage			
Test Mode NR/TM1  Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Setup	Test Setup 1			
Field Strength of Spurious Radiation  Test Case Test Conditions  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Case  Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup  Test Setup 2  RF Channels (TX)  NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  Test Environment (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup Test Setup Test Setup M (M= middle channel)	Test Mode	NR/TM1			
Test Environment Ambient Climate & Rated Voltage  Test Setup Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case Test Conditions  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)		Field Strength of Spurious Radiation			
Test Setup 2  RF Channels (TX) L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case  Test Conditions  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Case	Test Conditions			
RF Channels (TX)  L, M, H (L= low channel, M= middle channel, H= high channel)  NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case  Test Conditions  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  Test Setup 3  RF Channels (TX)  M (M= middle channel)	Test Environment	Ambient Climate & Rated Voltage			
Test Mode  NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case  Test Conditions  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  RF Channels (TX)  M (M= middle channel)	Test Setup	Test Setup 2			
Test Mode  Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.  Frequency Stability  Test Case  Test Conditions  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  Test Setup 3  RF Channels (TX)  M (M= middle channel)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)			
Test Case  Test Conditions  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  Test Setup 3  RF Channels (TX)  M (M= middle channel)	Test Mode	Remark: All bandwidth and modulation of NR have been pre tested, and only the			
Test Environment  (1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  RF Channels (TX)  M (M= middle channel)		Frequency Stability			
Test Environment (2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup Test Setup 3  RF Channels (TX) M (M= middle channel)	Test Case	Test Conditions			
(2) VL, VN and VH of Rated Voltage at Ambient Climate.  Test Setup  RF Channels (TX)  M (M= middle channel)	Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage			
RF Channels (TX) M (M= middle channel)	Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.			
· · · · · · · · · · · · · · · · · · ·	Test Setup	Test Setup 3			
Test Mode NR/TM1; NR/TM6	RF Channels (TX)	M (M= middle channel)			
	Test Mode	NR/TM1; NR/TM6			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions.frems-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.:

Page: 58 of 61

#### **Main Test Instruments** 5

RF conducted test								
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)			
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07			
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05			
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16			
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR			
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22			
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05			
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05			
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05			
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15			
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWA2303000029RG02

Rev.: Page: 59 of 61

	RSE Test System							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)			
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24			
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2023/02/07	2024/02/06			
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27			
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22			
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07			
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-04	2021/12/05	2023/12/04			
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04			
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13			
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09			
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22			
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22			
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22			
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05			
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22			
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	SUWI-01-04-01	2023/02/06	2024/02/05			
Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-01	2022/09/16	2023/09/15			
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions.frems-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWA2303000029RG02

Rev.: 01

Page: 60 of 61

### 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
7	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.88dB (30M -1GHz)
		± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

#### Remark:

The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>cispt/ETSI</sub> (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SEWA2303000029RG02

Rev.:

Page: 61 of 61

### **Appendixes**

Appendix A.2	WWAN Setup Photos
Appendix B.26	NR Band n2
Appendix B.27	NR Band n5
Appendix B.28	NR Band n7
Appendix B.29	NR Band n12
Appendix B.30	NR Band n13
Appendix B.31	NR Band n14
Appendix B.32	NR Band n25
Appendix B.33	NR Band n26(814-824)
Appendix B.34	NR Band n26(824-849)
Appendix B.35	NR Band n30
Appendix B.36	NR Band n38
Appendix B.37	NR Band n41
Appendix B.38	NR Band n66
Appendix B.39	NR Band n70
Appendix B.40	NR Band n71
Appendix B.41	NR Band n77(3450-3550)
Appendix B.42	NR Band n77(3700-3980)
Appendix B.43	NR Band n78(3450-3550)
Appendix B.44	NR Band n78(3700-3800)

---End of Report---



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000