

WCDMA Band 2

Frequency: 1907.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.42 \text{ S/m}$; $\epsilon_r = 41.079$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.91, 8.51, 8.47) @ 1907.6 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/WCDMA Band 2_Ch9538/Bottom_0mm /Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.37 W/kg

P-sensor on/Notebook Computer/WCDMA Band 2_Ch9538/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 1.39 W/kg

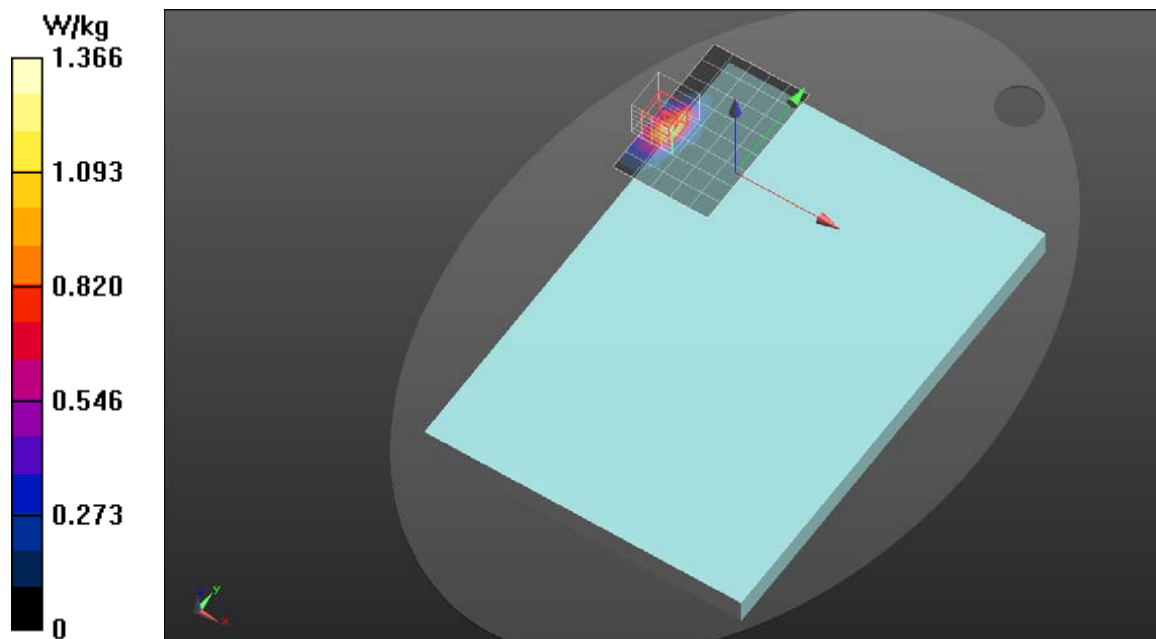

WCDMA Band 4

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 41.303$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(9.06, 8.8, 8.69) @ 1752.6 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/WCDMA Band 4_Ch1513/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.70 W/kg

P-sensor on/Notebook Computer/WCDMA Band 4_Ch1513/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.561 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.68 W/kg

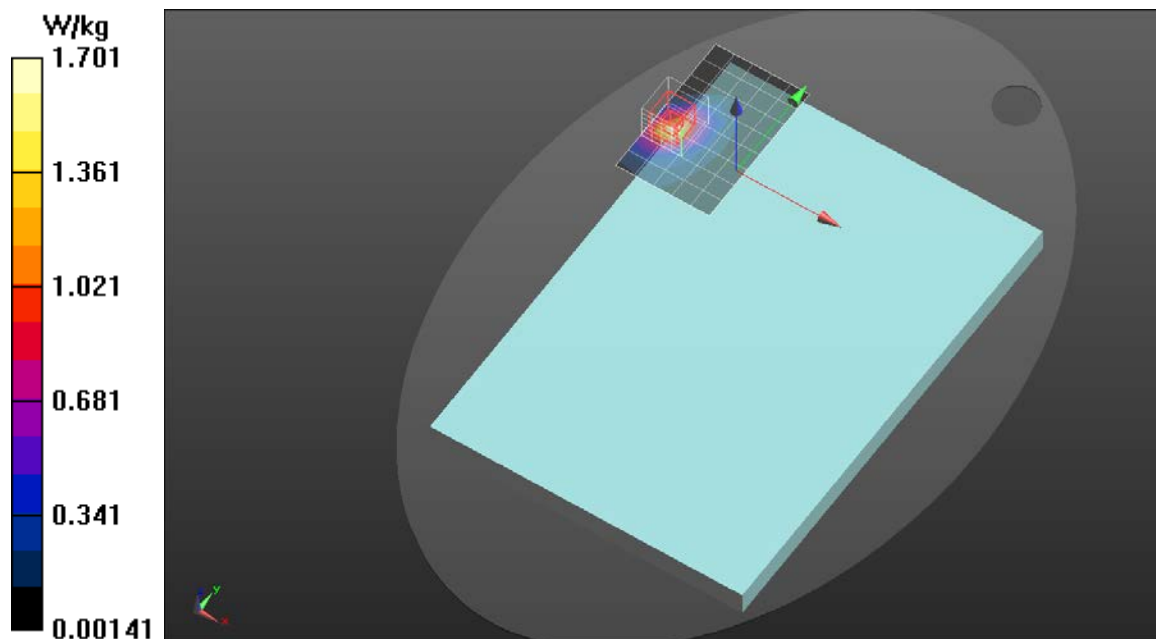

WCDMA Band 5

Frequency: 846.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 43.54$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.81, 10.4, 10.3) @ 846.6 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/WCDMA Band 5_Ch4233/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.33 W/kg

P-sensor on/Notebook Computer/WCDMA Band 5_Ch4233/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.936 W/kg; SAR(10 g) = 0.559 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 1.37 W/kg

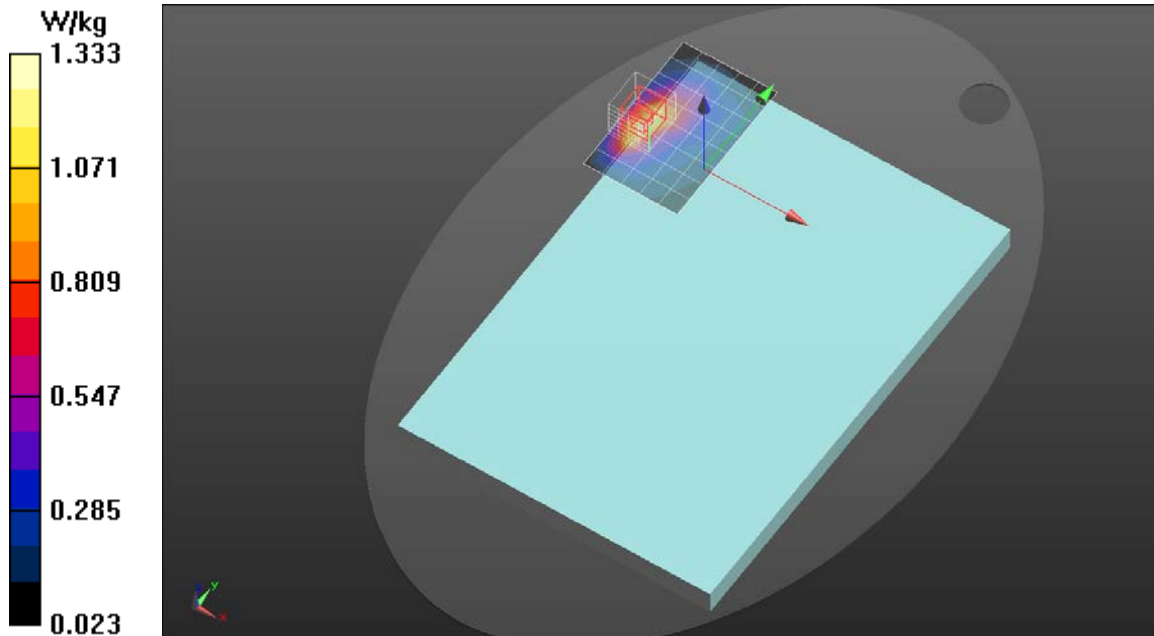

LTE Band 2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 41.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.91, 8.51, 8.47) @ 1900 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

2_20M_Ch19100_RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 W/kg

P-sensor on/Notebook Computer/LTE Band

2_20M_Ch19100_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.383 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 1.27 W/kg

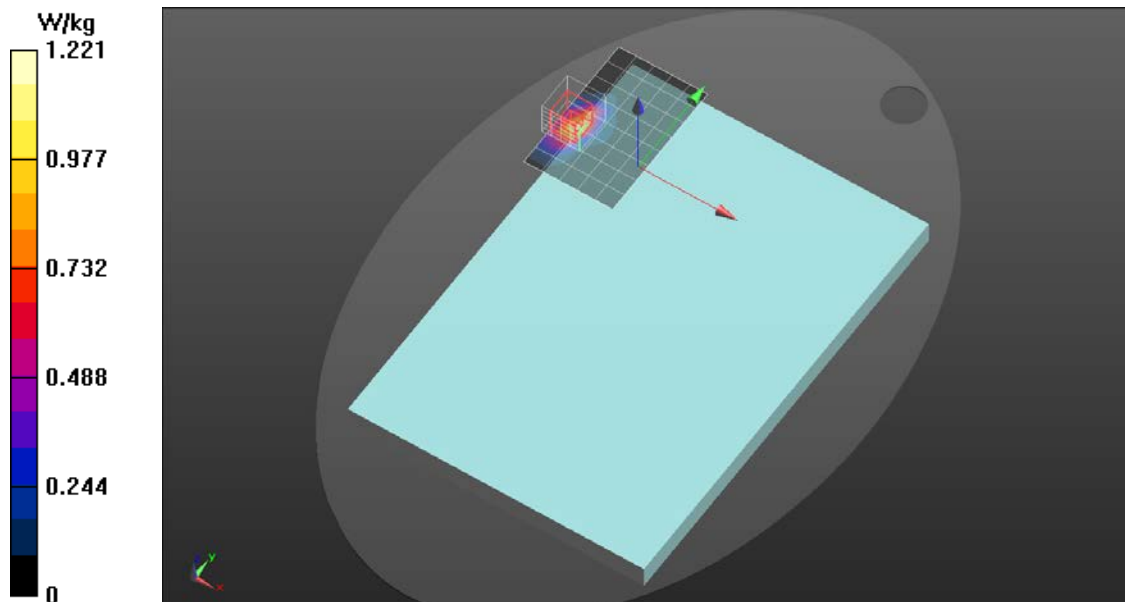

LTE Band 4

Frequency: 1745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 41.363$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(9.06, 8.8, 8.69) @ 1745 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

4_20M_Ch20300_RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.35 W/kg

P-sensor on/Notebook Computer/LTE Band

4_20M_Ch20300_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.477 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 1.47 W/kg

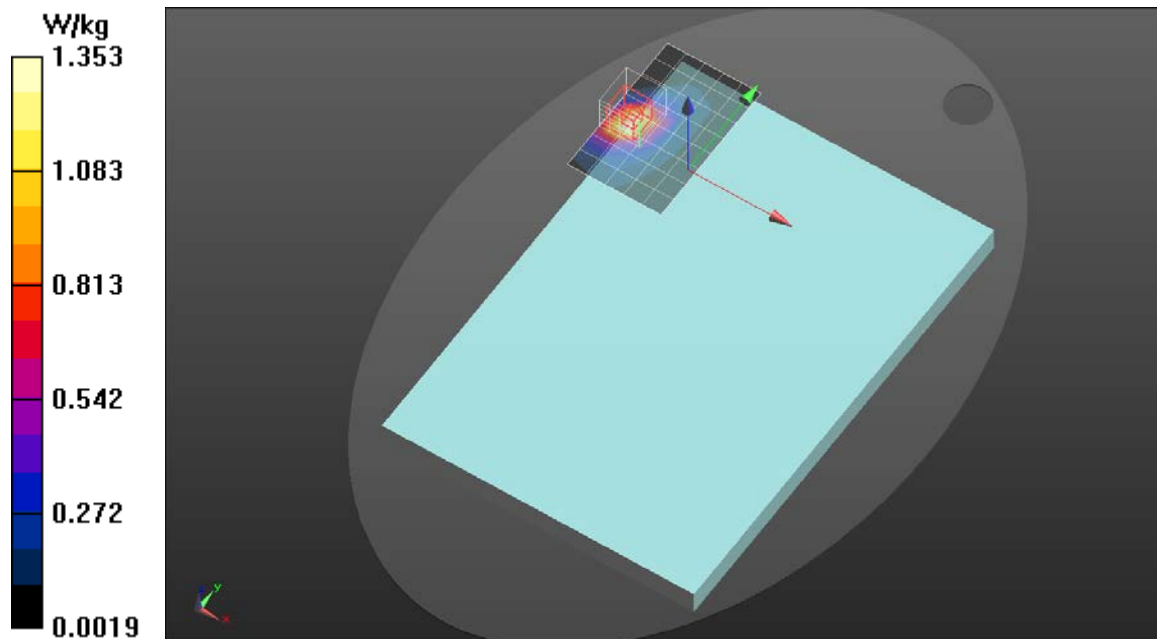

LTE Band 5

Frequency: 829 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 43.616$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.81, 10.4, 10.3) @ 829 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

5_10M_Ch20450_RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg

P-sensor on/Notebook Computer/LTE Band

5_10M_Ch20450_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.493 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 1.18 W/kg

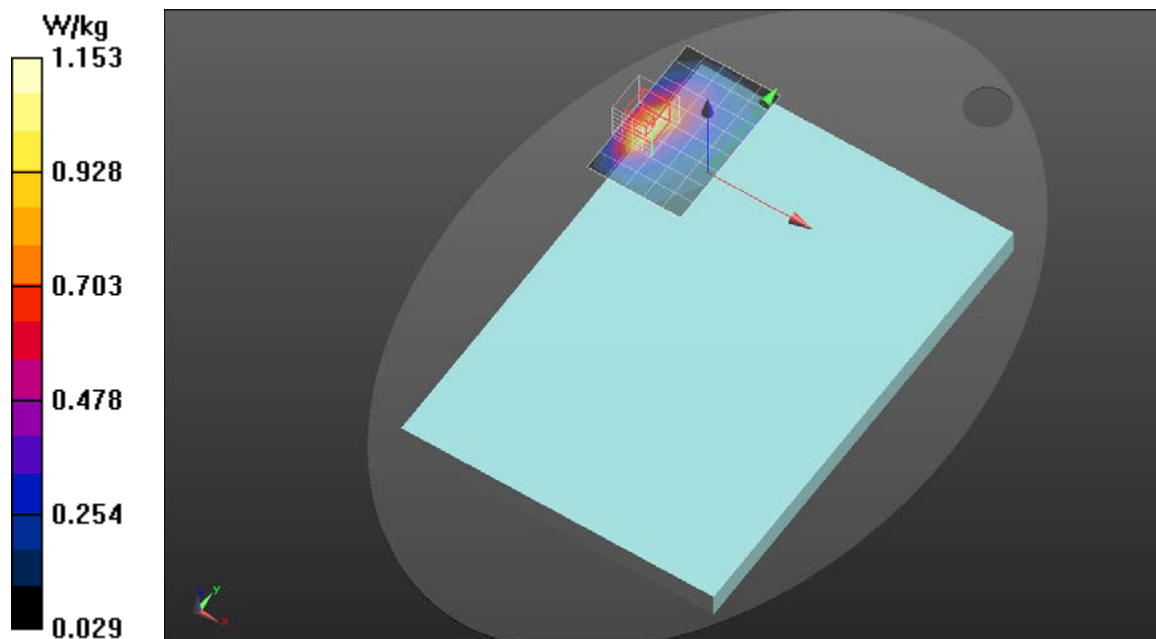

LTE Band 7

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.936$ S/m; $\epsilon_r = 39.024$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.42, 8, 8.03) @ 2510 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 7 20M_Ch20850 RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.37 W/kg

P-sensor on/Notebook Computer/LTE Band 7 20M_Ch20850 RB1.0/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.967 W/kg; SAR(10 g) = 0.443 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.72 W/kg

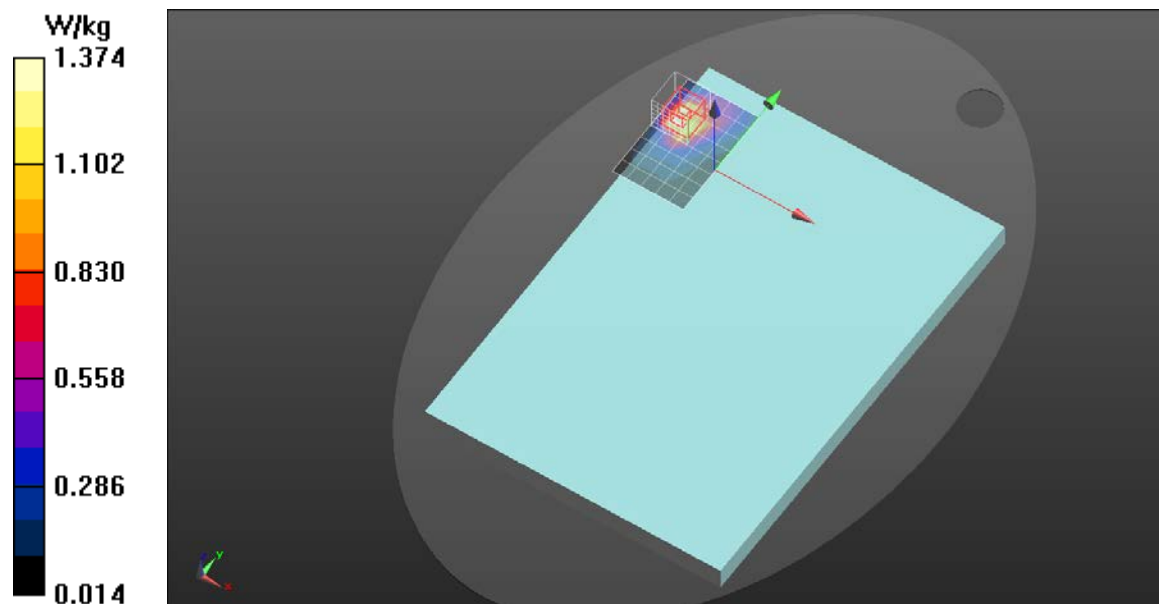

LTE Band 12

Frequency: 711 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.936$; $\rho = 1000$ kg/m³
DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.64, 10.22, 10.41) @ 711 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 12 10M_Ch23130 RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.00 W/kg

P-sensor on/Notebook Computer/LTE Band 12 10M_Ch23130 RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.552 W/kg

Smallest distance from peaks to all points 3 dB below = 20.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 1.04 W/kg

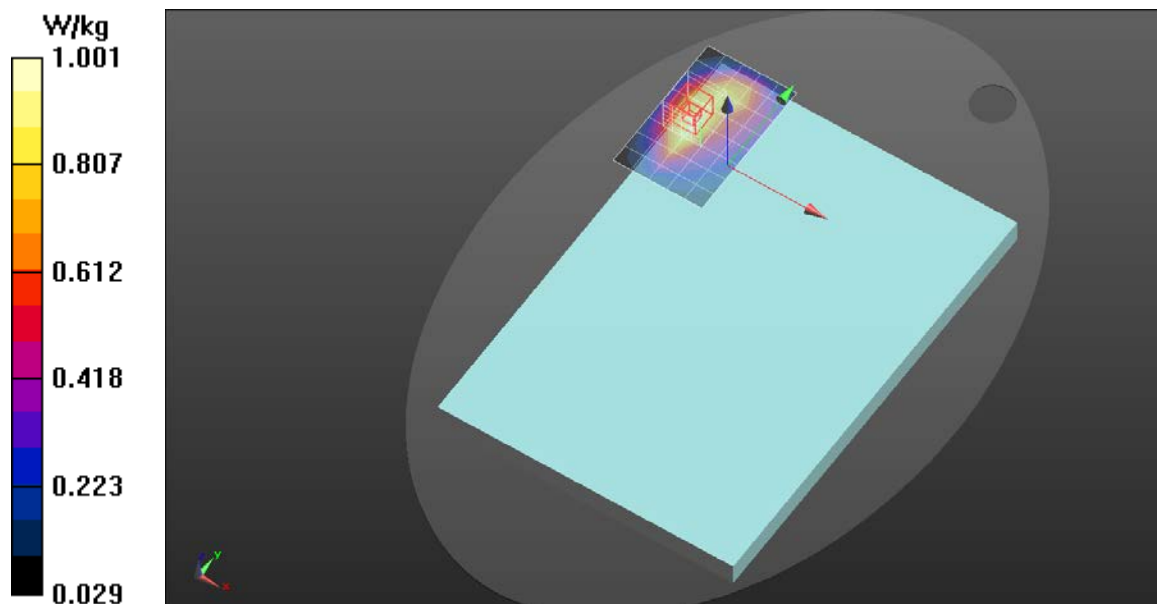

LTE Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 43.755$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.64, 10.22, 10.41) @ 782 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 13 10M_Ch23230 RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 W/kg

P-sensor on/Notebook Computer/LTE Band 13 10M_Ch23230 RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.597 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 1.30 W/kg

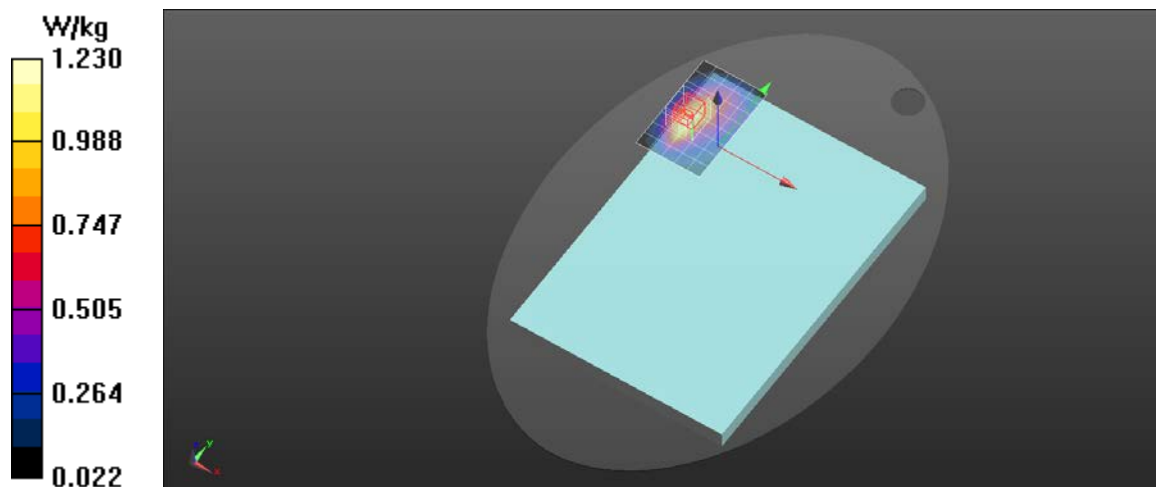

LTE Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 43.747$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.64, 10.22, 10.41) @ 793 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 14 10M_Ch23330 RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 W/kg

P-sensor on/Notebook Computer/LTE Band 14 10M_Ch23330 RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.583 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 1.29 W/kg

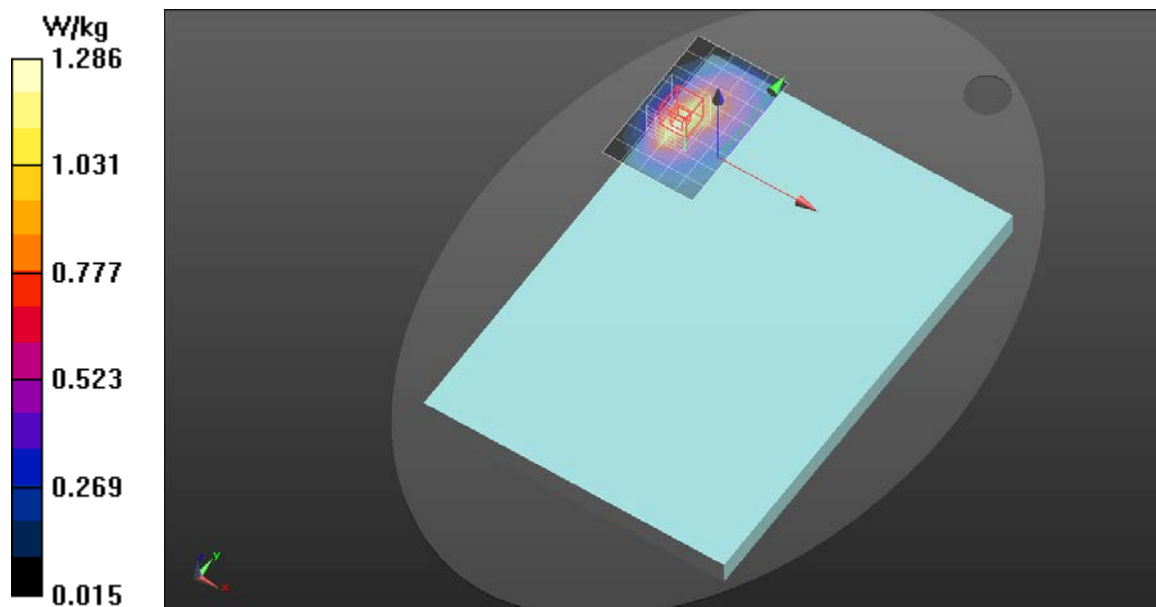

LTE Band 17


Frequency: 711 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 43.936$; $\rho = 1000$ kg/m³
DASY5 Configuration:
- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.64, 10.22, 10.41) @ 711 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 17 10M_Ch23800 RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.985 W/kg

P-sensor on/Notebook Computer/LTE Band 17 10M_Ch23800 RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.543 W/kg
Smallest distance from peaks to all points 3 dB below = 16.1 mm
Ratio of SAR at M2 to SAR at M1 = 72.1%
Maximum value of SAR (measured) = 1.03 W/kg

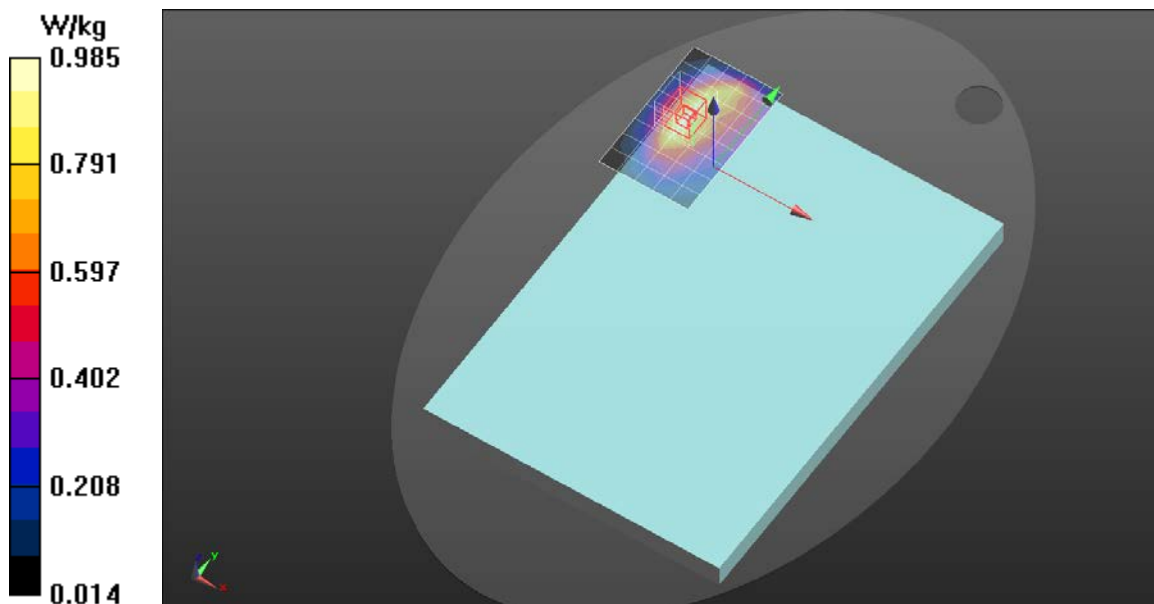

LTE Band 25

Frequency: 1905 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 41.091$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.91, 8.51, 8.47) @ 1905 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

25_20M_Ch26590_RB1.0/Bottom_0mm /Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg

P-sensor on/Notebook Computer/LTE Band

25_20M_Ch26590_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 1.18 W/kg

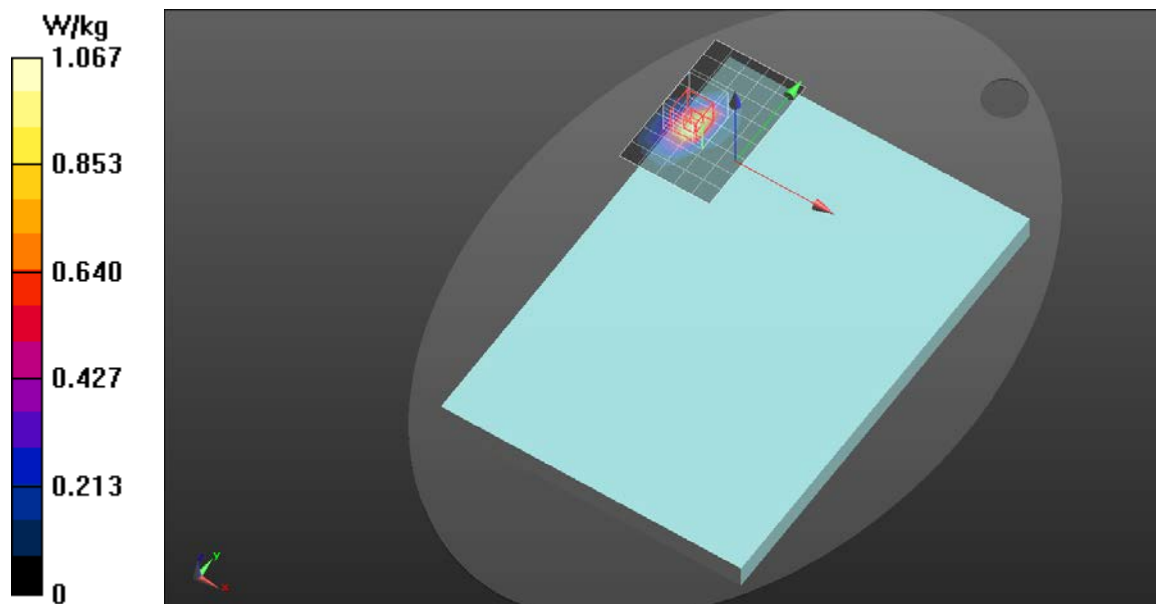

LTE Band 26

Frequency: 831.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 43.606$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.81, 10.4, 10.3) @ 831.5 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 26


15M_Ch26865RB1.0/Bottom_0mm/Area Scan (6x9x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.951 W/kg

P-sensor on/Notebook Computer/LTE Band 26

15M_Ch26865RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.471 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 63.1%
Maximum value of SAR (measured) = 1.07 W/kg

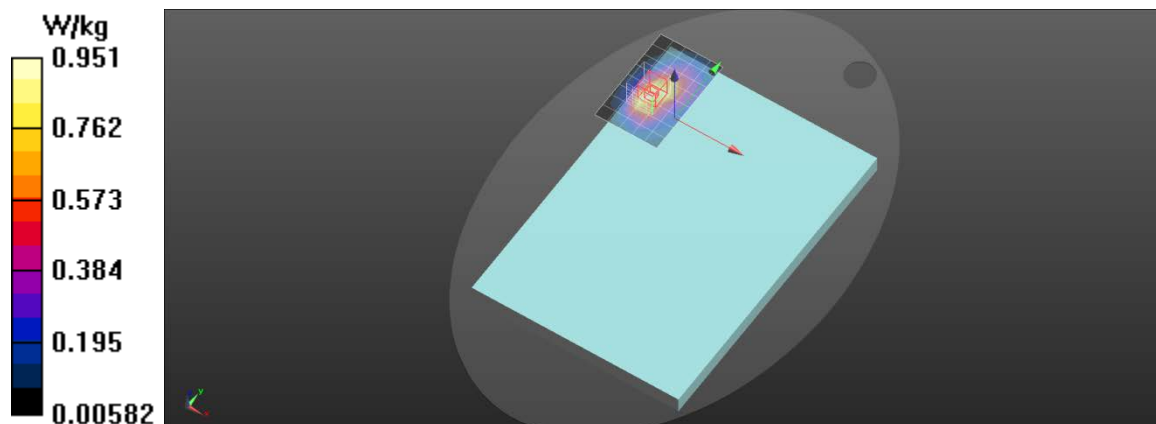

LTE Band 30

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.692$ S/m; $\epsilon_r = 40.639$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.44, 8.05, 8.04) @ 2310 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

30_10M_Ch27710_RB1.0/Bottom_0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.78 W/kg

P-sensor on/Notebook Computer/LTE Band

30_10M_Ch27710_RB1.0/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.518 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 1.78 W/kg

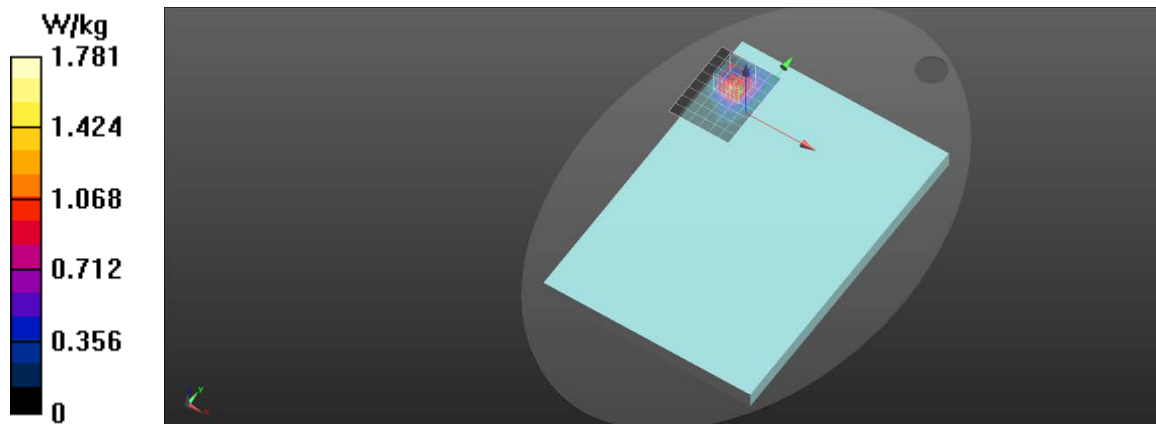

LTE Band 38


Frequency: 2610 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 2610$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 38.678$; $\rho = 1000$ kg/m³
DASY5 Configuration:
- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.42, 8, 8.03) @ 2610 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 38 20M_Ch38150 RB1.0/Bottom_0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.39 W/kg

P-sensor on/Notebook Computer/LTE Band 38 20M_Ch38150 RB1.0/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.86 W/kg
SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.367 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 44.1%
Maximum value of SAR (measured) = 1.42 W/kg

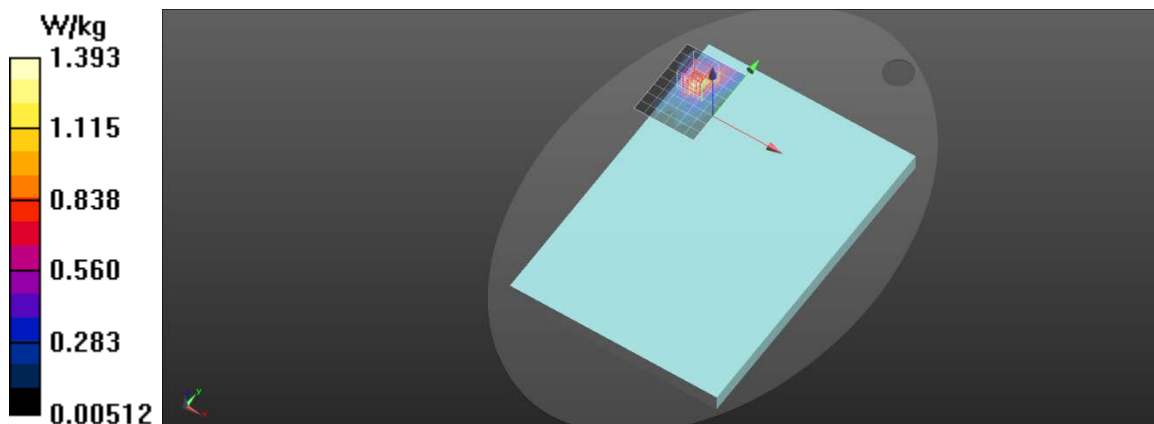

LTE Band 41

Frequency: 2593 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 38.713$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(8.42, 8, 8.03) @ 2593 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

41_10M_Ch40620_RB1.0/Bottom_0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.22 W/kg

P-sensor on/Notebook Computer/LTE Band

41_10M_Ch40620_RB1.0/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 42.8%

Maximum value of SAR (measured) = 1.41 W/kg

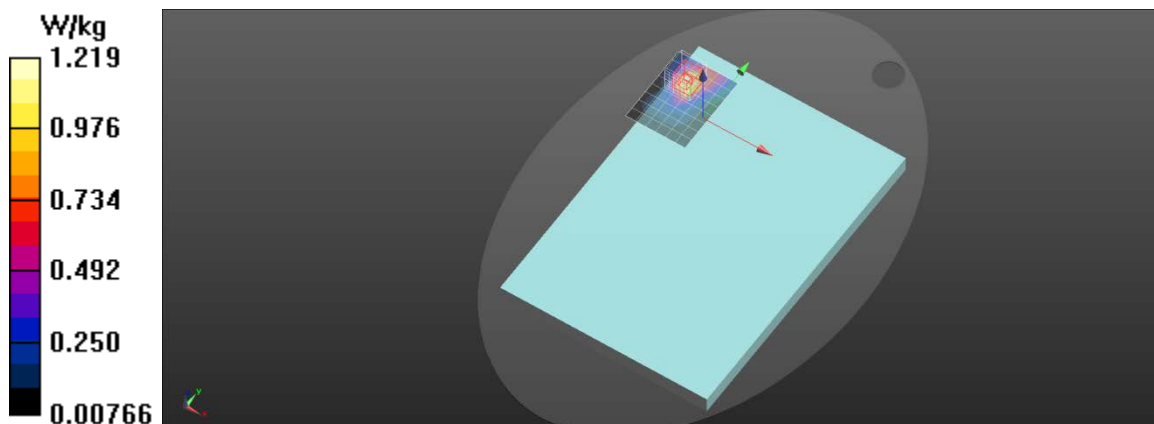

LTE Band 42

Frequency: 3460 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 3460$ MHz; $\sigma = 2.786$ S/m; $\epsilon_r = 38.49$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(7.45, 7.15, 7.14) @ 3460 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

42_20M_Ch42190_RB1.0/Bottom_0mm/Area Scan (8x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.745 W/kg

P-sensor on/Notebook Computer/LTE Band

42_20M_Ch42190_RB1.0/Bottom_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 0.851 W/kg

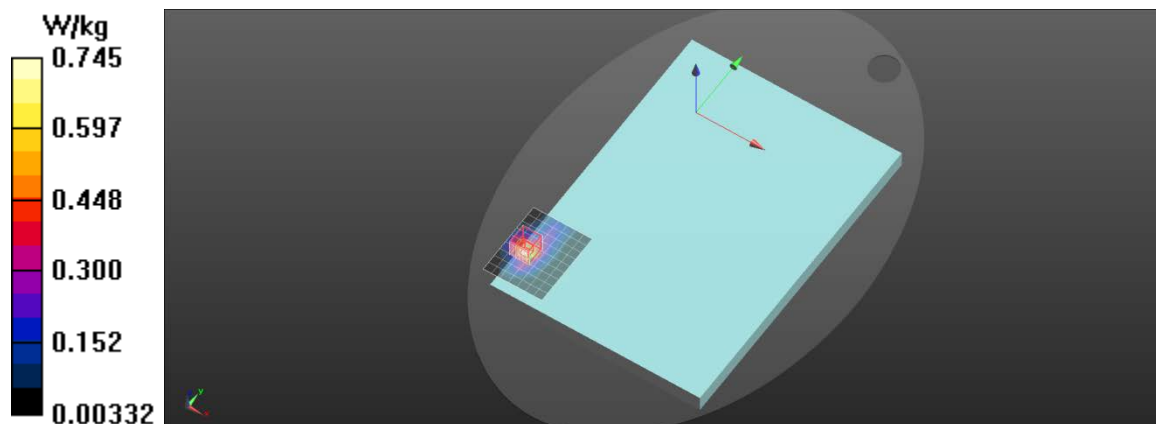

LTE Band 43


Frequency: 3790 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 3790$ MHz; $\sigma = 3.19$ S/m; $\epsilon_r = 35.571$; $\rho = 1000$ kg/m³
DASY5 Configuration:
- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(7.58, 7.25, 7.22) @ 3790 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band 43_20M_Ch45490_RB1.0/Bottom_0mm/Area Scan (8x10x1):

Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.605 W/kg

P-sensor on/Notebook Computer/LTE Band 43_20M_Ch45490_RB1.0/Bottom_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.128 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 58%
Maximum value of SAR (measured) = 0.837 W/kg

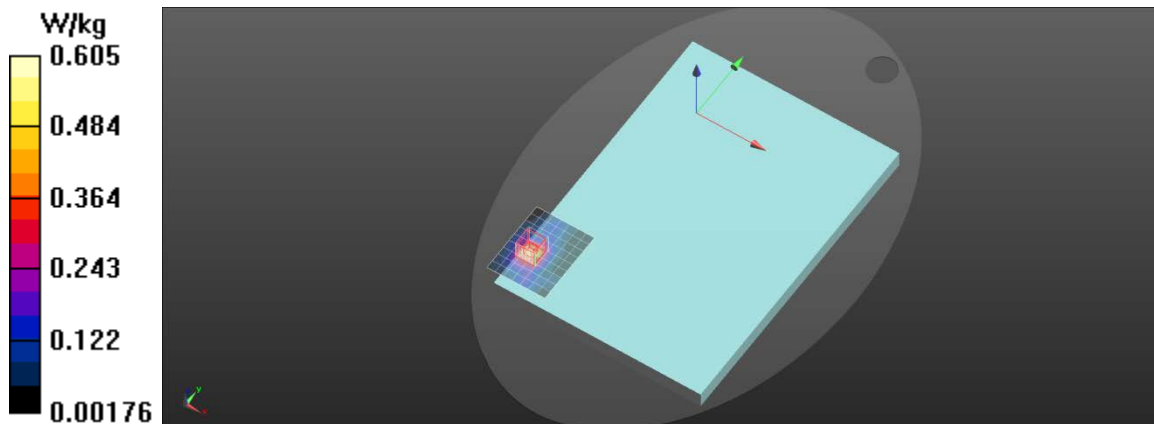

LTE Band 48

Frequency: 3560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 3560$ MHz; $\sigma = 2.884$ S/m; $\epsilon_r = 38.292$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(7.45, 7.15, 7.14) @ 3560 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

48_20M_Ch55340_RB1.0/Bottom_0mm/Area Scan (8x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.484 W/kg

P-sensor on/Notebook Computer/LTE Band

48_20M_Ch55340_RB1.0/Bottom_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.636 W/kg

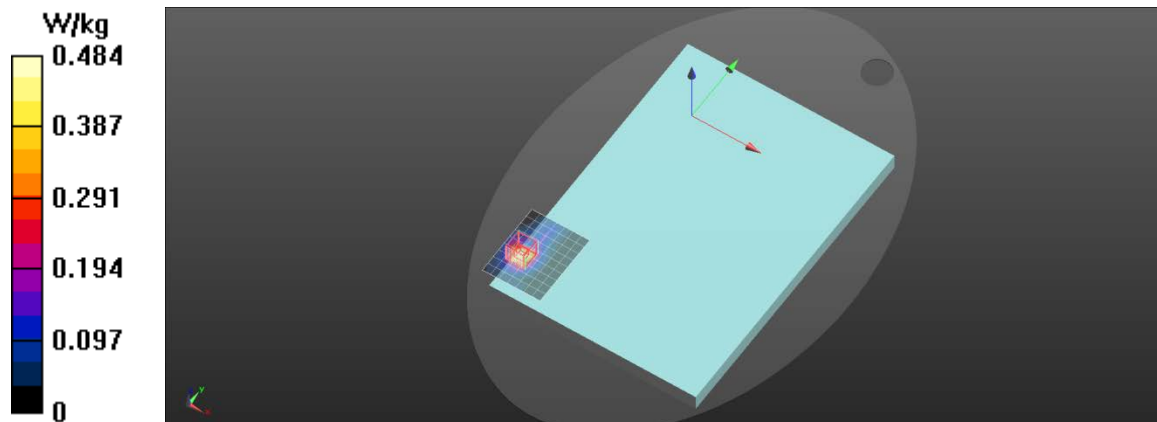

LTE Band 66

Frequency: 1770 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 41.178$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(9.06, 8.8, 8.69) @ 1770 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

66_20M_Ch132572_RB50.0/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.51 W/kg

P-sensor on/Notebook Computer/LTE Band

66_20M_Ch132572_RB50.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.551 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 1.77 W/kg

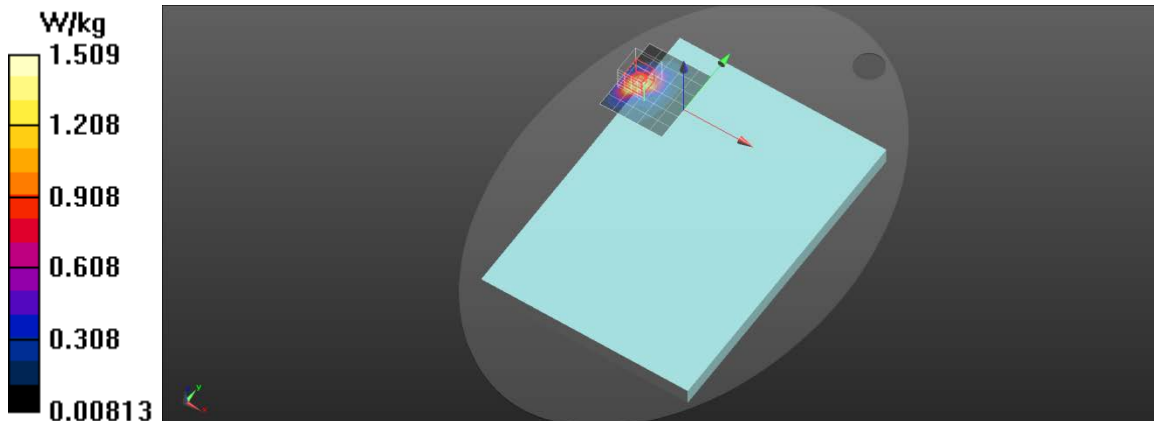

LTE Band 71

Frequency: 688 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 688$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 44.017$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1289; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7678; ConvF(10.64, 10.22, 10.41) @ 688 MHz; Calibrated: 2023/8/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/LTE Band

71_20M_Ch133372_RB1.0/Bottom_0mm/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.896 W/kg

P-sensor on/Notebook Computer/LTE Band

71_20M_Ch133372_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.720 W/kg; SAR(10 g) = 0.476 W/kg

Smallest distance from peaks to all points 3 dB below = 19.3 mm

Ratio of SAR at M2 to SAR at M1 = 71.1%

Maximum value of SAR (measured) = 0.904 W/kg

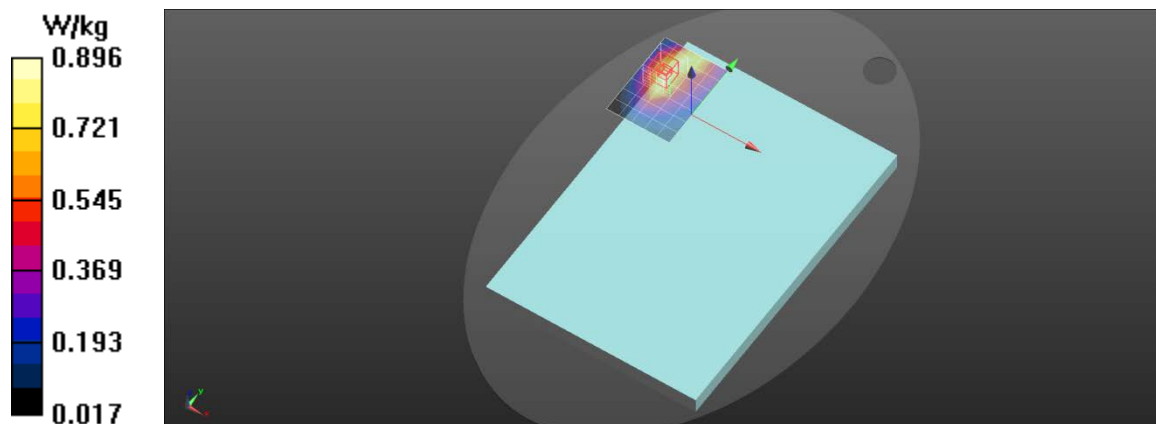

NR Band 2 Main

Frequency: 1880 MHz; Duty Cycle: 1:3.55795; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.755$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(8.26, 8.26, 8.26) @ 1880 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

2_20M_Ch376000_RB1.0/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.19 W/kg

P-sensor on/Notebook Computer/5G NR Band

2_20M_Ch376000_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 1.34 W/kg

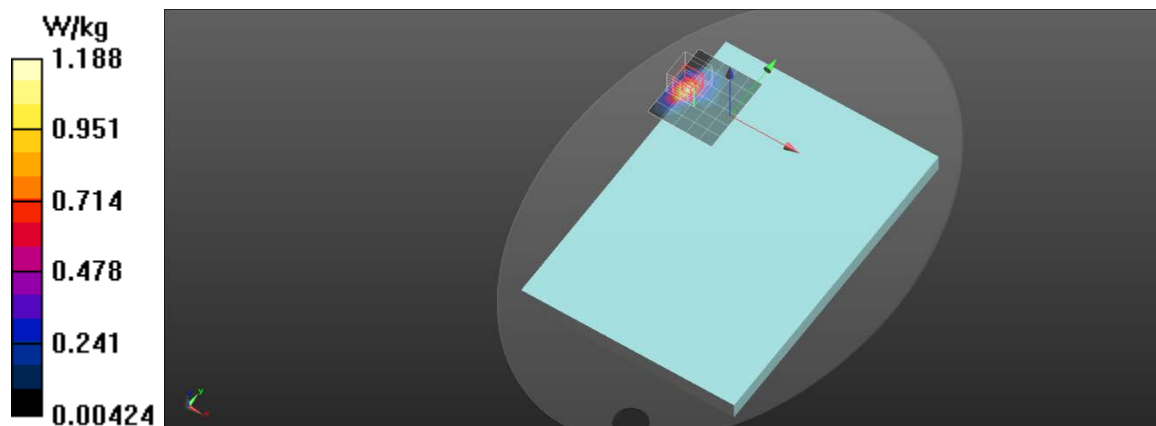

NR Band 5 Main

Frequency: 836.5 MHz; Duty Cycle: 1:3.55795; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 43.078$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(9.83, 9.83, 9.83) @ 836.5 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

5_20M_Ch167300_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 W/kg

P-sensor on/Notebook Computer/5G NR Band

5_20M_Ch167300_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.3680 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 1.12 W/kg

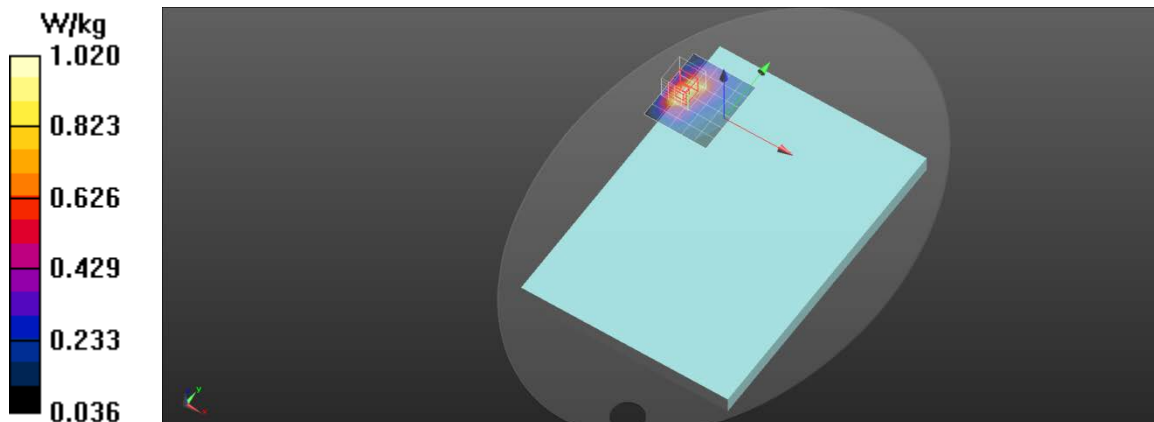

NR Band 7 Main

Frequency: 2520 MHz; Duty Cycle: 1:3.55877; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2520$ MHz; $\sigma = 1.924$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(7.48, 7.48, 7.48) @ 2520 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

7_40M_Ch504000_RB1.1/Bottom_0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.38 W/kg

P-sensor on/Notebook Computer/5G NR Band

7_40M_Ch504000_RB1.1/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.406 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 1.48 W/kg

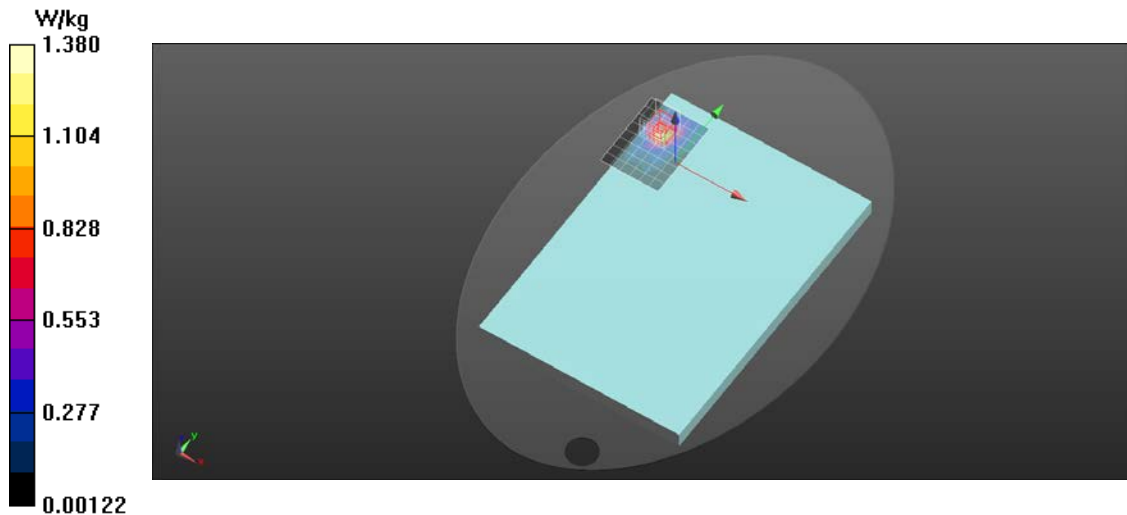

NR Band 12 Main

Frequency: 708.5 MHz; Duty Cycle: 1:3.56205; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 708.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.757$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(10.17, 10.17, 10.17) @ 708.5 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

12_10M_Ch141700_RB1.0/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.820 W/kg

P-sensor on/Notebook Computer/5G NR Band

12_10M_Ch141700_RB1.0/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.5950 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.472 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 70.4%

Maximum value of SAR (measured) = 0.927 W/kg

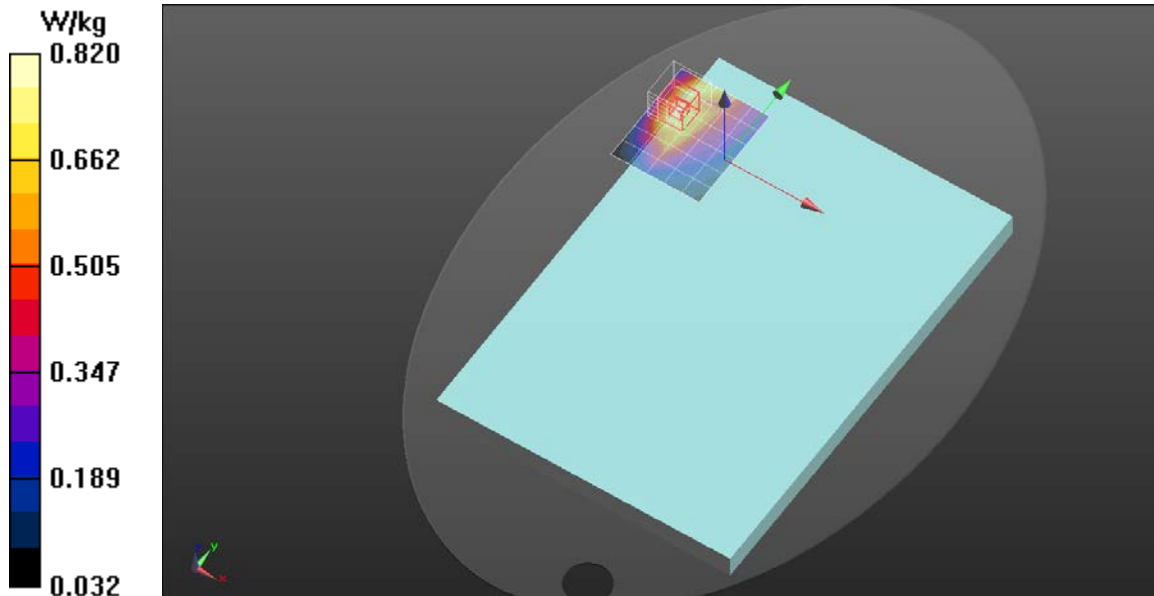

NR Band 13 Main

Frequency: 782 MHz; Duty Cycle: 1:3.56205; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 43.57$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg

- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16

- Probe: EX3DV4 - SN7369; ConvF(10.17, 10.17, 10.17) @ 782 MHz; Calibrated: 2023/5/22

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

13_10M_Ch156400_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg

P-sensor on/Notebook Computer/5G NR Band

13_10M_Ch156400_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6630 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 1.14 W/kg

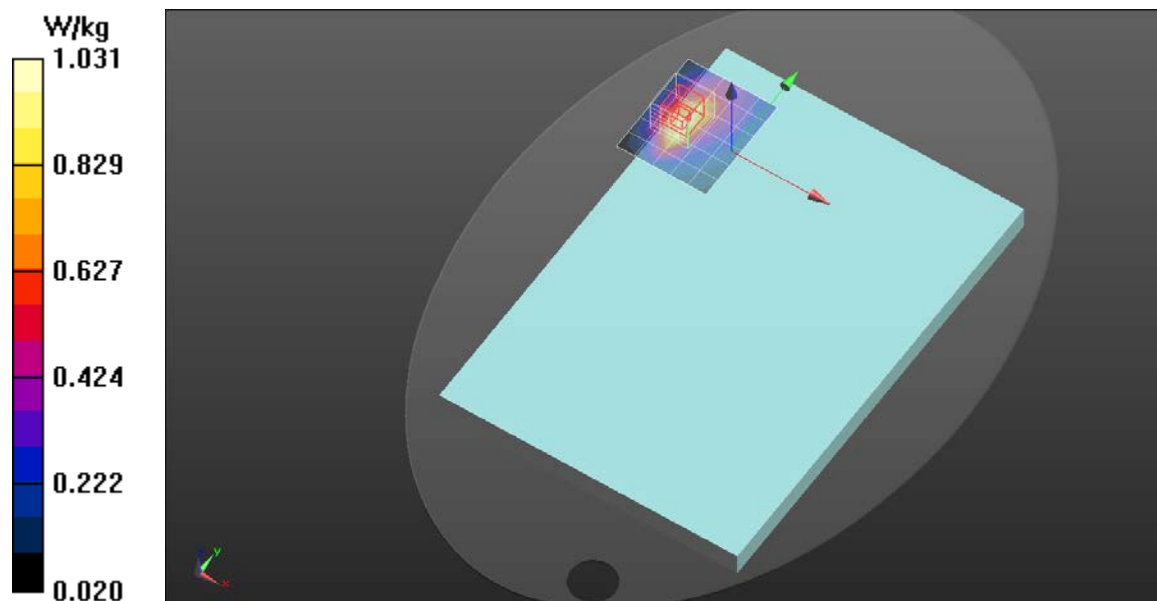

NR Band 14 Main

Frequency: 793 MHz; Duty Cycle: 1:3.56205; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.552$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(10.17, 10.17, 10.17) @ 793 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

14_10M_Ch158600_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.57 W/kg

P-sensor on/Notebook Computer/5G NR Band

14_10M_Ch158600_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7010 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.675 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.6%

Maximum value of SAR (measured) = 1.59 W/kg

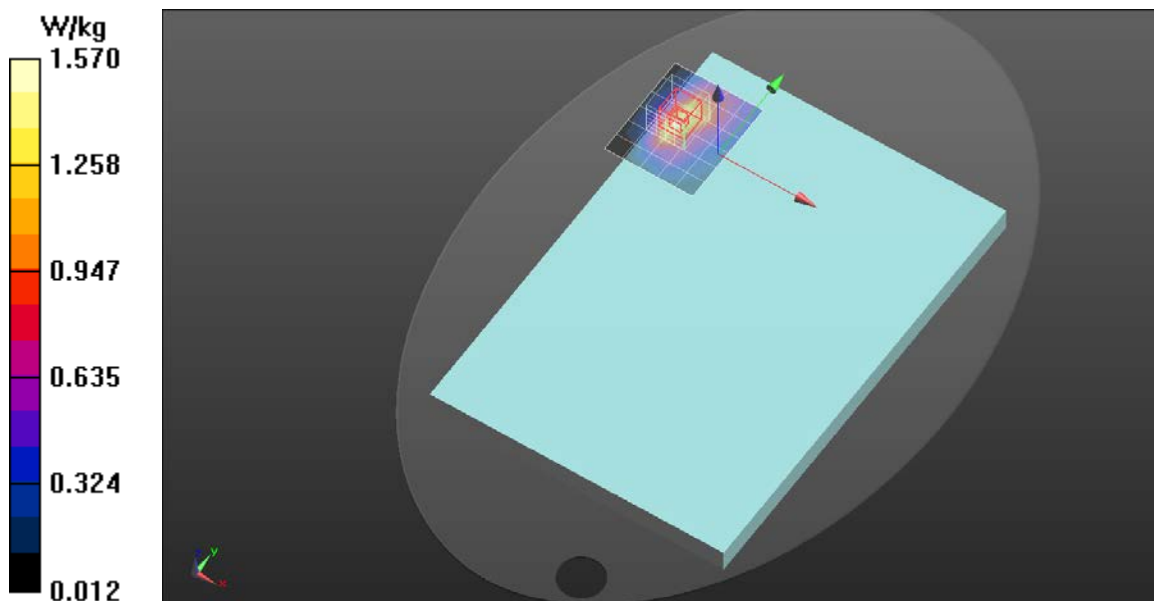

NR Band 25 Main

Frequency: 1882.5 MHz; Duty Cycle: 1:3.55877; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.746$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(8.26, 8.26, 8.26) @ 1882.5 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

25_40M_Ch376500_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm.

Maximum value of SAR (measured) = 1.00 W/kg

P-sensor on/Notebook Computer/5G NR Band

25_40M_Ch376500_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 1.28 W/kg

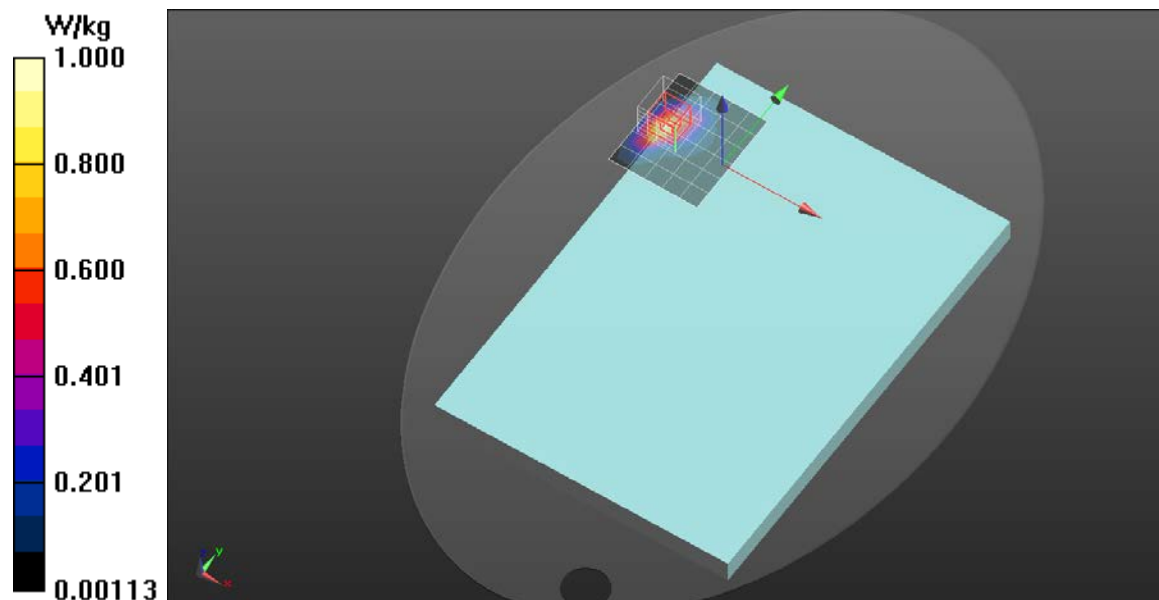

NR Band 26 Main

Frequency: 834 MHz; Duty Cycle: 1:3.55795; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 834$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.101$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(9.83, 9.83, 9.83) @ 834 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

26_20M_Ch166800_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg

P-sensor on/Notebook Computer/5G NR Band

26_20M_Ch166800_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.054 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.492 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.2

Maximum value of SAR (measured) = 1.13 W/kg

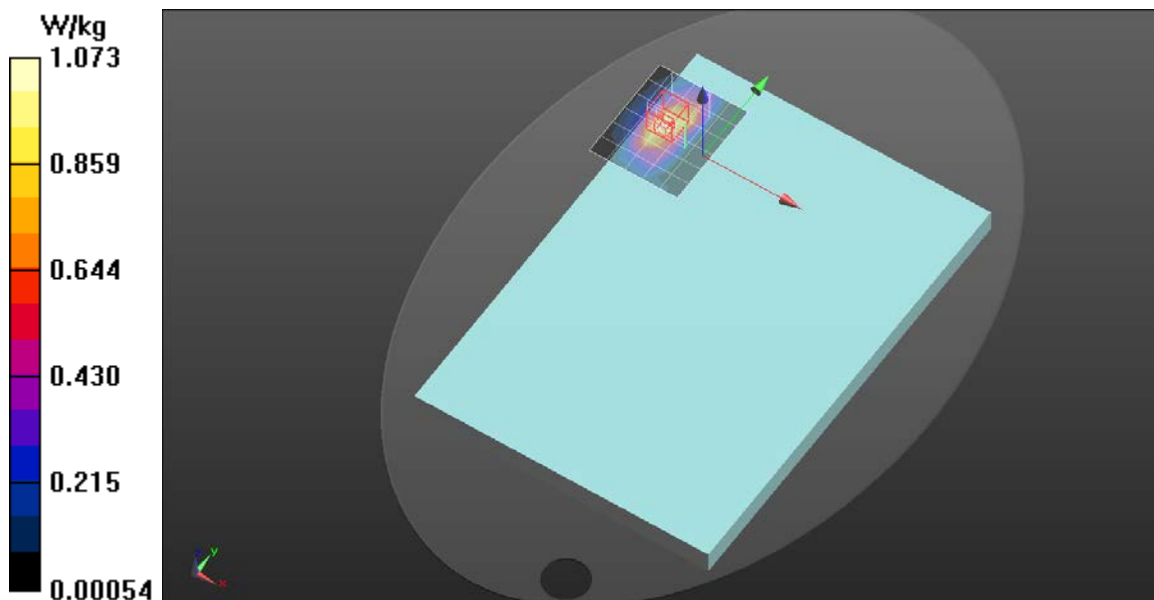

NR Band 30 Main

Frequency: 2310 MHz; Duty Cycle: 1:6.7515; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2310$ MHz; $\sigma = 1.758$ S/m; $\epsilon_r = 40.024$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(7.89, 7.89, 7.89) @ 2310 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/5G NR Band

30_10M_Ch462000_RB1.1/Bottom_0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm.

Maximum value of SAR (measured) = 1.76 W/kg

P-sensor on/Notebook Computer/5G NR Band

30_10M_Ch462000_RB1.1/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift =0.02 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%.

Maximum value of SAR (measured) = 1.69 W/kg

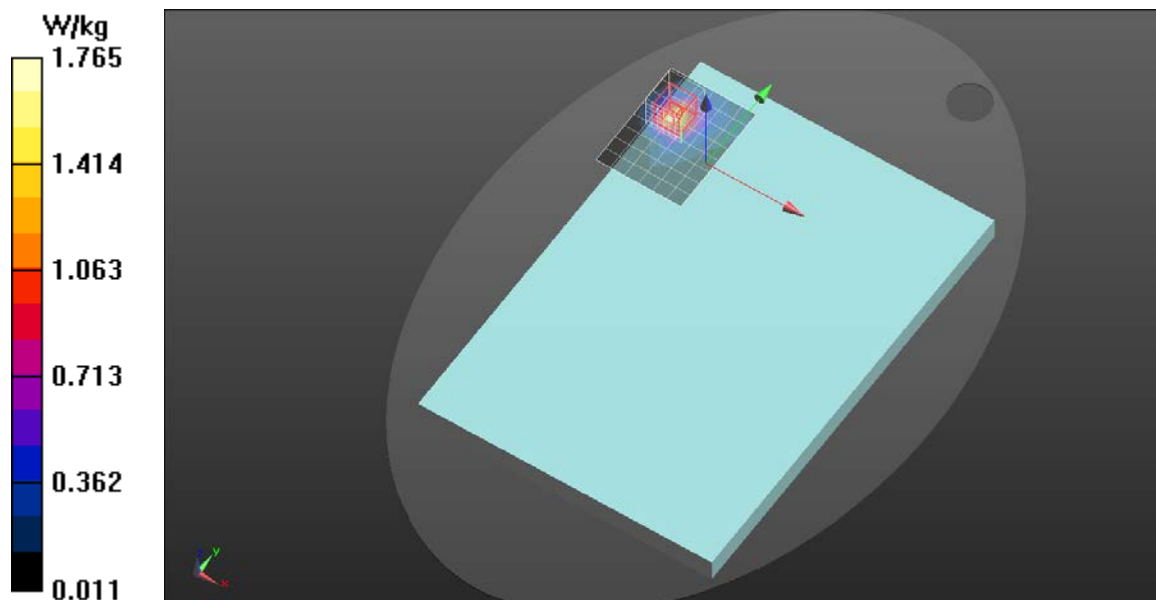

NR Band 38-Main

Frequency: 2595 MHz; Duty Cycle: 1:3.69828; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 38.595$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(7.48, 7.48, 7.48) @ 2595 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

38_20M_Ch519000_RB1.1/Bottom_0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.783 W/kg

P-sensor on/Notebook Computer/5G NR Band

38_20M_Ch519000_RB1.1/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.604 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 0.834 W/kg

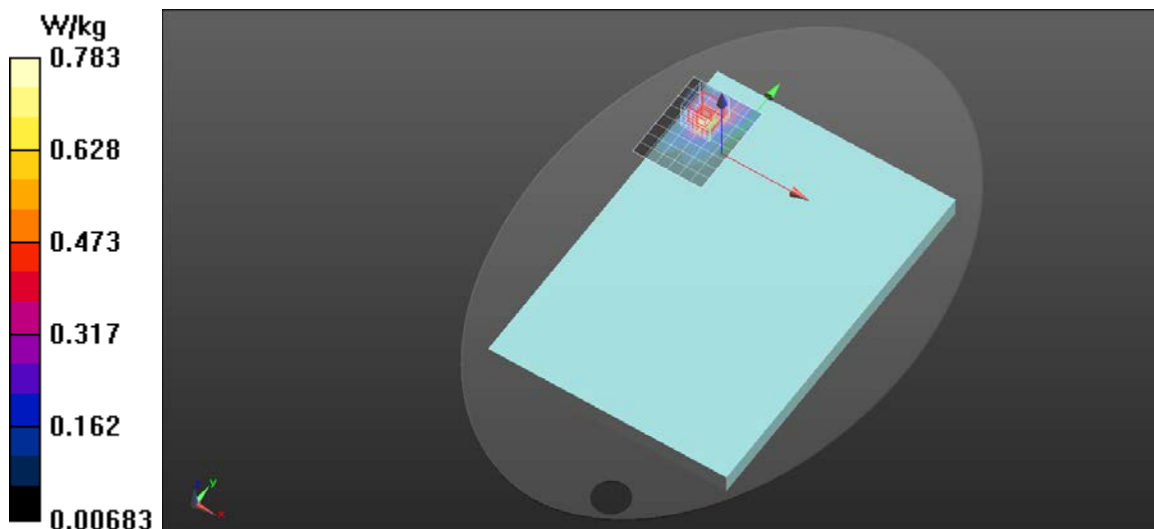

NR Band 38 -MIMO 2

Frequency: 2580 MHz; Duty Cycle: 1:3.69828; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2580$ MHz; $\sigma = 2.001$ S/m; $\epsilon_r = 38.649$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(7.48, 7.48, 7.48) @ 2580 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

38_20M_Ch516000_RB1.1/Bottom_0mm/Area Scan (8x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.753 W/kg

P-sensor on/Notebook Computer/5G NR Band

38_20M_Ch516000_RB1.1/Bottom_0mm/Zoom Scan (7x7x12)/Cube

0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.871 W/kg

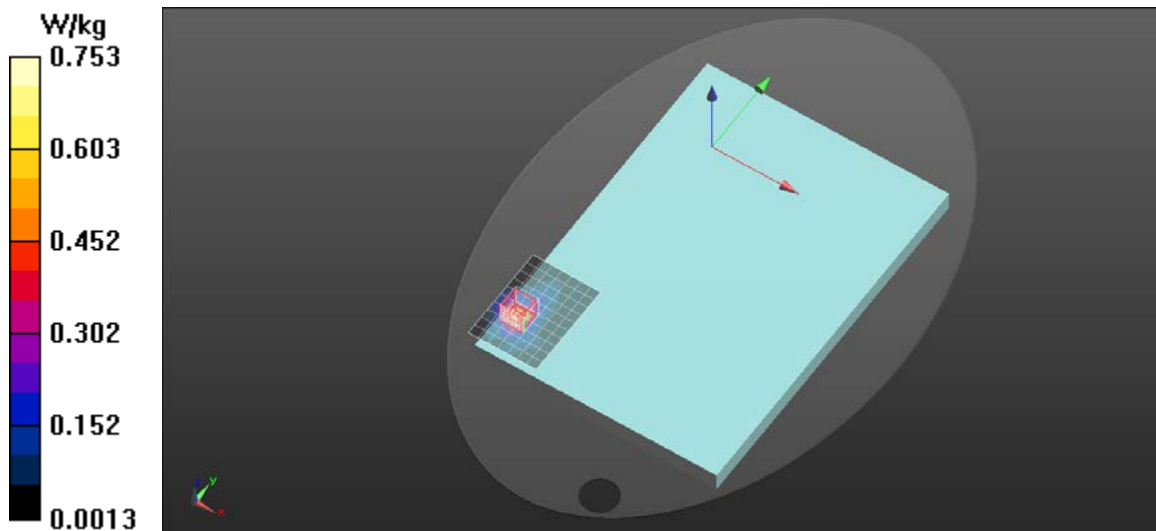

NR Band 41 Main

Frequency: 2592.99 MHz; Duty Cycle: 1:3.68808; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.004$ S/m; $\epsilon_r = 37.427$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(7.48, 7.48, 7.48) @ 2592.99 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

41_100M_Ch518598_RB1.1/Bottom_0mm/Area Scan (7x10x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.31 W/kg

P-sensor on/Notebook Computer/5G NR Band

41_100M_Ch518598_RB1.1/Bottom_0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 1.26 W/kg

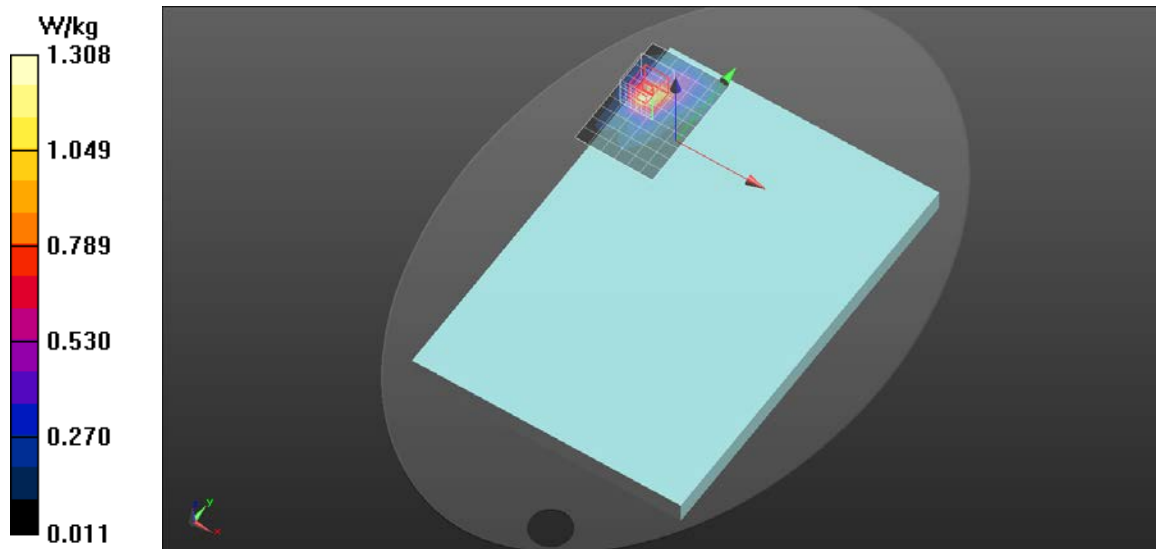

NR Band 41 MIMO 2

Frequency: 2546.01 MHz; Duty Cycle: 1:8.05008; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 2546.01$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 37.674$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(7.48, 7.48, 7.48) @ 2546.01 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

41_100M_Ch509202_RB1.1/Bottom_0mm/Area Scan (8x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.731 W/kg

P-sensor on/Notebook Computer/5G NR Band

41_100M_Ch509202_RB1.1/Bottom_0mm/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 0.846 W/kg

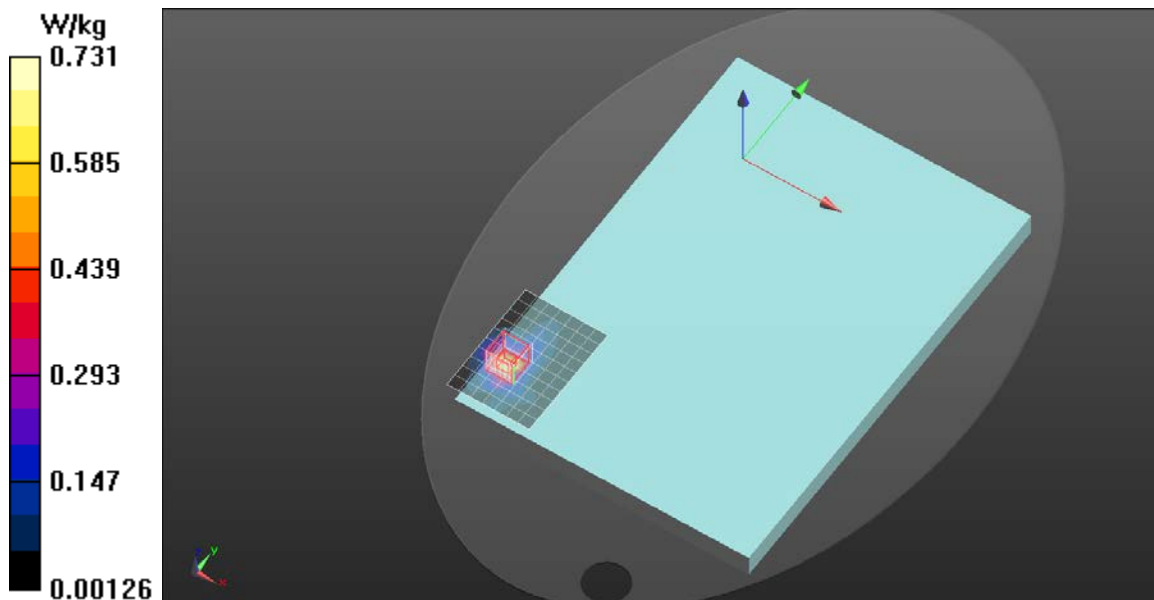

NR Band 48 Main

Frequency: 3570 MHz; Duty Cycle: 1:8.05008; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 3570$ MHz; $\sigma = 2.933$ S/m; $\epsilon_r = 36.217$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(6.91, 6.91, 6.91) @ 3570 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

48_40M_Ch638000_RB1.1/Bottom_0mm/Area Scan (8x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.02 W/kg

P-sensor on/Notebook Computer/5G NR Band

48_40M_Ch638000_RB1.1/Bottom_0mm/Zoom Scan (7x7x12)/Cube

0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.5240 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.728 W/kg; SAR(10 g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 2.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.3%

Maximum value of SAR (measured) = 1.09 W/kg

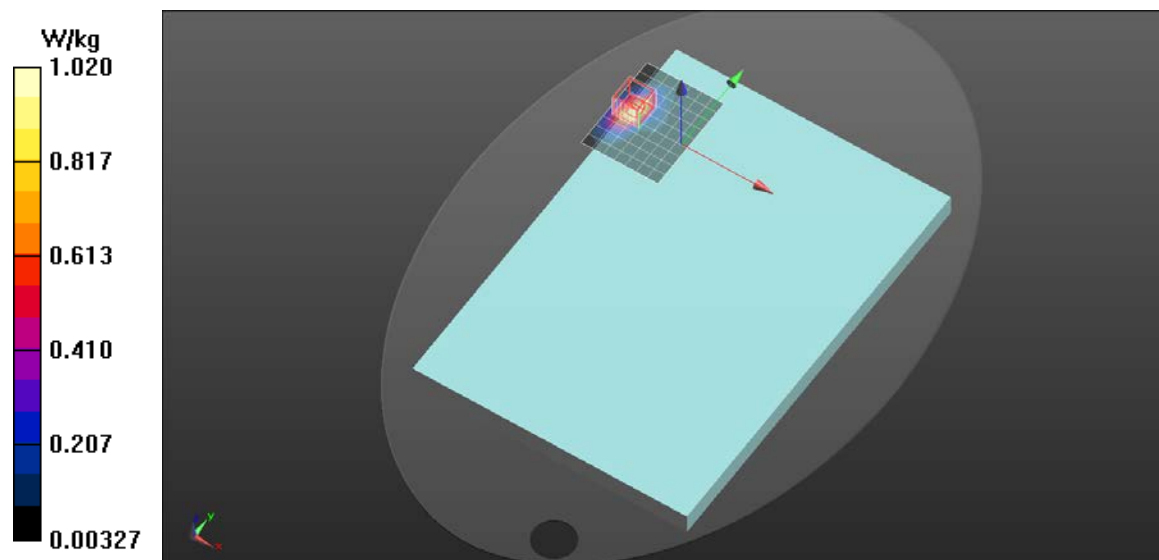

NR Band 48 MIMO 2

Frequency: 3679.98 MHz; Duty Cycle: 1:3.69999; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 3679.98$ MHz; $\sigma = 3.059$ S/m; $\epsilon_r = 35.889$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(6.86, 6.86, 6.86) @ 3679.98 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

48_40M_Ch645332_RB1.1/Bottom_0mm/Area Scan (8x10x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.165 W/kg

P-sensor on/Notebook Computer/5G NR Band

48_40M_Ch645332_RB1.1/Bottom_0mm/Zoom Scan (7x7x12)/Cube

0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 68.5%

Maximum value of SAR (measured) = 0.232 W/kg

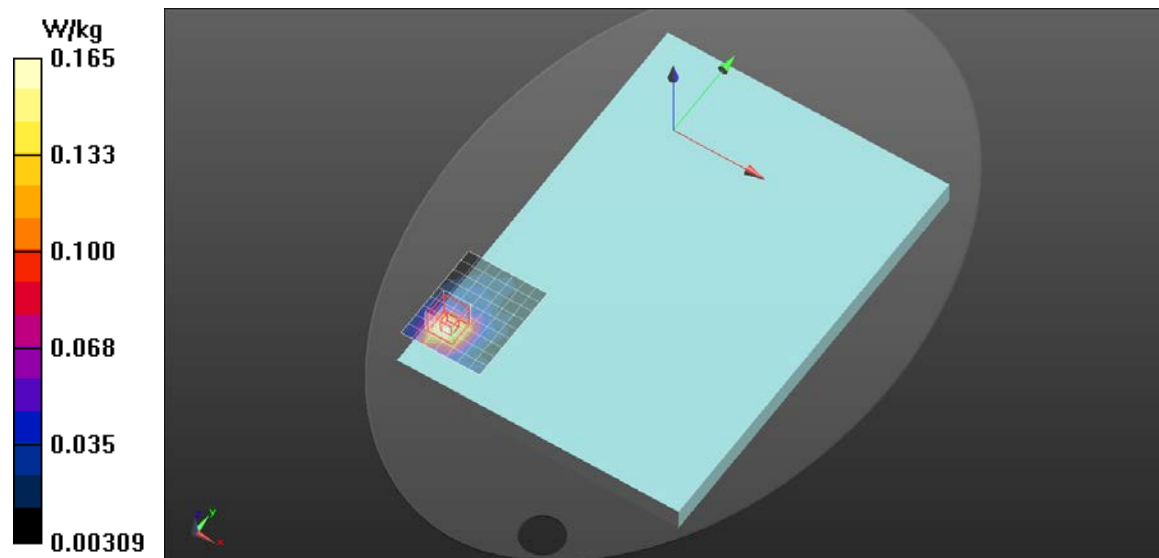

NR Band 66 Main

Frequency: 1760 MHz; Duty Cycle: 1:3.55877; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 1760$ MHz; $\sigma = 1.336$ S/m; $\epsilon_r = 41.549$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(8.59, 8.59, 8.59) @ 1760 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

66_40M_Ch352000_RB108.0/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg

P-sensor on/Notebook Computer/5G NR Band

66_40M_Ch352000_RB108.0/Bottom_0mm/Zoom Scan

(5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.518 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 1.54 W/kg

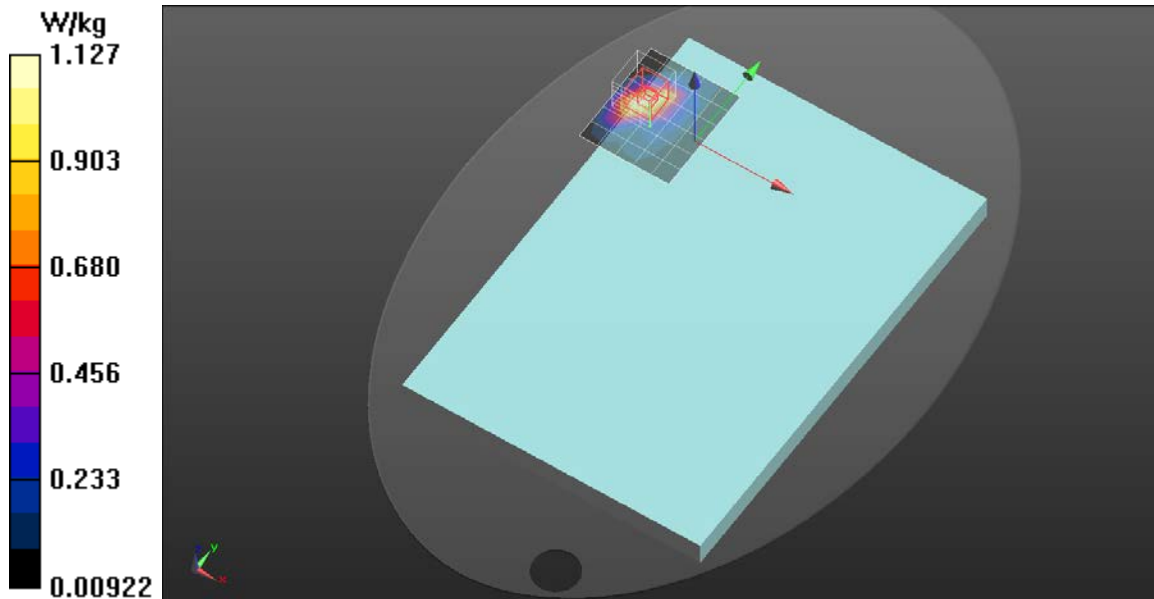

NR Band 70 MIMO 2

Frequency: 1702.5 MHz; Duty Cycle: 1:3.56205; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 1702.5$ MHz; $\sigma = 1.287$ S/m; $\epsilon_r = 41.85$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(8.59, 8.59, 8.59) @ 1702.5 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V8.0 (20deg probe tilt); Type: QD OVA 004 Ax; Serial: 2149

P-sensor on/Notebook Computer/5G NR Band 70_15M_Ch340500_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm.

Maximum value of SAR (measured) = 1.61 W/kg

P-sensor on/Notebook Computer/5G NR Band 70_15M_Ch340500_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.2860 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.575 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 1.63 W/kg

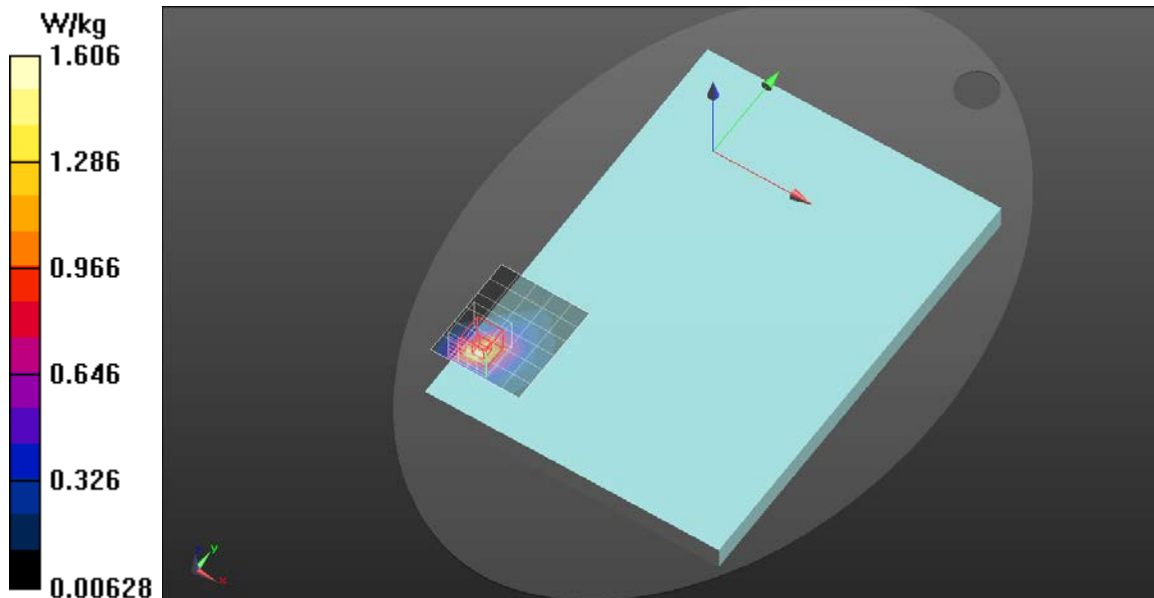

NR Band 71 Main

Frequency: 688 MHz; Duty Cycle: 1:3.56205; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 688$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 43.826$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(10.17, 10.17, 10.17) @ 688 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

71_20M_Ch137600_RB1.1/Bottom_0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.955 W/kg

P-sensor on/Notebook Computer/5G NR Band

71_20M_Ch137600_RB1.1/Bottom_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.284 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.534 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 71%

Maximum value of SAR (measured) = 1.07 W/kg

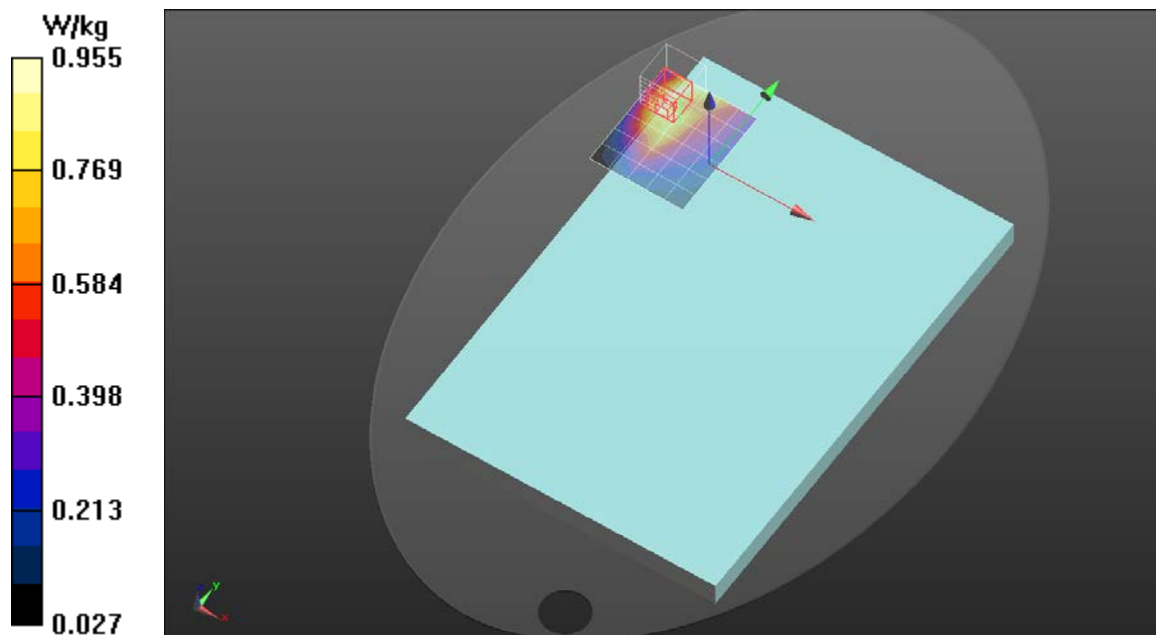

NR Band 77 Main

Frequency: 3930 MHz; Duty Cycle: 1:8.05008; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 3930$ MHz; $\sigma = 3.23$ S/m; $\epsilon_r = 37.733$; $\rho = 1000$ kg/m³
DASY5 Configuration:
- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(6.66, 6.66, 6.66) @ 3930 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)),
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

77_100M_Ch662000_RB1.1/Bottom_0mm/Area Scan (8x10x1):


Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.09 W/kg

P-sensor on/Notebook Computer/5G NR Band

77_100M_Ch662000_RB1.1/Bottom_0mm/Zoom Scan

(7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 0.9270 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.389 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 81.5%.
Maximum value of SAR (measured) = 1.19 W/kg

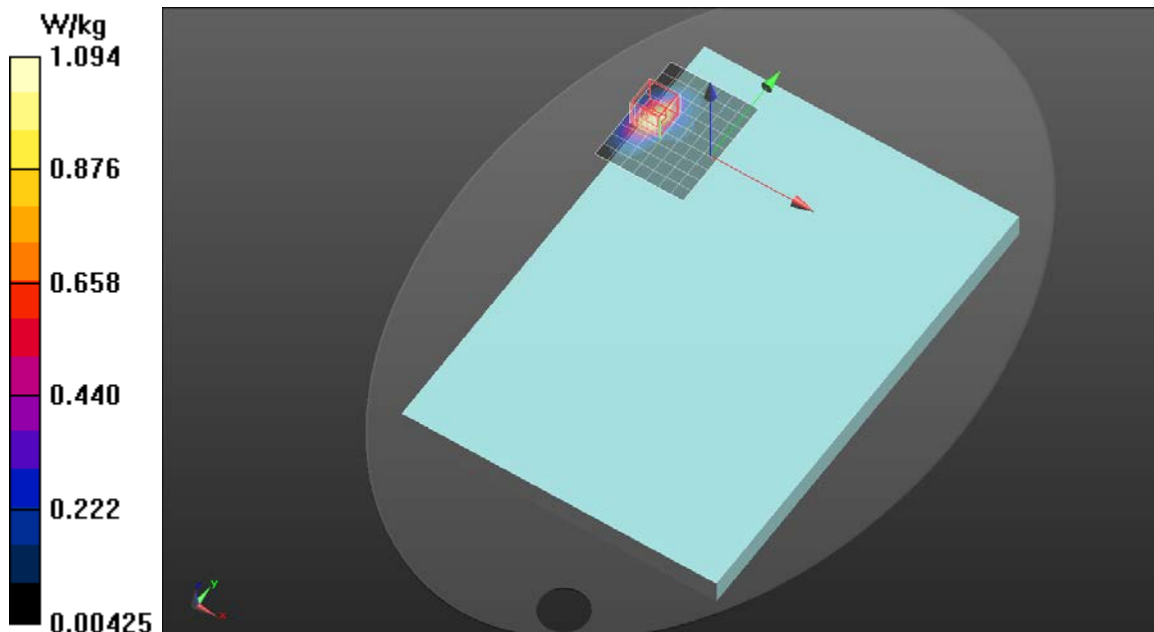

NR Band 77 MIMO 2

Frequency: 3500.01 MHz; Duty Cycle: 1:8.05008; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.801$ S/m; $\epsilon_r = 38.398$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2023/6/16
- Probe: EX3DV4 - SN7369; ConvF(6.91, 6.91, 6.91) @ 3500.01 MHz; Calibrated: 2023/5/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

P-sensor on/Notebook Computer/5G NR Band

77_100M_Ch633334_RB1.1/Bottom_0mm/Area Scan (8x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.11 W/kg

P-sensor on/Notebook Computer/5G NR Band

77_100M_Ch633334_RB1.1/Bottom_0mm/Zoom Scan

(7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.241 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.4%

Maximum value of SAR (measured) = 1.28 W/kg

