

RF Test Report

Applicant: Quectel Wireless Solutions Co., Ltd.

Address: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

Product: IATF 16949 Compliant Automotive Grade 5G NR + DSDS Module

Model No.: AG598E-ROWA

Brand Name: QUECTEL

FCC ID: XMR2025AG598EROWA
47 CFR Part 2
47 CFR Part 22

Standards: 47 CFR Part 24
47 CFR Part 27
47 CFR Part 90

Report No.: PD20250077-R3A

Issue Date: 2025/07/30

Test Result: PASS *

* Testing performed at Hefei Panwin Technology Co., Ltd. on the above equipment indicates the product meets the requirements of the relevant standards.



Reviewed By: Charlie Wang

Approved By: Alec Yang

Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
TEL: +86-0551-63811775

Revision History

Report No.	Version	Description	Issue Date	Note
PD20250077-R3A	01	Initial Report	2025/07/30	Valid

CONTENTS

1 Test Laboratory	12
1.1 Notes of the Test Report	12
1.2 Test Facility	12
1.3 Testing Laboratory	12
2 General Description of Equipment under Test	12
2.1 Details of Application	12
2.2 Details of EUT	13
2.3 Frequency List of Low/Middle/High Channels	15
2.4 Application Standards	26
3 Test Condition	27
3.1 Test Environmental Conditions	27
3.2 Test Configuration	27
3.3 Equipment List	29
3.4 Test Uncertainty	30
4 Test Items Description	31
4.1 RF Output Power & Effective (Isotropic) Radiated Power	31
4.2 EIRP Power Density	32
4.3 Peak-to-Average Ratio	33
4.4 Occupied Bandwidth	34
4.5 Conducted Band Edge Measurement	35
4.6 Spurious Emissions at Antenna Terminals	36
4.7 Frequency Stability	37
4.8 Radiated Spurious Emission	38
ANNEX A: Test Results	40
ANNEX B: The EUT Appearance	41
ANNEX C: Test Setup Photographs	42

Test Summary

GSM1900 / UMTS Band II / LTE Band 2 / 25

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §24.232(c)	EIRP ≤2 Watt	PASS
2	Peak-to-Average Ratio	§24.232(d)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §24.235	Within authorized bands of operation/frequency block.	PASS

UMTS Band IV / LTE Band 4 / 66 / LTE CA_66B / LTE CA_66C

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(d)(4)	EIRP ≤ 1 Watt	PASS
2	Peak-to-Average Ratio	§27.50(d)(5)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS


GSM850 / UMTS Band V / LTE Band 5 / 26(824~849 MHz) / LTE CA_5B

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046 §22.913 (a)(5)	ERP ≤ 7 Watt	PASS
2	Peak-to-Average Ratio	§22.913 (d)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051 §22.917 (a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051 §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053 §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	PASS
7	Frequency Stability	§2.1055 §22.355	< ±2.5 ppm	PASS

LTE Band 26(814~824 MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §90.635(b)	< 100 W	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log10}(f/6.1)$ decibels or $50 + 10 \text{ Log10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §90.691	< $43 + 10\text{Log10}(P[\text{Watts}])$ for all out-of- band emissions	PASS
6	Radiated Spurious Emission	§2.1053, §90.691		PASS
7	Frequency Stability	§2.1055 §90.213	Within authorized bands of operation/frequency block.	PASS

LTE Band 7 / 38 / 41 / LTE CA_7C / LTE CA_38C / LTE CA_41C

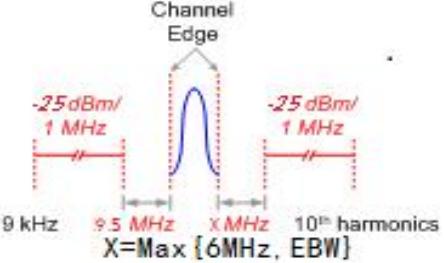No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(h)(2)	EIRP ≤ 2 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(m)		PASS
6	Radiated Spurious Emission	§2.1053, §27.53(m)		PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

LTE Band 12 / LTE CA_12B

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(c)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

LTE Band 42 (3450 to 3550MHz) / LTE CA_42C (3450 to 3550MHz)

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	PASS
2	Peak-to-Average Ratio	§27.50(k)(4)	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	PASS
5	Spurious Emissions at Antenna Terminals			PASS
6	Radiated Spurious Emission	§2.1053, §27.50(n)(2)		PASS
7	Frequency Stability	§2.1055 §27.54	Within authorized bands of operation/frequency block.	PASS

LTE Band 71

No.	Test Case	FCC Rules	Limit	Verdict
1	RF Output Power & Effective Radiated Power	§2.1046, §27.50(c)(10)	ERP ≤ 3 Watt	PASS
2	Peak-to-Average Ratio	--	≤13 dB	PASS
3	Occupied Bandwidth	§2.1049	No limit.	Report Only
4	Conducted Band Edge Measurement	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
5	Spurious Emissions at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	PASS
6	Radiated Spurious Emission	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	PASS
7	Frequency Stability	§2.1055 §27.54	within the authorized bands of operation.	PASS

Conducted detection date: 2025/05/13 to 2025/07/05

Radiated detection date: 2025/06/09 to 2025/07/02

Date of sample received: 2025/05/13

- The samples tested have been evaluated in accordance with the procedures given in the application standards in **Section 2.4** of this report and have been shown to comply with the applicable technical standards.
- All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

1 Test Laboratory

1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

1.2 Test Facility

A2LA (Certificate Number: 6849.01)

Hefei Panwin Technology Co., Ltd. has been accredited by American Association for Laboratory Accreditation to perform measurement.

FCC (Designation Number: CN1361, Test Firm Registration Number: 473156)

Hefei Panwin Technology Co., Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform measurements.

1.3 Testing Laboratory

Company Name	Hefei Panwin Technology Co., Ltd.
Address	Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
Telephone	+86-0551-63811775
Post Code	230031

2 General Description of Equipment under Test

2.1 Details of Application

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant Address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer Address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China

2.2 Details of EUT

Product	IATF 16949 Compliant Automotive Grade 5G NR + DSDS Module			
Model	AG598E-ROWA			
Hardware Version	R1.0			
Software Version	AG598EROWAADDR02A102M1_OCPU			
SN	Conducted: E1Y25DR20000059 Radiated: E1Y25DR20000016			
GSM Specification				
Single Band	GSM850, GSM1900			
Multi-slot class	GPRS: 33/ EGPRS: 33			
Type of Modulation	GMSK(GSM, GPRS),8PSK (EGPRS)			
UMTS Specification				
Single Band	WCDMA Band II, IV, V			
Power Class for UMTS	PC3			
Type of Modulation	Supports QPSK, 16QAM and 64QAM modulations			
E-UTRA Specification				
Single Band	Band 2, 4, 5, 7, 12, 25, 26, 38, 41, 42, 66, 71			
Power Class for LTE	PC3: Band 2, 4, 5, 7, 12, 25, 26, 38, 42, 66, 71 PC2: Band 41			
CA	LTE CA_5B, LTE CA_7C, LTE CA_12B, LTE CA_38C, LTE CA_41C, LTE CA_42C, LTE CA_66B, LTE CA_66C			
Type of Modulation	UL: QPSK, 16QAM, 64QAM, 256QAM DL: QPSK, 16QAM, 64QAM, 256QAM			
Antenna Type	<input checked="" type="checkbox"/> External <input type="checkbox"/> Integrated			
Antenna Gain	GSM850: 0.30dBi(Ant DIV) GSM1900: 1.80dBi(Ant MAIN) WCDMA Band II: 1.80dBi(Ant MAIN) WCDMA Band IV: 1.20dBi(Ant MAIN) WCDMA Band V: 0.30dBi(Ant DIV) LTE Band 2: 1.80dBi(Ant MAIN) LTE Band 4: 1.20dBi(Ant MAIN) LTE Band 5: 0.30dBi(Ant DIV) LTE Band 7: 1.40dBi(Ant MAIN)		LTE Band 12: -0.50dBi(Ant DIV) LTE Band 25: 1.80dBi(Ant MAIN) LTE Band 26: 0.30dBi(Ant DIV) LTE Band 38: 1.40dBi(Ant MAIN) LTE Band 41: 1.40dBi(Ant MAIN) LTE Band 42: 3.40dBi(Ant DIV) LTE Band 66: 1.50dBi(Ant MAIN) LTE Band 71: -0.90dBi(Ant DIV)	
GSM Frequency Range(s)	Band	Tx (MHz)		
	GSM 850	824 to 849		
	GSM 1900	1850 to 1910		
Frequency	SISO Band	Supported Channel Bandwidth (MHz)	Tx (MHz)	Rx (MHz)

	1.4	3	5	10	15	20		
WCDMA Band II	-	-	v	-	-	-	1850 to 1910	1930 to 1990
WCDMA Band IV	-	-	v	-	-	-	1710 to 1755	2110 to 2155
WCDMA Band V	-	-	v	-	-	-	824 to 849	869 to 894
LTE Band 2	v	v	v	v	v	v	1850 to 1910	1930 to 1990
LTE Band 4	v	v	v	v	v	v	1710 to 1755	2110 to 2155
LTE Band 5	v	v	v	v	-	-	824 to 849	869 to 894
LTE Band 7	-	-	v	v	v	v	2500 to 2570	2620 to 2690
LTE Band 12	v	v	v	v	-	-	699 to 716	729 to 746
LTE Band 25	v	v	v	v	v	v	1850 to 1915	1930 to 1995
LTE Band 26	v	v	v	v	v	-	814 to 849	859 to 894
LTE Band 38	-	-	v	v	v	v	2570 to 2620	2570 to 2620
LTE Band 41	-	-	v	v	v	v	2496 to 2690	2496 to 2690
LTE Band 42	-	-	v	v	v	v	3450 to 3550	3450 to 3550
LTE Band 66	v	v	v	v	v	v	1710 to 1780	2110 to 2180
LTE Band 71	-	-	v	v	v	v	663 to 698	617 to 652

Note 1: The declared of product specification for EUT and/or Antenna presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 2: From C63.26: As an alternative, the highest power level measured in a narrower RBW (relative to the specified reference bandwidth) can be scaled by applying a correction factor determined from: $10 \log [(\text{reference bandwidth}) / (\text{resolution or measurement bandwidth})]$. When using a smaller RBW, the current usage limit needs to be converted from the original limit.

Support Equipment

Equipment	Manufacturer	Description	Model	Serial Number
EVB	QUECTEL	-	Q2-A0459	MPQ22J610000143 MPQ23CB17000493
Adapter	Dong Guan City GangQi Electronic Co.,Ltd	AC to DC power supply to EVB	GQ36-120300-AX	-
Base Station Simulator	Anritsu	-	MT8821C	PWC0039

2.3 Frequency List of Low/Middle/High Channels

GSM850 Channel and Frequency List

BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
0.2	Channel	128	190	251
	Frequency	824.2	836.6	848.8

GSM1900 Channel and Frequency List

BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
0.2	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8

WCDMA Band II Channel and Frequency List

BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6

WCDMA Band IV Channel and Frequency List

BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

WCDMA Band V Channel and Frequency List

BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6

LTE Band 2 Channel and Frequency List

BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
10	Channel	20450	20525	20600
	Frequency	829	836.5	844

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3
3	Channel	23025	23095	23165

	Frequency	700.5	707.5	714.5
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
10	Channel	23060	23095	23130
	Frequency	704	707.5	711

LTE Band 25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	26047	26365	26683
	Frequency	1850.7	1882.5	1914.3
3	Channel	26055	26365	26675
	Frequency	1851.5	1882.5	1913.5
5	Channel	26065	26365	26665
	Frequency	1852.5	1882.5	1912.5
10	Channel	26090	26365	26640
	Frequency	1855	1882.5	1910
15	Channel	26115	26365	26615
	Frequency	1857.5	1882.5	1907.5
20	Channel	26140	26365	26590
	Frequency	1860	1882.5	1905

LTE Band 26 (814 to 824MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	26697	26740	26783
	Frequency	814.7	819	823.3
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5
10	Channel	26740	26740	26740
	Frequency	819	819	819

LTE Band 26 (824 to 849MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
10	Channel	26840	26915	26990
	Frequency	829.0	836.5	844.0

15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610

LTE Band 41 (2496 to 2690MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	39675	40620	41565
	Frequency	2498.5	2593	2687.5
10	Channel	39700	40620	41540
	Frequency	2501	2593	2685
15	Channel	39725	40620	41515
	Frequency	2503.5	2593	2682.5
20	Channel	39750	40620	41490
	Frequency	2506	2593	2680

LTE Band 42 (3450 to 3550MHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	42115	42590	43065
	Frequency	3452.5	3500	3547.5
10	Channel	42140	42590	43040
	Frequency	3455	3500	3545
15	Channel	42165	42590	43015
	Frequency	3457.5	3500	3542.5
20	Channel	42190	42590	42990
	Frequency	3460	3500	3540

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3
3	Channel	131987	132322	132657

	Frequency	1711.5	1745	1778.5
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770

LTE Band 71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	133147	133297	133447
	Frequency	665.5	680.5	695.5
10	Channel	133172	133297	133422
	Frequency	668	680.5	693
15	Channel	133197	133297	133397
	Frequency	670.5	680.5	690.5
20	Channel	133222	133322	133372
	Frequency	673	683	688

Table 4.3.1.1.5A-1: Test frequencies for CA_5B

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	15+25	15	20416	825.6	2416	870.6	25	20455	829.5	2455	874.5
		25	20425	826.5	2425	871.5	15	20464	830.4	2464	875.4
		25	20428	826.8	2428	871.8	50	20500	834	2500	879
		50	20450	829	2450	874	25	20522	836.2	2522	881.2
		50	20450	829	2450	874	50	20549	838.9	2549	883.9
Mid	15+25	15	20501	834.1	2501	879.1	25	20540	838.0	2540	883.0
		25	20510	835.0	2510	880.0	15	20549	838.9	2549	883.9
	25+50	25	20478	831.8	2478	876.8	50	20550	839	2550	884
	50+25	50	20500	834	2500	879	25	20572	841.2	2572	886.2
	50+50	50	20476	831.6	2476	876.6	50	20575	841.5	2575	886.5
High	15+25	15	20586	842.6	2586	887.6	25	20625	846.5	2625	891.5
		25	20595	843.5	2595	888.5	15	20634	847.4	2634	892.4
	25+50	25	20528	836.8	2528	881.8	50	20600	844	2600	889
	50+25	50	20550	839	2550	884	25	20622	846.2	2622	891.2
	50+50	50	20501	834.1	2501	879.1	50	20600	844	2600	889

Note 1: Carriers in increasing frequency order.

Table 4.3.1.1.7A-1: Test frequencies for CA_7C

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680

Note 1: Carriers in increasing frequency order.

Table 4.3.1.1.12A-1: Test frequencies for CA_12B

Range	CC- Combo / N _{RB_agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	25+25	25	23035	701.5	5035	731.5	25	23083	706.3	5083	736.3
	25+50	25	23038	701.8	5038	731.8	50	23110	709	5110	739
Mid	25+25	25	23071	705.1	5071	735.1	25	23119	709.9	5119	739.9
	25+50	25	23048	702.8	5048	732.8	50	23120	710	5120	740
High	25+25	25	23107	708.7	5107	738.7	25	23155	713.5	5155	743.5
	25+50	25	23058	703.8	5058	733.8	50	23130	711	5130	741

Note 1: Carriers in increasing frequency order.

Table 4.3.1.2.6A-1: Test frequencies for CA_38C

Range	CC- Combo / N _{RB_agg} [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610

Note 1: Carriers in increasing frequency order.

Table 4.3.1.2.9A-1: Test frequencies for CA_41C

Range	CC- Combo / N_{RB_agg} [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	$N_{UL/DL}$	$f_{UL/DL}$ [MHz]	BW [RB]	$N_{UL/DL}$	$f_{UL/DL}$ [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
	75+100	75	39728	2503.8	100	39899	2520.9
		100	39750	2506	75	39921	2523.1
	100+100	100	39750	2506	100	39948	2525.8
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
		100	40546	2585.6	75	40717	2602.7
	100+100	100	40521	2583.1	100	40719	2602.9
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
		100	41341	2665.1	75	41512	2682.2
	100+100	100	41292	2660.2	100	41490	2680

Note 1: Carriers in increasing frequency order.
 Note 2: This test frequency is applicable only for intra-band contiguous CA which requires channel spacing to be less than nominal channel spacing.

LTE Band CA_42C (3450 to 3550MHz) Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20+20	PCC	Channel	42190	42491	42792
		Frequency	3460	3490.1	3520.2
	SCC	Channel	42388	42689	42990
		Frequency	3479.8	3509.9	3540
20+15	PCC	Channel	42190	42516	42841
		Frequency	3460	3492.6	3525.1
	SCC	Channel	42361	42687	43012
		Frequency	3477.1	3509.7	3542.2
15+20	PCC	Channel	42168	42493	42819
		Frequency	3457.8	3490.3	3522.9
	SCC	Channel	42339	42664	42990
		Frequency	3474.9	3507.4	3540
20+10	PCC	Channel	42190	42541	42891
		Frequency	3460	3495.1	3530.1
	SCC	Channel	42334	42685	43035
		Frequency	3474.4	3509.5	3544.5
10+20	PCC	Channel	42145	42496	42846
		Frequency	3455.5	3490.6	3525.6
	SCC	Channel	42289	42640	42990
		Frequency	3469.9	3505	3540
20+5	PCC	Channel	42190	42565	42940
		Frequency	3460	3497.5	3535
	SCC	Channel	42307	42682	43057
		Frequency	3471.7	3509.2	3546.7
5+20	PCC	Channel	42123	42498	42873
		Frequency	3453.3	3490.8	3528.3
	SCC	Channel	42240	42615	42990
		Frequency	3465	3502.5	3540

Table 4.3.1.1.66A-1: Test frequencies for CA_66B

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	25+25	25	131997	1712.5	66461	2112.5	25	132045	1717.3	66509	2117.3
	25+50	25	132000	1712.8	66464	2112.8	50	132072	1720	66536	2120
		50	132022	1715	66486	2115	25	132094	1722.2	66558	2122.2
	25+75	25	132002	1713	66466	2113	75	132095	1722.3	66559	2122.3
		75	132047	1717.5	66511	2117.5	25	132140	1726.8	66604	2126.8
Mid	50+50	50	132022	1715	66486	2115	50	132121	1724.9	66585	2124.9
	25+25	25	132398	1752.6	66862	2152.6	25	132446	1757.4	66910	2157.4
	25+50	25	132375	1750.3	66839	2150.3	50	132447	1757.5	66911	2157.5
		50	132397	1752.5	66861	2152.5	25	132469	1759.7	66933	2159.7
	25+75	25	132353	1748.1	66817	2148.1	75	132446	1757.4	66910	2157.4
		75	132398	1752.6	66862	2152.6	25	132491	1761.9	66955	2161.9
High ²	50+50	50	132373	1750.1	66837	2150.1	50	132472	1760	66936	2160
	25+25	25	132647	1777.5	67111	2177.5	25	NA	NA	67159	2182.3
	25+50	25	132647	1777.5	67111	2177.5	50	NA	NA	67183	2184.7
		50	132622	1775	67086	2175	25	NA	NA	67158	2182.2
	25+75	25	132647	1777.5	67111	2177.5	75	NA	NA	67204	2186.8
		75	132597	1772.5	67061	2172.5	25	NA	NA	67154	2181.8
High ³	50+50	50	132622	1775	67086	2175	50	NA	NA	67185	2184.9
	25+25	25	132599	1772.7	67063	2172.7	25	132647	1777.5	67111	2177.5
	25+50	25	132550	1767.8	67014	2167.8	50	132622	1775.	67086	2175
		50	132572	1770	67036	2170	25	132644	1777.2	67108	2177.2
	25+75	25	132504	1763.2	66968	2163.2	75	132597	1772.5	67061	2172.5
		75	132549	1767.7	67013	2167.7	25	132642	1777	67106	2177
	50+50	50	132523	1765.1	66987	2165.1	50	132622	1775	67086	2175

Note 1: Carriers in increasing frequency order.

Note 2: Applicable for intra-band contiguous CA without UL CA.

Note 3: Applicable for intra-band contiguous CA with UL CA.

Table 4.3.1.1.66A-2: Test frequencies for CA_66C

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+75	50	132025	1715.3	66489	2115.3	75	132145	1727.3	66609	2127.3
		75	132047	1717.5	66511	2117.5	50	132167	1729.5	66631	2129.5
	50+100	50	132027	1715.5	66491	2115.5	100	132171	1729.9	66635	2129.9
		100	132072	1720	66536	2120	50	132216	1734.4	66680	2134.4
	75+75	75	132047	1717.5	66511	2117.5	75	132197	1732.5	66661	2132.5
	75+100	75	132050	1717.8	66514	2117.8	100	132221	1734.9	66685	2134.9
		100	132072	1720	66536	2120	75	132243	1737.1	66707	2137.1
	100+25	100	132072	1720	66536	2120	25	132189	1731.7	66653	2131.7
		25	132005	1713.3	66469	2113.3	100	132122	1725.0	66586	2125.0
	100+100	100	132072	1720	66536	2120	100	132270	1739.8	66734	2139.8
Mid	50+75	50	132351	1747.9	66815	2147.9	75	132471	1759.9	66935	2159.9
		75	132373	1750.1	66837	2150.1	50	132493	1762.1	66957	2162.1
	50+100	50	132328	1745.6	66792	2145.6	100	132472	1760	66936	2160
		100	132373	1750.1	66837	2150.1	50	132517	1764.5	66981	2164.5
	75+75	75	132347	1747.5	66811	2147.5	75	132497	1762.5	66961	2162.5
	75+100	75	132325	1745.3	66789	2145.3	100	132496	1762.4	66960	2162.4
		100	132348	1747.6	66812	2147.6	75	132519	1764.7	66983	2164.7
	100+25	100	132397	1752.5	66861	2152.5	25	132514	1764.2	66978	2164.2
		25	132330	1745.8	66794	2145.8	100	132447	1757.5	66911	2157.5
	100+100	100	132323	1745.1	66787	2145.1	100	132521	1764.9	66985	2164.9
High ²	50+75	50	132622	1775	67086	2175	75	NA	NA	67206	2187
		75	132597	1772.5	67061	2172.5	50	NA	NA	67181	2184.5
	50+100	50	132622	1775	67086	2175	100	NA	NA	67230	2189.4
		100	132572	1770	67036	2170	50	NA	NA	67180	2184.4
	75+75	75	132597	1772.5	67061	2172.5	75	NA	NA	67211	2187.5
	75+100	75	132597	1772.5	67061	2172.5	100	NA	NA	67232	2189.6
		100	132572	1770	67036	2170	75	NA	NA	67207	2187.1
	100+25	100	132572	1770	67036	2170	25	NA	NA	67153	2181.7
		25	132647	1777.5	67111	2177.5	100	NA	NA	67228	2189.2
	100+100	100	132572	1770	67036	2170	100	NA	NA	67234	2189.8
High ³	50+75	50	132477	1760.5	66941	2160.5	75	132597	1772.5	67061	2172.5
		75	132499	1762.7	66963	2162.7	50	132619	1774.7	67083	2174.7
	50+100	50	132428	1755.6	66892	2155.6	100	132572	1770	67036	2170
		100	132473	1760.1	66937	2160.1	50	132617	1774.5	67081	2174.5
	75+75	75	132447	1757.5	66911	2157.5	75	132597	1772.5	67061	2172.5
	75+100	75	132401	1752.9	66885	2152.9	100	132572	1770	67036	2170
		100	132423	1755.1	66887	2155.1	75	132594	1772.2	67058	2172.2
	100+25	100	132522	1765	66986	2165	25	132639	1776.7	67103	2176.7
		25	132455	1758.3	66919	2158.3	100	132572	1770.0	67036	2170.0
		100+100	100	132374	1750.2	66838	2150.2	100	132572	1770	67036

Note 1: Carriers in increasing frequency order.

Note 2: Applicable for intra-band contiguous CA without UL CA.

Note 3: Applicable for intra-band contiguous CA with UL CA.

2.4 Application Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 2
47 CFR Part 22
47 CFR Part 24
47 CFR Part 27
47 CFR Part 90
ANSI C63.26-2015
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

3 Test Condition

3.1 Test Environmental Conditions

During testing, environmental conditions are described below.

Normal Configuration		Extreme Configuration				
Voltage	3.8V	Voltage		High: 4.3V		Low: 3.3V

3.2 Test Configuration

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in 'Z' position and the worst case was recorded.

GSM										
Test Case	BW (MHz)	Modulation				RB		CH		
		GMSK	8PSK	1	full	L	M	H		
RF Output Power & Effective (Isotropic) Radiated	0.2	v	v	-	-	v	v	v		
Occupied Bandwidth	0.2	v	v	-	-	v	v	v		
Conducted Band Edge	0.2	v	v	-	-	v	-	v		
Spurious Emissions at Antenna Terminals	0.2	v	v	-	-	v	v	v		
Peak-to-Average Ratio	0.2	v	v	-	-	v	v	v		
Frequency Stability	0.2	v	v	-	-	-	v	-		
Radiated Spurious Emission	worst case									
WCDMA										
Test Case	BW (MHz)	Modulation				RB		CH		
		QPSK	16QAM	64QAM	256QAM	1	full	L	M	H
RF Output Power & Effective (Isotropic) Radiated	5	v	-	-	-	-	-	v	v	v
Occupied Bandwidth	5	v	-	-	-	-	-	v	v	v
Conducted Band Edge	5	v	-	-	-	-	-	v	-	v
Spurious Emissions at Antenna Terminals	5	v	-	-	-	-	-	v	v	v

Peak-to-Average Ratio	5	v	-	-	-	-	-	v	v	v	
Frequency Stability	5	v	-	-	-	-	-	-	v	-	
Radiated Spurious Emission	worst case										
LTE											
Test Case	BW	Modulation					RB		CH		
		QPSK	16QAM	64QAM	256QAM	1	full	L	M	H	
RF Output Power & Effective (Isotropic) Radiated	all	v	v	v	v	v	v	v	v	v	
Occupied Bandwidth	all	v	v	v	v	-	v	-	v	-	
Conducted Band Edge	all	v	-	-	-	v	v	v	-	v	
Spurious Emissions at Antenna Terminals	all	v	-	-	-	v	-	v	v	v	
Peak-to-Average Ratio	all	v	v	v	v	-	v	-	v	-	
Frequency Stability	max	v	-	-	-	-	v	-	v	-	
Radiated Spurious Emission	worst case										

Note:

- 1.The mark " V " means that this configuration is chosen for testing.
- 2.The mark " -- " means that this bandwidth is not supported.
- 3.The device is investigated from 30Hz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- 4.Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.3V. ; High Voltage =4.3V

3.3 Equipment List

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
Conducted					
Base Station Simulator	R&S	CMW500	PWC0052	1 Year	2025/09/12
Spectrum Analyzer	Keysight	N9020B	PWC0047	1 Year	2025/09/11
Base Station Simulator	R&S	CMW500	PWC0006	1 Year	2025/09/11
Spectrum Analyzer	R&S	FSV3030	PWC0003	1 Year	2025/09/12
DC Power	KEYSIGHT	E3640A	PWC0043	1 Year	2025/09/12
Climate Chamber	Boyi	B-T-48C	PWC0051	1 Year	2025/09/12
Shielded Chamber	Mao Rui	MR534	PWC0041	3 Years	2026/08/26
RF cable	TIMES Microwave Systems	SFT205PUR-NMSWSM-1.50M	PWD0165	1 Year	2025/09/12
RF cable	TIMES Microwave Systems	HF160-KMKMR-1.50M	PWD0166	1 Year	2025/09/12
Coupling unit	COM-MW	ZDC6-10M1	PWD0167	1 Year	2025/09/12
Test Software	Tonscend	JS1120 V3.1.46	-	-	-
Radiated					
Receiver	R&S	ESR7	PWB0023	1 Year	2025/09/11
Spectrum Analyzer	R&S	FSV3044	PWB0024	1 Year	2025/09/11
Loop Antenna	R&S	HFH2-Z2E	PWB0026	1 Year	2025/09/13
TRILOG Broadband Antenna	Schwarzbeck	VULB9162	PWB0029	1 Year	2025/09/09
Double-Ridged Guide Antenna	ETS-Lindgren	3117	PWB0031	1 Year	2025/09/26
k Type Horn Antenna	Steatite Antennas	QMS-00880	PWB0035	1 Year	2025/09/08
Pre-Amplifier	R&S	OSP220 (OSP-B155G)	PWB0042	1 Year	2025/09/11
Pre-Amplifier	COM-MW	DLNA8	PWB0094	1 Year	2025/09/11
Pre-Amplifier	R&S	SCU18F	PWB0034	1 Year	2025/09/11
Pre-Amplifier	R&S	SCU40F1	PWB0036	1 Year	2025/09/11
Anechoic Chamber	ETS-Lindgren	Fact 3-2m	PWB0003	3 Years	2026/06/05
Test Software	Tonscend	JS36 V5.0.0	-	-	-

3.4 Test Uncertainty

No.	Parameter	Uncertainty
1	Maximum transmit power	0.677dB
2	Frequency error	37.064Hz
3	Bandwidth occupied	5.9kHz
4	Emission spurious, Band edge and PAPR	10Hz-3.5GHz: 0.982dB 3.5GHz-18GHz: 1dB 18GHz-26.5GHz: 0.777dB 26.5GHz-40GHz: 1.066dB
5	Radiated Spurious Emission	Below 1GHz: 4.88 dB Above 1GH: 5.06 dB
6	Temperature	3°C
7	Humidity	1.3 %
8	Supply voltages	0.006 V

4 Test Items Description

Ambient condition

Shielded Chamber

Temperature [°C]	20.1 to 27.6
Humidity [%RH]	39 to 58
Pressure [kPa]	100.2 to 101.5

Anechoic Chamber

Temperature [°C]	20.3 to 25.7
Humidity [%RH]	43 to 58
Pressure [kPa]	99.6 to 101.0

4.1 RF Output Power & Effective (Isotropic) Radiated Power

Methods of Measurement

Base Station Simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

According to KDB 412172 D01 Power Approach,


$EIRP = PT + GT - LC$, $ERP = EIRP - 2.15$, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

Test Setup

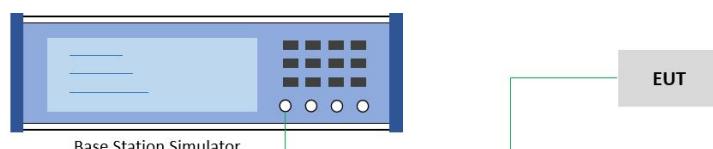


1. The testing follows ANSI C63.26 Section 5.2.
2. The transmitter output port was connected to the base station simulator.
3. Set EUT at maximum power through the base station simulator
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

4.2 EIRP Power Density

Methods of Measurement

Measurement Procedure: C63.26 -2015 section 5.2.4

Test Setup

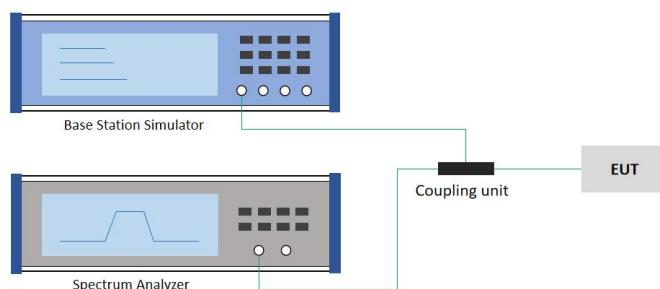


1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

4.3 Peak-to-Average Ratio

Methods of Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth.

Test Setup

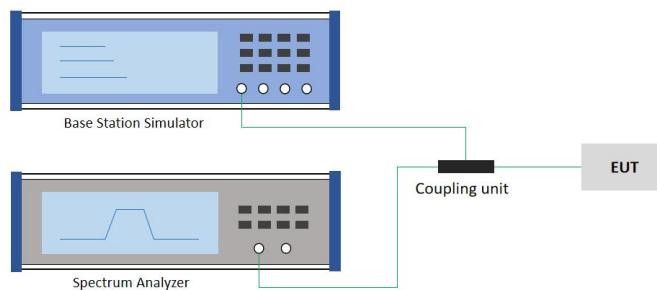

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a coupling unit.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.


4.4 Occupied Bandwidth

Methods of Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

Test Setup

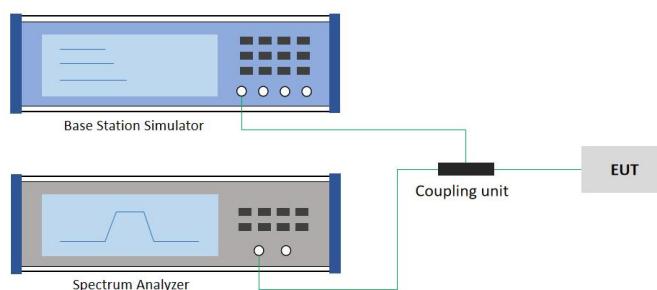

The testing follows ANSI C63.26 Section 5.4.

The EUT was connected to spectrum analyzer and system simulator via a coupling unit.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value).

Determine the '-26 dB down amplitude' as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the '-X dB down amplitude' determined in step 6. If a marker is below this '-X dB down amplitude' value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.


4.5 Conducted Band Edge Measurement

Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel). In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to RMS.

Test Setup

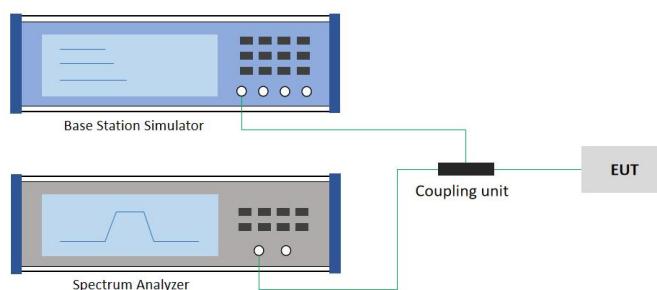

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used and the measured power was integrated over the full required measurement bandwidth of 1 MHz.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


4.6 Spurious Emissions at Antenna Terminals

Methods of Measurement

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Test Setup

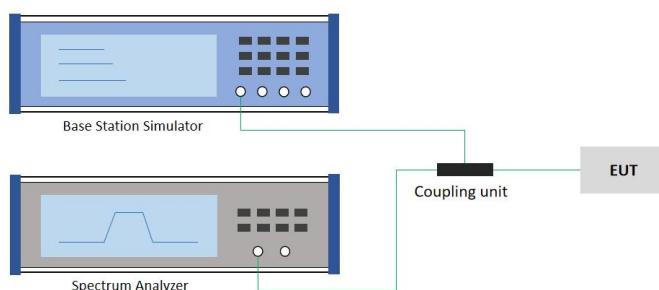

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a coupling unit.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Note: As described in Section C63.26 4.2.3: Generally, the measurement must be corrected by adding $10 \log [(\text{reference bandwidth}) / (\text{resolution or measurement bandwidth})]$ to the measured value (such bandwidth scaling is limited to cases where the measurement bandwidth used to perform the measurement is less than the reference bandwidth). Therefore, the converted limit value is the standard limit value minus the conversion factor.

4.7 Frequency Stability

Methods of Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

Test Setup

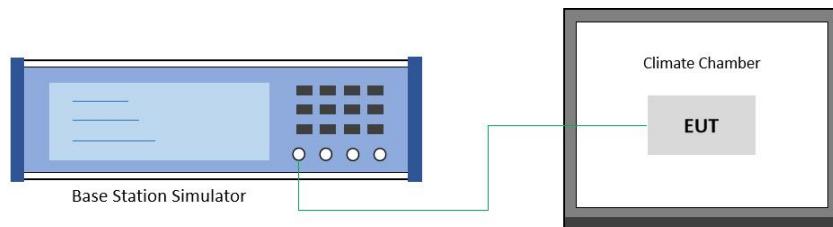

Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.



4.8 Radiated Spurious Emission


Methods of Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Test Setup

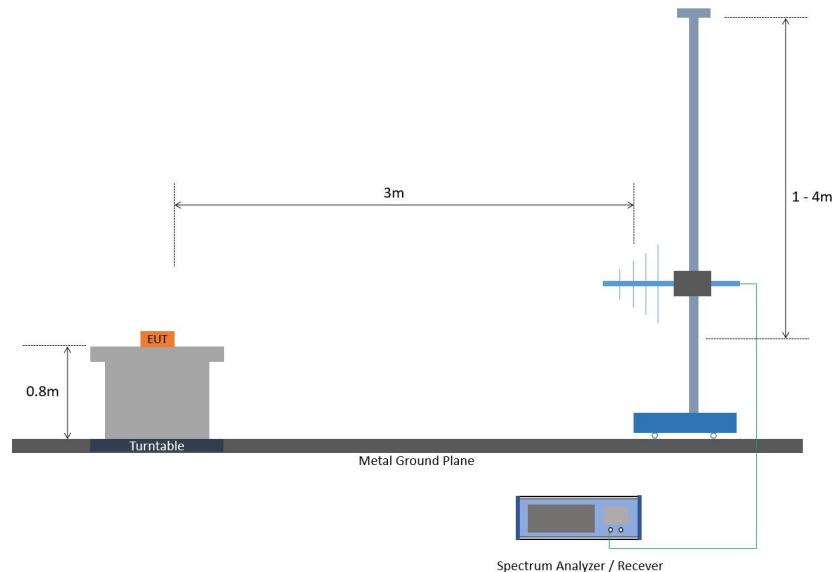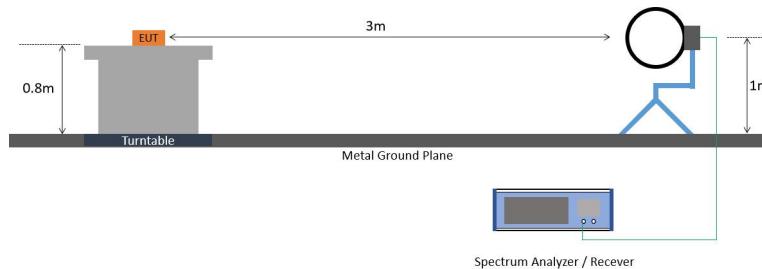

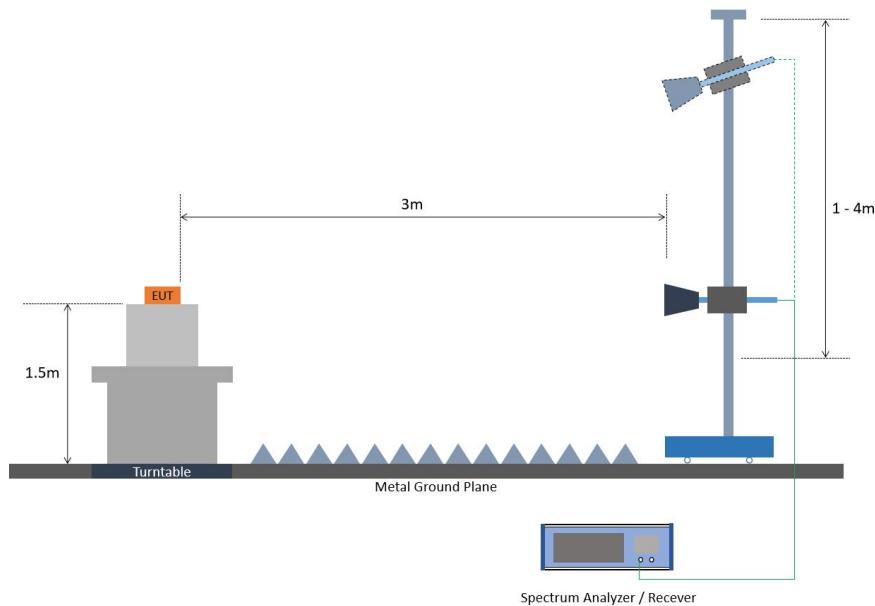

For radiated test above 1GHz

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Remark: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

----- THE END -----

ANNEX A: Test Results

Test Results of Conducted Test

GSM850	Refer to ANNEX A.1
GSM1900	Refer to ANNEX A.2
WCDMA Band II	Refer to ANNEX A.3
WCDMA Band IV	Refer to ANNEX A.4
WCDMA Band V	Refer to ANNEX A.5
LTE Band 2	Refer to ANNEX A.6
LTE Band 4	Refer to ANNEX A.7
LTE Band 5	Refer to ANNEX A.8
LTE Band 7	Refer to ANNEX A.9
LTE Band 12	Refer to ANNEX A.10
LTE Band 25	Refer to ANNEX A.11
LTE Band 26(814-824MHz)	Refer to ANNEX A.12
LTE Band 26(824-849MHz)	Refer to ANNEX A.13
LTE Band 38	Refer to ANNEX A.14
LTE Band 41	Refer to ANNEX A.15
LTE Band 42(3450-3550MHz)	Refer to ANNEX A.16
LTE Band 66	Refer to ANNEX A.17
LTE Band 71	Refer to ANNEX A.18
LTE CA_5B	Refer to ANNEX A.19
LTE CA_7C	Refer to ANNEX A.20
LTE CA_12B	Refer to ANNEX A.21
LTE CA_38C	Refer to ANNEX A.22
LTE CA_41C	Refer to ANNEX A.23
LTE CA_42C(3450-3550MHz)	Refer to ANNEX A.24
LTE CA_66B	Refer to ANNEX A.25
LTE CA_66C	Refer to ANNEX A.26

Test Results of Radiated Test

Radiated Emission	Refer to ANNEX A.27
-------------------	---------------------

ANNEX B: The EUT Appearance

The EUT Appearance (internal and external photographs) are submitted separately.

ANNEX C: Test Setup Photographs

The Test Setup Photographs are submitted separately.