



FCC Radio Test Report

FCC ID: XMR2025SC682ANA

This report concerns: Original Grant

Project No. : 2502H027
Equipment : LTE Module with Wi-Fi & Bluetooth
Brand Name : QUECTEL
Test Model : SC682A-NA
Series Model : N/A
Applicant : Quectel Wireless Solutions Co., Ltd.
Address : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China.
Manufacturer : Quectel Wireless Solutions Co., Ltd.
Address : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China.
Date of Receipt : Mar. 05, 2025
Date of Test : Mar. 05, 2025~Mar. 25, 2025
Issued Date : Apr. 21, 2025
Report Version : R00
Test Sample : Engineering Sample No.: SH20250305144
Standard(s) : FCC CFR Title 47, Part 15, Subpart C
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Shanghai).



Prepared by : Sherry Huang



Approved by : Riley Wei

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China.

Tel: +86-021-61765666

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 SUPPORT UNITS	12
3 . RADIATED EMISSIONS	13
3.1 LIMIT	13
3.2 TEST PROCEDURE	14
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	15
3.5 EUT OPERATING CONDITIONS	17
3.6 TEST RESULT - 9 KHZ TO 30 MHZ	17
3.7 TEST RESULT - 30 MHZ TO 1000 MHZ	17
3.8 TEST RESULT - ABOVE 1000 MHZ	17
4 . BANDWIDTH	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM STANDARD	18
4.4 TEST SETUP	18
4.5 EUT OPERATION CONDITIONS	18
4.6 TEST RESULTS	18
5 . MAXIMUM OUTPUT POWER	19
5.1 LIMIT	19
5.2 TEST PROCEDURE	19
5.3 DEVIATION FROM STANDARD	19
5.4 TEST SETUP	19

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	19
5.6 TEST RESULTS	19
6 . CONDUCTED SPURIOUS EMISSION	20
6.1 LIMIT	20
6.2 TEST PROCEDURE	20
6.3 DEVIATION FROM STANDARD	20
6.4 TEST SETUP	20
6.5 EUT OPERATION CONDITIONS	20
6.6 TEST RESULTS	20
7 . POWER SPECTRAL DENSITY	21
7.1 LIMIT	21
7.2 TEST PROCEDURE	21
7.3 DEVIATION FROM STANDARD	21
7.4 TEST SETUP	21
7.5 EUT OPERATION CONDITIONS	21
7.6 TEST RESULTS	21
8 . MEASUREMENT INSTRUMENTS LIST	22
9 . EUT TEST PHOTO	24
APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ	28
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	33
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	36
APPENDIX D - BANDWIDTH	59
APPENDIX E - MAXIMUM OUTPUT POWER	62
APPENDIX F - CONDUCTED SPURIOUS EMISSION	65
APPENDIX G - POWER SPECTRAL DENSITY	68

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2502H027	R00	Original Report.	Apr. 21, 2025	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	N/A	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

BTL's Registration Number for FCC: 964234

BTL's Designation Number for FCC: CN1374

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB02	CISPR	9 KHz~30 MHz	-	2.72
		30 MHz~200 MHz	V	4.4
		30 MHz~200 MHz	H	3.16
		200 MHz~1,000 MHz	V	4.6
		200 MHz~1,000 MHz	H	4.2
		1GHz ~ 6GHz	-	4.56
		6GHz ~ 18GHz	-	5.14
		18 ~ 26.5 GHz	-	3.36

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Radiated Emissions-9 kHz to 30 MHz	18°C	42%	AC 120V/60Hz	Nicole Yan
Radiated Emissions-30 MHz to 1000 MHz	18°C	40%	AC 120V/60Hz	Nicole Yan
Radiated Emissions-Above 1000 MHz	18°C~19.6°C	34%~54%	AC 120V/60Hz	Nicole Yan
Bandwidth	18°C	39%~40%	DC 3.8V	Thacker Tang
Maximum Output Power	18°C	39%~40%	DC 3.8V	Thacker Tang
Conducted Spurious Emission	18°C	39%~40%	DC 3.8V	Thacker Tang
Power Spectral Density	18°C	39%~40%	DC 3.8V	Thacker Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE Module with Wi-Fi & Bluetooth
Brand Name	QUECTEL
Test Model	SC682A-NA
Series Model	N/A
Model Difference(s)	N/A
Software Version	SC682ANAPAR01A01
Hardware Version	SC682A-NA
Power Source	DC Voltage supplied from host system.
Power Rating	3.55 to 4.4V; Typical: 3.8V
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 125Kbps, 500Kbps
Max. Output Power	2Mbps: 1.98 dBm (0.0016 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	 圣丹纳	SAA31578A	Folded Dipole Antenna	SMA-J	0.47

Note:

The antenna gain is provided by the manufacturer.

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_125Kbps Channel 00/19/39
Mode 4	TX Mode_500Kbps Channel 00/19/39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX Mode_2Mbps Channel 19

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 00/19/39
Mode 2	TX Mode_2Mbps Channel 00/19/39
Mode 3	TX Mode_125Kbps Channel 00/19/39
Mode 4	TX Mode_500Kbps Channel 00/19/39

Note:


- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For radiated emissions below 1 GHz test, the 2Mbps Channel 19 is found to be the worst case and recorded.
- (3) In the maximum power output report recorded 1 Mbps / 2 Mbps / 125Kbps / 500Kbps data, other test items are only 1 Mbps / 2 Mbps data.

2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	QRCT4		
Frequency (MHz)	2402	2440	2480
1Mbps	DEF	DEF	DEF
2Mbps	DEF	DEF	DEF
125Kbps	DEF	DEF	DEF
500Kbps	DEF	DEF	DEF

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

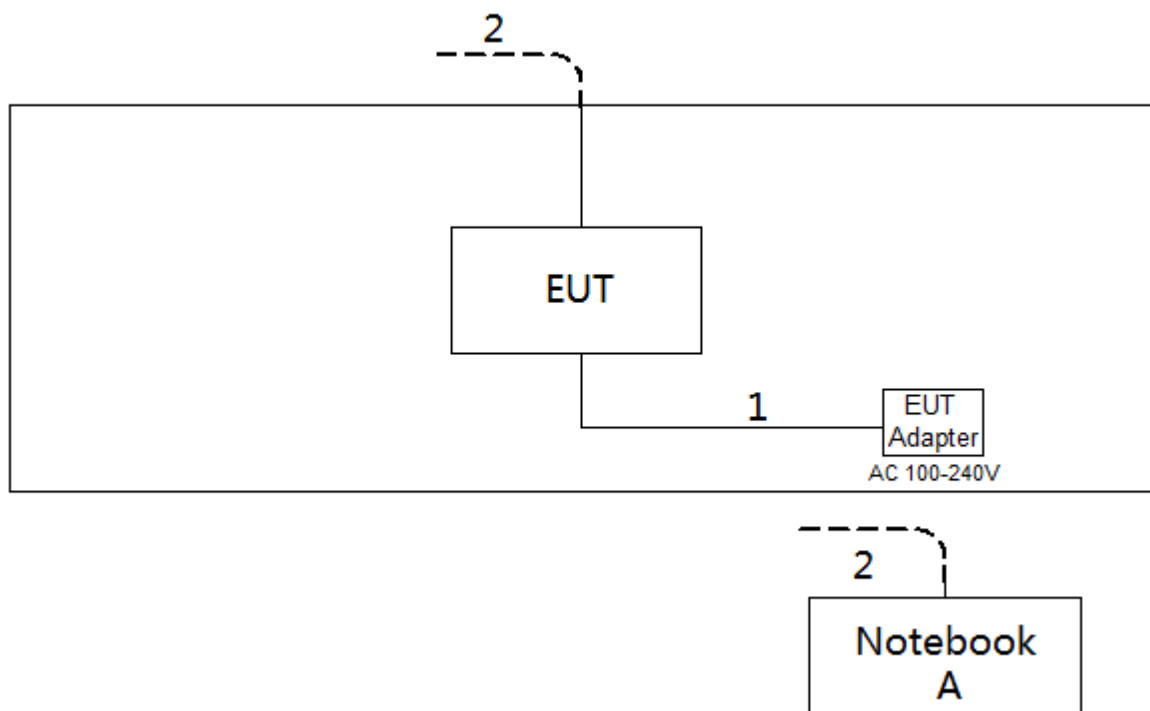

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	WIN-Q473UQS5N2A	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	USB cable	NO	NO	1.5m

3. RADIATED EMISSIONS

3.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

3.3 DEVIATION FROM TEST STANDARD


No deviation.

3.4 TEST SETUP


9 kHz to 30 MHz

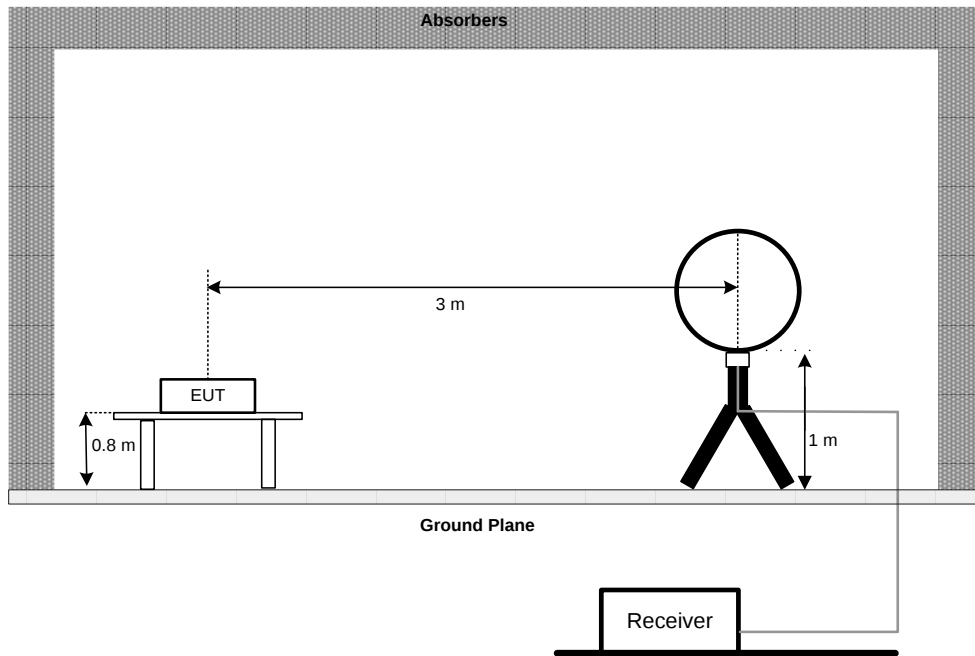

30 MHz to 1 GHz

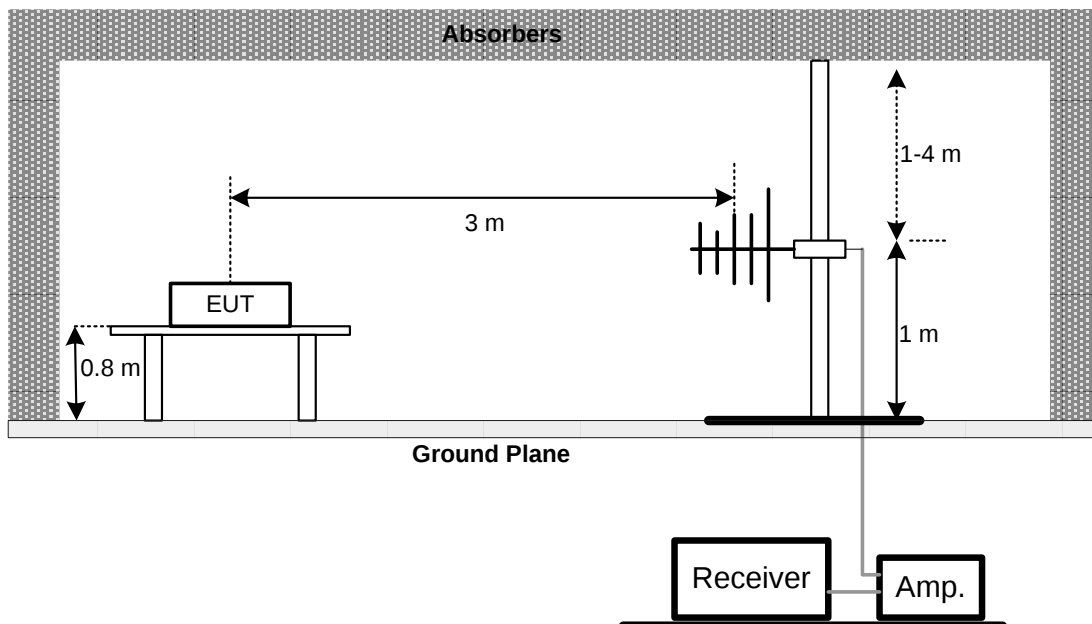

Above 1 GHz

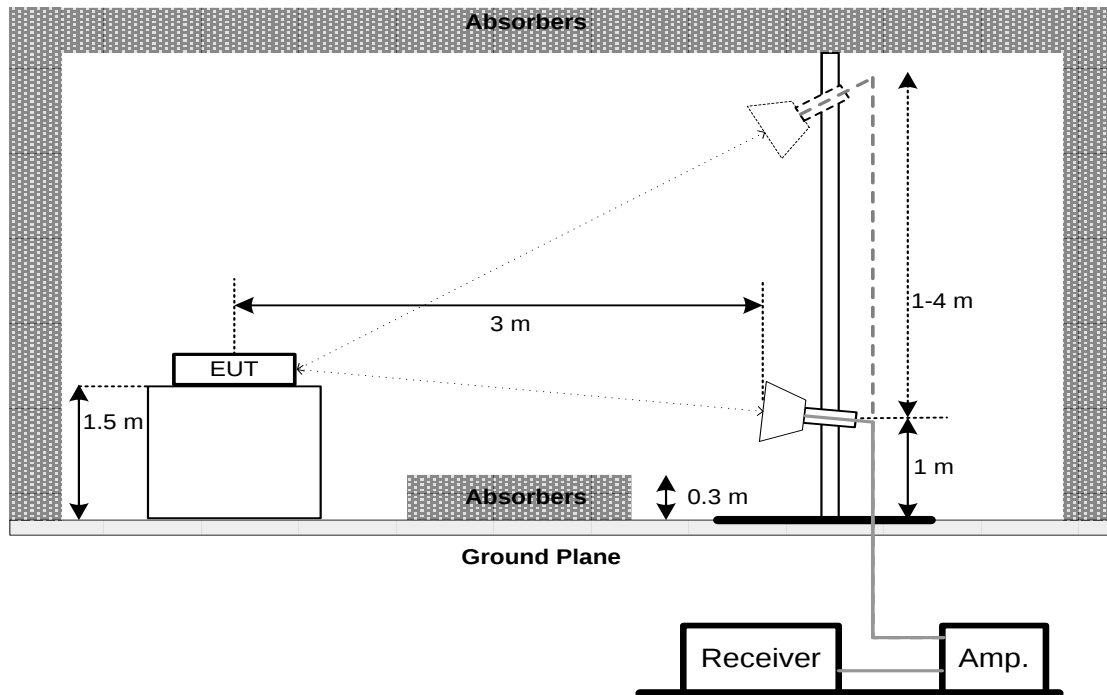

3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX A.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

3.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX B.

3.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

4. BANDWIDTH

4.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz
	99% Emission Bandwidth	-

4.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	$>$ Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX D.

5. MAXIMUM OUTPUT POWER

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. CONDUCTED SPURIOUS EMISSION

6.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

6.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

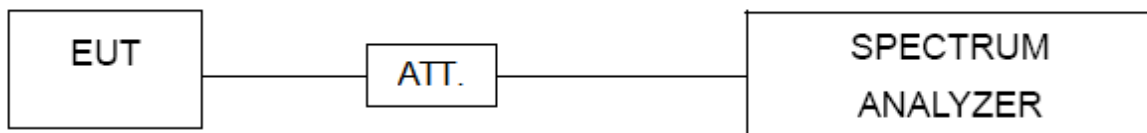

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

7.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps) / 4 MHz (2 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

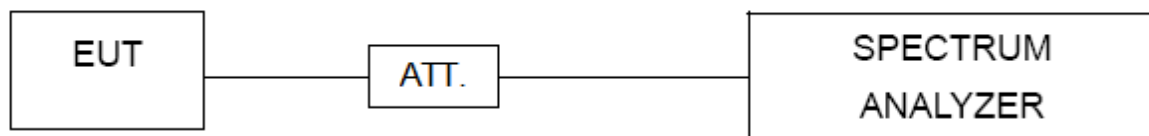

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 12, 2025 Mar. 11, 2026
2	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Jan. 18, 2026
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
4	Pre-Amplifier	emci	EMC9135	980401	Jan. 18, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	emci	VULB 9168	1467	Mar. 8, 2025 Mar. 7, 2026
2	Pre-Amplifier	emci	EMC9135	980401	Jan. 18, 2026
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Jan. 18, 2026
4	Test Cable	emci	EMC104-SM-SM-7 000	181020	May 20, 2025
5	Test Cable	emci	RWP50-4.6A-SMS M-1M	20200928 002	May 20, 2025
6	Test Cable	emci	EMC104-SM-SM-2 500	170618	May 20, 2025
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	BBHA 9120D	9120D-1817	Mar. 8, 2025 Mar. 7, 2026
2	Pre-Amplifier	emci	EMC051845SE	980725	Jul. 12, 2025
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Jan. 18, 2026
4	Test Cable	emci	EMC104-SM-SM-7000	181020	May 20, 2025
5	Test Cable	emci	RWP50-4.6A-SMS M-1M	20200928 002	May 20, 2025
6	Test Cable	emci	EMC104-SM-SM-2500	170618	May 20, 2025
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1	N/A	N/A
8	Antenna	Schwarzbeck	BBHA9170	9170-651	Mar. 17, 2025 Mar. 16, 2026
9	Pre-Amplifier	EMC INSTRUMENT	EMC184045B	980265	Jan. 18, 2026
10	Test Cable	emci	EMC-104HS-SM-S M-1000	240625	Jul. 27, 2025
11	Test Cable	emci	EMC104HS-SM-S M-5000	240627	Aug. 5, 2025

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Jul. 12, 2025
2	BTL Conducted Test	BTL	20250107	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000507	Jan. 18, 2026
2	Wideband Power Sensor	Keysight	N1923A	MY58310003	Jan. 18, 2026

Antenna Conducted Spurious Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Jul. 12, 2025
2	BTL Conducted Test	BTL	20250107	N/A	N/A

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Jul. 12, 2025
2	BTL Conducted Test	BTL	20250107	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.

9. EUT TEST PHOTO

Radiated Emissions Test Photos



9 kHz to 30 MHz

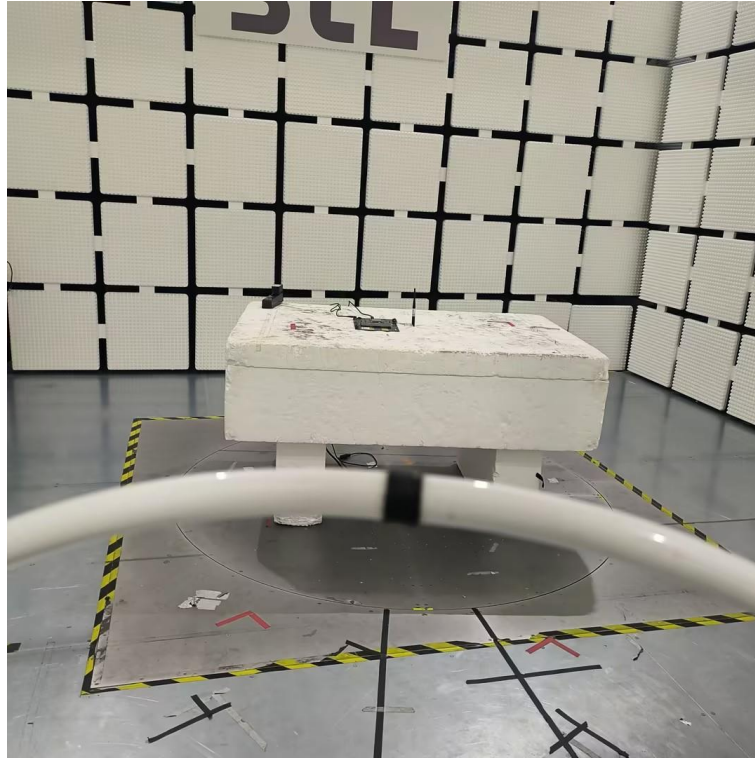

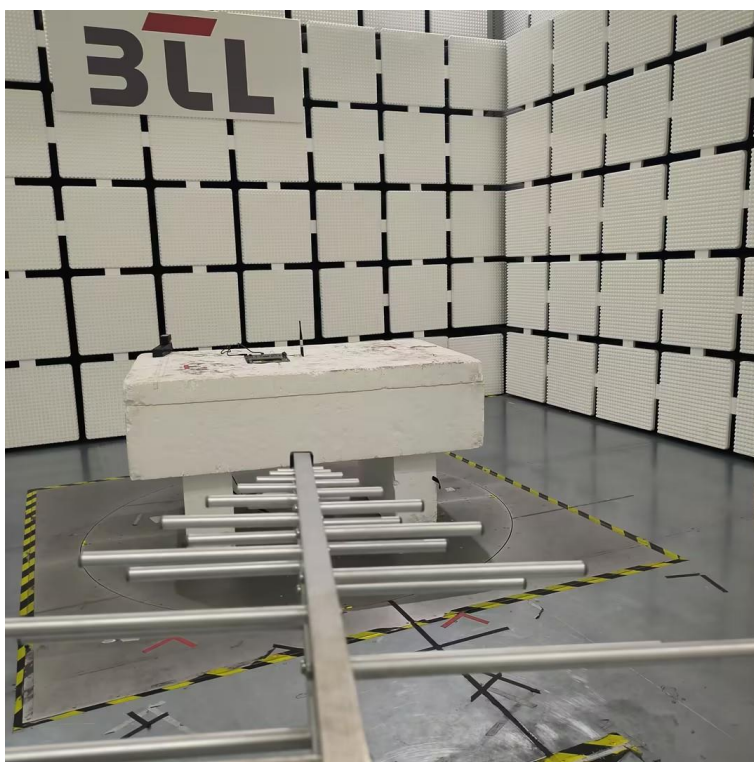
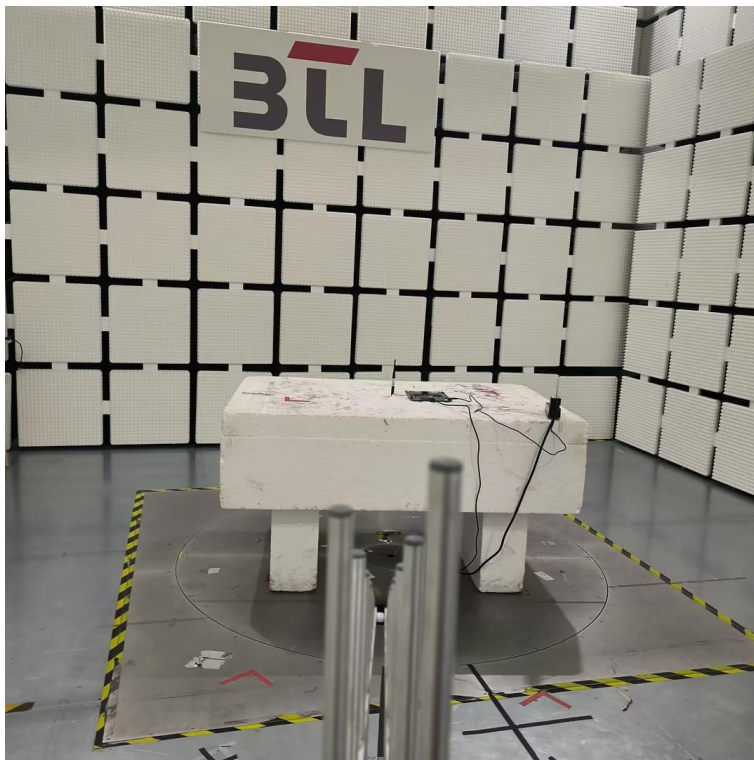
Radiated Emissions Test Photos**30 MHz to 1000 MHz**

Radiated Emissions Test Photos

Above 1 GHz

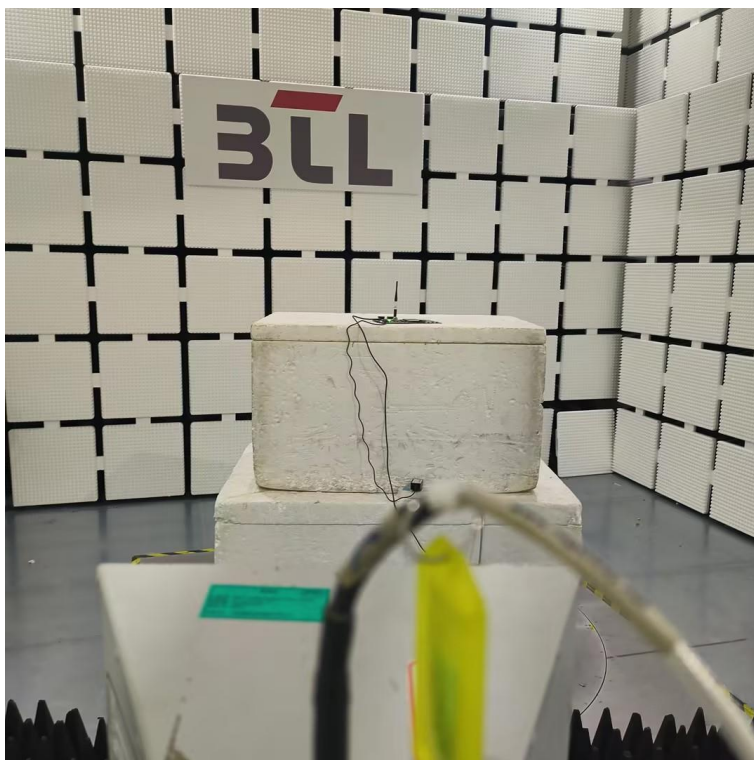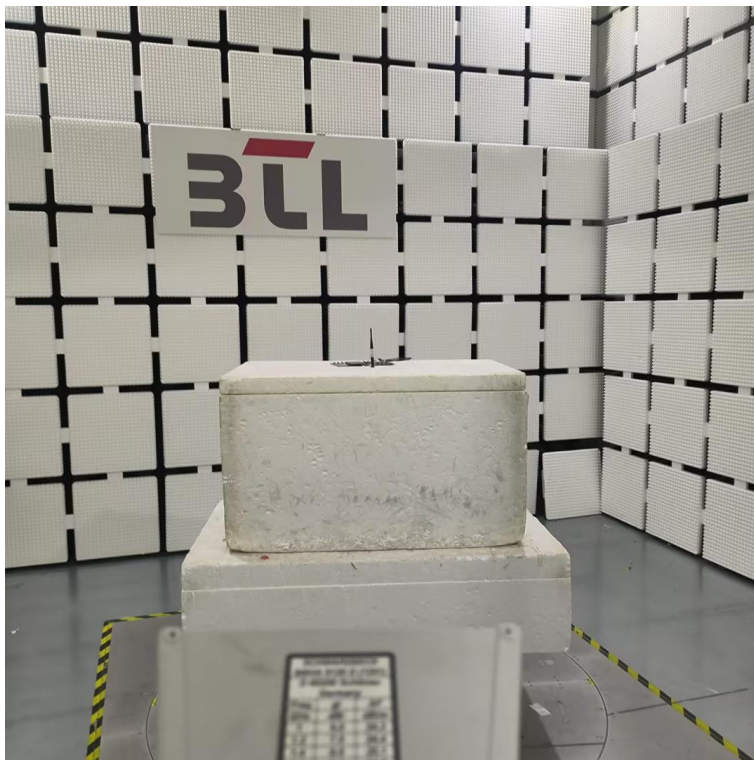


Above 18 GHz

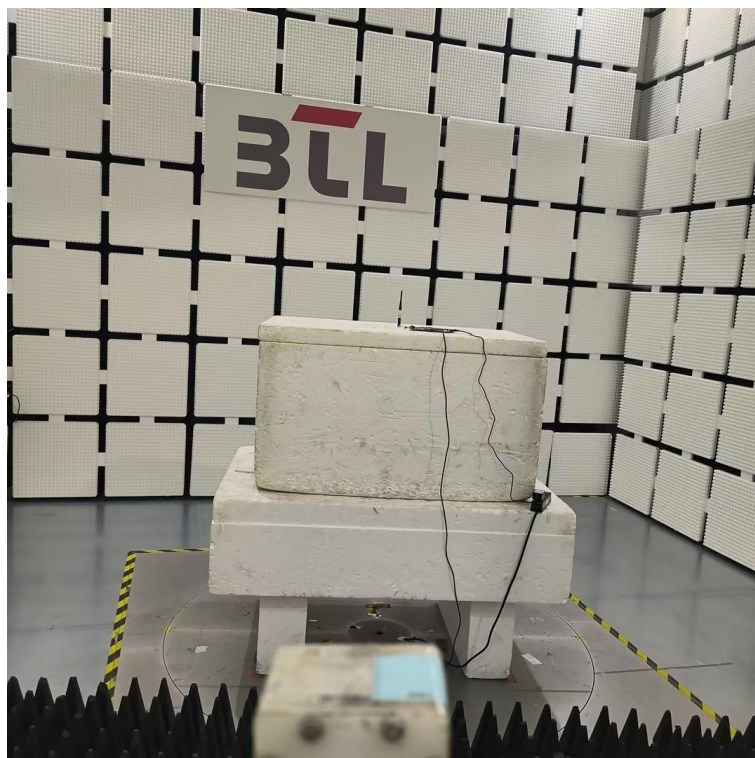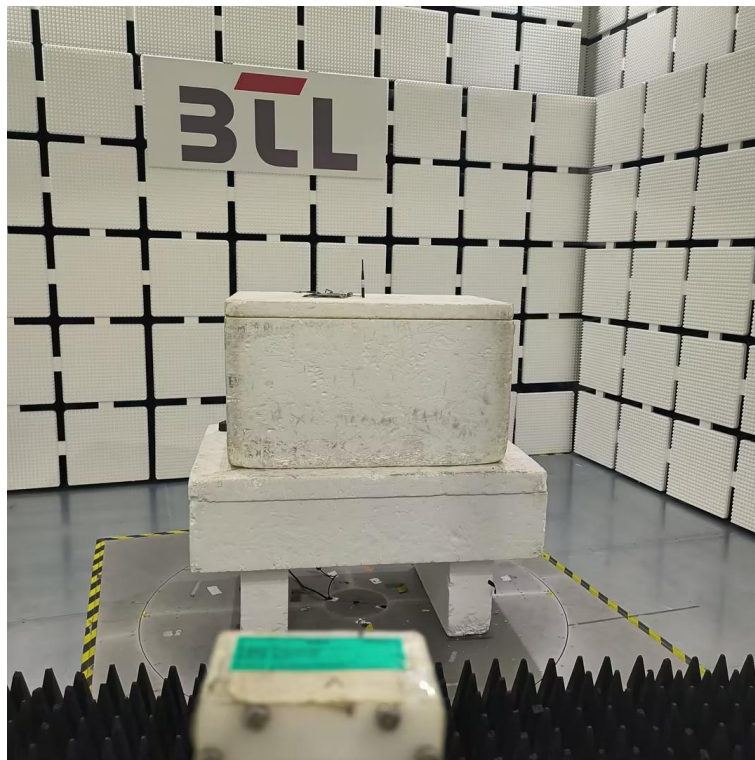

APPENDIX A - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_2Mbps Channel 19	Polarization	Vertical
-----------	--------------------------	--------------	----------

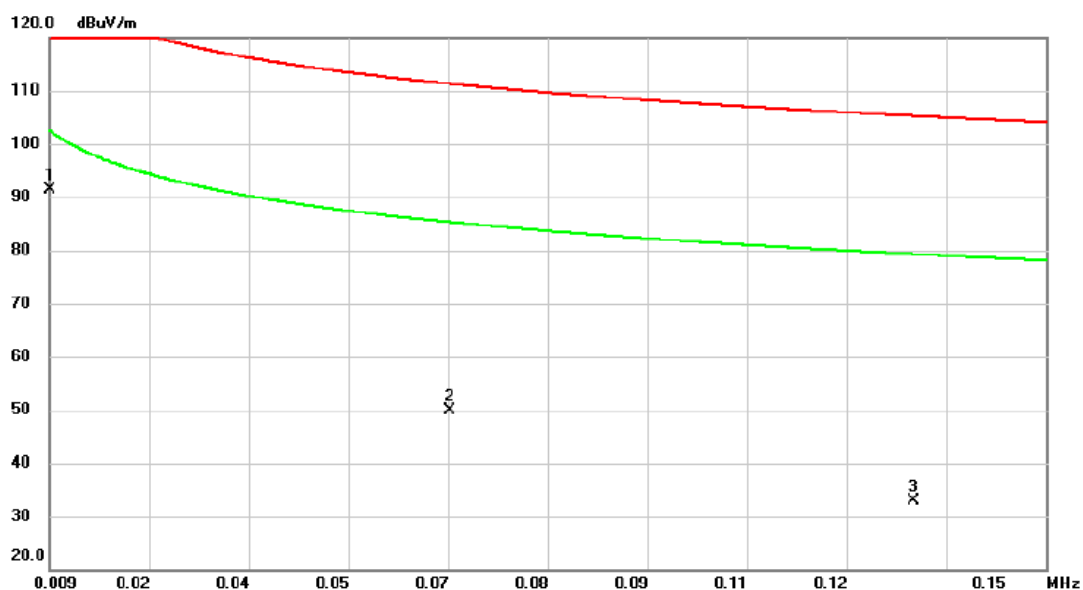


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV		dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0090	21.28	70.03	91.31	128.52	-37.21	peak
2		0.0656	12.63	37.22	49.85	111.27	-61.42	peak
3		0.1312	7.47	25.50	32.97	105.25	-72.28	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 19	Polarization	Horizontal
-----------	--------------------------	--------------	------------

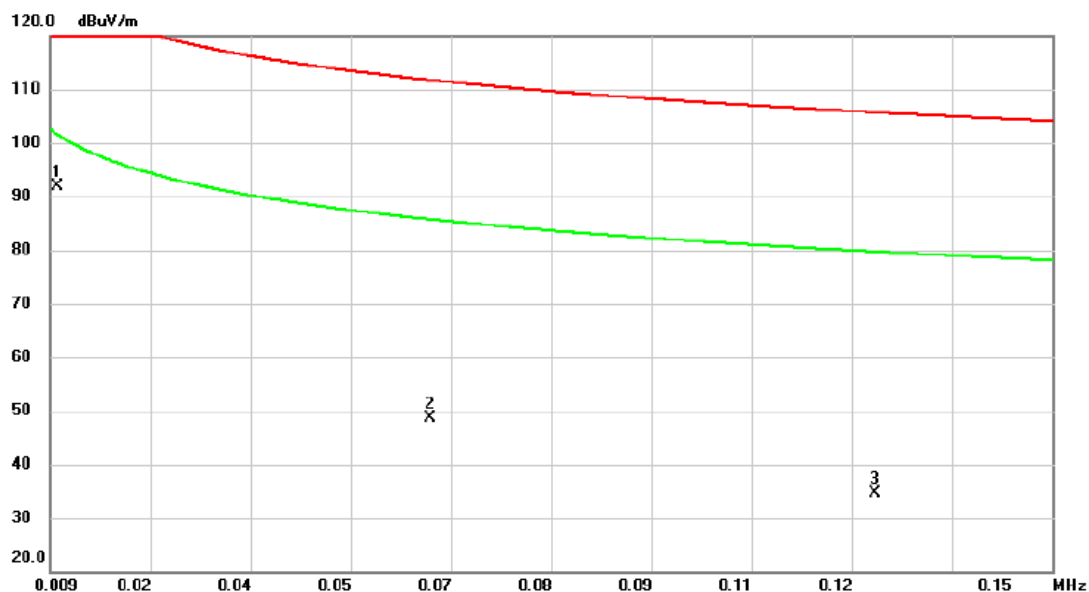


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV		dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0100	23.62	68.36	91.98	127.60	-35.62	peak	
2		0.0625	10.52	38.06	48.58	111.69	-63.11	peak	
3		0.1250	8.45	26.16	34.61	105.67	-71.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 19	Polarization	Vertical
-----------	--------------------------	--------------	----------

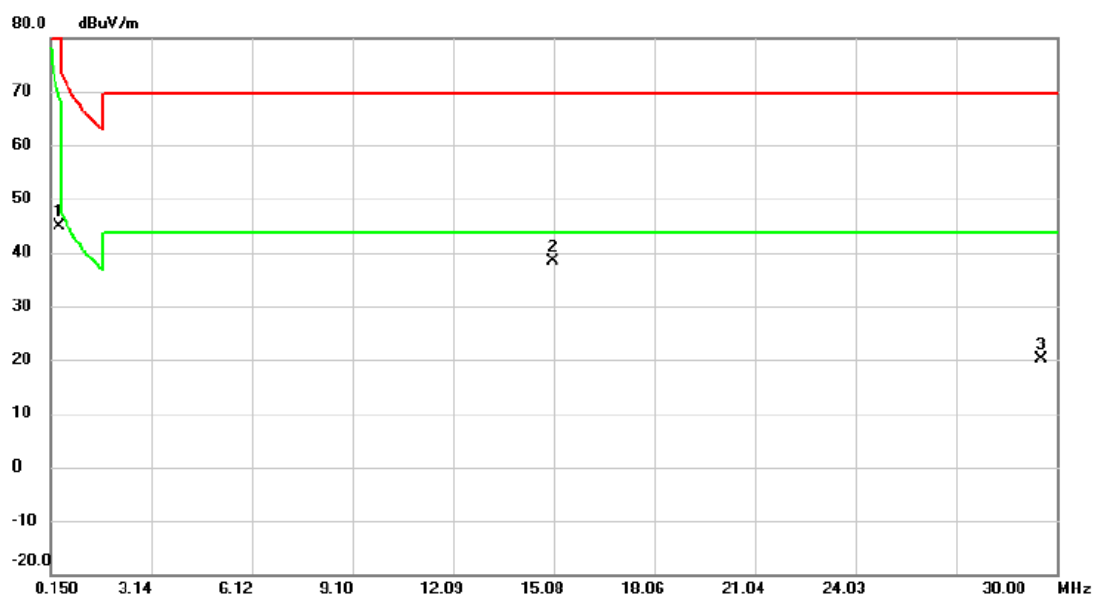


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.4037	34.74	10.23	44.97	95.48	-50.51	peak	
2	*	15.0601	41.35	-2.86	38.49	69.54	-31.05	peak	
3		29.5523	22.55	-2.52	20.03	69.54	-49.51	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 19	Polarization	Horizontal
-----------	--------------------------	--------------	------------

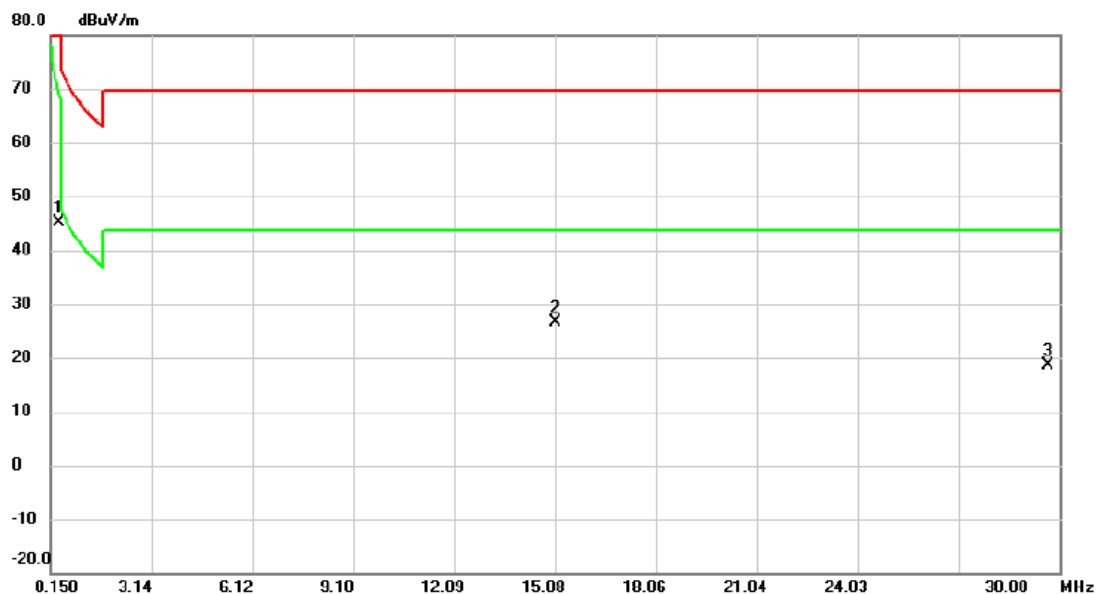


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV		dBuV/m	dBuV/m	dB	Detector Comment
1		0.4037	34.86	10.23	45.09	95.48	-50.39	peak
2	*	15.0900	29.41	-2.88	26.53	69.54	-43.01	peak
3		29.6567	21.07	-2.32	18.75	69.54	-50.79	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_2Mbps Channel 19	Polarization	Vertical
-----------	--------------------------	--------------	----------

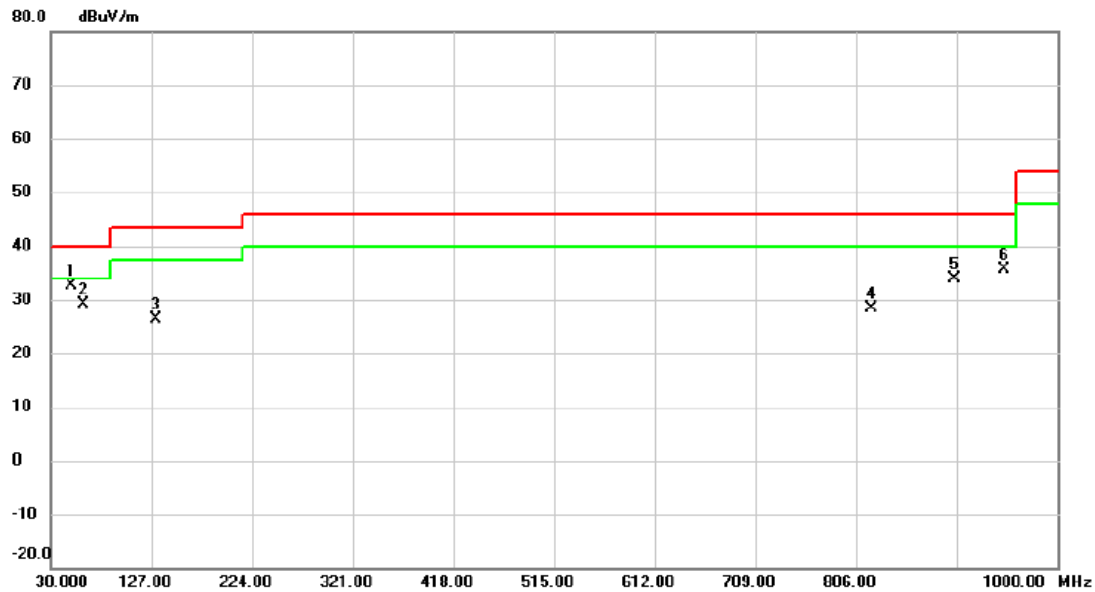


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	49.4000	49.82	-17.15	32.67	40.00	-7.33	peak	
2	61.5250	47.07	-17.95	29.12	40.00	-10.88	peak	
3	131.8500	44.29	-17.99	26.30	43.50	-17.20	peak	
4	821.0350	34.39	-5.97	28.42	46.00	-17.58	peak	
5	901.0600	39.49	-5.54	33.95	46.00	-12.05	peak	
6	948.5900	40.39	-4.85	35.54	46.00	-10.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_2Mbps Channel 19	Polarization	Horizontal
-----------	--------------------------	--------------	------------

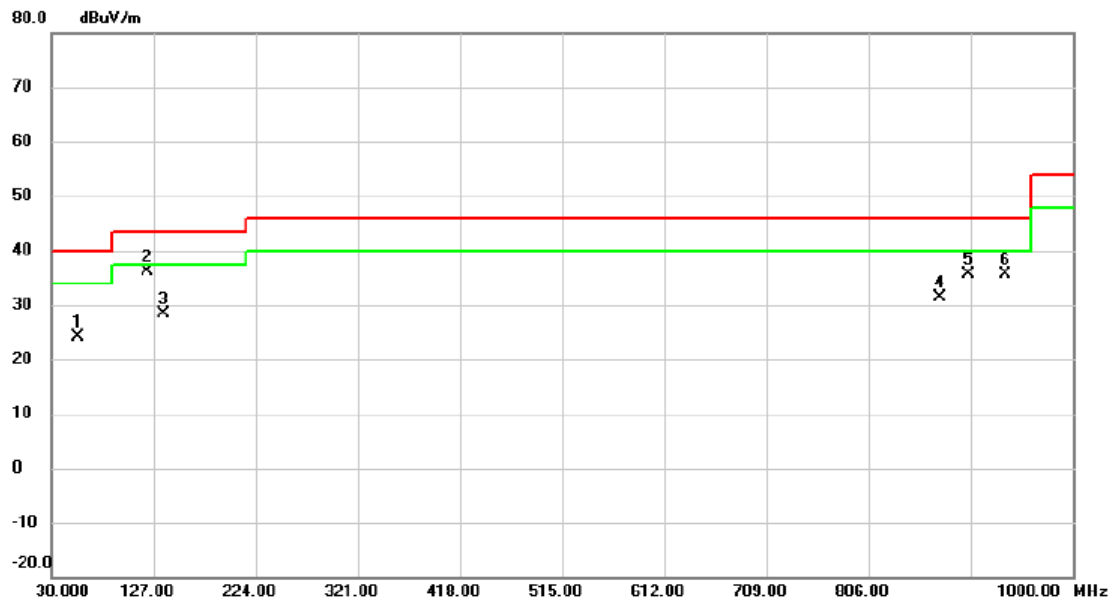

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		54.7350	41.38	-17.32	24.06	40.00	-15.94	peak	
2	*	121.1800	55.16	-19.06	36.10	43.50	-7.40	peak	
3		137.1850	45.99	-17.52	28.47	43.50	-15.03	peak	
4		874.3850	37.17	-5.90	31.27	46.00	-14.73	peak	
5		901.0600	41.28	-5.54	35.74	46.00	-10.26	peak	
6		936.4650	40.72	-5.02	35.70	46.00	-10.30	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

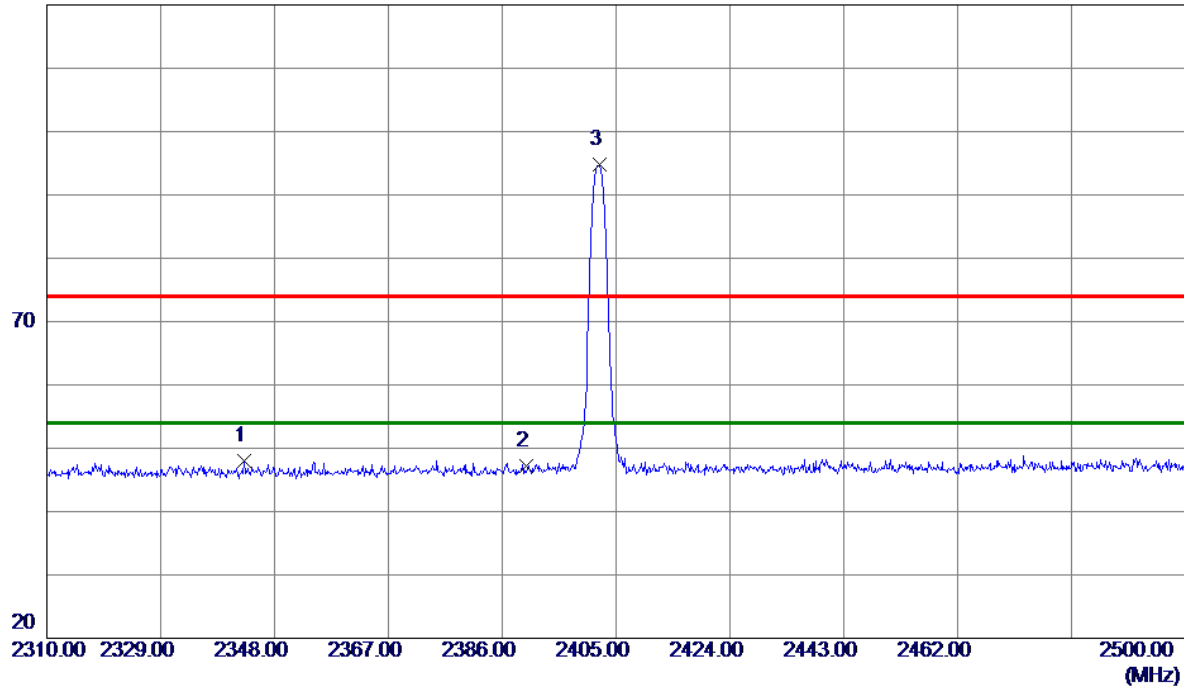


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2342.8890	16.03	32.01	48.04	74.00	-25.96	Peak	
2	2390.0000	15.06	32.20	47.26	74.00	-26.74	Peak	
3 *	2402.2830	62.60	32.25	94.85	74.00	20.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

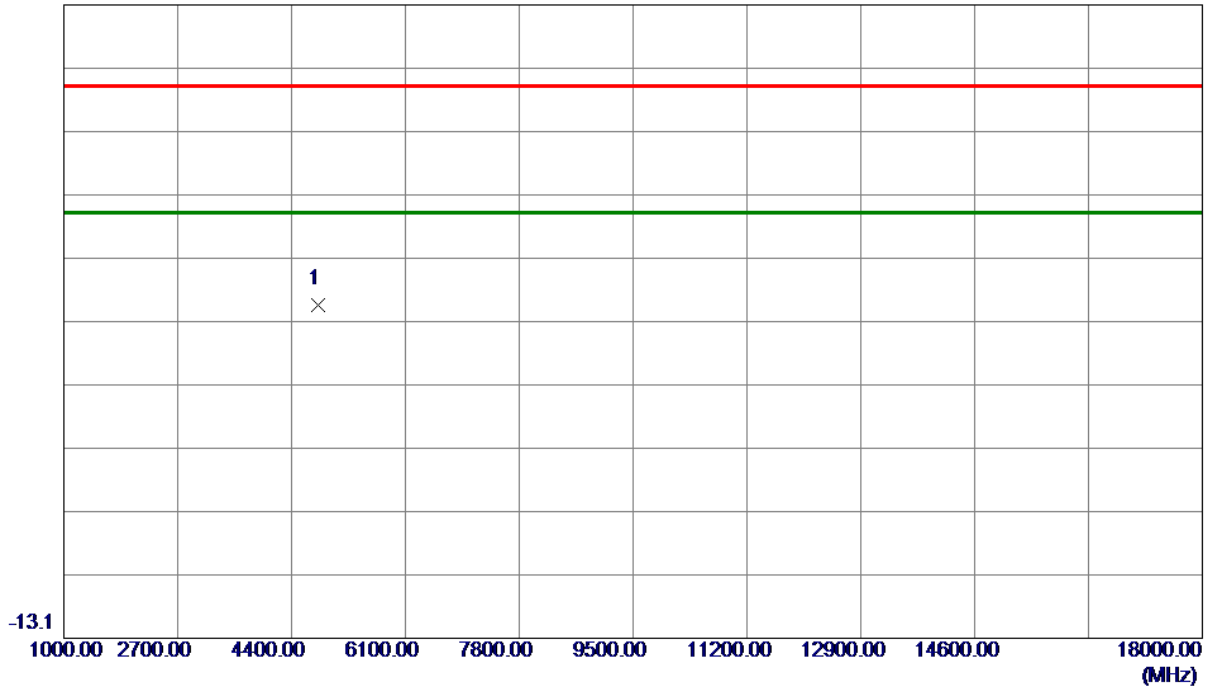


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.0000	53.72	-14.12	39.60	74.00	-34.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

120 dBuV/m

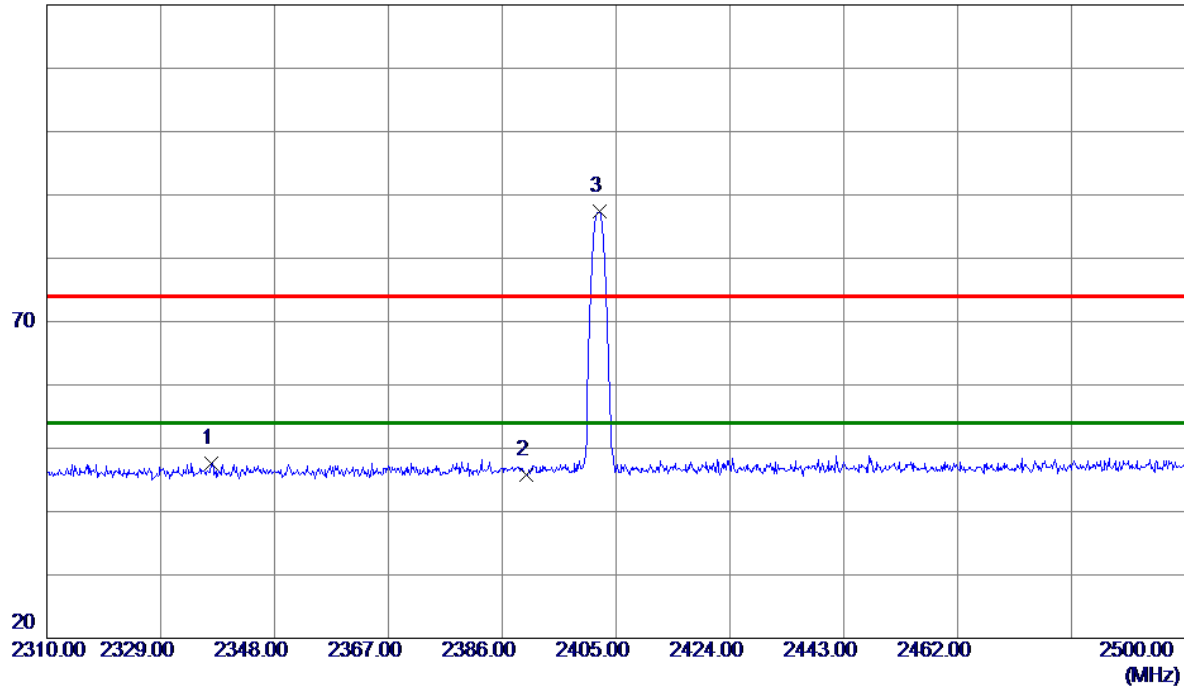


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2337.5410	15.63	31.99	47.62	74.00	-26.38	Peak	
2	2390.0000	13.67	32.20	45.87	74.00	-28.13	Peak	
3 *	2402.2450	55.12	32.25	87.37	74.00	13.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

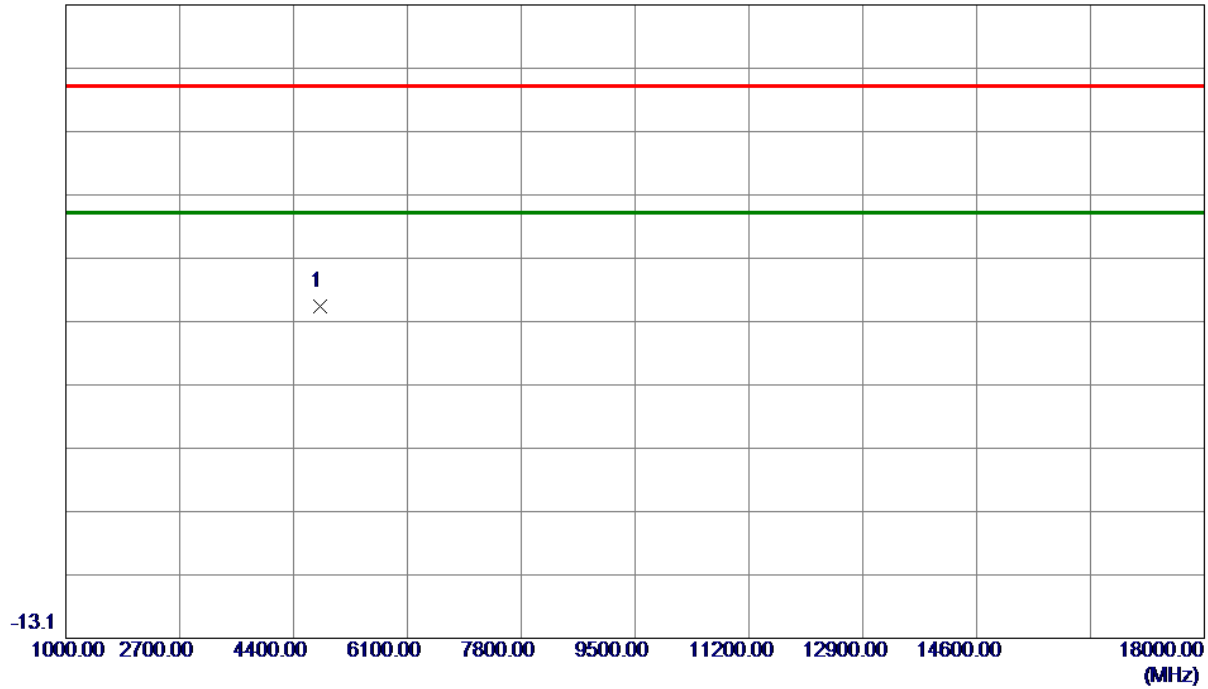


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.0000	53.38	-14.12	39.26	74.00	-34.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

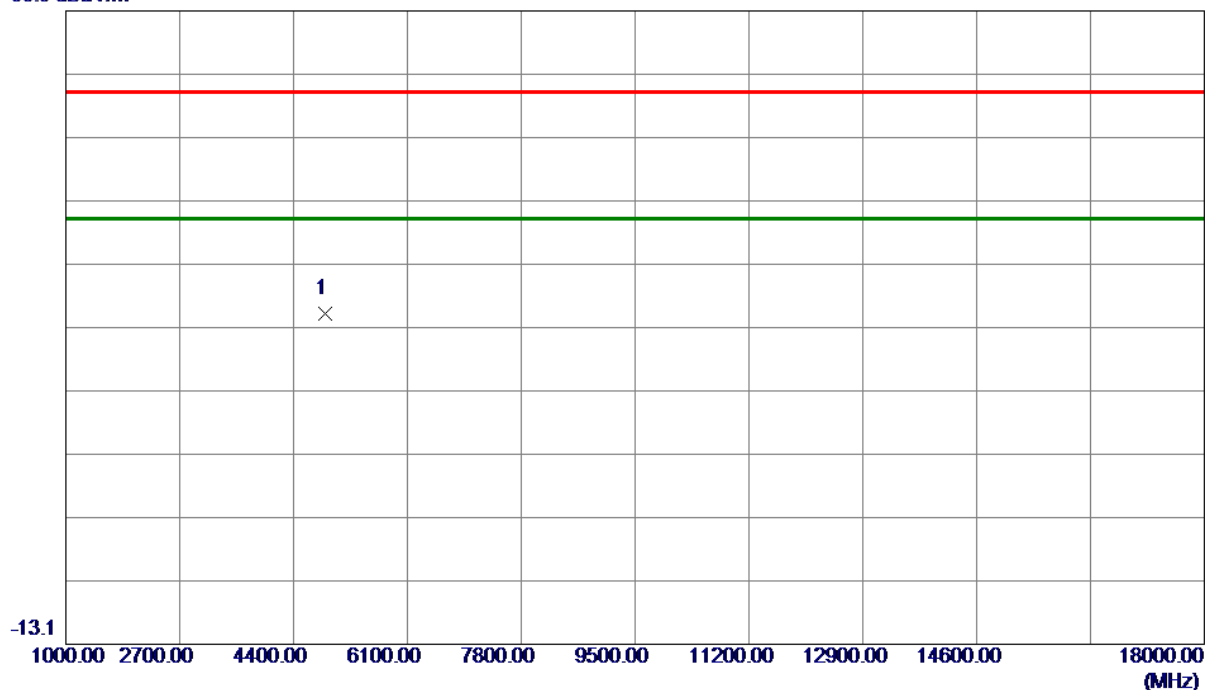


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4880.0000	52.96	-13.88	39.08	74.00	-34.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

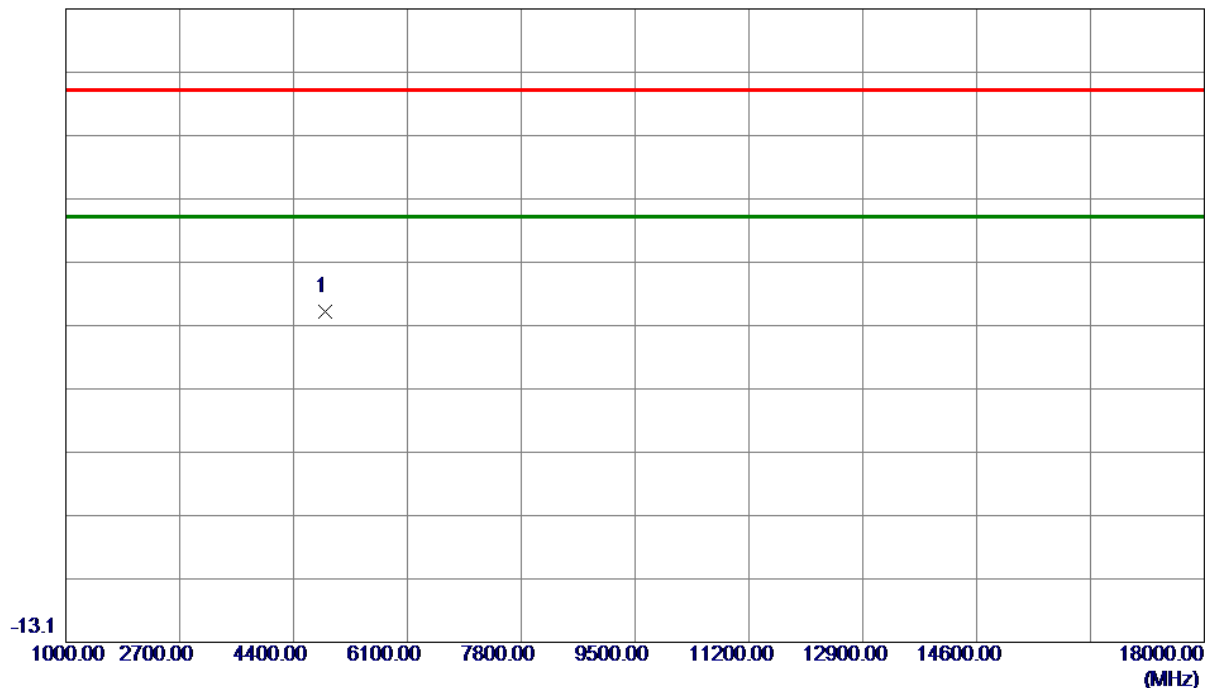


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4880.0000	52.96	-13.88	39.08	74.00	-34.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

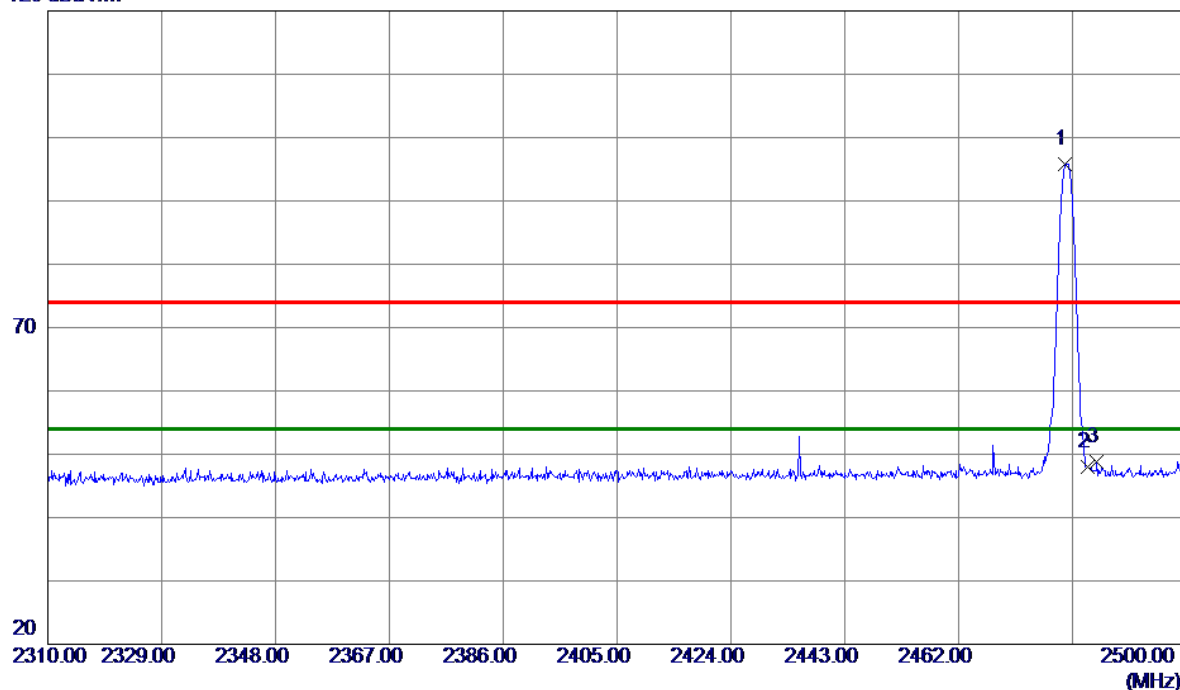


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.7649	63.26	32.57	95.83	74.00	21.83	Peak	
2	2483.5000	15.49	32.58	48.07	74.00	-25.93	Peak	
3	2485.0660	16.12	32.59	48.71	74.00	-25.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

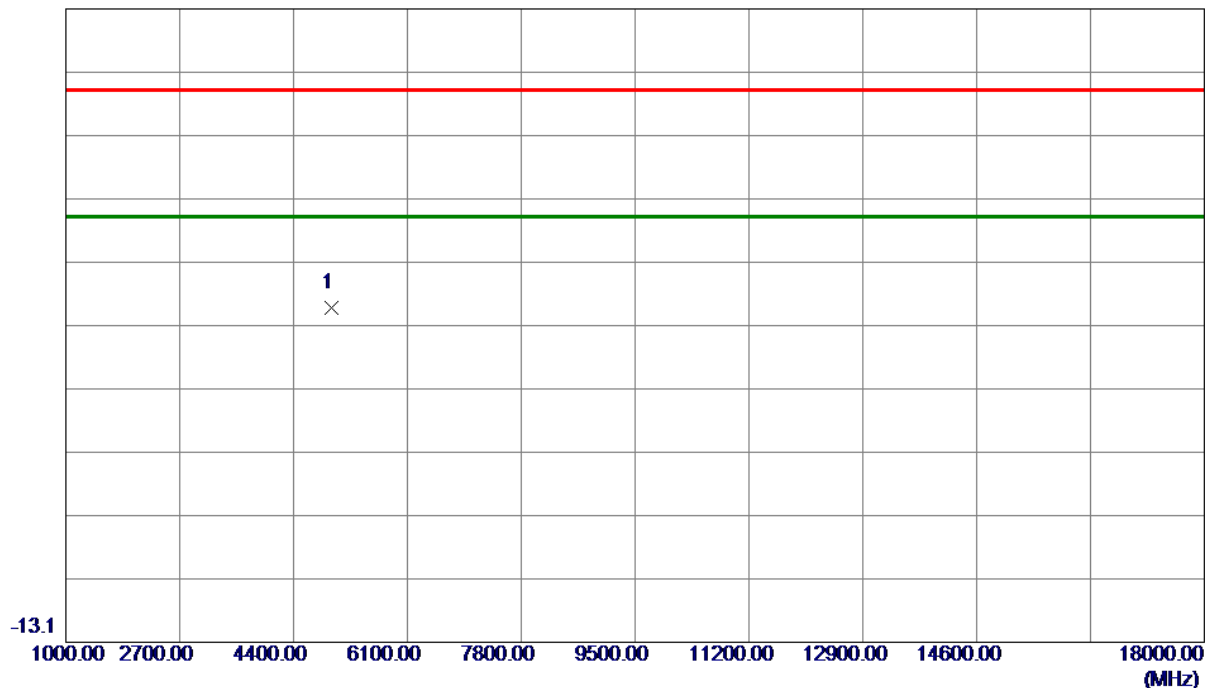


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4960.0000	53.34	-13.62	39.72	74.00	-34.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

120 dBuV/m

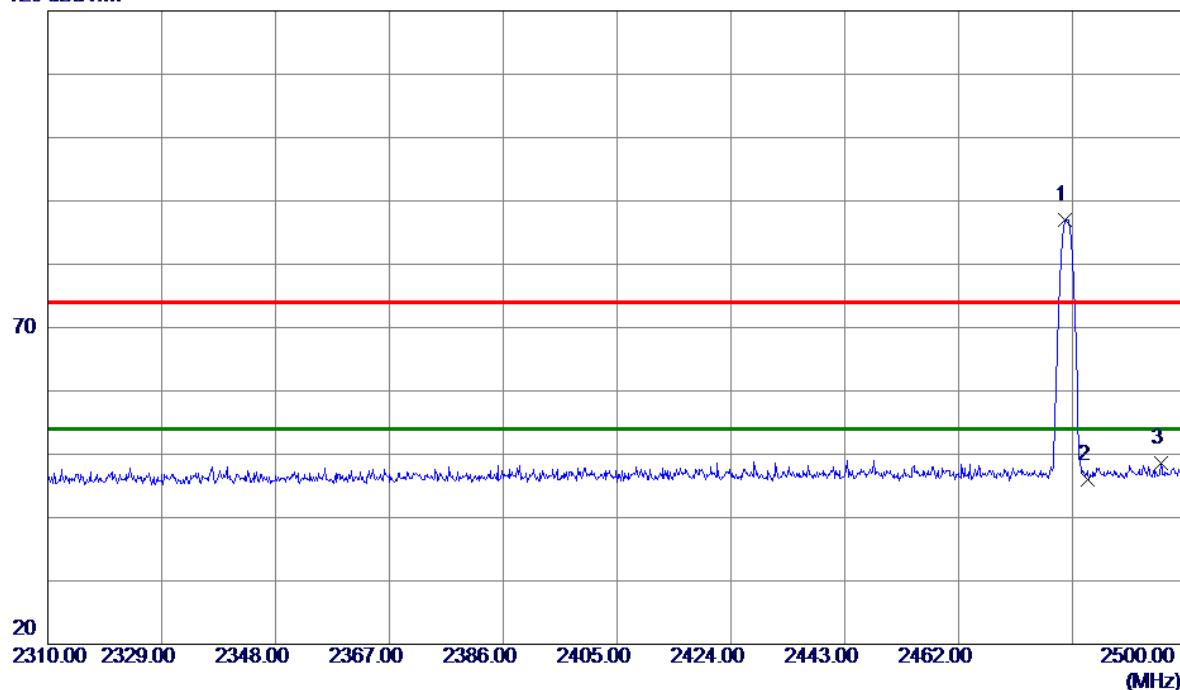


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.7840	54.43	32.57	87.00	74.00	13.00	Peak	
2	2483.5000	13.34	32.58	45.92	74.00	-28.08	Peak	
3	2495.6870	15.92	32.63	48.55	74.00	-25.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

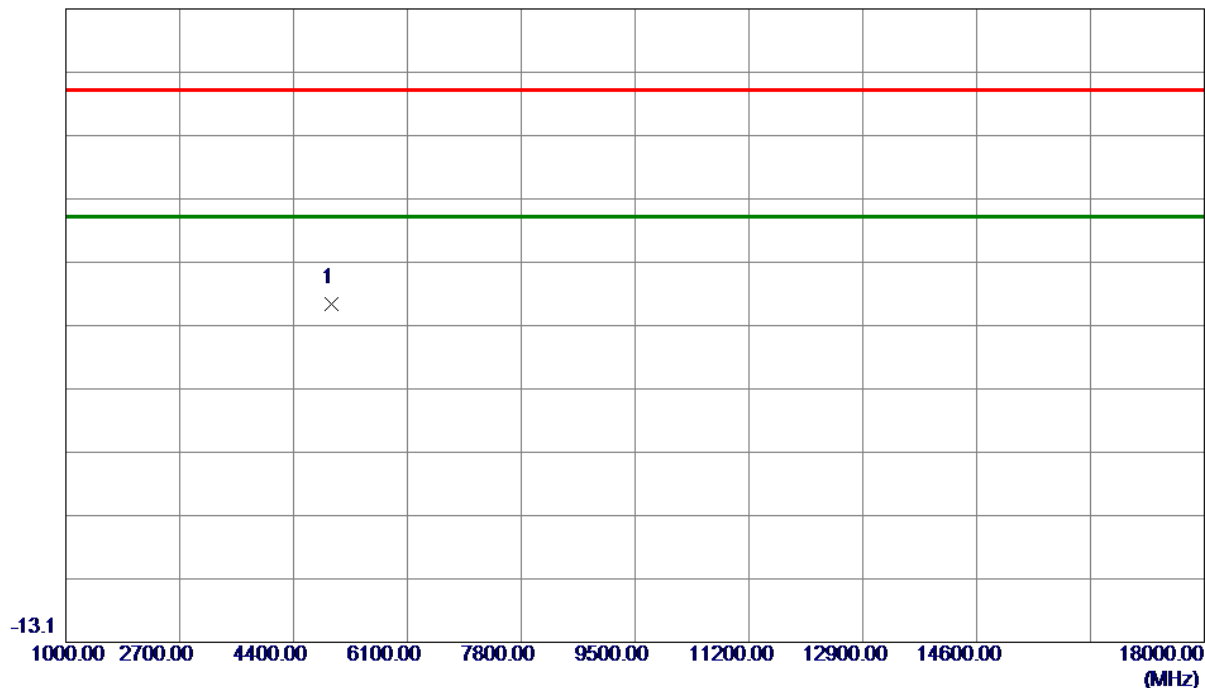


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4960.0000	54.02	-13.62	40.40	74.00	-33.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

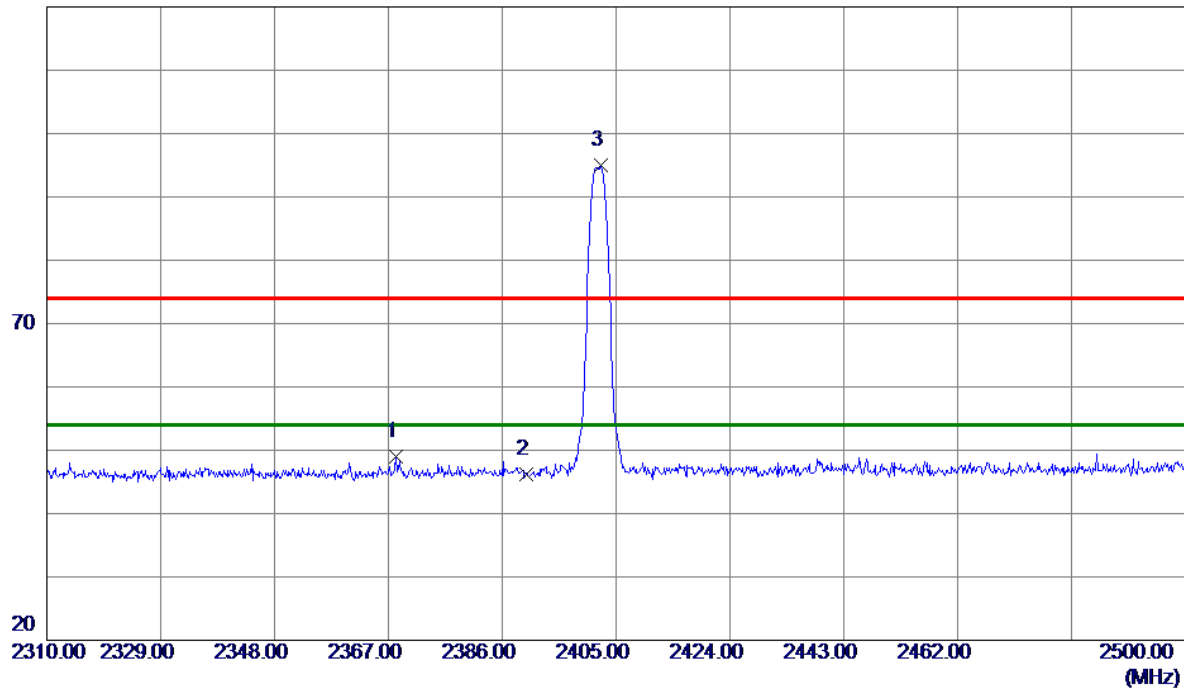


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2368.2920	16.84	32.11	48.95	74.00	-25.05	Peak	
2	2390.0000	14.00	32.20	46.20	74.00	-27.80	Peak	
3 *	2402.4830	62.70	32.25	94.95	74.00	20.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

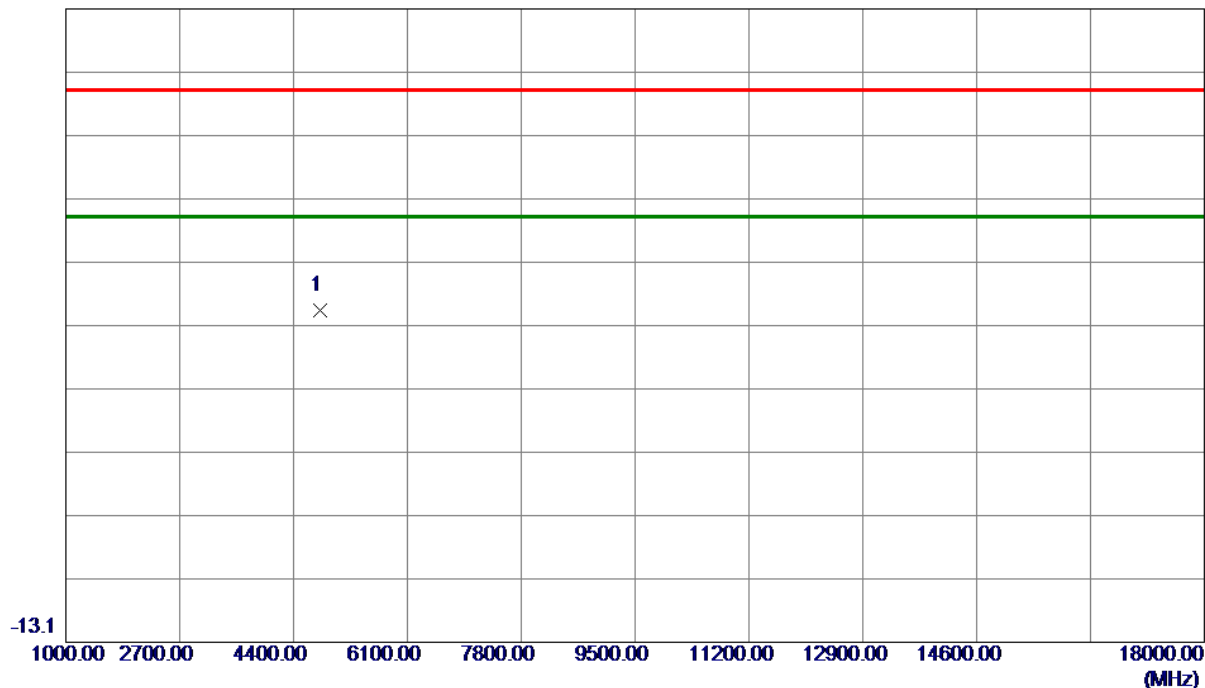


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4804.0000	53.45	-14.12	39.33	74.00	-34.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

120 dBuV/m

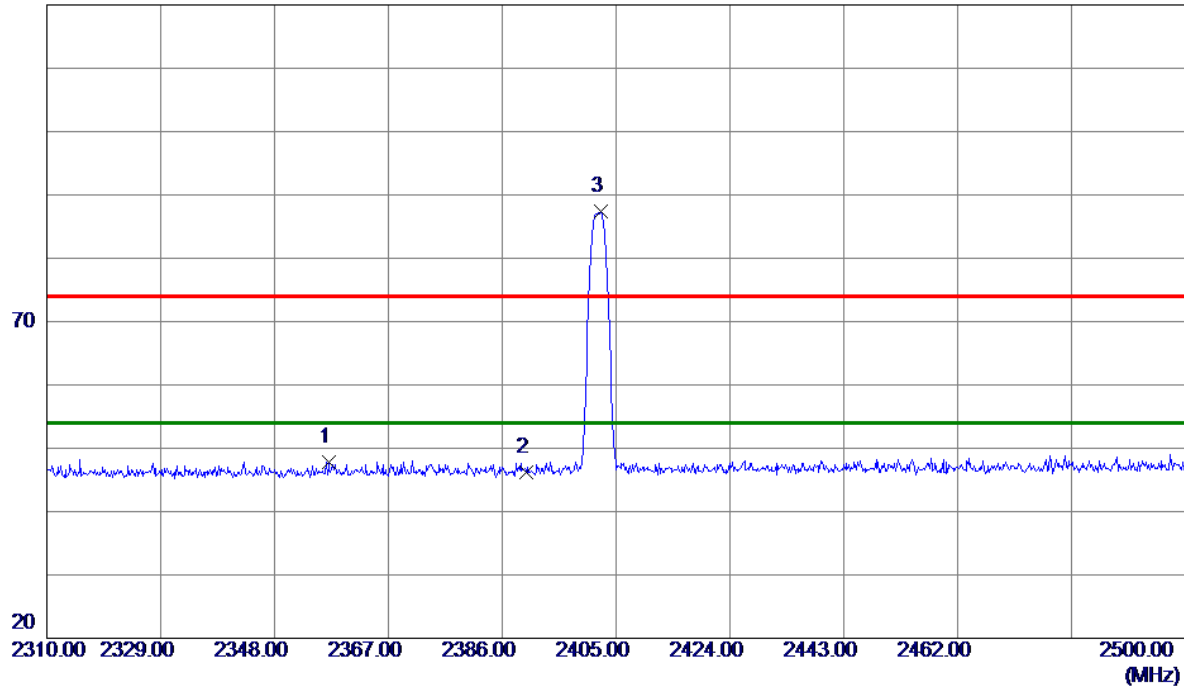


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2357.0820	15.72	32.07	47.79	74.00	-26.21	Peak	
2	2390.0000	14.00	32.20	46.20	74.00	-27.80	Peak	
3 *	2402.5590	55.23	32.25	87.48	74.00	13.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

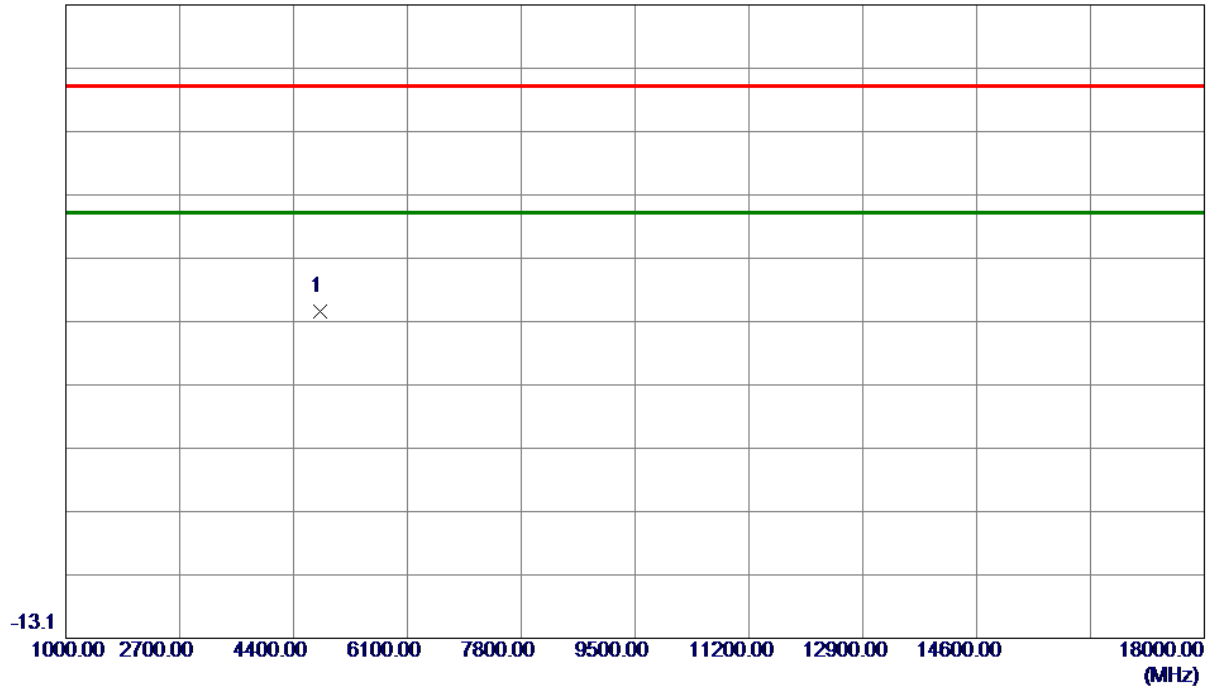


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4804.0000	52.71	-14.12	38.59	74.00	-35.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

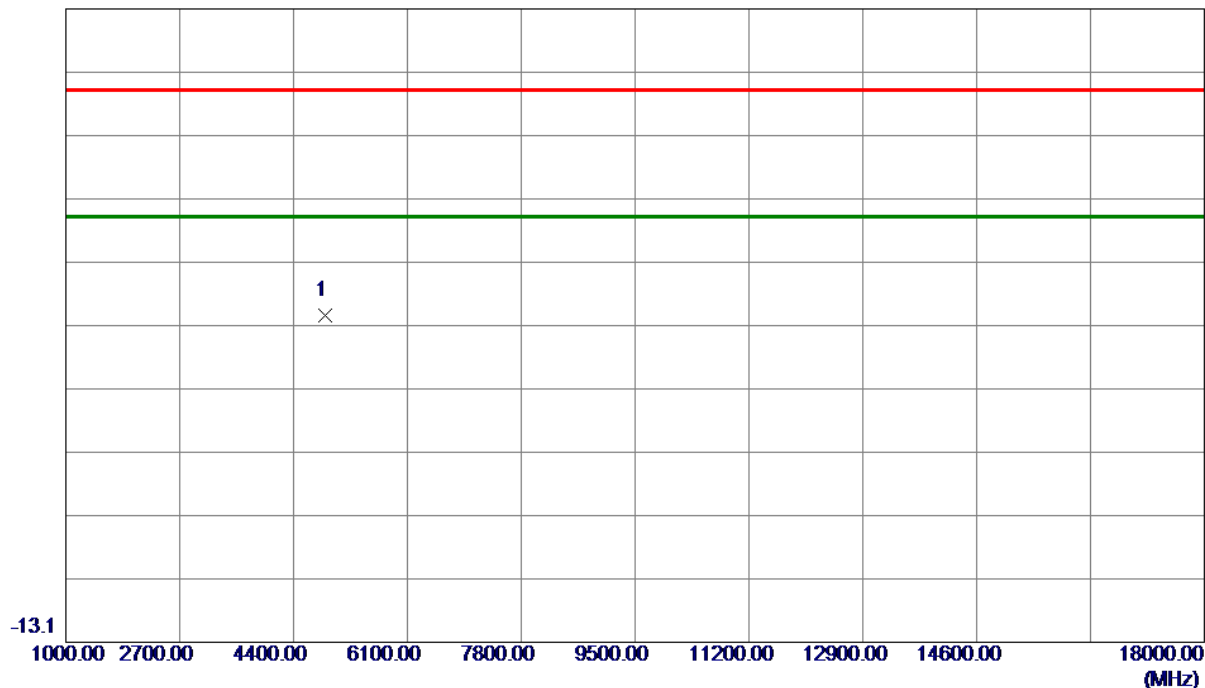


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4880.0000	52.33	-13.88	38.45	74.00	-35.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

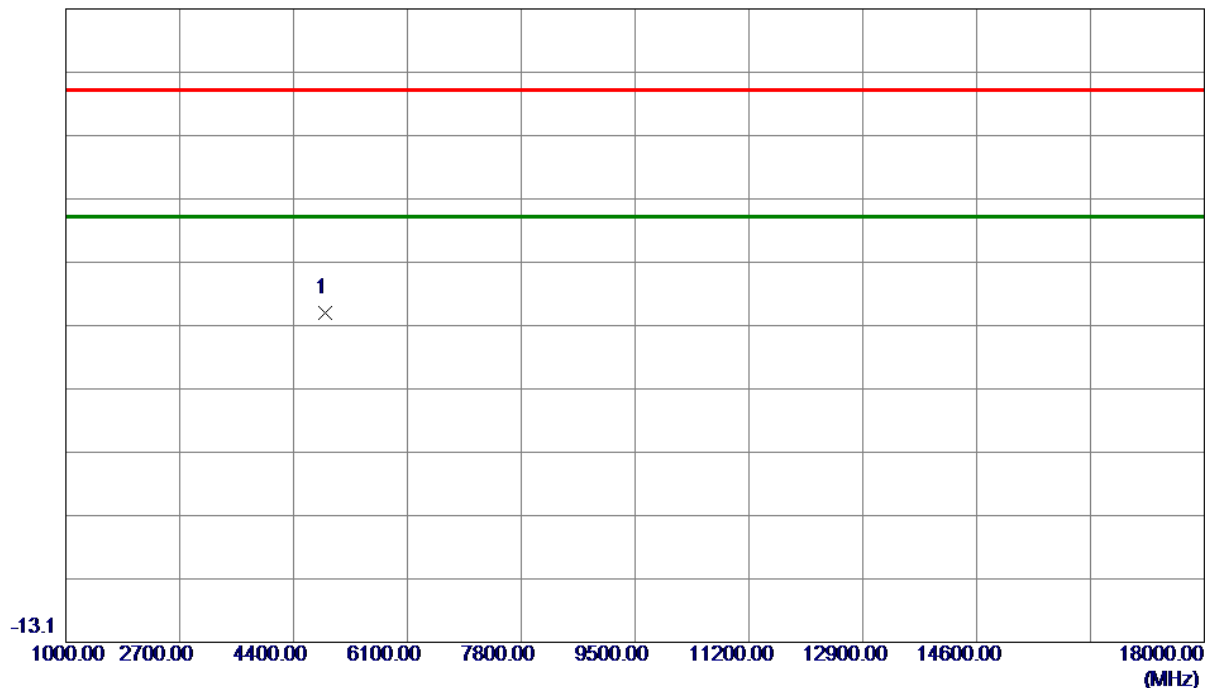


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4880.0000	52.76	-13.88	38.88	74.00	-35.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

120 dBuV/m

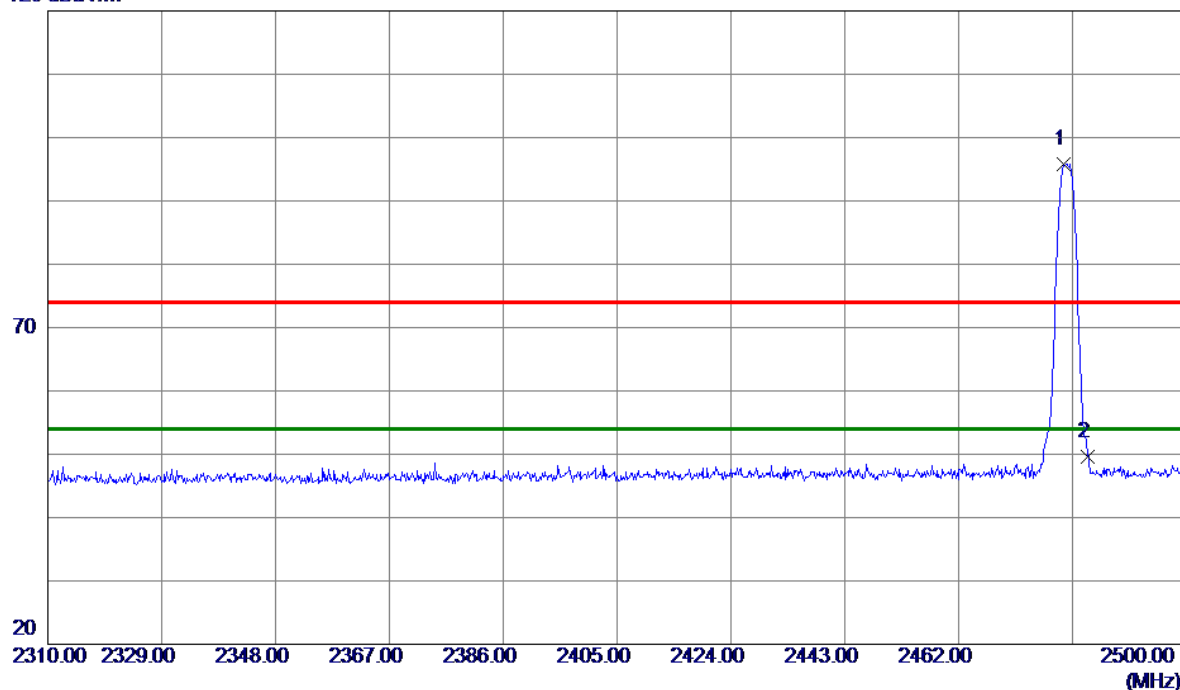


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.4990	63.21	32.57	95.78	74.00	21.78	Peak	
2	2483.5000	17.11	32.58	49.69	74.00	-24.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

86.9 dBuV/m

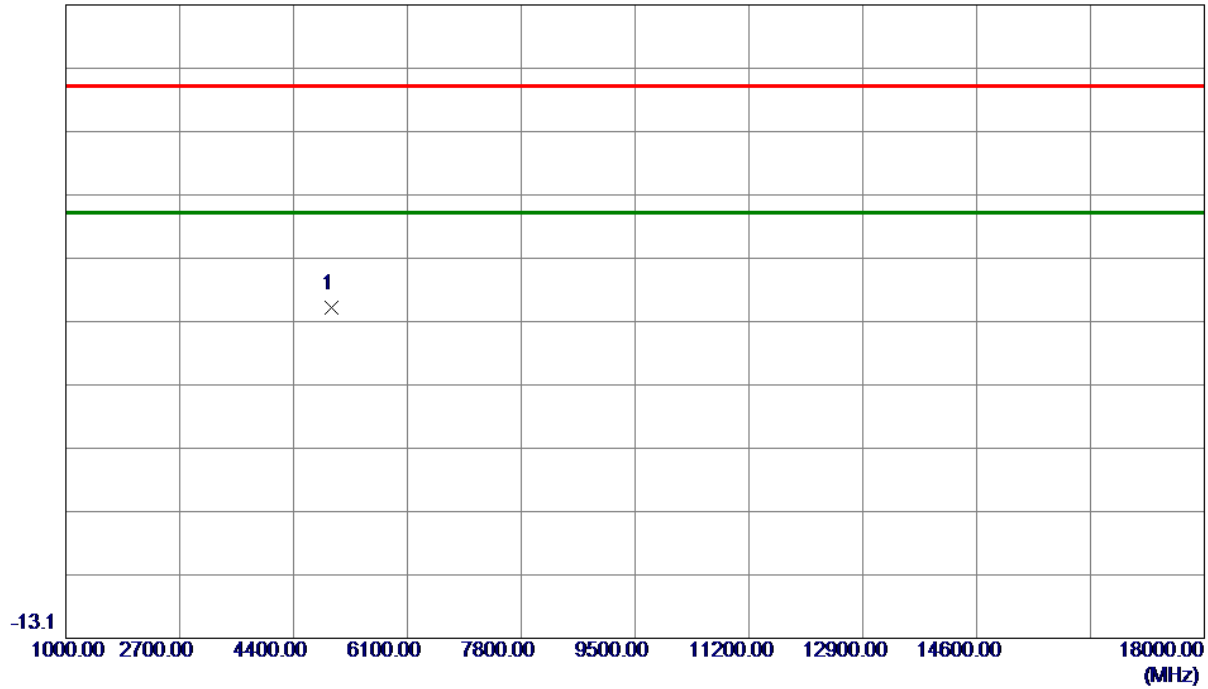


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4960.0000	52.62	-13.62	39.00	74.00	-35.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

120 dBuV/m

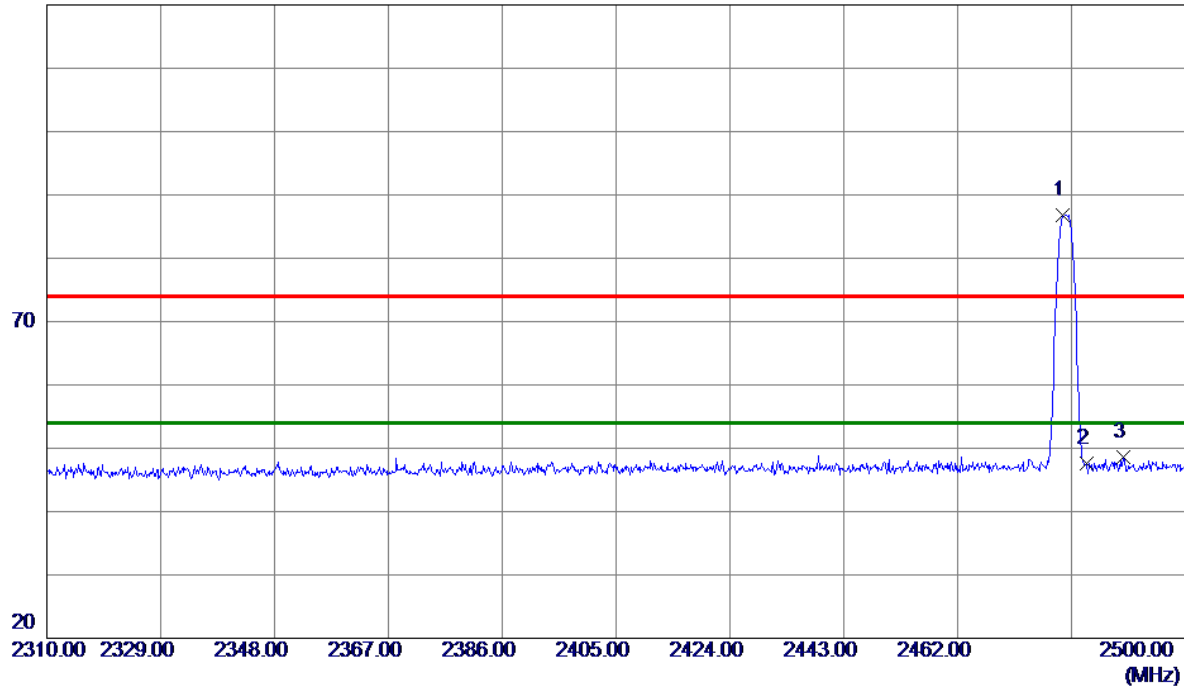


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2479.5750	54.25	32.57	86.82	74.00	12.82	Peak	
2	2483.5000	14.97	32.58	47.55	74.00	-26.45	Peak	
3	2489.6730	16.08	32.61	48.69	74.00	-25.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

86.9 dBuV/m

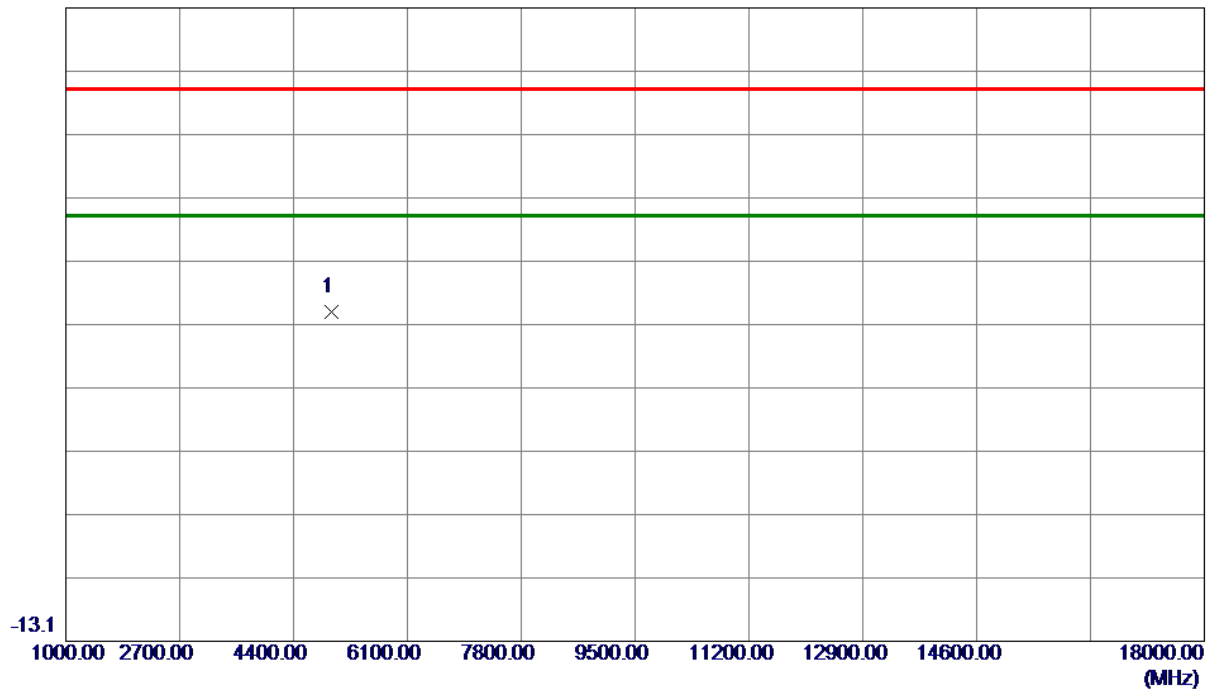


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4960.0000	52.45	-13.62	38.83	74.00	-35.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

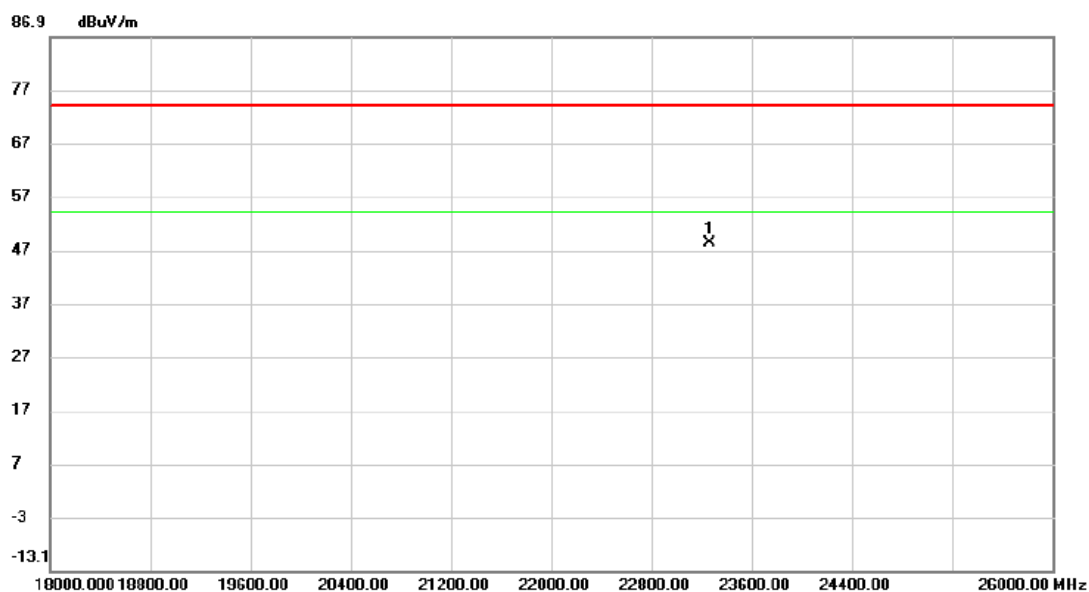


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	23267.218	53.33	-5.02	48.31	74.00	-25.69	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH19_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

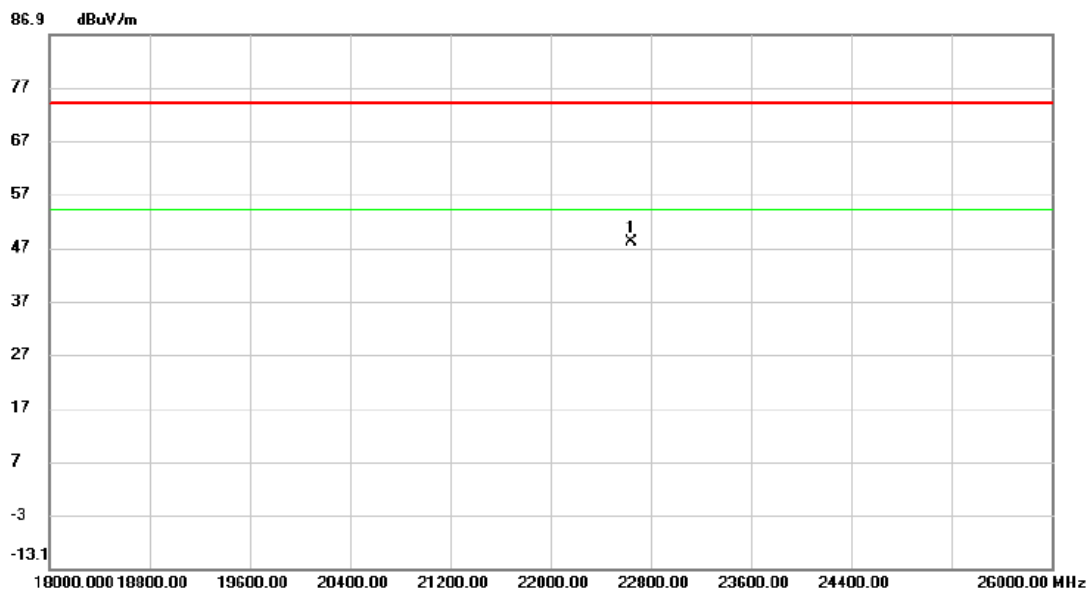

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	22640.884	53.60	-5.53	48.07	74.00	-25.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH


Test Mode	TX Mode _1Mbps
-----------	----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	0.666	1.037	0.5	Pass
19	2440	0.669	1.035	0.5	Pass
39	2480	0.665	1.036	0.5	Pass




CH00


CH19
6 dB Bandwidth


CH39

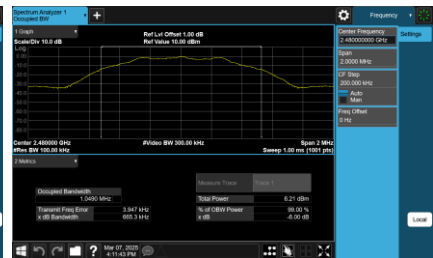

99 % Occupied Bandwidth

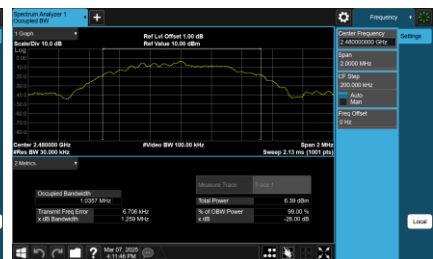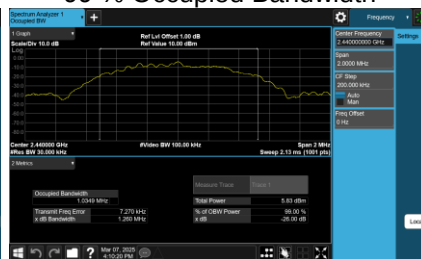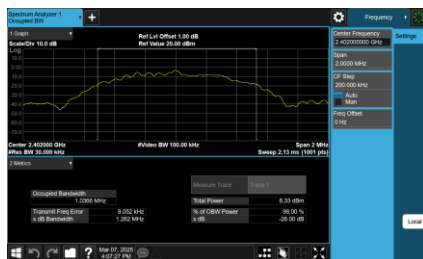

Test Mode	TX Mode _2Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2402	1.140	2.044	0.5	Pass
19	2440	1.137	2.043	0.5	Pass
39	2480	1.149	2.046	0.5	Pass

CH00



CH19




6 dB Bandwidth

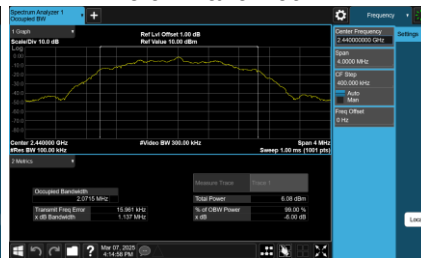

CH39




99 % Occupied Bandwidth

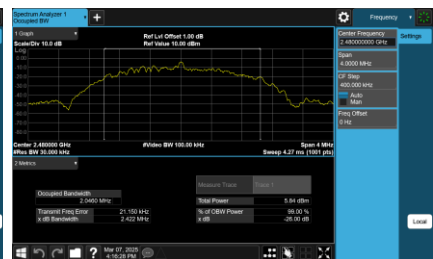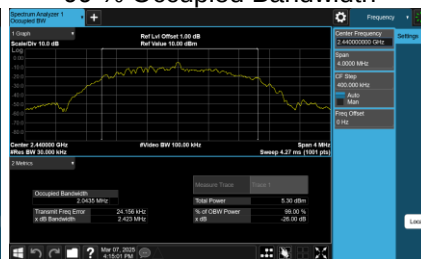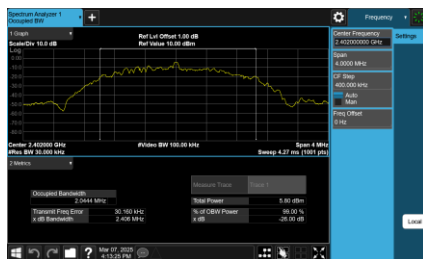

APPENDIX E - MAXIMUM OUTPUT POWER


Test Mode	TX Mode _1Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	1.03	0.0013	30.00	1.0000	Pass
2440	1.86	0.0015	30.00	1.0000	Pass
2480	1.66	0.0015	30.00	1.0000	Pass

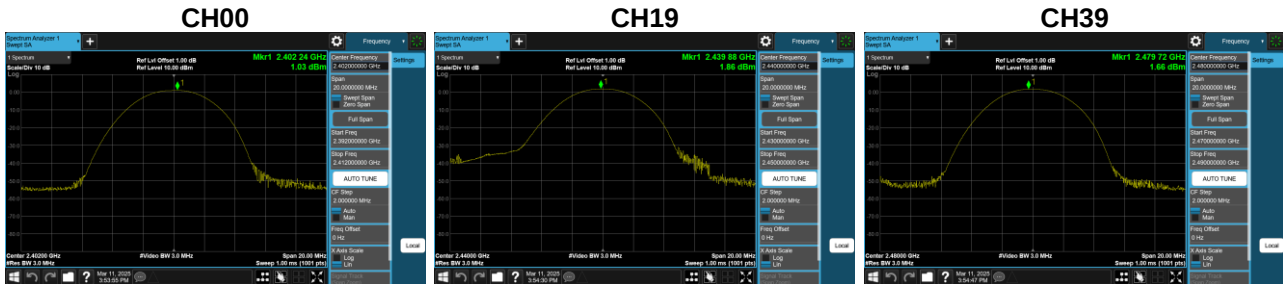


Test Mode	TX Mode _2Mbps
-----------	----------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	1.19	0.0013	30.00	1.0000	Pass
2440	1.98	0.0016	30.00	1.0000	Pass
2480	1.76	0.0015	30.00	1.0000	Pass

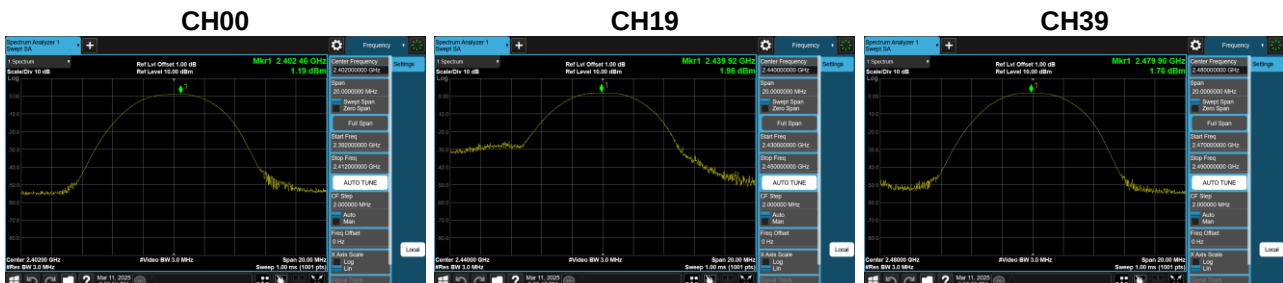


Test Mode	TX Mode _125Kbps
-----------	------------------

Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	1.04	0.0013	30.00	1.0000	Pass
2440	1.79	0.0015	30.00	1.0000	Pass
2480	1.67	0.0015	30.00	1.0000	Pass

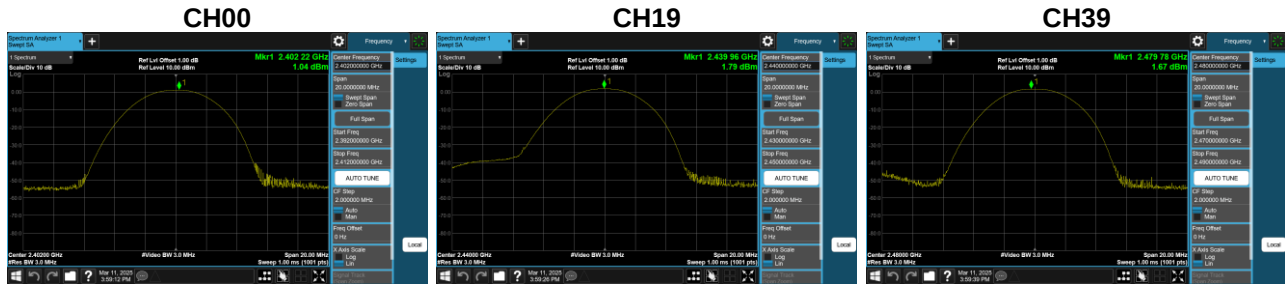

Test Mode	TX Mode _500Kbps
-----------	------------------


Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	1.03	0.0013	30.00	1.0000	Pass
2440	1.72	0.0015	30.00	1.0000	Pass
2480	1.66	0.0015	30.00	1.0000	Pass

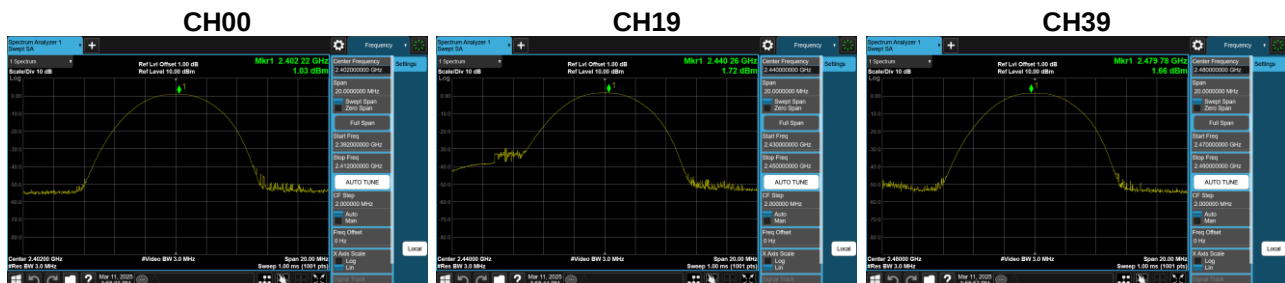


APPENDIX F - CONDUCTED SPURIOUS EMISSION

Test Mode TX Mode _1Mbps


Bandedge CH00 (Lower)

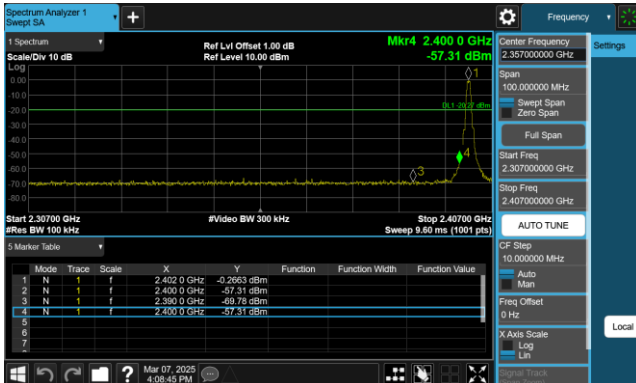


Bandedge CH39 (Upper)

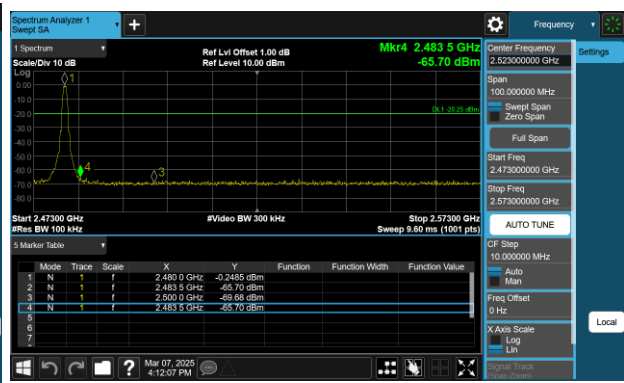


CH00 – 10th Harmonic of the fundamental frequency

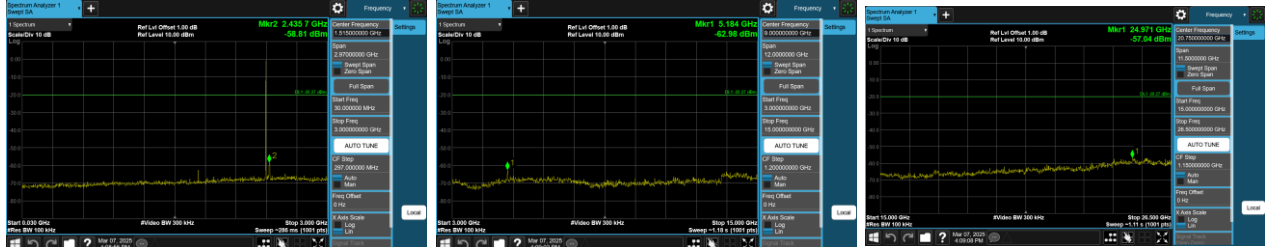

CH19 – 10th Harmonic of the fundamental frequency

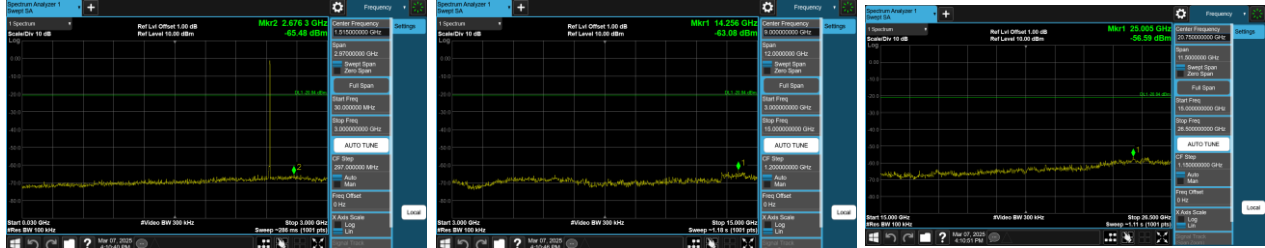


CH39 – 10th Harmonic of the fundamental frequency

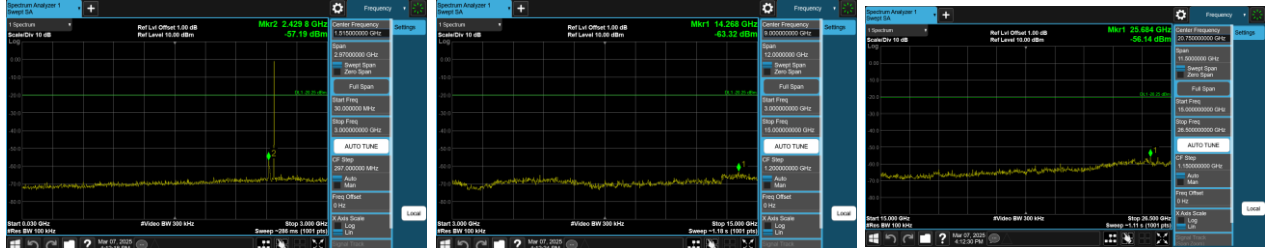


Test Mode	TX Mode _2Mbps
-----------	----------------


Bandedge CH00 (Lower)

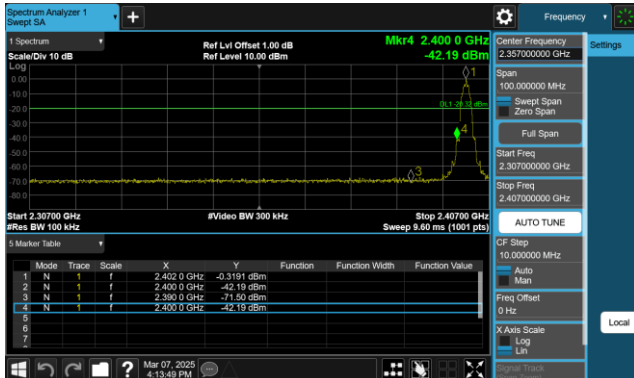


Bandedge CH39 (Upper)

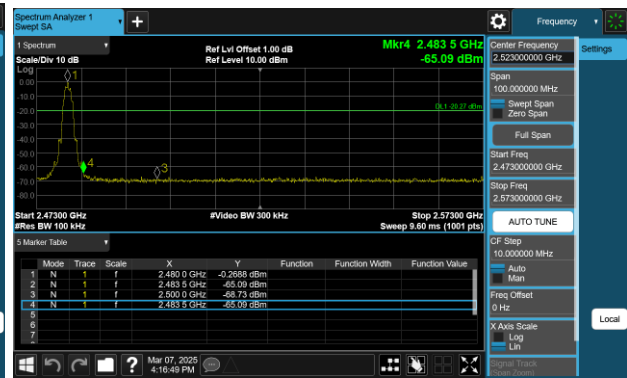


CH00 – 10th Harmonic of the fundamental frequency

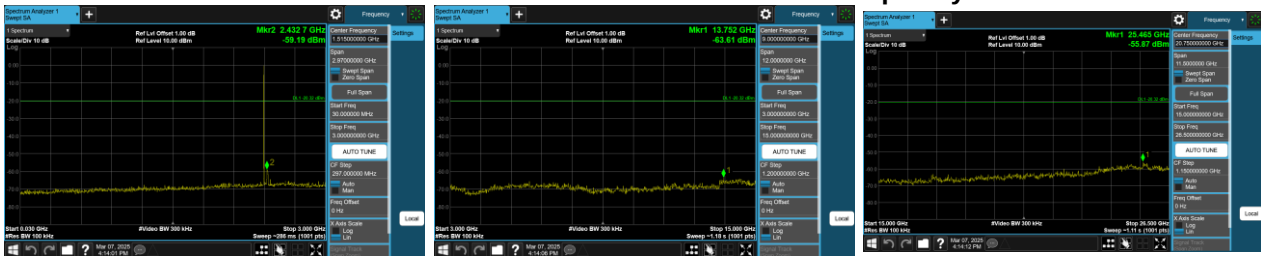

CH19 – 10th Harmonic of the fundamental frequency

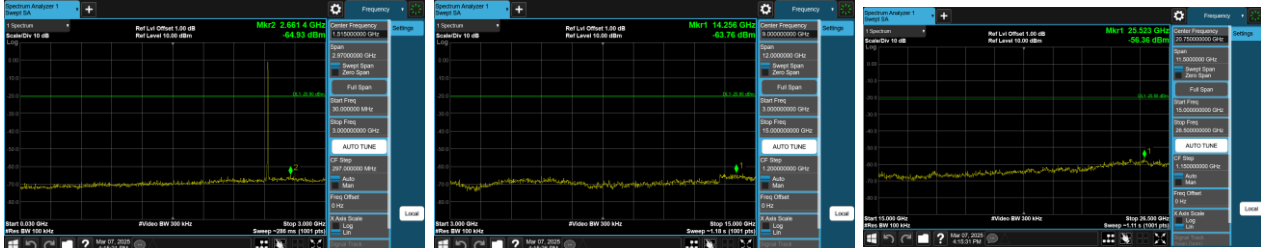


CH39 – 10th Harmonic of the fundamental frequency

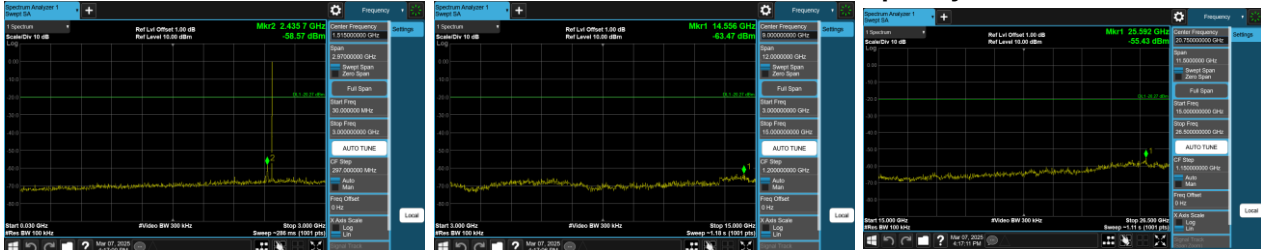

APPENDIX G - POWER SPECTRAL DENSITY


Test Mode	TX Mode _1Mbps
-----------	----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-15.09	8.00	Pass
19	2440	-15.56	8.00	Pass
39	2480	-15.03	8.00	Pass

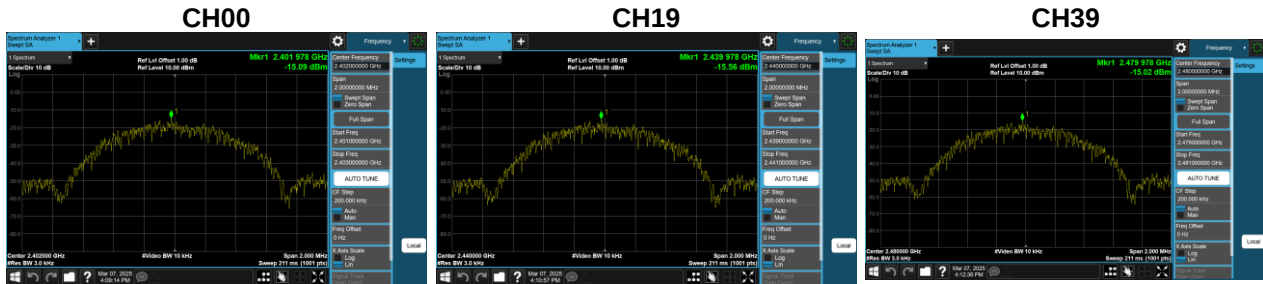

Test Mode	TX Mode _2Mbps
-----------	----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2402	-18.55	8.00	Pass
19	2440	-19.08	8.00	Pass
39	2480	-18.56	8.00	Pass

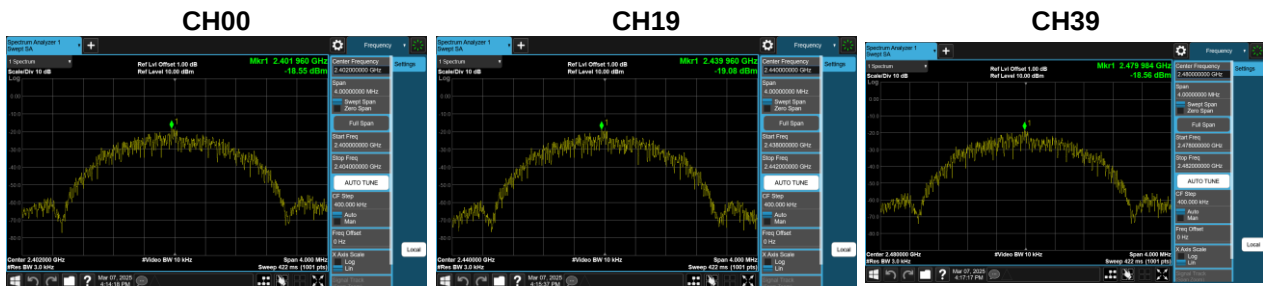

End of Test Report