



FCC Radio Test Report

FCC ID: XMR2025SC682ANA

This report concerns: Original Grant

Project No. : 2502H027
Equipment : LTE Module with Wi-Fi & Bluetooth
Brand Name : QUECTEL
Test Model : SC682A-NA
Series Model : N/A
Applicant : Quectel Wireless Solutions Co., Ltd.
Address : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China.
Manufacturer : Quectel Wireless Solutions Co., Ltd.
Address : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233, China.
Date of Receipt : Mar. 03, 2025
Date of Test : Mar. 13, 2025 ~ Apr. 09, 2025
Issued Date : Apr. 22, 2025
Report Version : R00
Test Sample : Engineering Sample No.: SH20250305145 for radiated, SH20250305145 and SH20250305146 for conducted.
Standard(s) : 47 CFR FCC Part 90 Subpart R
 47 CFR FCC Part 2

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by :

Edward Li

Edward Li

Approved by :

Steven Lu

Steven Lu

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective. Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . TEST RESULT	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMIT	12
4.1.2 TEST PROCEDURE	12
4.1.3 TEST SETUP LAYOUT	12
4.1.4 TEST DEVIATION	12
4.1.5 TEST RESULTS	12
4.2 OCCUPIED BANDWIDTH MEASUREMENT	13
4.2.1 TEST PROCEDURE	13
4.2.2 TEST SETUP LAYOUT	13
4.2.3 TEST DEVIATION	13
4.2.4 TEST RESULTS	13
4.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	14
4.3.1 LIMIT	14
4.3.2 TEST PROCEDURES	14
4.3.3 TEST SETUP LAYOUT	14
4.3.4 TEST DEVIATION	14
4.3.5 TEST RESULTS	14
4.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT	15
4.4.1 LIMIT	15
4.4.2 TEST PROCEDURES	15
4.4.3 TEST SETUP LAYOUT	16
4.4.4 TEST DEVIATION	17
4.4.5 TEST RESULTS (9KHZ TO 30MHZ)	17
4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)	17
4.4.7 TEST RESULTS (ABOVE 1000MHZ)	17
4.5 MASK MEASUREMENTS	18

Table of Contents	Page
4.5.1 LIMIT	18
4.5.2 TEST PROCEDURES	18
4.5.3 TEST SETUP LAYOUT	18
4.5.4 TEST DEVIATION	18
4.5.5 TEST RESULTS	18
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	19
4.6.1 LIMIT	19
4.6.2 TEST PROCEDURES	19
4.6.3 TEST SETUP LAYOUT	19
4.6.4 TEST DEVIATION	19
4.6.5 TEST RESULTS	19
4.7 CONDUCTED BAND EDGE MEASUREMENT	20
4.7.1 LIMIT	20
4.7.2 TEST PROCEDURES	20
4.7.3 TEST SETUP LAYOUT	20
4.7.4 TEST DEVIATION	20
4.7.5 TEST RESULTS	20
4.8 FREQUENCY STABILITY MEASUREMENT	21
4.8.1 LIMIT	21
4.8.2 TEST PROCEDURES	21
4.8.3 TEST SETUP LAYOUT	21
4.8.4 TEST DEVIATION	21
4.8.5 TEST RESULTS	21
5 . LIST OF MEASUREMENT EQUIPMENTS	22
5. EUT TEST PHOTO	24
APPENDIX A - OUTPUT POWER	27
APPENDIX B - OCCUPIED BANDWIDTH	30
APPENDIX C - CONDUCTED SPURIOUS EMISSIONS	33
APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)	35
APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)	37
APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)	39
APPENDIX G - MASK	41
APPENDIX H - PEAK TO AVERAGE RATIO	44
APPENDIX I - CONDUCTED BAND EDGE MEASUREMENT	47
APPENDIX J - FREQUENCY STABILITY	50

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-10-2502H027	R00	Original Report.	Apr. 22, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.26-2015

The following reference test guidance is not within the scope of accreditation of A2LA:

FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 90 Subpart R & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
2.1046 & 90.542 (a)(7)	Effective Radiated Power	PASS	-----
2.1049	Occupied Bandwidth	PASS	-----
2.1053 & 90.543(e)(3)	Conducted Spurious Emissions	PASS	-----
2.1053 & 90.543(e)(3) & 90.543(f)	Radiated Spurious Emissions	PASS	-----
2.1051 & 90.210(n)	Mask Measurements	PASS	-----
-	Peak To Average Ratio	PASS	Record Only
2.1053 & 90.543(e)(2)(3)	Conducted Band Edge Measurement	PASS	-----
2.1055 & 90.539(e)	Frequency Stability	PASS	-----

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)
SSL-CB01	CISPR	9kHz ~ 30MHz	2.74

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)
SSL-CB01 (3m)	CISPR	30MHz ~ 200MHz	V	4.70
		30MHz ~ 200MHz	H	3.56
		200MHz ~ 1,000MHz	V	4.92
		200MHz ~ 1,000MHz	H	4.54

Test Site	Method	Measurement Frequency Range	U , (dB)
SSL-CB01 (3m)	CISPR	1GHz ~ 6GHz	4.56
		6GHz ~ 18GHz	5.14

B. Other Measurement:

Parameter	Uncertainty
Spectrum Bandwidth	± 1.74 dB
Maximum Output Power	± 0.87 dB
Frequency Stability	± 53.10 Hz
Conducted Spurious Emissions	2.71 dB
Temperature	± 0.48 °C
Humidity	± 1.37 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Output Power & ERP	23.5°C	43%	DC 3.8V	Gavin Ge	Mar. 13, 2025~ Mar. 27, 2025
Occupied Bandwidth	23.5°C	43%	DC 3.8V	Gavin Ge	Mar. 13, 2025~ Mar. 27, 2025
Conducted Spurious Emissions	23.5°C	43%	DC 3.8V	Gavin Ge	Mar. 13, 2025~ Mar. 27, 2025
Radiated Spurious Emissions (9 kHz to 30 MHz)	23°C	47%	DC 3.8V	Young Zou	Mar. 24, 2025
Radiated Spurious Emissions (30 MHz to 1000 MHz)	22°C	50%	DC 3.8V	Young Zou	Mar. 24, 2025
Radiated Spurious Emissions (Above 1000 MHz)	22°C	50%	DC 3.8V	Young Zou	Mar. 24, 2025
Mask	23.5°C	43%	DC 3.8V	Gavin Ge	Mar. 28, 2025
Peak to Average Ratio	23.5°C	43%	DC 3.8V	Gavin Ge	Mar. 13, 2025~ Mar. 27, 2025
Conducted Band Edge Measurement	23.5°C	43%	DC 3.8V	Gavin Ge	Mar. 13, 2025~ Mar. 27, 2025
Frequency Stability	Normal & Extreme	43%	Normal & Extreme	Gavin Ge	Mar. 13, 2025~ Mar. 27, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE Module with Wi-Fi & Bluetooth			
Brand Name	QUECTEL			
Test Model	SC682A-NA			
Series Model	N/A			
Model Difference(s)	N/A			
Hardware Version	SC682A-NA			
Software Version	SC682ANAPAR01A01			
Power Source	DC Voltage supplied from host system.			
Power Rating	3.55 to 4.4V; Typical: 3.8V			
IMEI No.	Radiated	867665070008943		
	Conducted	867665070008943, 867665070010568		
Modulation Type	UL: QPSK,16QAM DL: QPSK,16QAM,64QAM			
Max. ERP	LTE	Channel Bandwidth (MHz)	QPSK (dBm)	16QAM (dBm)
	Band 14	5	20.65	19.75
		10	21.01	19.62

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

LTE Band 14(UL: 788-798 MHz, DL: 758-768 MHz)					
Test Frequency ID	Bandwidth (MHz)	N _{UL}	Frequency of Uplink (MHz)	N _{DL}	Frequency of Downlink (MHz)
Low Range	5	23305	790.5	5305	760.5
	10	23330	793	5330	763
Mid Range	5/10	23330	793	5330	763
High Range	5	23355	795.5	5.55	763.5
	10	23330	793	5330	763

3. Table for Filed Antenna:

Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
QUECTEL	External 5G Antenna	Dipole	SMA Male	-0.5	LTE Band 14


Note: The antenna gain is provided by the manufacturer.

3.2 DESCRIPTION OF TEST MODES

Following mode(s) is (were) found to be the worst case(s) and selected for the final test.

LTE BAND 14 MODE					
Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power & ERP	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	1RB/12RB/25RB
	23330	23330	10MHz	QPSK, 16QAM	1RB/25RB/50RB
Occupied Bandwidth	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	25RB
	23330	23330	10MHz	QPSK, 16QAM	50RB
Conducted Spurious Emissions	23305 to 23355	23330	5MHz	QPSK	1RB
	23330	23330	10MHz	QPSK	1RB
Radiated Spurious Emissions	23305 to 23355	23330	5MHz	QPSK	1RB
	23330	23330	10MHz	QPSK	1RB
Mask	23305 to 23355	23305, 23355	5MHz	QPSK	1RB
					25RB
	23330	23330	10MHz	QPSK	1RB
					50RB
Peak To Average Ratio	23305 to 23355	23305, 23330, 23355	5MHz	QPSK, 16QAM	1RB
	23330	23330	10MHz	QPSK, 16QAM	1RB
Conducted Band Edge Measurement	23305 to 23355	23305, 23355	5MHz	QPSK	1RB
					25RB
	23330	23330	10MHz	QPSK	1RB
					50RB
Frequency Stability	23305 to 23355	23330	10MHz	QPSK	50RB

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED

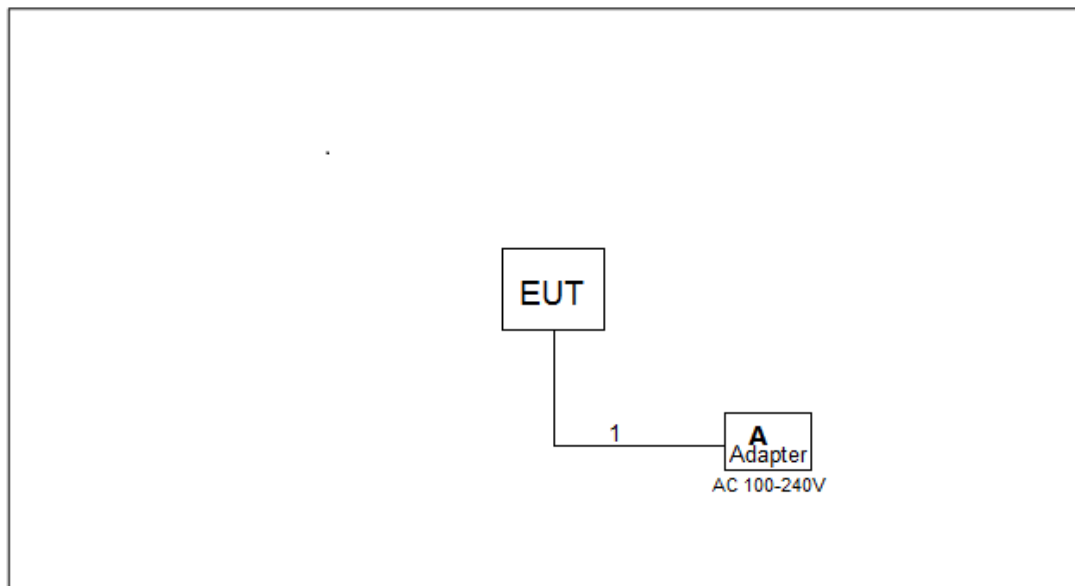

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Adapter	Keyu Power Supply	KA1801A-0503000DE-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Control stations and mobile stations transmitting in the 758–768 MHz band and the 788–798 MHz band are limited to 30 watts ERP.

Portable stations (hand-held devices) transmitting in the 758–768 MHz band and the 788–798 MHz band are limited to 3 watts ERP.

4.1.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.0 or ANSI C63.26-2015 Section 5.2.

ERP:

$\text{EIRP} = \text{Output Power} + \text{Antenna gain}$


$\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

Output Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP LAYOUT

Output Power Measurement

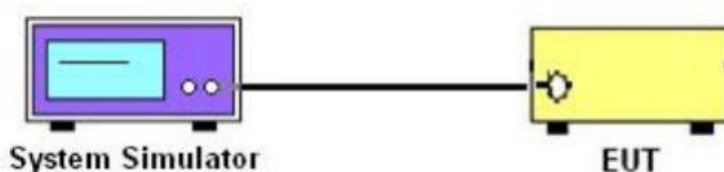

4.1.4 TEST DEVIATION

No deviation.

4.1.5 TEST RESULTS

Please refer to the APPENDIX A.


4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 4.0 or ANSI C63.26-2015 Section 5.4.

1. The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. $RBW = (1\% \sim 5\%) * EBW$
 $VBW \geq 3 * RBW$
4. Set spectrum analyzer with RMS detector.

4.2.2 TEST SETUP LAYOUT

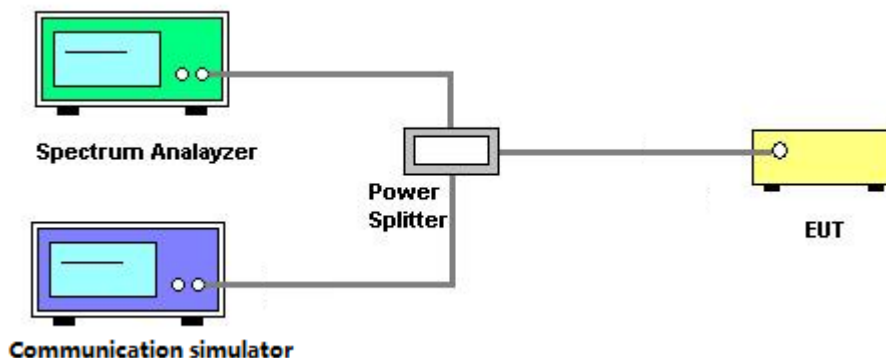

4.2.3 TEST DEVIATION

No deviation.

4.2.4 TEST RESULTS

Please refer to the APPENDIX B.

4.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

4.3.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.0 or ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with Peak or RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.3.3 TEST SETUP LAYOUT

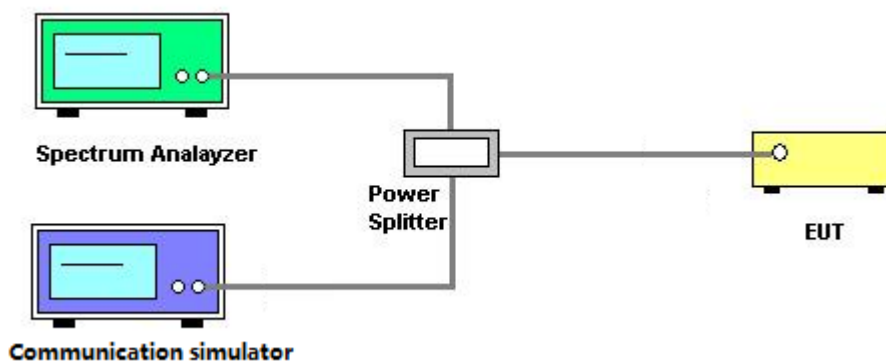

4.3.4 TEST DEVIATION

No deviation.

4.3.5 TEST RESULTS

Please refer to the APPENDIX C.

4.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.4.1 LIMIT

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$; where D is the measurement distance in meters. The emission limit equal to 82.26dB μ V/m or 55.26dB μ V/m.


4.4.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.2 or ANSI C63.26-2015 Section 5.5.


1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
4. Start the test, rotate the table 360° to find the worst Angle, maintain the worst Angle, raise the antenna to 1-4m to find the worst height, maintain the worst height, then rotate the table to determine the final worst Angle, grab the spectrum diagram.
5. EUT shall be placed in accordance with X,Y,Z as required by Figure 5 in ANSI C63.26. Repeat Step 5 above to find the worst placement. Test all bands according to the worst placement.
6. Then EIRP is then converted to field strength as follows in Equation
7. $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log(D) + 104.8$; where D is the measurement distance (in the far field region) in m. The emission limit equal to 82.26dB μ V/m or 55.26dB μ V/m.


4.4.3 TEST SETUP LAYOUT

Below 30MHz

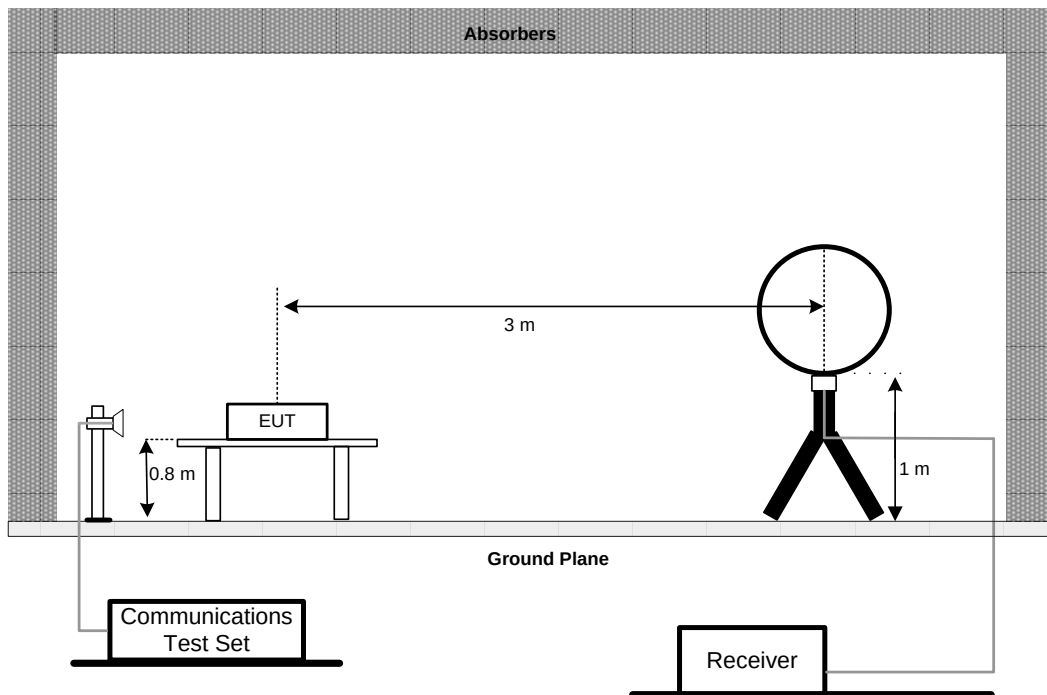

30MHz to 1000MHz

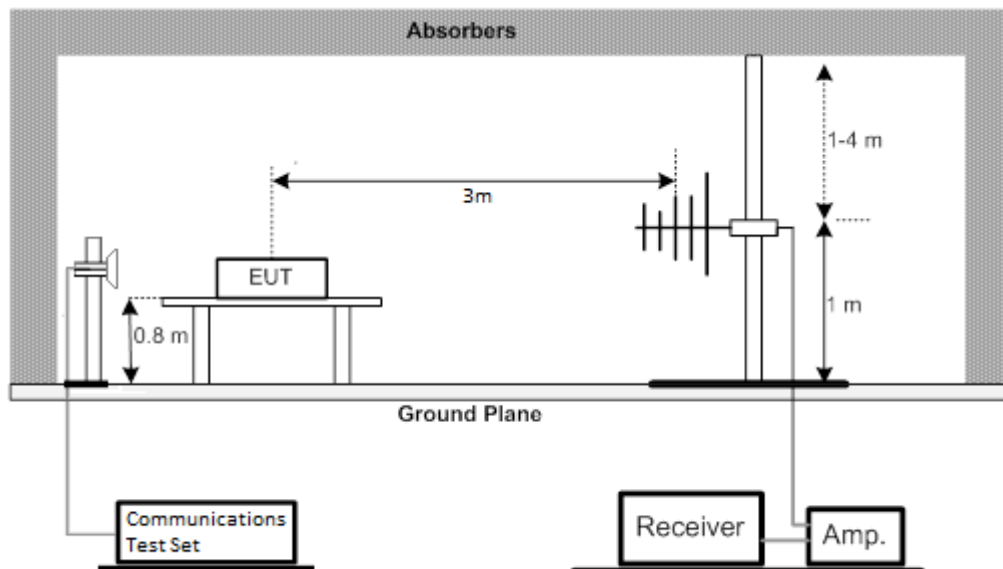

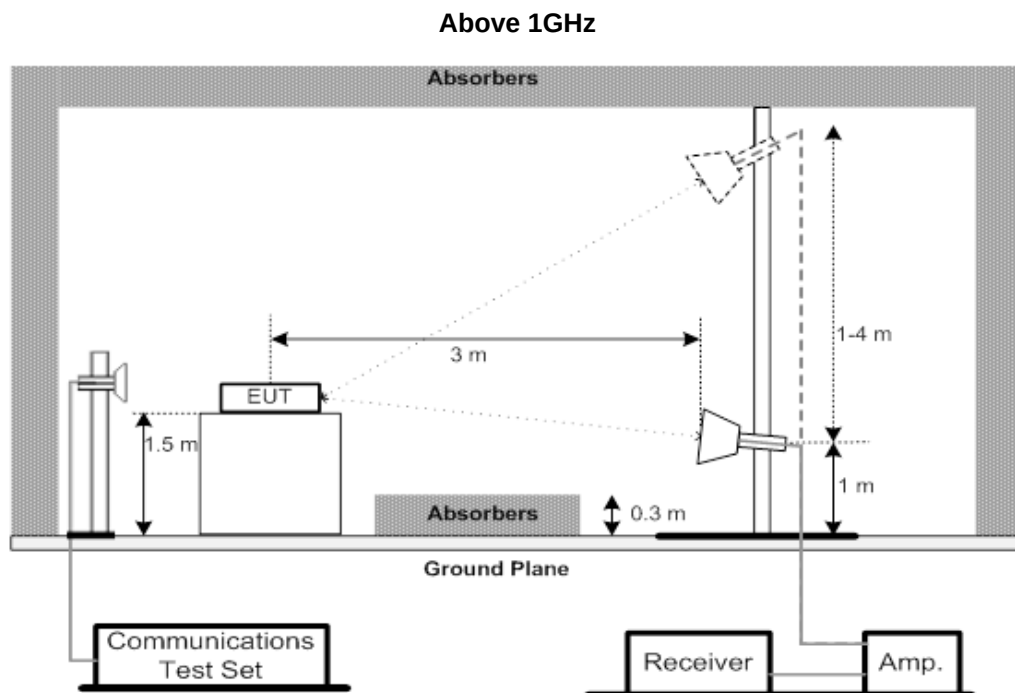

4.4.4 TEST DEVIATION

No deviation.

4.4.5 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the APPENDIX D.

4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the APPENDIX E.

4.4.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the APPENDIX F.

4.5 MASK MEASUREMENTS

4.5.1 LIMIT

<Mask B>

For transmitter that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:


- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43+10\log(P)$ dB.

4.5.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.0 or ANSI C63.26-2015 Section 5.7.

1. All measurements were done at low and high operational frequency range.
2. Set RBW=1% of 26dBc bandwidth, VBW=3 X RBW, detector=RMS, Sweep time = Auto.
3. Record the max trace plot into the test report.

4.5.3 TEST SETUP LAYOUT

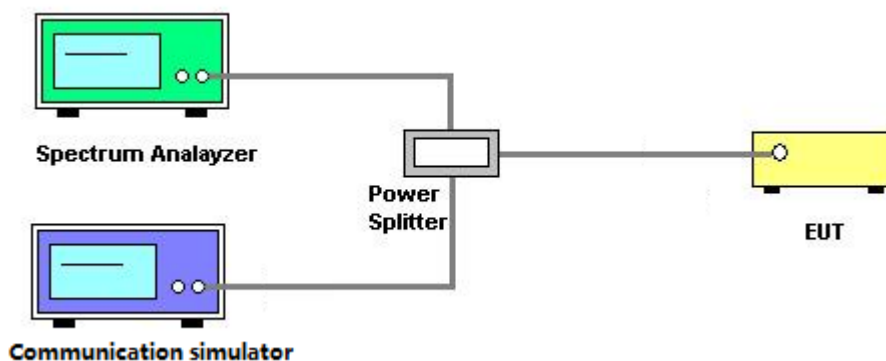

4.5.4 TEST DEVIATION

No deviation.

4.5.5 TEST RESULTS

Please refer to the APPENDIX G.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT

4.6.1 LIMIT


In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 5.7 or ANSI C63.26-2015 Section 5.2.6.

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TEST SETUP LAYOUT

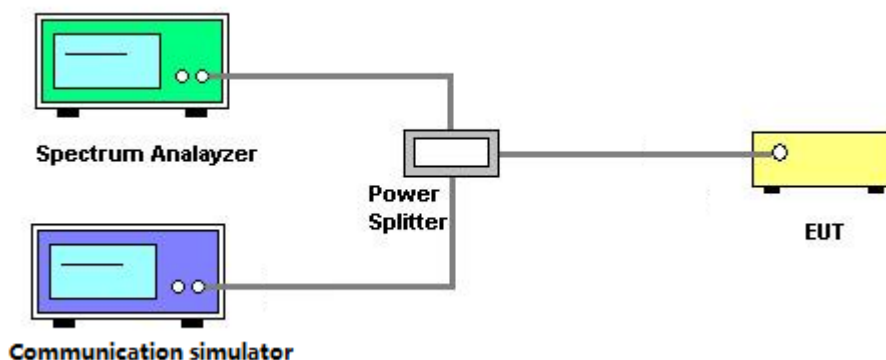

4.6.4 TEST DEVIATION

No deviation.

4.6.5 TEST RESULTS

Please refer to the APPENDIX H.

4.7 CONDUCTED BAND EDGE MEASUREMENT

4.7.1 LIMIT


- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76+10\log(P)$ dB In a 6.25 KHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65+10\log(P)$ dB In a 6.25 KHz band segment, for mobile and portable stations.
- (3) On all frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43+10\log(P)$ dB.

4.7.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6 or ANSI C63.26-2015 Section 5.7.

1. All measurements were done at low and high operational frequency range.
2. Record the max trace plot into the test report.

4.7.3 TEST SETUP LAYOUT

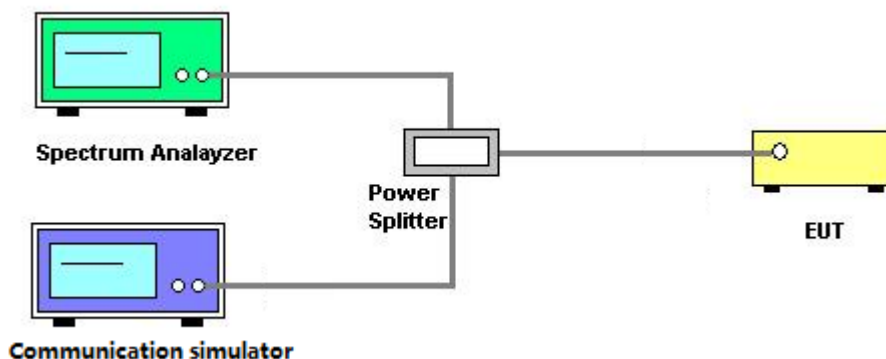

4.7.4 TEST DEVIATION

No deviation.

4.7.5 TEST RESULTS

Please refer to the APPENDIX I.

4.8 FREQUENCY STABILITY MEASUREMENT

4.8.1 LIMIT


The frequency stability of mobile portable and control transmitters operating in the wideband segment must be 1.25 parts per million or better.

4.8.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 9.0 or ANSI C63.26-2015 Section 5.6.

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.8.3 TEST SETUP LAYOUT

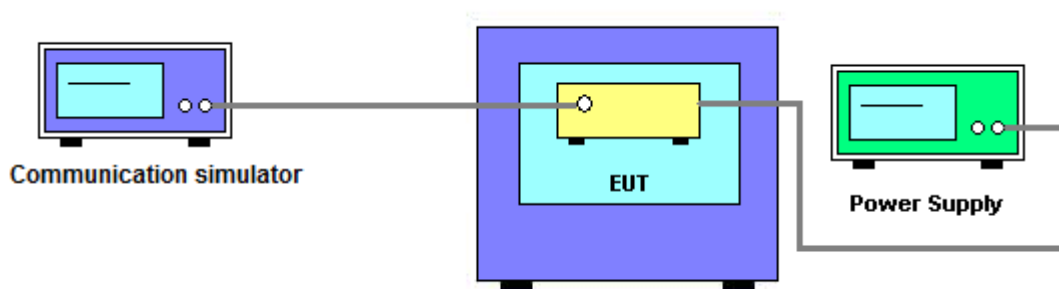

4.8.4 TEST DEVIATION

No deviation.

4.8.5 TEST RESULTS

Please refer to the APPENDIX J.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	MXE EMI Receiver	Keysight	N9038A	MY59050118	Jun. 28, 2025
3	Cable	EMC INSTRUMENT	EMCCFD400-N M-NM-3000	N/A	Jun. 06, 2025
4	Cable	EMC INSTRUMENT	EMCCFD400-N M-NM-7000	N/A	Jun. 06, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Wideband Radio Communication Tester	R&S	CWM 500	104462	Jun. 28, 2025
7	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 06, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	01269	May 18, 2025
2	Attenuator	EMCI	EMCI-N-6-06	AN-N0697	May 18, 2025
3	MXE EMI Receiver	Keysight	N9038A	MY59050118	Jun. 28, 2025
4	Preamplifier	EMC INSTRUMENT	EMC001330	980825	Jan. 10, 2026
5	Cable	EMC INSTRUMENT	EMCCFD400-NM-N M-2500	N/A	Jun. 06, 2025
6	Cable	EMC INSTRUMENT	EMCCFD400-NM-N M-7000	N/A	Jun. 06, 2025
7	Cable	EMC INSTRUMENT	EMCCFD400-NM-N M-3000	N/A	Jun. 06, 2025
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
9	Wideband Radio Communication Tester	R&S	CWM 500	104462	Jun. 28, 2025
10	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 06, 2025

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXE EMI Receiver	Keysight	N9038A	MY59050118	Jun. 28, 2025
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980739	Jan. 11, 2026
4	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Dec. 09, 2025
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Dec. 09, 2025
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 000	N/A	Dec. 09, 2025
7	Double Ridged Broadband Horn Antenna	RF SPIN	DRH18-E	210106A18E	Jul. 17, 2025
8	Band Reject Filter	COM-MW	ZHPF6-M1000-150 00-533	7213127	Jun. 28, 2025
9	Wideband Radio Communication Tester	R&S	CWM 500	104462	Jun. 28, 2025
10	Band Reject Filter	COM-MW	ZHPF6-C3000-180 00-174	7213126	Jun. 28, 2025
11	Preamplifier	EMC INSTRUMENT	EMC184045SE	980793	Jan. 10, 2026
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01046	Jul. 22, 2025
13	Cable	RegalWay	RWLP50-3.6A-2.92 M2.92M-6M	20241119-001	Nov. 26, 2025
14	Cable	RegalWay	RWLP50-3.6A-2.92 M2.92M-0.8M	20241119-001	Nov. 26, 2025
15	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 06, 2025



Conducted Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wideband Radio Communication Tester	R&S	CWM 500	165848	Jan. 10, 2026
2	MXA Signal Analyzer	KEYSIGHT	N9020A	MY52091060	Jan. 11, 2026
3	Temperature Chamber	ESPEC	SU-242	93018777	Jun. 28, 2025
4	DC power supply	UNI-T	UDP6721	AWP7224050018	Jan. 10, 2026



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.


5. EUT TEST PHOTO

Radiated Emissions Test Photos

9 kHz to 30 MHz

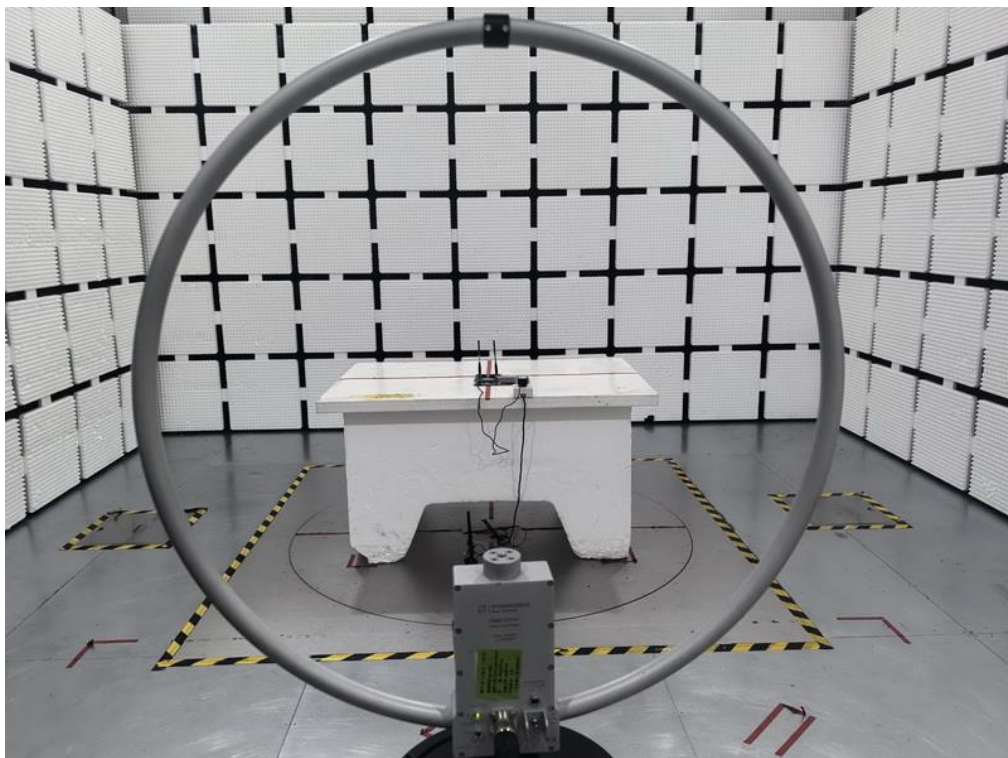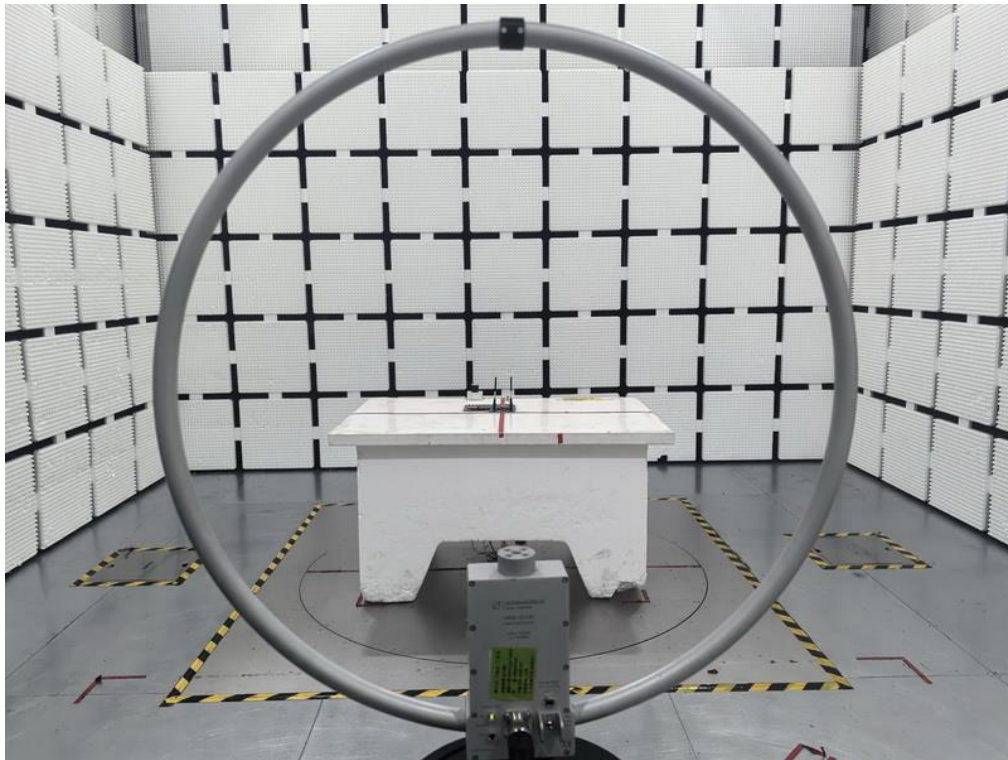

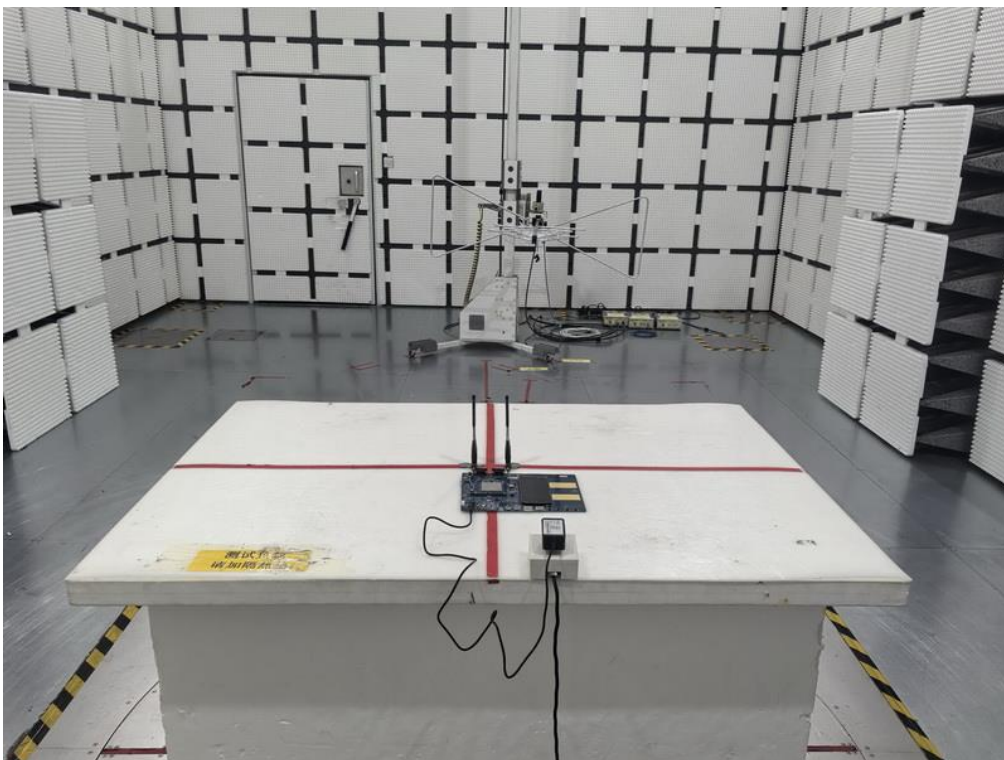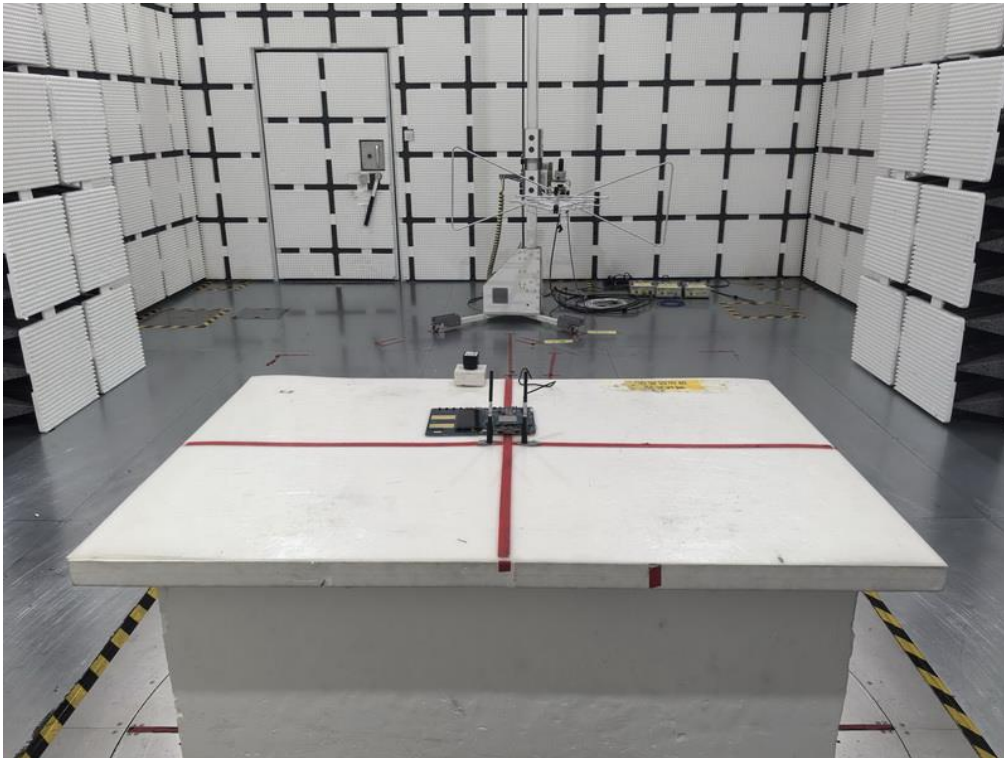Radiated Emissions Test Photos**30 MHz to 1 GHz**

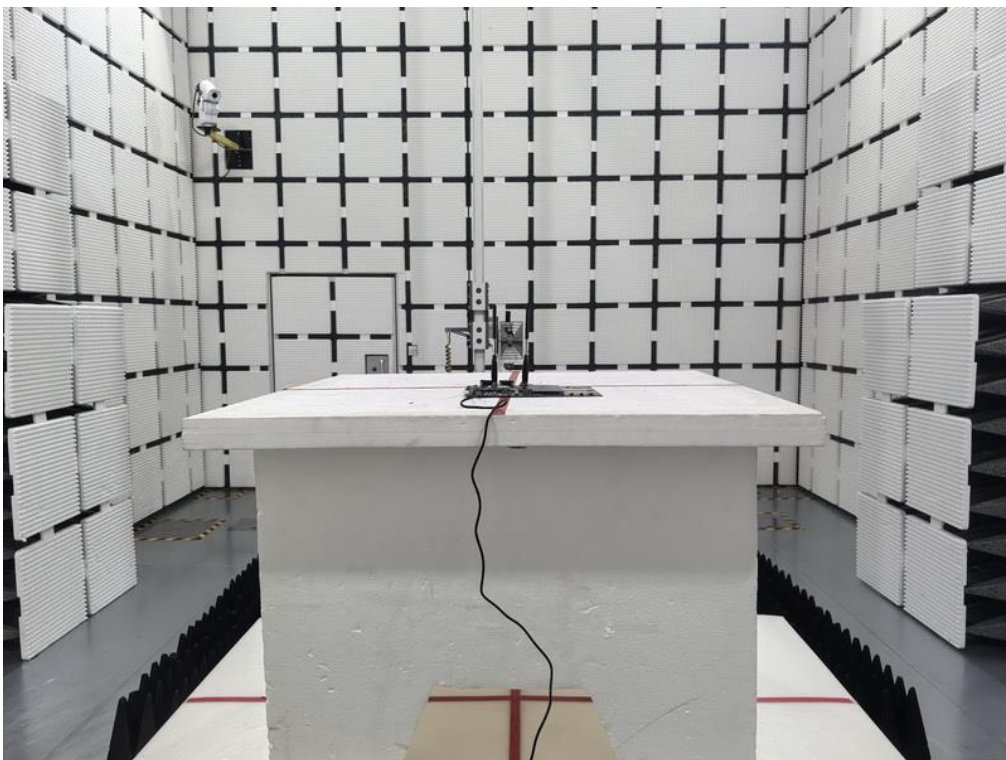Radiated Emissions Test Photos**Above 1 GHz**


APPENDIX A - OUTPUT POWER

Bandwidth	Modulation	RB size	RB offset	CH23305	CH23330	CH23355	ERP		
				790.5MHz	793MHz	795.5MHz			
5MHz	QPSK	1	0	22.65	22.97	22.80	20.00	20.32	20.15
		1	13	23.12	23.30	22.90	20.47	20.65	20.25
		1	24	23.09	23.10	22.81	20.44	20.45	20.16
		12	0	22.26	22.26	22.18	19.61	19.61	19.53
		12	6	22.27	22.27	22.29	19.62	19.62	19.64
		12	11	22.23	22.27	22.34	19.58	19.62	19.69
		25	0	22.21	22.31	22.21	19.56	19.66	19.56
	16QAM	1	0	21.54	21.83	21.74	18.89	19.18	19.09
		1	13	22.38	22.16	22.40	19.73	19.51	19.75
		1	24	21.72	21.67	21.78	19.07	19.02	19.13
		12	0	21.03	21.17	20.96	18.38	18.52	18.31
		12	6	21.26	21.25	21.07	18.61	18.60	18.42
		12	11	21.27	21.28	20.99	18.62	18.63	18.34
		25	0	21.15	21.34	21.19	18.50	18.69	18.54


Bandwidth	Modulation	RB size	RB offset	-	CH23330	-	ERP		
				-	793MHz	-			
10MHz	QPSK	1	0	-	23.49	-	-	20.84	-
		1	25	-	23.66	-	-	21.01	-
		1	49	-	23.52	-	-	20.87	-
		25	0	-	22.15	-	-	19.50	-
		25	13	-	22.25	-	-	19.60	-
		25	25	-	22.24	-	-	19.59	-
		50	0	-	22.25	-	-	19.60	-
	16QAM	1	0	-	22.27	-	-	19.62	-
		1	25	-	22.27	-	-	19.62	-
		1	49	-	21.85	-	-	19.20	-
		25	0	-	21.26	-	-	18.61	-
		25	13	-	21.28	-	-	18.63	-
		25	25	-	21.30	-	-	18.65	-
		50	0	-	21.06	-	-	18.41	-

APPENDIX B - OCCUPIED BANDWIDTH

LTE Band 14_5MHz					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23305	790.5	4.4940	4.4825	4.923	4.950
23330	793	4.5101	4.4926	4.962	5.005
23355	795.5	4.5012	4.4989	4.975	4.961

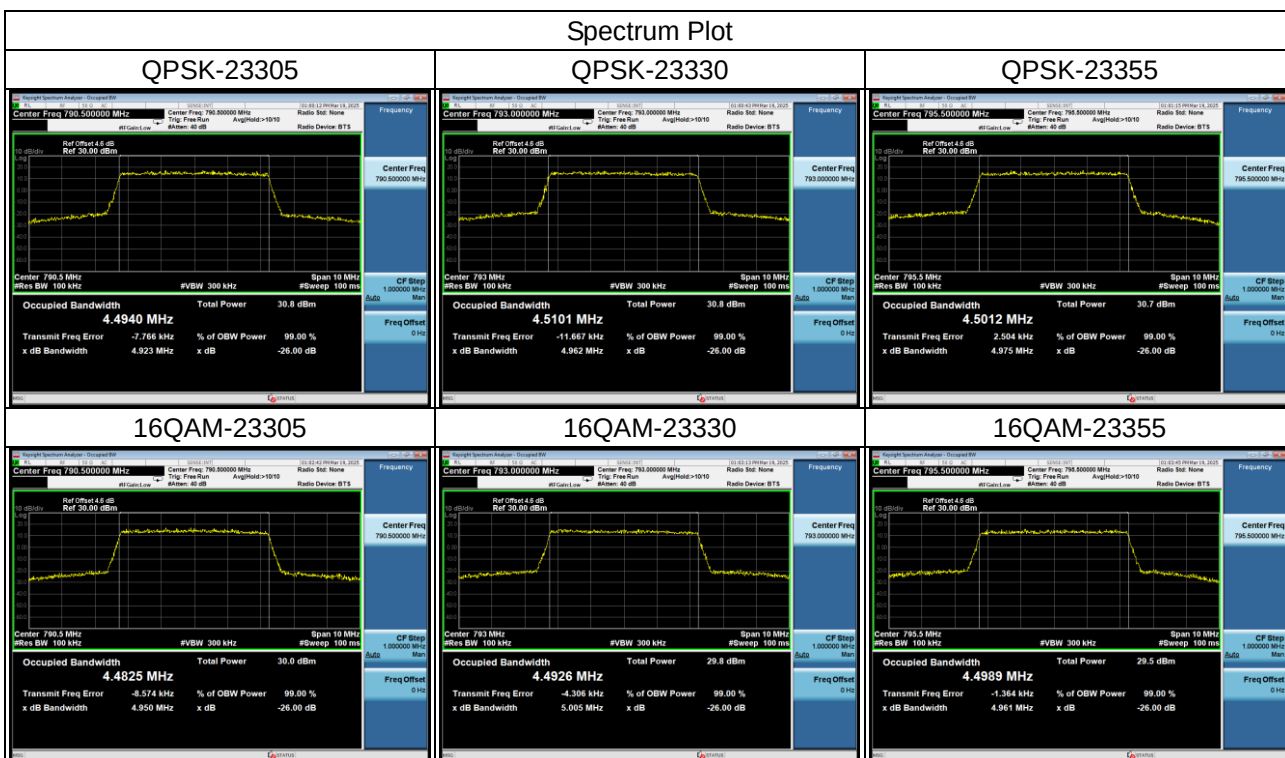


LTE Band 14_10MHz					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
23330	793	8.9839	8.9805	9.917	9.830

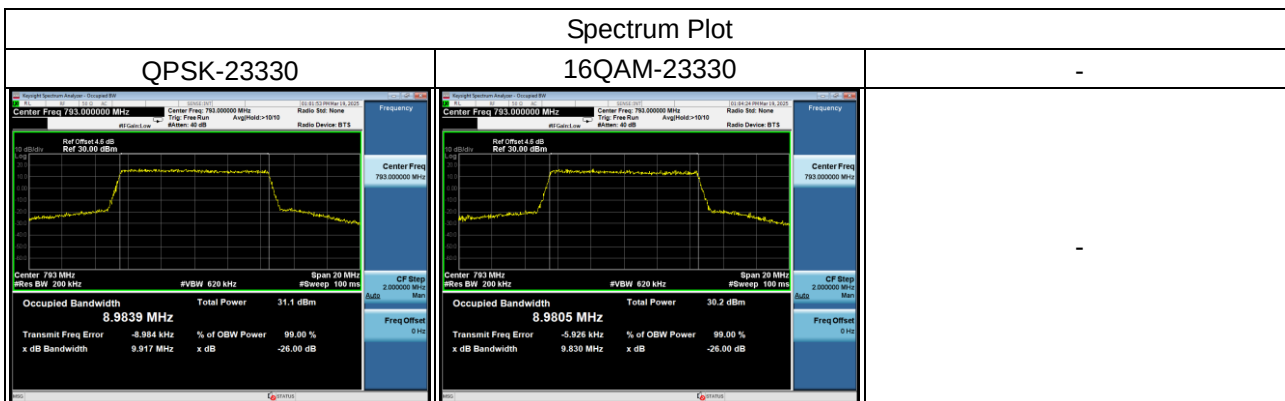


APPENDIX C - CONDUCTED SPURIOUS EMISSIONS

LTE Band 14_5MHz_CH23330 Spectrum Plot

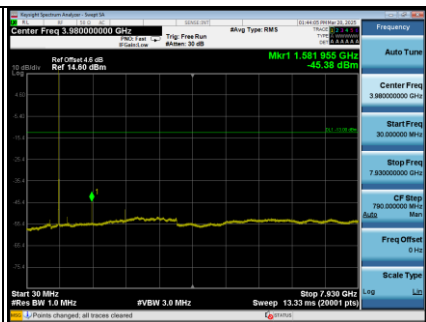


LTE Band 14_10MHz_CH23330 Spectrum Plot

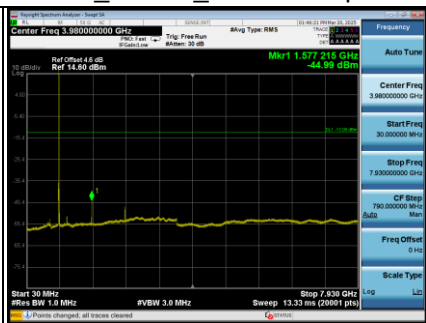

APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)

Test Mode : TX Mode


Ant 0°

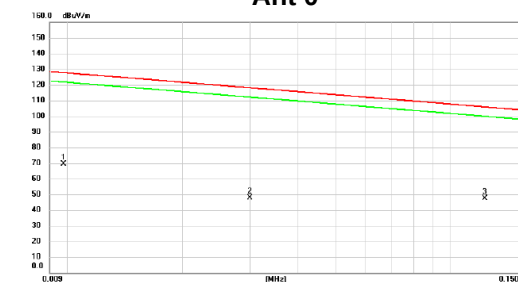

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0098	48.78	20.53	69.31	127.78	-58.47	peak	
2	0.0300	27.64	20.13	47.77	118.06	-70.29	peak	
3	0.1228	27.29	20.08	47.37	105.82	-58.45	peak	

Test Mode : TX Mode


Ant 0°

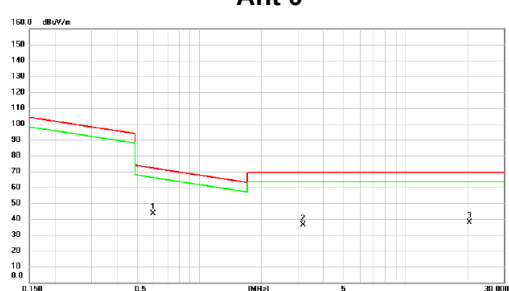

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.5978	23.55	20.00	43.55	72.07	-28.52	peak	
2	3.1947	16.04	20.10	36.14	69.54	-33.40	peak	
3	20.4182	17.13	20.74	37.87	69.54	-31.67	peak	

Test Mode : TX Mode


Ant 90°

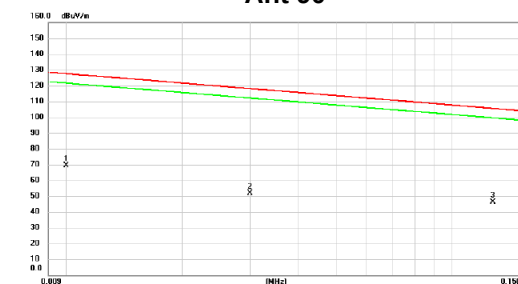

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.0100	48.79	20.53	69.32	127.60	-58.28	peak	
2	0.0300	31.50	20.13	51.63	118.06	-66.43	peak	
3	0.1276	26.01	20.07	46.08	105.49	-59.41	peak	

Test Mode : TX Mode

Ant 90°

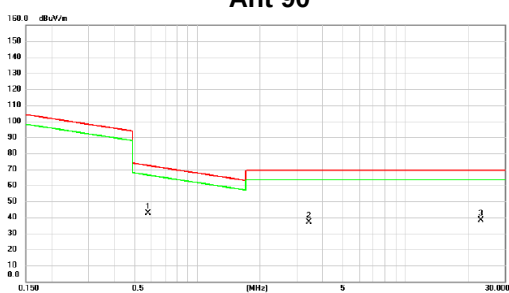


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.5823	22.52	20.00	42.52	72.30	-29.78	peak	
2	3.4335	16.83	20.11	36.94	69.54	-32.60	peak	
3	23.0151	17.18	20.89	38.07	69.54	-31.47	peak	

APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)

Test Mode : LTE Band 14_TX CH23330_5MHz


Vertical

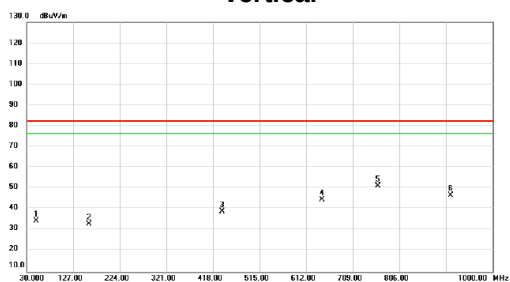

No. Mx.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	49.8850	35.86	-1.53	34.33	82.30	-47.97	peak	
2	160.4650	34.27	-1.21	33.06	82.30	-49.24	peak	
3	436.9150	35.93	3.14	39.07	82.30	-43.23	peak	
4	645.4650	36.71	7.90	44.61	82.30	-37.69	peak	
5 *	761.8650	41.22	9.96	51.18	82.30	-31.12	peak	
6	912.2150	35.29	11.42	46.71	82.30	-35.59	peak	

Test Mode : LTE Band 14_TX CH23330_5MHz


Horizontal

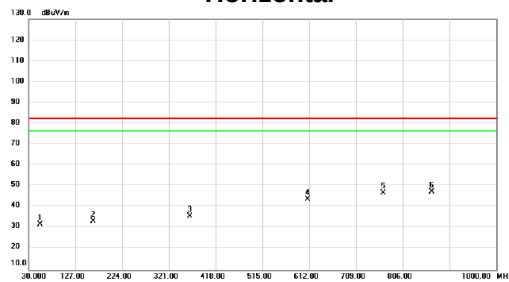

No. Mx.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	53.2800	33.44	-1.63	31.81	82.30	-50.49	peak	
2	163.3750	34.41	-1.31	33.10	82.30	-49.20	peak	
3	364.6500	34.69	0.91	35.60	82.30	-46.70	peak	
4	608.1200	36.62	7.22	43.84	82.30	-38.46	peak	
5	765.2600	36.69	10.02	46.71	82.30	-35.59	peak	
6 *	866.6250	36.42	10.87	47.29	82.30	-35.01	peak	

Test Mode : LTE Band 14_TX CH23330_10MHz


Vertical

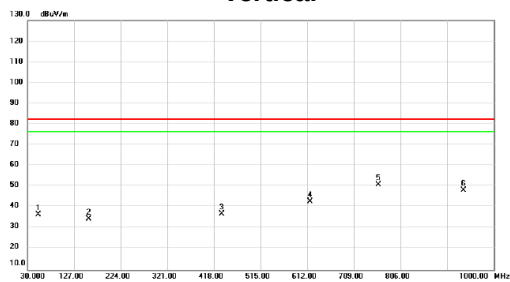

No. Mx.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	52.7950	38.18	-1.62	36.56	82.30	-45.74	peak	
2	157.5550	35.57	-1.21	34.36	82.30	-47.94	peak	
3	434.0050	33.80	3.04	36.84	82.30	-45.46	peak	
4	617.3350	35.41	7.39	42.80	82.30	-39.50	peak	
5 *	760.4100	40.99	9.95	50.94	82.30	-31.36	peak	
6	936.9500	36.48	11.91	48.39	82.30	-33.91	peak	

Test Mode : LTE Band 14_TX CH23330_10MHz

Horizontal

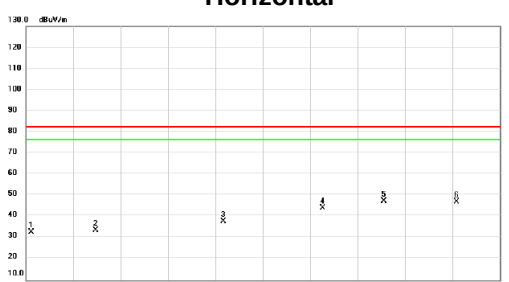


No. Mx.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	40.6700	34.58	-2.05	32.53	82.30	-49.77	peak	
2	173.0750	35.41	-1.85	33.56	82.30	-48.74	peak	
3	433.5200	34.83	3.03	37.86	82.30	-44.44	peak	
4	637.2200	36.21	7.75	43.96	82.30	-38.34	peak	
5 *	762.3500	37.42	9.97	47.39	82.30	-34.91	peak	
6	910.7600	35.78	11.40	47.18	82.30	-35.12	peak	

APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)


Test Mode : LTE Band 14_TX CH23330_5MHz

Vertical

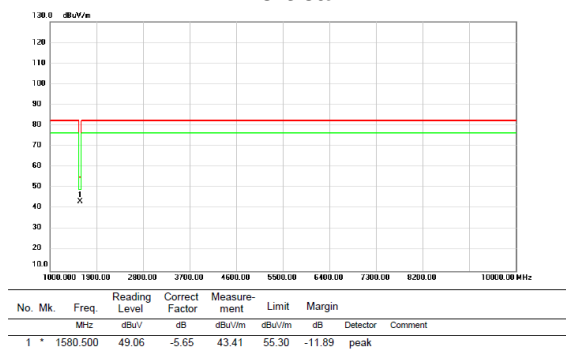


Test Mode : LTE Band 14_TX CH23330_5MHz

Horizontal

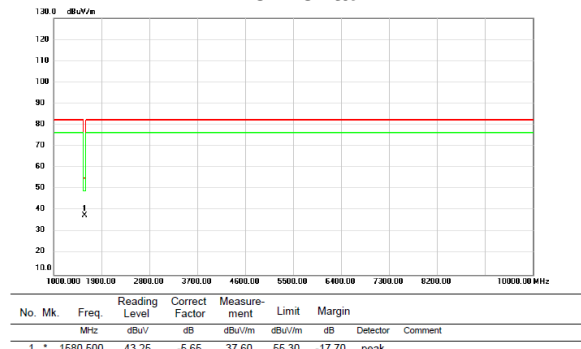


Test Mode : LTE Band 14_TX CH23330_10MHz

Vertical

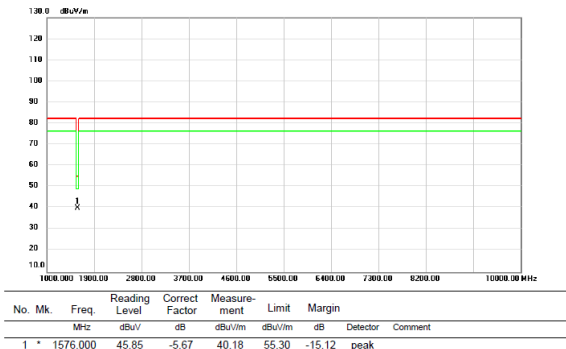



Test Mode : LTE Band 14_TX CH23330_10MHz

Horizontal

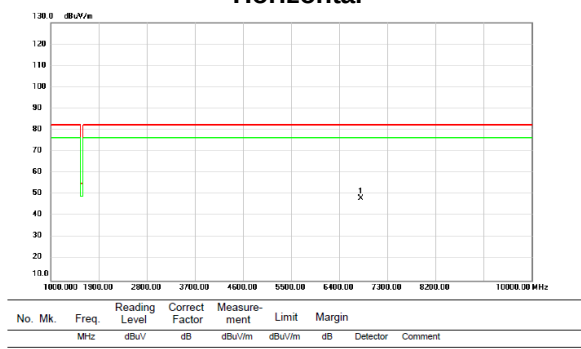


APPENDIX G - MASK

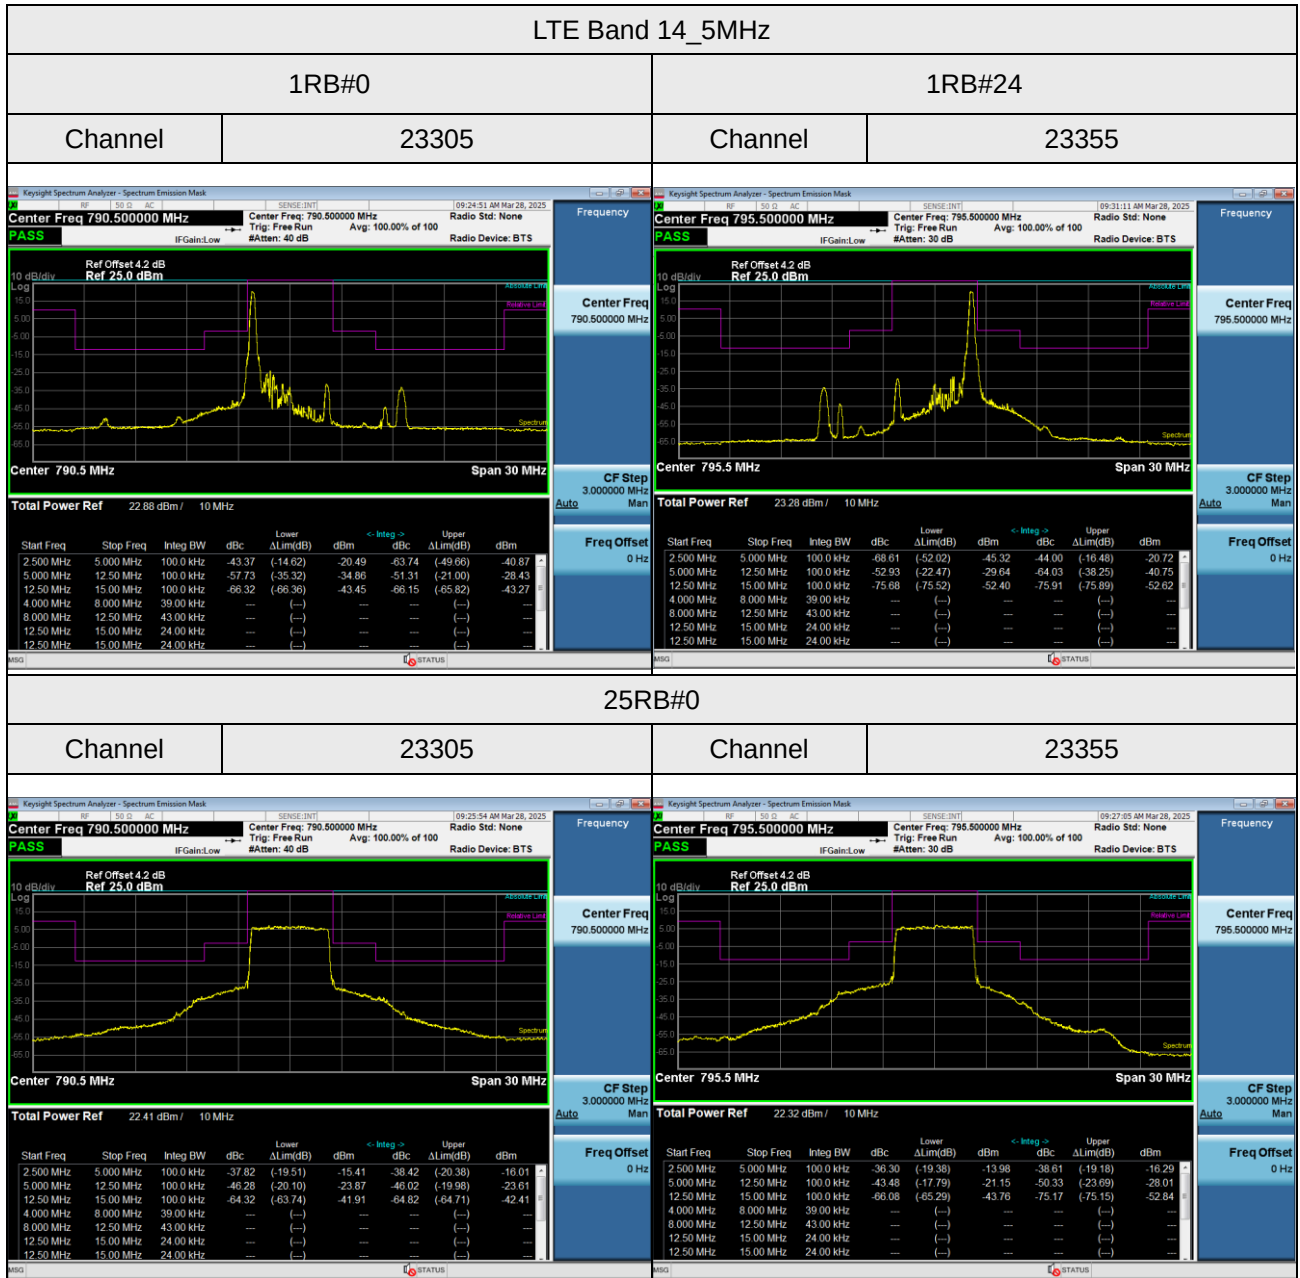


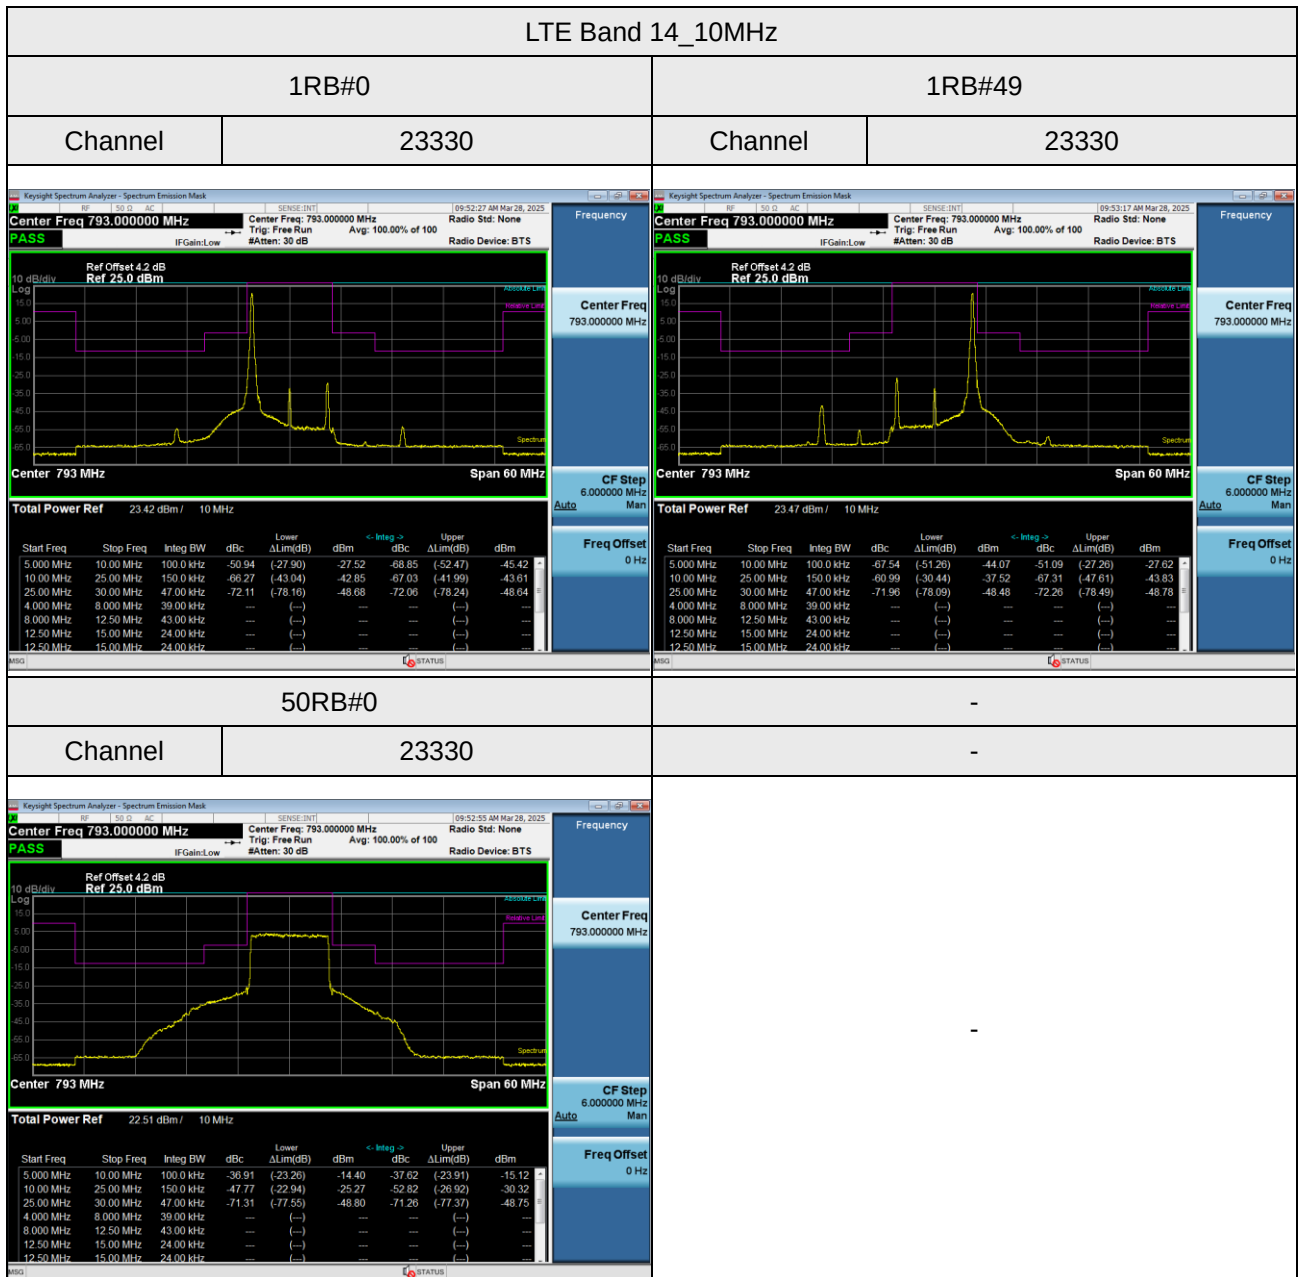


APPENDIX H - PEAK TO AVERAGE RATIO


LTE Band 14_5MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
23305	790.5	5.85	6.81	13	Pass
23330	793	5.55	6.67	13	Pass
23355	795.5	5.61	6.76	13	Pass

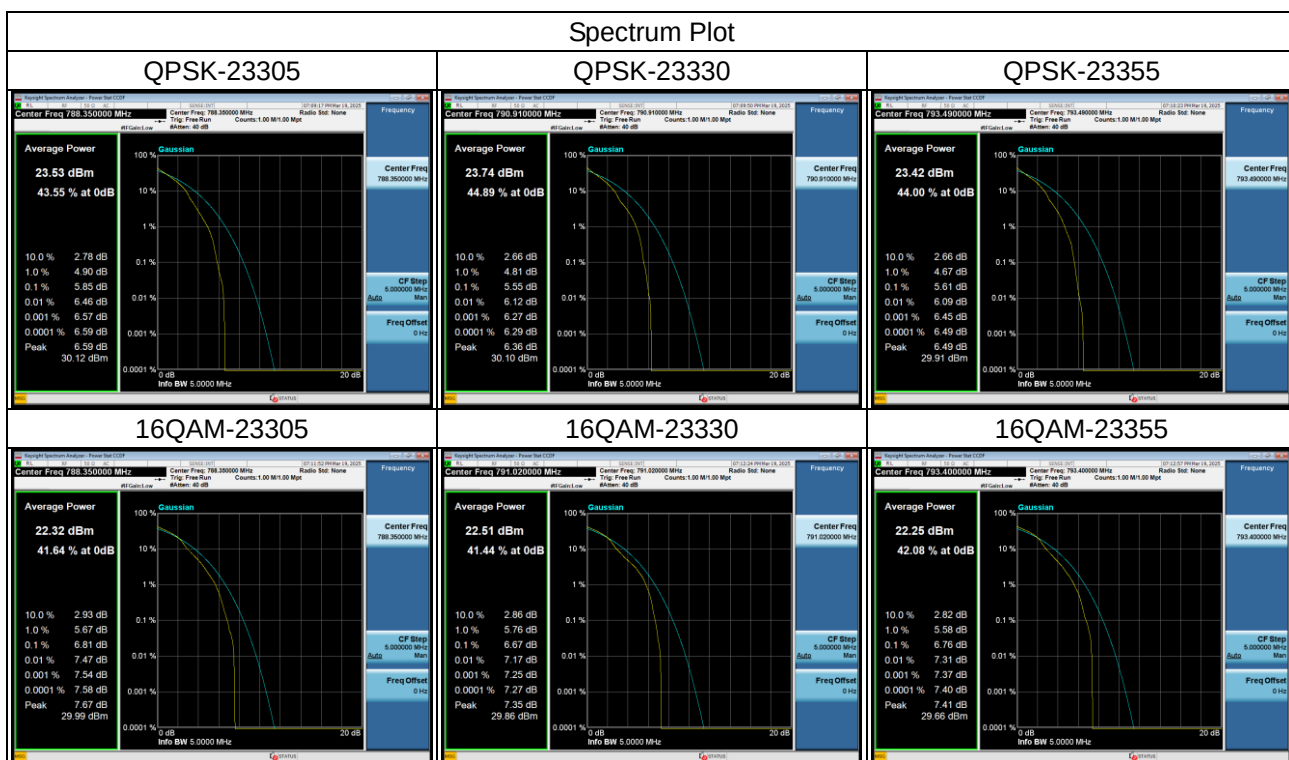


LTE Band 14_10MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
23330	793	5.65	6.70	13	Pass

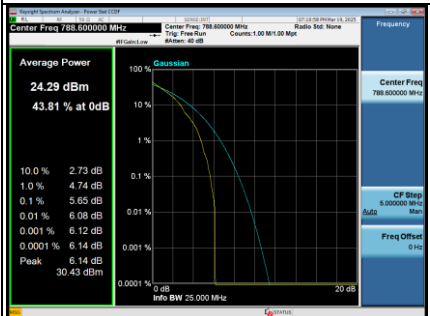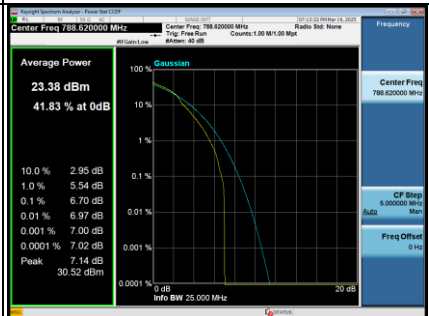Spectrum Plot		
QPSK-23330	16QAM-23330	-
		-

APPENDIX I - CONDUCTED BAND EDGE MEASUREMENT

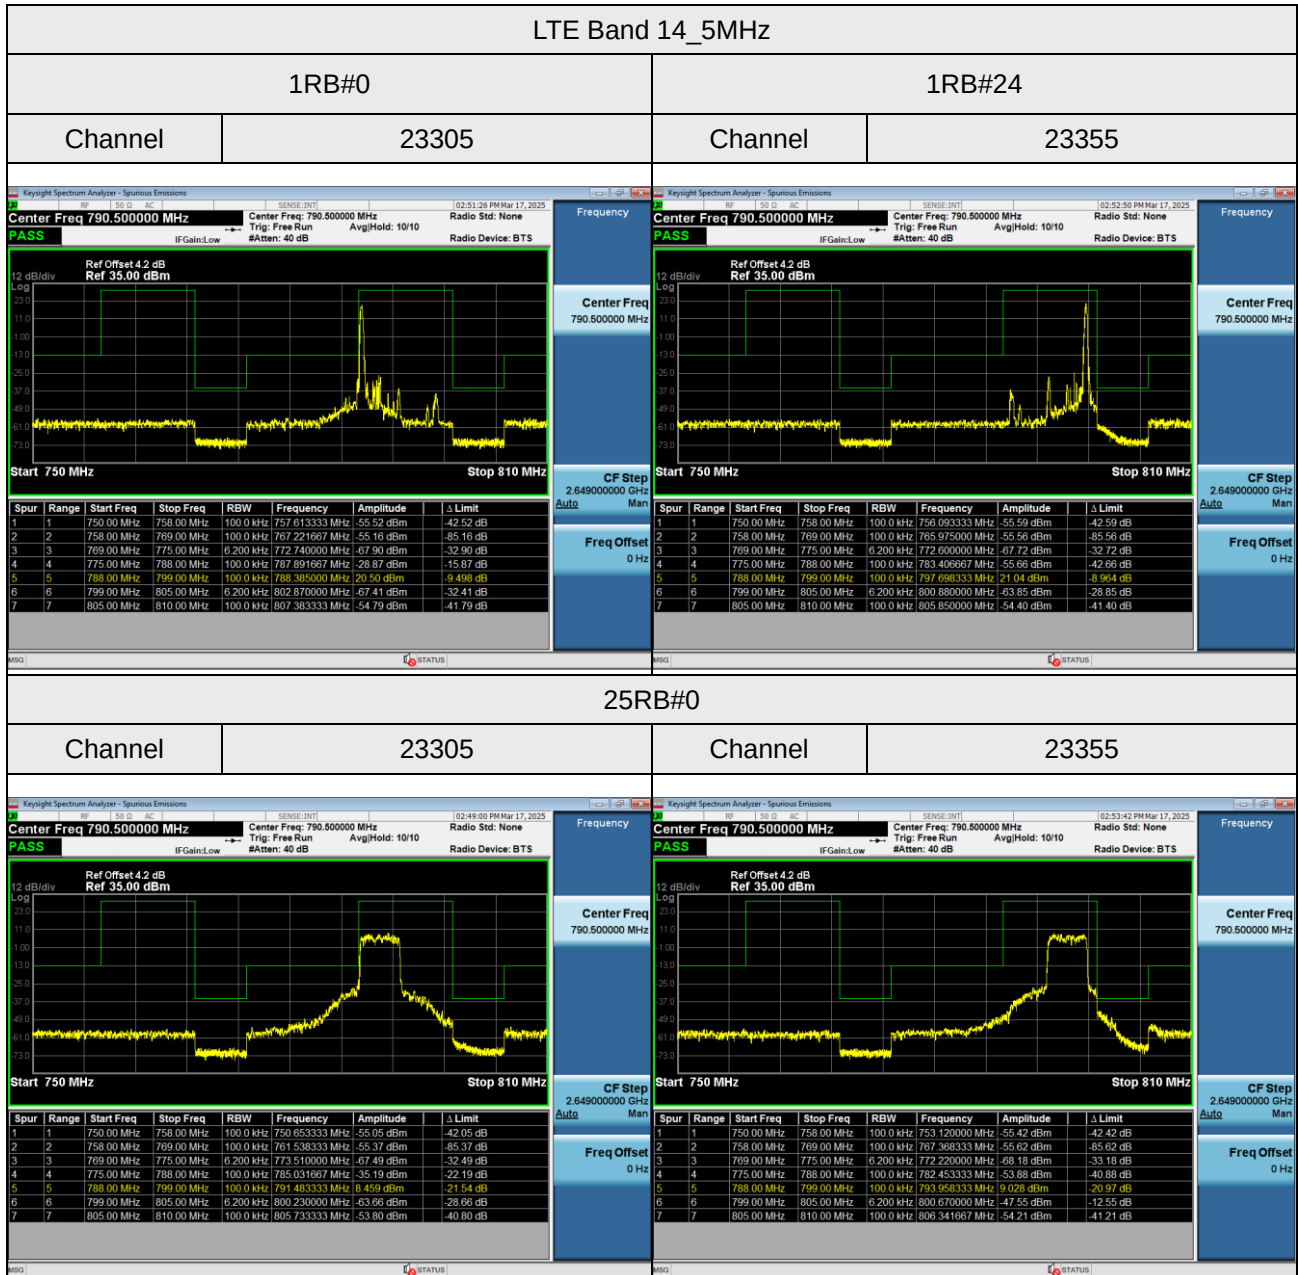

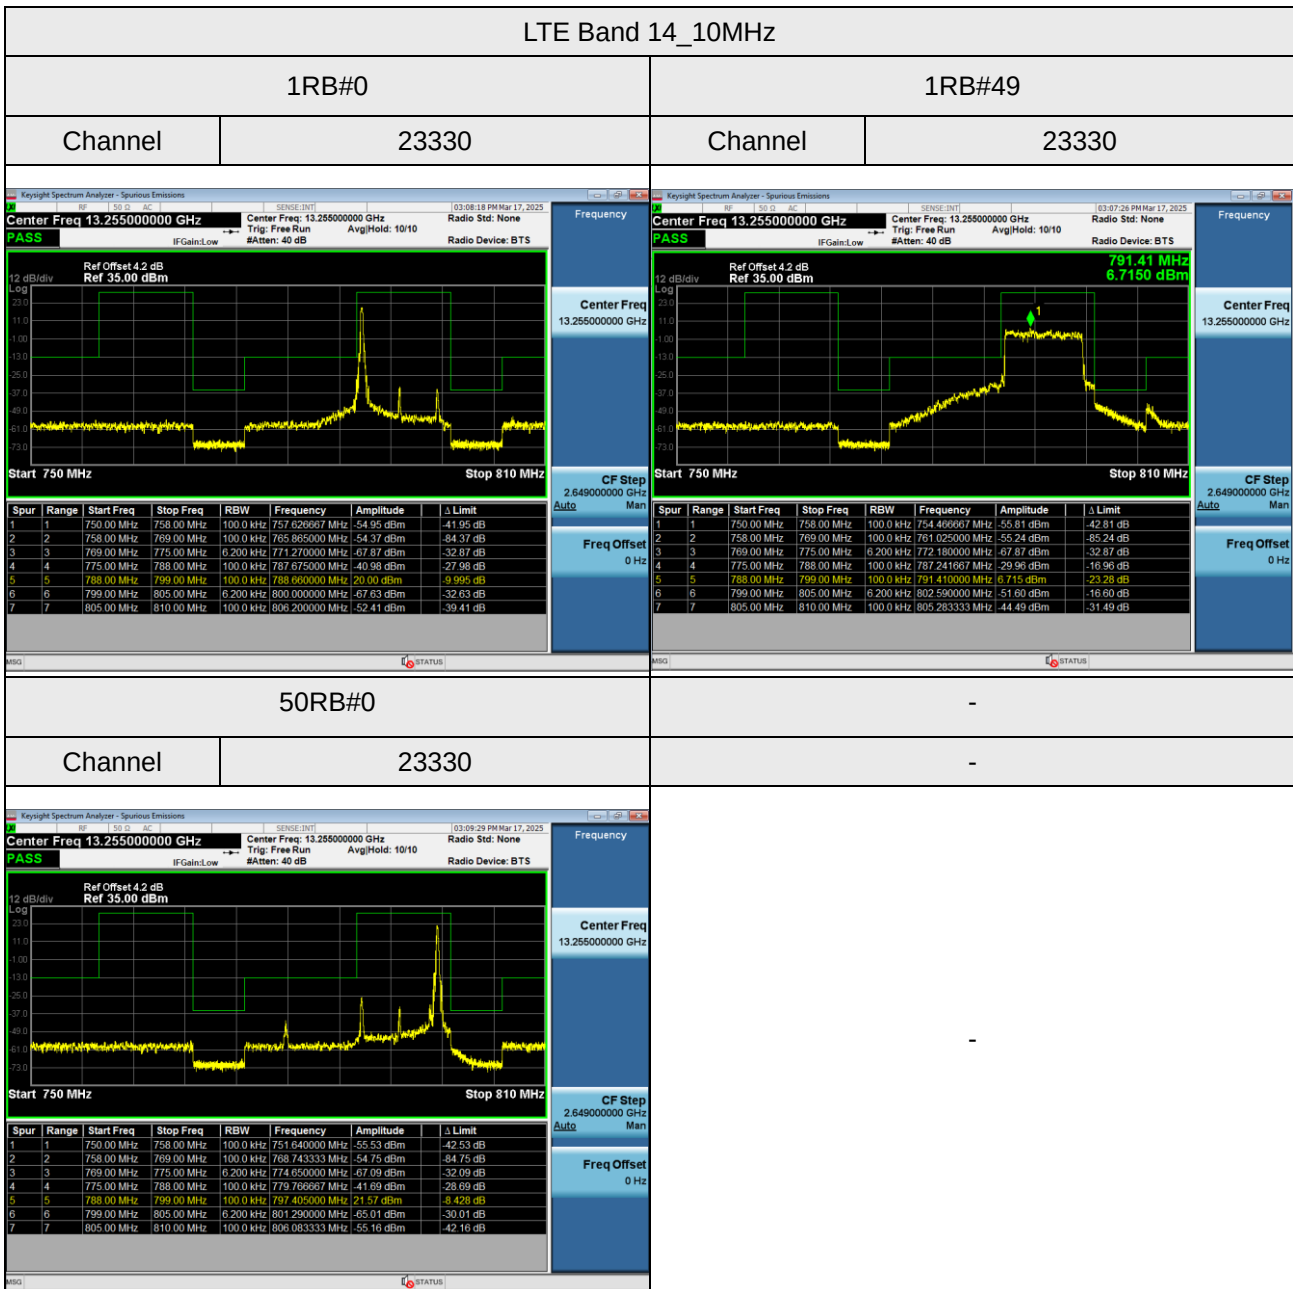

APPENDIX J - FREQUENCY STABILITY

Test Mode	LTE Band 14 _10MHz
-----------	--------------------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency error (Hz)	ppm	Limit
50	5.21	0.0066	±1.25ppm
40	-5.98	-0.0075	
30	-4.63	-0.0058	
20	4.82	0.0061	
10	5.54	0.0070	
0	4.23	0.0053	
-10	3.56	0.0045	
-20	5.12	0.0065	
-30	4.89	0.0062	
Minimum voltage	3.74	0.0047	
Maximum voltage	-7.25	-0.0091	
Nominal voltage	-8.35	-0.0105	

Note: Nominal voltage= 3.8V, Maximum voltage= 4.4V, Minimum voltage= 3.55V.

End of Test Report