

FCC PART 15.249



TEST REPORT

For

EB BRANDS (HK)

Unit 705&706 Enterprise Square, Phase 1, Tower III, 9 Sheung Yuet Road, Kowloon Bay,
Kowloon, Hong Kong

FCC ID: XRB7170IM2400TX

Report Type: Original Report	Product Type: Remote Control
Test Engineer: Kyle Xu	
Report Number: RSZ130507002-00	
Report Date: 2013-05-17	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EQUIPMENT MODIFICATIONS	4
CONFIGURATION OF TEST SETUP	4
BLOCK DIAGRAM OF TEST SETUP	4
SUMMARY OF TEST RESULTS.....	5
FCC §15.203 - ANTENNA REQUIREMENT.....	6
APPLICABLE STANDARD	6
ANTENNA CONNECTOR CONSTRUCTION	6
FCC §15.205, §15.209 & §15.249 - RADIATED EMISSIONS	7
APPLICABLE STANDARD	7
MEASUREMENT UNCERTAINTY	7
TEST EQUIPMENT SETUP	7
EUT SETUP	8
TEST PROCEDURE	8
CORRECTED AMPLITUDE & MARGIN CALCULATION	8
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.249(d) - OUT OF BAND EMISSION (50 dB ATTENUATION)	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA	12

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *EB BRANDS (HK)* 's product, model number: 7170 (FCC ID: XRB7170IM2400TX) or the "EUT" in this report is a *Remote Control*, named as *Iron Man RC Extreme Hero* by applicant, which was measured approximately: 14 cm (L) × 14 cm (W) × 6 cm (H), rated input voltage: DC 6*1.5V AAA alkaline battery.

All measurement and test data in this report was gathered from production sample serial number: 1305026 (Assigned by BACL, Shenzhen). The EUT supplied by applicant was received on 2013-05-07.

Objective

This type approval report is prepared on behalf of *EB BRANDS (HK)* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15-Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.249 DXT submittal of receiver unit with FCC ID: XRB7170IM2400RX.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured in a testing mode which provided by manufacturer.

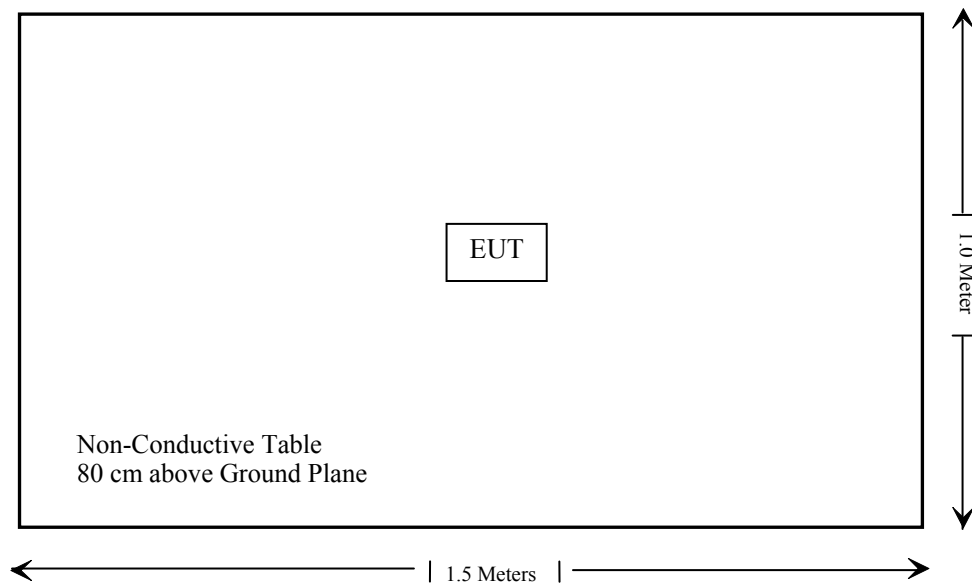
Equipment Modifications

No modifications were made to the EUT tested.

Configuration of Test Setup



Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	N/A*
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.249(d)	Outside of Band Emission(50dB attenuation)	Compliance

Note: EUT is powered by battery only.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has one integrated antenna arrangement, which were permanently attached and the gain was 0 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliant.

FCC §15.205, §15.209 & §15.249 - RADIATED EMISSIONS

Applicable Standard

As per FCC §15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for all the test data recorded in the report.

Test Equipment Setup

The spectrum analyzer or receiver is set as:

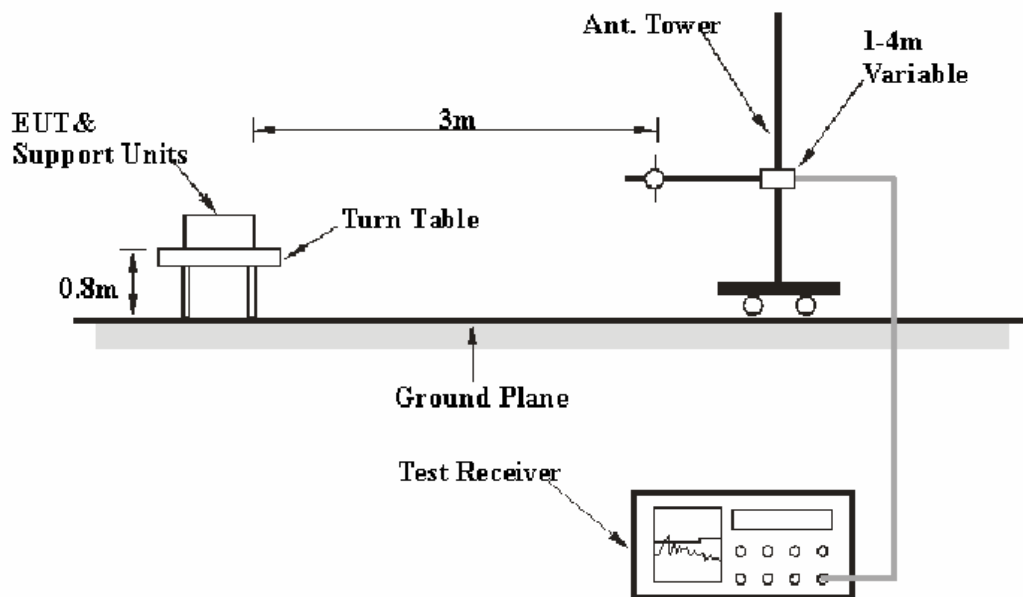
Below 1000MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000MHz:

$$\begin{aligned} \text{Peak: RBW} &= 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto} \\ \text{Average: RBW} &= 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto} \end{aligned}$$

EUT Setup



The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2013-03-17	2014-03-16
Mini-Circuits	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2012-12-01	2013-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
Electro-Mechanics	Horn antenna	3116	9510-2270	2012-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.205 & 15.249, with the worst margin reading of:

2.7 dB at 2447.0 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	100.0 kPa

The testing was performed by Kyle Xu on 2013-05-09.

Test Mode: Transmitting

30 MHz to 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.205/15.209		
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)	Comments
Low channel (2414 MHz)										
2414.0	84.38	Ave.	113	1.0	V	6.13	90.51	94	3.49	Fund.
2414.0	82.54	Ave.	35	1.2	H	6.13	88.67	94	5.33	Fund.
2414.0	97.55	PK	113	1.0	V	6.13	103.68	114	10.32	Fund.
2414.0	95.22	PK	35	1.2	H	6.13	101.35	114	12.65	Fund.
9656.0	20.86	Ave.	93	1.3	H	19.29	40.15	54	13.85	Harmonic
4828.0	47.59	PK	16	1.1	H	12.40	59.99	74	14.01	Harmonic
405.02	43.01	QP	12	1.2	V	-11.8	31.21	46	14.79	Spurious
7242.0	22.09	Ave.	117	1.2	H	16.62	38.71	54	15.29	Harmonic
9656.0	38.53	PK	93	1.3	H	19.29	57.82	74	16.18	Harmonic
4828.0	24.76	Ave.	16	1.1	H	12.40	37.16	54	16.84	Harmonic
2325.9	49.56	PK	87	1.1	V	5.48	55.04	74	18.96	Spurious
7242.0	35.22	PK	117	1.2	H	16.62	51.84	74	22.16	Harmonic
2351.2	46.01	PK	93	1.3	H	5.48	51.49	74	22.51	Spurious
2493.7	44.09	PK	22	1.2	V	7.21	51.30	74	22.70	Spurious
2325.9	23.78	Ave.	87	1.1	V	5.48	29.26	54	24.74	Spurious
2493.7	21.35	Ave.	22	1.2	V	7.21	28.56	54	25.44	Spurious
2351.2	22.84	Ave.	93	1.3	H	5.48	28.32	54	25.68	Spurious
Middle channel (2447 MHz)										
2447.0	84.09	Ave.	112	1.1	V	7.21	91.30	94	2.70	Fund.
2447.0	82.16	Ave.	35	1.0	H	7.21	89.37	94	4.63	Fund.
2447.0	98.38	PK	112	1.1	V	7.21	105.59	114	8.41	Fund.
2447.0	96.22	PK	35	1.0	H	7.21	103.43	114	10.57	Fund.
4894.0	48.31	PK	13	1.3	H	12.46	60.77	74	13.23	Harmonic
9788.0	21.03	Ave.	36	1.1	H	19.29	40.32	54	13.68	Harmonic
405.02	42.05	QP	152	1.1	V	-11.8	30.25	46	15.75	Spurious
9788.0	38.56	PK	36	1.1	H	19.29	57.85	74	16.15	Harmonic
4894.0	24.53	Ave.	13	1.3	H	12.46	36.99	54	17.01	Harmonic
7341.0	18.11	Ave.	87	1.2	H	16.49	34.60	54	19.40	Harmonic
2361.7	46.11	PK	74	1.3	H	5.48	51.59	74	22.41	Spurious
7341.0	31.86	PK	87	1.2	H	16.49	48.35	74	25.65	Harmonic
2382.1	42.19	PK	33	1.0	H	6.13	48.32	74	25.68	Spurious
2490.7	21.07	Ave.	102	1.1	V	7.21	28.28	54	25.72	Spurious
2382.1	21.73	Ave.	33	1.0	H	6.13	27.86	54	26.14	Spurious
2361.7	22.26	Ave.	74	1.3	H	5.48	27.74	54	26.26	Spurious
2490.7	39.16	PK	102	1.1	V	7.21	46.37	74	27.63	Spurious

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.249/15.205/15.209		
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H /V)			Limit (dBμV/m)	Margin (dB)	Comments
High channel (2473 MHz)										
2473.0	83.00	Ave.	54	1.1	V	7.21	90.21	94	3.79	Fund.
2473.0	81.30	Ave.	113	1.2	H	7.21	88.51	94	5.49	Fund.
2473.0	97.23	PK	54	1.1	V	7.21	104.44	114	9.56	Fund.
2473.0	95.51	PK	113	1.2	H	7.21	102.72	114	11.28	Fund.
9892.0	42.27	PK	84	1.3	H	19.39	61.66	74	12.34	Harmonic
9892.0	21.32	Ave.	84	1.3	H	19.39	40.71	54	13.29	Harmonic
405.02	42.77	QP	197	1.1	V	-11.8	30.97	46	15.03	Spurious
4946.0	46.00	PK	77	1.3	H	12.50	58.50	74	15.50	Harmonic
4946.0	23.53	Ave.	77	1.3	H	12.50	36.03	54	17.97	Harmonic
7419.0	17.94	Ave.	106	1.2	H	15.90	33.84	54	20.16	Harmonic
2327.4	46.96	PK	93	1.3	H	5.48	52.44	74	21.56	Spurious
2496.5	43.61	PK	25	1.1	H	7.21	50.82	74	23.18	Spurious
7419.0	34.77	PK	106	1.2	H	15.90	50.67	74	23.33	Harmonic
2365.7	44.75	PK	11	1.2	V	5.48	50.23	74	23.77	Spurious
2496.5	21.02	Ave.	25	1.1	H	7.21	28.23	54	25.77	Spurious
2327.4	22.09	Ave.	93	1.3	H	5.48	27.57	54	26.43	Spurious
2365.7	21.93	Ave.	11	1.2	V	5.48	27.41	54	26.59	Spurious

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) + cable loss – amplifier factor

Margin = Limit- Corrected Amplitude

FCC §15.249(d) - OUT OF BAND EMISSION (50 dB ATTENUATION)

Applicable Standard

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

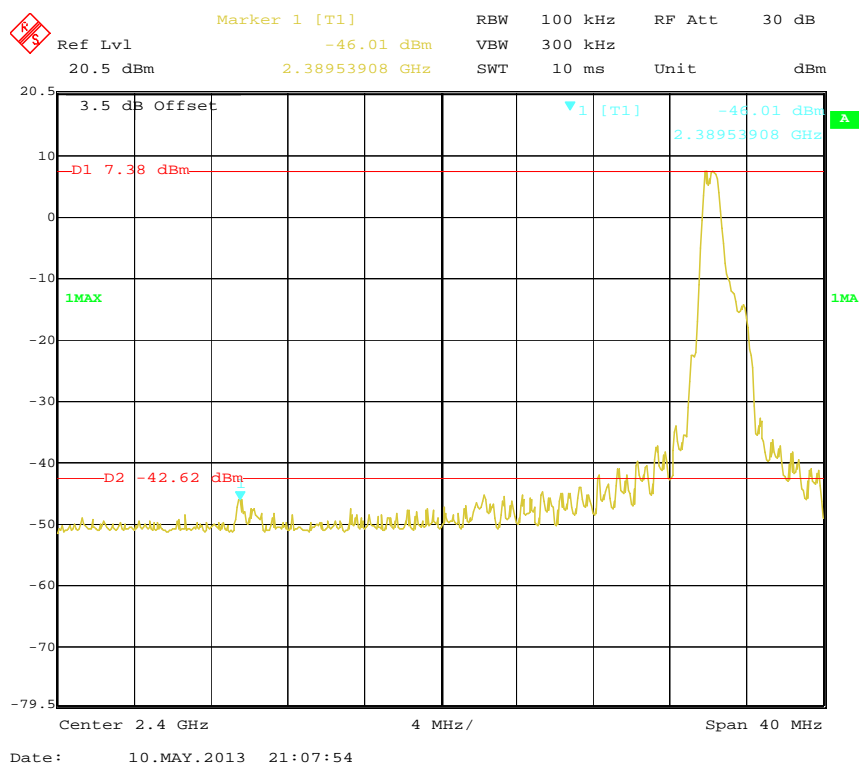
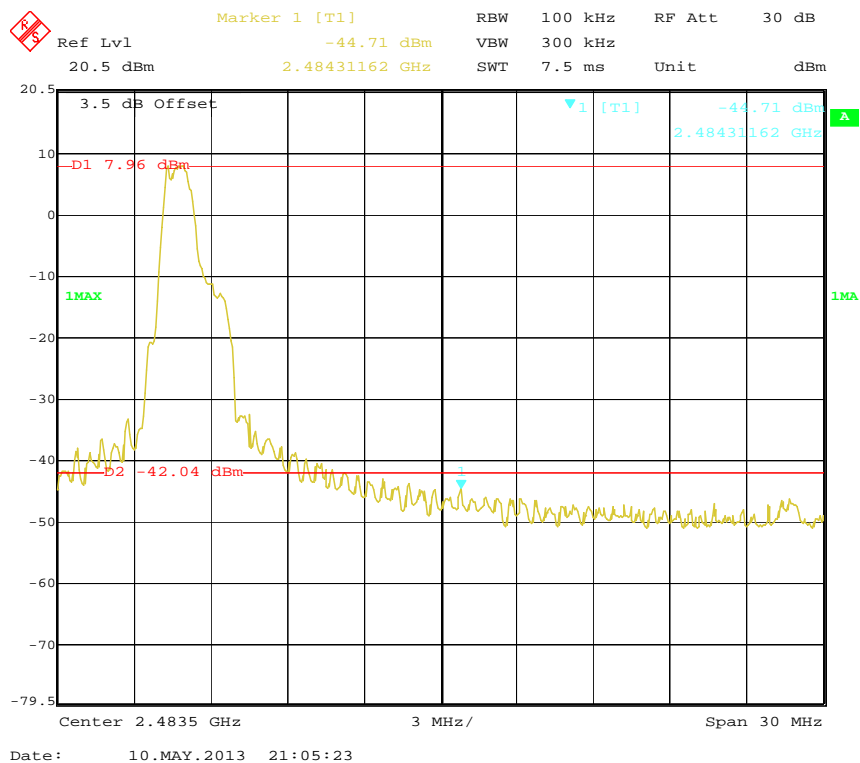
Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Kyle Xu on 2013-05-10.

Test Result: Compliance. Please refer to the following table and plots:

Frequency (MHz)	Delta Peak to Band Emission (dBc)	Delta Limit (dBc)
2389.54	53.39	50
2484.31	52.67	50

Band Edge: Left Side**Band Edge: Right Side********* END OF REPORT *******