

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

**Test Report No.** : OT-194-RWD-047  
**AGR No.** : A193A-238  
**Applicant** : UNION COMMUNITY  
**Address** : Hyundai Topics Bldg. Bangi 2-dong, Songpa-gu, Seoul, South Korea  
**Manufacturer** : UNION COMMUNITY  
**Address** : Hyundai Topics Bldg. Bangi 2-dong, Songpa-gu, Seoul, South Korea  
**Type of Equipment** : Access controller  
**FCC ID** : XX2-UBIO-XPRO  
**Model Name** : UBio-X Pro  
**Multiple Model Name** : UBio-X Pro Lite  
**Serial number** : N/A  
**Total page of Report** : 16 pages (including this page)  
**Date of Incoming** : March 28, 2019  
**Date of Issuing** : April 23, 2019

## SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 Subpart C Section 15.209 and 15.207.**


This test report only contains the result of a single test of the sample supplied for the examination.  
It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Tae-Ho, Kim / Senior Manager  
ONETECH Corp.

Approved by:

  
7/16  
Ki-Hong, Nam / Chief Engineer  
ONETECH Corp.

## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>5</b>
<b>2.2 MODEL DIFFERENCES: .....</b>	<b>5</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>5</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>5</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>5</b>
<b>2.6 TEST FACILITY.....</b>	<b>6</b>
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
<b>3.1 JUSTIFICATION.....</b>	<b>7</b>
<b>3.2 PERIPHERAL EQUIPMENT .....</b>	<b>8</b>
<b>3.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>8</b>
<b>3.4 EQUIPMENT MODIFICATIONS.....</b>	<b>8</b>
<b>3.5 CONFIGURATION OF TEST SYSTEM.....</b>	<b>9</b>
<b>3.6 ANTENNA REQUIREMENT .....</b>	<b>9</b>
<b>4. PRELIMINARY TEST .....</b>	<b>9</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>9</b>
<b>4.2 RADIATED EMISSIONS TESTS.....</b>	<b>9</b>
<b>5. FINAL RESULT OF 124.8 KHZ MEASUREMENT.....</b>	<b>10</b>
<b>5.1 CONDUCTED EMISSION TEST.....</b>	<b>10</b>
<b>5.2 RADIATED EMISSION TEST BELOW 30 MHZ.....</b>	<b>12</b>
<b>5.3 RADIATED EMISSION TEST ABOVE 30 MHZ .....</b>	<b>13</b>
<b>5.4 BANDWIDTH OF THE OPERATING FREQUENCY.....</b>	<b>14</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>15</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>16</b>

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-194-RWD-047	April 23, 2019	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

- . APPLICANT : UNION COMMUNITY  
- . ADDRESS : Hyundai Topics Bldg. Bangi 2-dong, Songpa-gu, Seoul, South Korea  
- . CONTACT PERSON : KyungWook, Han  
- . TELEPHONE NO : +82-2-6488-3027  
- . FCC ID : XX2-UBIO-XPRO  
- . MODEL NO/NAME : UBio-X Pro  
- . SERIAL NUMBER : N/A  
- . DATE : April 23, 2019

DEVICE TYPE	DCD – Part 15, Low Power Transmitter below 1 705 kHz
E.U.T. DESCRIPTION	Access controller
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR47 Part 15 Subpart C Section 15.207 and 15.209
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m, Semi Anechoic Chamber

- . The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The UNION COMMUNITY, Model UBio-X Pro (referred to as the EUT in this report) is an Access controller, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Access controller
TRANSMITTING FREQUENCY	124.8 kHz, 13.56 MHz, 2 402 MHz ~ 2 480 MHz
MODULATION	ASK
ANTENNA TYPE	Coil Antenna, PCB Antenna
LIST OF EACH OSC. or CRY. FREQ.(FREQ. >= 1 MHz)	124.8 kHz, 13.558 MHz, 27 MHz, 8MHz, 32.768 kHz, 7.3728 MHz, 27.12 MHz
USED AC/DC ADAPTER	Output : DC 15 V, 4 A Model No : KPL-060H-VI Manufacturer : Channel Well Technology(Guangzhou) Co.,Ltd.

### 2.2 Model Differences:

The following lists consist of the added model and their differences.

Model Name	Differences	Tested
UBio-X Pro	Basic model.	<input checked="" type="checkbox"/>
UBio-X Pro Lite	The model is buyers request model name.	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test, therefore this test report just guarantees the units which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.209 and 15.207.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

## 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

- Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN BOARD	UNION COMMUNITY	PAC7000PMA01 V11	N/A
LCD INTERFACE BOARD	UNION COMMUNITY	PAC7000PLC01 V11	N/A
LCD BOARD	UNION COMMUNITY	N/A	N/A
FINGERPRINT BOARD(1)	UNION COMMUNITY	PFAS06MA01	N/A
FINGERPRINT BOARD(2)	UNION COMMUNITY	PFAS06SE01	N/A
CAMERA BOARD	UNION COMMUNITY	PAC7000PCM01	N/A
SPEAKER(1)	N/A	N/A	N/A
SPEAKER(2)	N/A	N/A	N/A
LED BOARD(1)	N/A	N/A	N/A
LED BOARD(2)	N/A	N/A	N/A
TOUNCH BOARD	N/A	MTH-UAC700	N/A
SD CARD BOARD	N/A	Pac7000SD01 V10	N/A
MODULE BOARD	N/A	PAC7000RF01 V10	N/A
Bluetooth LE Module	PROCHILD INC.	PBLN51822m	2AEEY- PBLN51822M
ADAPTER	Channel Well Technology (Guangzhou)Co., LTd.	KPL-060H-VI	N/A
13.56 MHz ANTENNA BOARD	N/A	PAC7000SA01	N/A
125 kHz ANTENNA	N/A	N/A	N/A

### 3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
UBio-X Pro	UNION COMMUNITY	Access controller (EUT)	-
KPL-060H-VI	Channel Well Technology (Guangzhou)Co., LTD.	ADAPTER	EUT
Ideapad330	LENOVO	Notebook PC	EUT
PA-1450-55LR	LITE-ON TECHNOLOGY	ADAPTER	-
N/A	N/A	Door Open Switch	EUT
N/A	N/A	Door lock	EUT
N/A	N/A	13.56 MHz Card	EUT
N/A	N/A	125 kHz Card	EUT

### 3.3 Mode of operation during the test

- The EUT has 124.8 kHz RF boards for reading Card and program was used for making continuous transmission mode during the test.

### 3.4 Equipment Modifications

- None

### 3.5 Configuration of Test System

**Line Conducted Test :**

The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test :**

Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber.

For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna.

The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The transmitter antenna of the EUT is a Coil Antenna and PCB Antenna so there is no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


## 5. FINAL RESULT OF 124.8 kHz MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

### 5.1 Conducted Emission Test


Humidity Level : (46 ~ 47) % R.H. Temperature: (23 ~ 24) °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)  
 Result : PASSED

EUT : Access controller Date: April 02, 2019  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)  
 Tested Line : HOT LINE

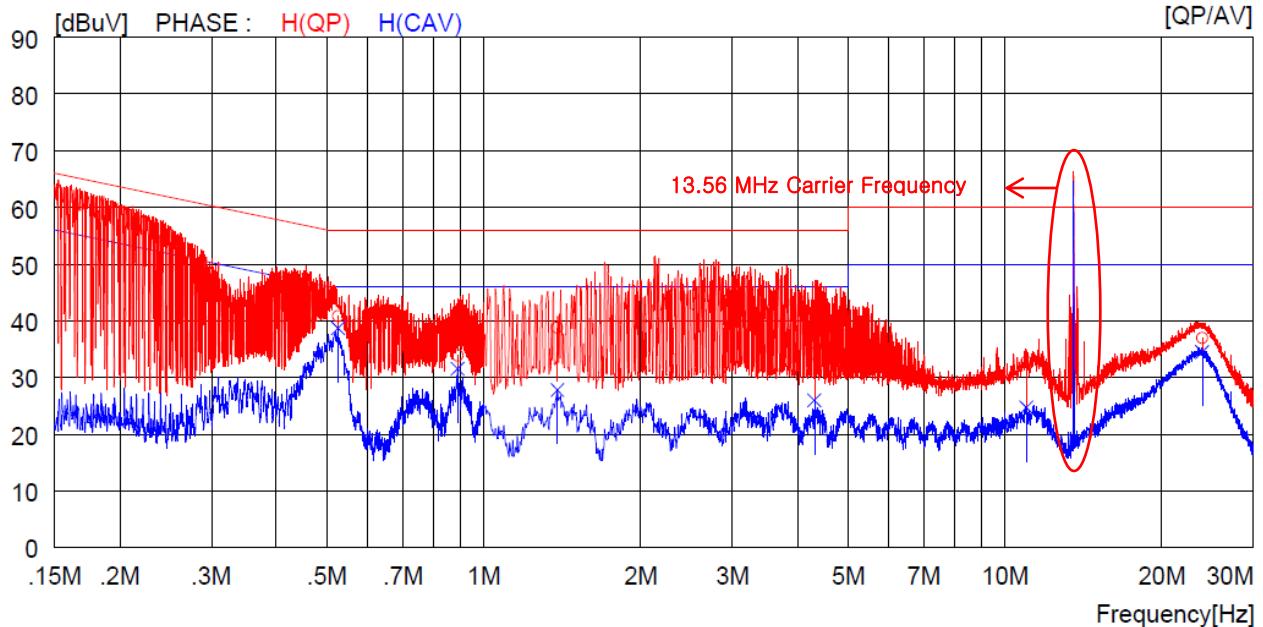

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.52500	30.8	----	10.0	40.8	----	56.0	----	15.2	----	H (QP)
2	0.89100	23.8	----	10.1	33.9	----	56.0	----	22.1	----	H (QP)
3	1.38400	28.7	----	10.1	38.8	----	56.0	----	17.2	----	H (QP)
4	4.31200	24.1	----	10.1	34.2	----	56.0	----	21.8	----	H (QP)
5	11.00000	22.4	----	10.3	32.7	----	60.0	----	27.3	----	H (QP)
6	23.93000	26.5	----	10.4	36.9	----	60.0	----	23.1	----	H (QP)
7	0.52500	28.7	10.0	----	38.7	----	46.0	----	7.3	----	H (CAV)
8	0.89100	21.4	10.1	----	31.5	----	46.0	----	14.5	----	H (CAV)
9	1.38400	17.7	10.1	----	27.8	----	46.0	----	18.2	----	H (CAV)
10	4.31200	15.9	10.1	----	26.0	----	46.0	----	20.0	----	H (CAV)
11	11.00000	14.4	10.3	----	24.7	----	50.0	----	25.3	----	H (CAV)
12	23.93000	24.1	10.4	----	34.5	----	50.0	----	15.5	----	H (CAV)


Tested Line : NEUTRAL LINE

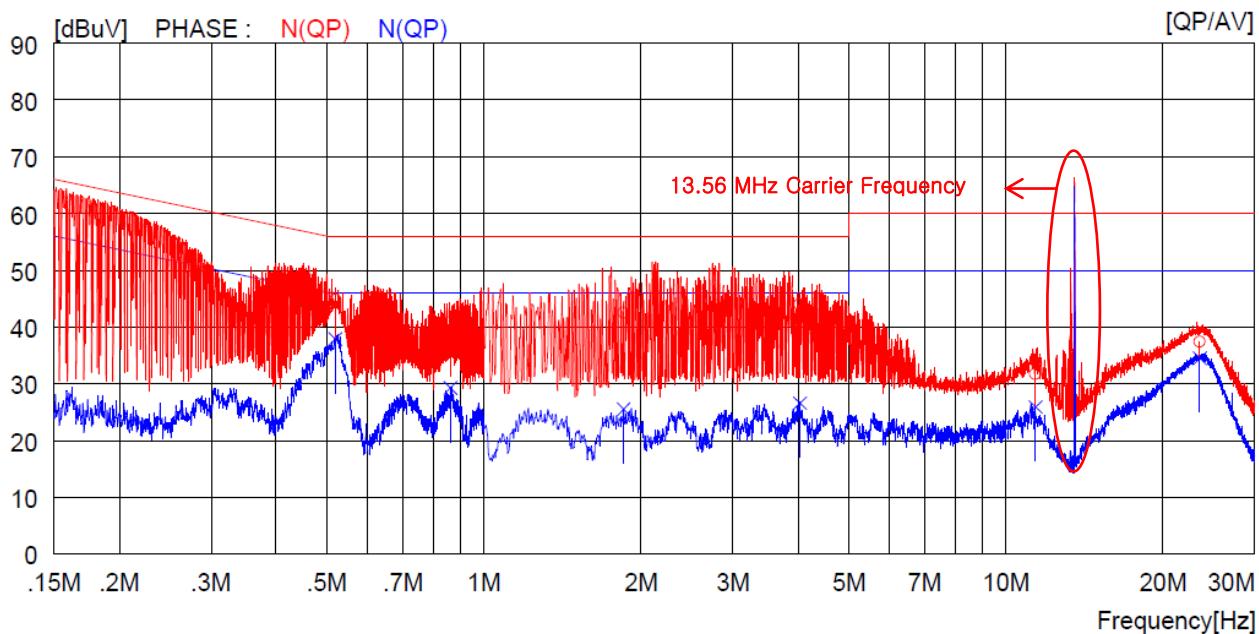

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.51900	34.8	----	10.0	44.8	----	56.0	----	11.2	----	N (QP)
2	0.86200	30.7	----	10.1	40.8	----	56.0	----	15.2	----	N (QP)
3	1.85200	32.4	----	10.1	42.5	----	56.0	----	13.5	----	N (QP)
4	4.02800	33.9	----	10.1	44.0	----	56.0	----	12.0	----	N (QP)
5	11.40000	21.4	----	10.3	31.7	----	60.0	----	28.3	----	N (QP)
6	23.55000	27.0	----	10.4	37.4	----	60.0	----	22.6	----	N (QP)
7	0.51900	----	27.9	10.0	----	37.9	----	46.0	----	8.1	N (CAV)
8	0.86200	----	19.2	10.1	----	29.3	----	46.0	----	16.7	N (CAV)
9	1.85200	----	15.4	10.1	----	25.5	----	46.0	----	20.5	N (CAV)
10	4.02800	----	16.5	10.1	----	26.6	----	46.0	----	19.4	N (CAV)
11	11.40000	----	15.6	10.3	----	25.9	----	50.0	----	24.1	N (CAV)
12	23.55000	----	24.1	10.4	----	34.5	----	50.0	----	15.5	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.



Tested by: Ju Yun Park / Assistant Manager

## 5.2 Radiated Emission Test below 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>47 % R.H.</u>	Temperature: <u>23 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209</u>	
Type of Test	: <u>Low Power Transmitter below 1 705 kHz</u>	
Result	: <u>PASSED</u>	

EUT : Access controller Date: March 29, 2019 ~ April 04, 2019  
 Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
0.016	42.23	H	1	180	20.01	0.05	62.29	183.5	121.21
0.031	39.72	H	1	180	20.11	0.06	59.89	177.8	117.91
0.063	31.62	V	1	360	20.15	0.05	51.82	171.6	119.78
0.124 8	69.27	H	1	180	20.23	0.05	89.55	165.7	76.15
0.25	41.30	H	1	360	20.23	0.06	61.59	159.6	98.01
0.687	34.80	H	1	180	20.25	0.07	55.12	110.9	55.78

### Radiated Emission Tabulated Data below 30 MHz

Note: According to the distance of measurements was reduced to 3 m, the limit was extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade) as follows.

Limit calculation: Limit at specified distance +  $40\log(300/3) = \text{Limit} + 80 \text{ dB}$  for up to 0.49 MHz

Limit at specified distance +  $40\log(30/3) = \text{Limit} + 40 \text{ dB}$  for above 0.49 MHz




Tested by: Ju Yun Park / Assistant Manager

### 5.3 Radiated Emission Test above 30 MHz

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>(47 ~ 48) % R.H.</u>	Temperature: <u>(23 ~ 24) °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.209</u>	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)	
Type of Test	: <u>Low Power Transmitter below 1 705 kHz</u>	

EUT : Access controller Date: March 28, 2019  
 Distance : 3 m

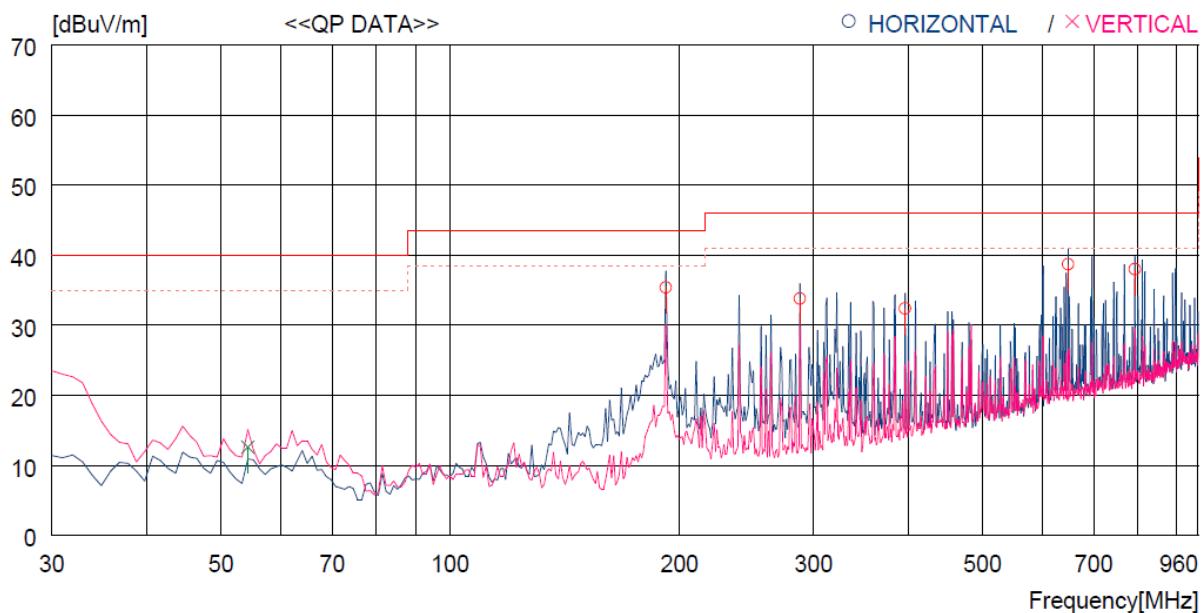

No.	FREQ [MHz]	READING QP	ANT FACTOR	LOSS	GAIN	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN	ANTENNA TABLE	
									[dB]	[cm]
----- Horizontal -----										
1	191.990	54.3	10.9	3.2	33.0	35.4	43.5	8.1	100	114
2	288.020	49.7	13.2	3.9	33.0	33.8	46.0	12.2	100	175
3	395.690	45.1	15.8	4.6	33.1	32.4	46.0	13.6	100	114
4	647.887	46.5	19.7	5.8	33.3	38.7	46.0	7.3	100	182
5	792.412	43.3	21.2	6.6	33.1	38.0	46.0	8.0	100	175
----- Vertical -----										
6	54.250	30.2	13.7	1.8	33.1	12.6	40.0	27.4	400	359

  
 Tested by: Ju Yun Park / Assistant Manager

## 5.4 Bandwidth of the operating frequency

Humidity Level : 47 % R.H. Temperature: 23 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209  
 Type of Test : Low Power Transmitter below 1 705 kHz

EUT : Access controller Date: March 29, 2019 ~ April 04, 2019  
 Resolution Bandwidth : 1.0 kHz  
 Video Bandwidth : 3.0 kHz  
 SPAN : 10.00 kHz


Carrier Freq. (kHz)	Bandwidth of the emission. (Hz)	Limit (kHz)	Remark
124.8	2.996 9	None	<u>The point 20 dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.



Tested by: Ju Yun Park / Assistant Manager

### Photo Data for bandwidth

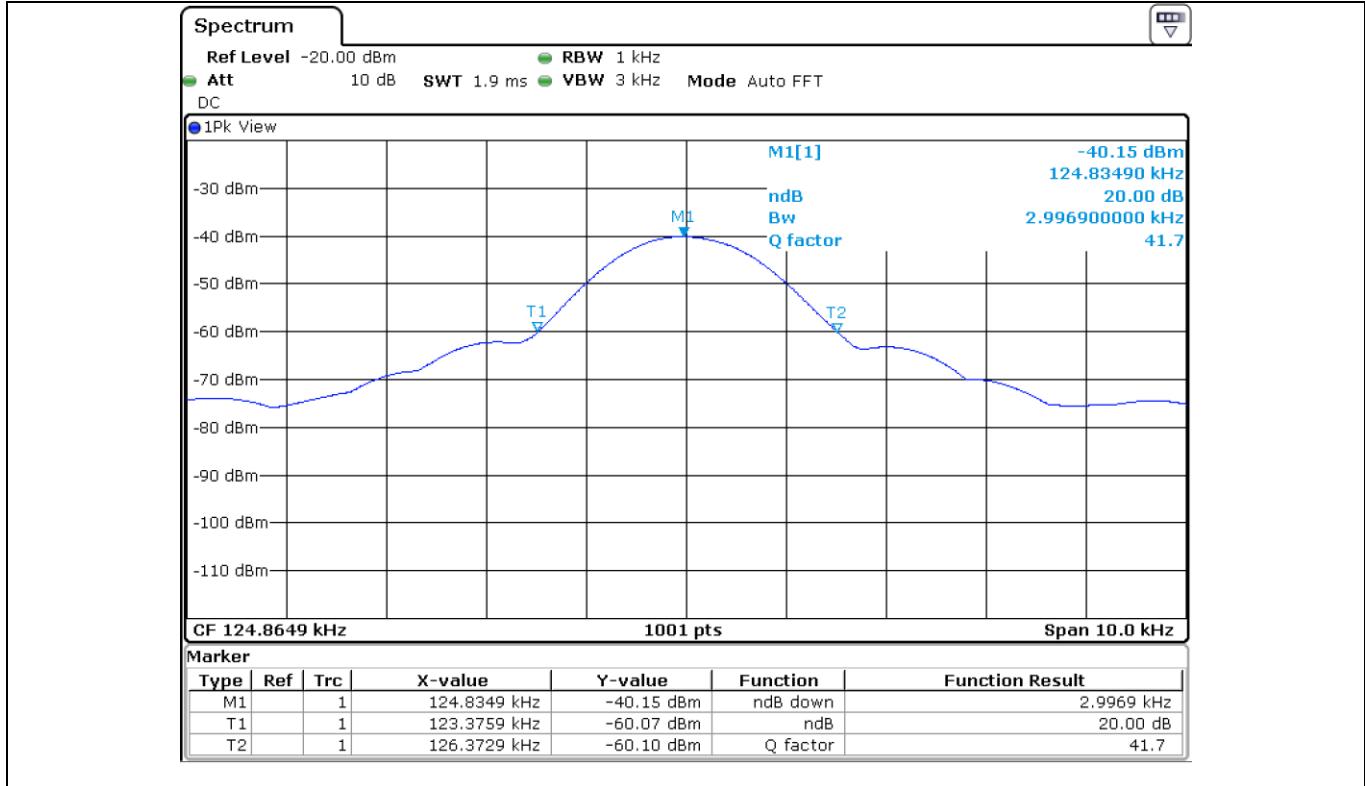

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses.

+ Meter reading	(dB $\mu$ V)
- Amplifier Gain	(dB)
+ Cable Loss	(dB)
- Antenna Factor	(dB/m)
<hr/>	
= Corrected Result	(dB $\mu$ V/m)

Margin (dB)	
Specification Limit	(dB $\mu$ V/m)
<hr/>	
- Corrected Result	(dB $\mu$ V/m)
<hr/>	
= dB Relative to Spec	( $\pm$ dB)

## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESCI	101012	Oct. 22, 2018	One Year	-
2.		R/S	ESR	101470	Oct. 22, 2018	One Year	■
3.		R/S	ESPI	101278	Oct. 20, 2018	One Year	■
4.	Spectrum analyzer	R/S	FSV30	101372	Aug. 23, 2018	One Year	■
5.	Amplifier	Sonoma Instrument	310N	312544	Mar. 18, 2019	One Year	■
6.	Amplifier	Sonoma Instrument	310N	312545	Mar. 18, 2019	One Year	-
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-255	Jun. 05, 2018	Two Year	■
8.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-419	Aug. 09, 2018	Two Year	-
9.	Controller	Innco System	CO3000	CO3000/904/37211215/L	N/A	N/A	■
10.	LISN	EMCO	3825/2	9109-1867	Mar. 27, 2019	One Year	-
				9109-1869	Mar. 19, 2019	One Year	■
		Schwarzbeck	NNLK8121	804	Oct. 22, 2018	One Year	■
		Schwarzbeck	NSLK8128	8128-216	Mar. 20, 2019	One Year	■
11.	Turn Table	Innco System	DT3000	930611	N/A	N/A	■
12.	Antenna Master	Innco System	MA4000-EP	MA4000/332	N/A	N/A	-
13.	Antenna Master	Innco System	MA-4000XPET	MA4000/509	N/A	N/A	■
14.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-235	May 13, 2018	Two Year	■
15.	Frequency Counter	HP	53152A	US39270295	Aug. 23, 2018	One Year	■
16.	Environmental Test Chamber	ESPEC	PSL-2KP	14009407	Feb. 22, 2019	One Year	■
17.	DC Power Supply	Protek	PWS-3003D	4020409	Aug. 24, 2018	One Year	■