



## MEASUREMENT REPORT

### FCC PART 15.247 & IC RSS-247 Bluetooth

---


**FCC ID:** VPYLBEE59B1LV  
**IC:** 772C-LBEE59B1LV  
**APPLICANT:** Murata Manufacturing Co., Ltd.  
  
**Application Type:** Certification  
**Product:** Communication Module  
**Model No.:** Type1LV  
**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter(DSS)  
**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)  
**IC Rule(s):** RSS-247 Issue 2, RSS-GEN Issue 5  
**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v05r01  
**Test Date:** March 01 ~ March 07, 2019

Reviewed By:



( Kevin Guo )

Approved By:



( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 1901WSU002-U4 | Rev. 01 | Initial Report | 03-28-2019 | Valid |
|               |         |                |            |       |

## CONTENTS

| Description                                                  | Page      |
|--------------------------------------------------------------|-----------|
| <b>1. INTRODUCTION .....</b>                                 | <b>7</b>  |
| 1.1. Scope .....                                             | 7         |
| 1.2. MRT Test Location .....                                 | 7         |
| <b>2. PRODUCT INFORMATION .....</b>                          | <b>8</b>  |
| 2.1. Feature of Equipment under Test .....                   | 8         |
| 2.2. Product Specification Subjective to this Standard ..... | 8         |
| 2.3. Operation Frequency / Channel List .....                | 9         |
| 2.4. Pseudorandom Frequency Hopping Sequence.....            | 10        |
| 2.5. Description of Test Software .....                      | 10        |
| 2.6. Test Configuration .....                                | 10        |
| 2.7. EMI Suppression Device(s)/Modifications.....            | 10        |
| 2.8. Labeling Requirements.....                              | 11        |
| <b>3. DESCRIPTION of TEST .....</b>                          | <b>12</b> |
| 3.1. Evaluation Procedure .....                              | 12        |
| 3.2. AC Line Conducted Emissions .....                       | 12        |
| 3.3. Radiated Emissions .....                                | 13        |
| <b>4. TEST EQUIPMENT CALIBRATION DATE .....</b>              | <b>14</b> |
| <b>5. MEASUREMENT UNCERTAINTY .....</b>                      | <b>16</b> |
| <b>6. TEST RESULT .....</b>                                  | <b>17</b> |
| 6.1. Summary .....                                           | 17        |
| 6.2. 20dB Bandwidth Measurement.....                         | 18        |
| 6.2.1. Test Limit .....                                      | 18        |
| 6.2.2. Test Procedure used .....                             | 18        |
| 6.2.3. Test Setting .....                                    | 18        |
| 6.2.4. Test Setup.....                                       | 18        |
| 6.2.5. Test Result.....                                      | 19        |
| 6.3. Output Power Measurement .....                          | 22        |
| 6.3.1. Test Limit .....                                      | 22        |
| 6.3.2. Test Procedure Used .....                             | 22        |
| 6.3.3. Test Setting .....                                    | 22        |
| 6.3.4. Test Setup.....                                       | 22        |
| 6.3.5. Test Result.....                                      | 23        |
| 6.4. Carrier Frequency Separation Measurement .....          | 27        |
| 6.4.1. Test Limit .....                                      | 27        |

|         |                                                 |    |
|---------|-------------------------------------------------|----|
| 6.4.2.  | Test Procedure Used .....                       | 27 |
| 6.4.3.  | Test Setting .....                              | 27 |
| 6.4.4.  | Test Setup.....                                 | 27 |
| 6.4.5.  | Test Result.....                                | 28 |
| 6.5.    | Number of Hopping Channels Measurement .....    | 31 |
| 6.5.1.  | Test Limit .....                                | 31 |
| 6.5.2.  | Test Procedure Used .....                       | 31 |
| 6.5.3.  | Test Setting .....                              | 31 |
| 6.5.4.  | Test Setup.....                                 | 31 |
| 6.5.5.  | Test Result.....                                | 32 |
| 6.6.    | Time of Occupancy Measurement .....             | 35 |
| 6.6.1.  | Test Limit .....                                | 35 |
| 6.6.2.  | Test Procedure Used .....                       | 35 |
| 6.6.3.  | Test Setting .....                              | 35 |
| 6.6.4.  | Test Setup.....                                 | 35 |
| 6.6.5.  | Test Result.....                                | 36 |
| 6.7.    | Band-edge Compliance Measurement.....           | 38 |
| 6.7.1.  | Test Limit .....                                | 38 |
| 6.7.2.  | Test Procedure Used .....                       | 38 |
| 6.7.3.  | Test Setting .....                              | 38 |
| 6.7.4.  | Test Setup.....                                 | 39 |
| 6.7.5.  | Test Result.....                                | 40 |
| 6.8.    | Conducted Spurious Emissions Measurement.....   | 43 |
| 6.8.1.  | Test Limit .....                                | 43 |
| 6.8.2.  | Test Procedure Used .....                       | 43 |
| 6.8.3.  | Test Setting .....                              | 43 |
| 6.8.4.  | Test Setup.....                                 | 44 |
| 6.8.5.  | Test Result.....                                | 45 |
| 6.9.    | Radiated Spurious Emission Measurement .....    | 48 |
| 6.9.1.  | Test Limit .....                                | 48 |
| 6.9.2.  | Test Procedure Used .....                       | 48 |
| 6.9.3.  | Test Setting .....                              | 48 |
| 6.9.4.  | Test Setup.....                                 | 50 |
| 6.9.5.  | Test Result.....                                | 51 |
| 6.10.   | Radiated Restricted Band Edge Measurement ..... | 62 |
| 6.10.1. | Test Limit .....                                | 62 |
| 6.10.2. | Test Procedure Used .....                       | 65 |
| 6.10.3. | Test Setting .....                              | 65 |

---

|           |                                                |           |
|-----------|------------------------------------------------|-----------|
| 6.10.4.   | Test Setup.....                                | 66        |
| 6.10.5.   | Test Result.....                               | 67        |
| 6.11.     | AC Conducted Emissions Measurement.....        | 91        |
| 6.11.1.   | Test Limit .....                               | 91        |
| 6.11.2.   | Test Setup.....                                | 91        |
| 6.11.3.   | Test Result.....                               | 91        |
| <b>7.</b> | <b>CONCLUSION.....</b>                         | <b>92</b> |
|           | <b>Appendix A – Test Setup Photograph.....</b> | <b>93</b> |
|           | <b>Appendix B – EUT Photograph .....</b>       | <b>94</b> |

## §2.1033 General Information

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>              | Murata Manufacturing Co., Ltd.                                                                                                  |
| <b>Applicant Address:</b>      | 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan                                                              |
| <b>Manufacturer:</b>           | Murata Manufacturing Co., Ltd.                                                                                                  |
| <b>Manufacturer Address:</b>   | 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan                                                              |
| <b>Test Site:</b>              | MRT Technology (Suzhou) Co., Ltd                                                                                                |
| <b>Test Site Address:</b>      | D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China                      |
| <b>FCC Registration No.:</b>   | 893164                                                                                                                          |
| <b>IC Registration No.:</b>    | 11384A-1                                                                                                                        |
| <b>Test Device Serial No.:</b> | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

|                         |                                |
|-------------------------|--------------------------------|
| Product Name:           | Communication Module           |
| Model No.:              | Type1LV                        |
| Brand Name:             | Murata                         |
| Work Voltage            | DC 3.3V                        |
| WiFi Specification      | 802.11 a/b/g/n/ac              |
| Bluetooth Specification | BR / EDR / LE 1Mbps / LE 2Mbps |

Note: Work voltage of test fixture is DC 5V.

### 2.2. Product Specification Subjective to this Standard

|                     |                                               |
|---------------------|-----------------------------------------------|
| Operating Frequency | 2402~2480MHz                                  |
| Channel Number      | 79                                            |
| Type of modulation  | GFSK, Pi/4 DQPSK, 8DPSK                       |
| Data Rate           | 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK) |
| Antenna type        | PCB Antenna                                   |
| Antenna Gain        | 0.9dBi                                        |

The equipment under test (EUT) is the **Communication Module**. The test data contained in this report pertains only to the emissions due to the EUT's Bluetooth transmitter.

- 15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.
- 15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.
- 15.247(h): The EUT employs Adaptive Frequency Hopping (AFH) which identifies sources of interference namely devices operating in 802.11 WLAN and excludes them from the list of available channels. The process of re-mapping reduces the number of test channels from 79 channels to a minimum number of 20 channels.


### 2.3. Operation Frequency / Channel List

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 00      | 2402 MHz  | 01      | 2403 MHz  | 02      | 2404 MHz  |
| 03      | 2405 MHz  | 04      | 2406 MHz  | 05      | 2407 MHz  |
| 06      | 2408 MHz  | 07      | 2409 MHz  | 08      | 2410 MHz  |
| 09      | 2411 MHz  | 10      | 2412 MHz  | 11      | 2413 MHz  |
| 12      | 2414 MHz  | 13      | 2415 MHz  | 14      | 2416 MHz  |
| 15      | 2417 MHz  | 16      | 2418 MHz  | 17      | 2419 MHz  |
| 18      | 2420 MHz  | 19      | 2421 MHz  | 20      | 2422 MHz  |
| 21      | 2423 MHz  | 22      | 2424 MHz  | 23      | 2425 MHz  |
| 24      | 2426 MHz  | 25      | 2427 MHz  | 26      | 2428 MHz  |
| 27      | 2429 MHz  | 28      | 2430 MHz  | 29      | 2431 MHz  |
| 30      | 2432 MHz  | 31      | 2433 MHz  | 32      | 2434 MHz  |
| 33      | 2435 MHz  | 34      | 2436 MHz  | 35      | 2437 MHz  |
| 36      | 2438 MHz  | 37      | 2439 MHz  | 38      | 2440 MHz  |
| 39      | 2441 MHz  | 40      | 2442 MHz  | 41      | 2443 MHz  |
| 42      | 2444 MHz  | 43      | 2445 MHz  | 44      | 2446 MHz  |
| 45      | 2447 MHz  | 46      | 2448 MHz  | 47      | 2449 MHz  |
| 48      | 2450 MHz  | 49      | 2451 MHz  | 50      | 2452 MHz  |
| 51      | 2453 MHz  | 52      | 2454 MHz  | 53      | 2455 MHz  |
| 54      | 2456 MHz  | 55      | 2457 MHz  | 56      | 2458 MHz  |
| 57      | 2459 MHz  | 58      | 2460 MHz  | 59      | 2461 MHz  |
| 60      | 2462 MHz  | 61      | 2463 MHz  | 62      | 2464 MHz  |
| 63      | 2465 MHz  | 64      | 2466 MHz  | 65      | 2467 MHz  |
| 66      | 2468 MHz  | 67      | 2469 MHz  | 68      | 2470 MHz  |
| 69      | 2471 MHz  | 70      | 2472 MHz  | 71      | 2473 MHz  |
| 72      | 2474 MHz  | 73      | 2475 MHz  | 74      | 2476 MHz  |
| 75      | 2477 MHz  | 76      | 2478 MHz  | 77      | 2479 MHz  |
| 78      | 2480 MHz  | -       | -         | -       | -         |

## 2.4. Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

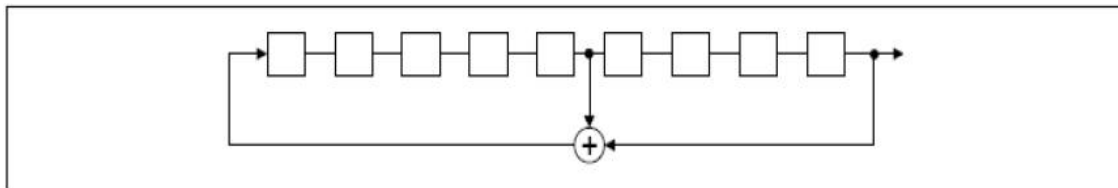

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

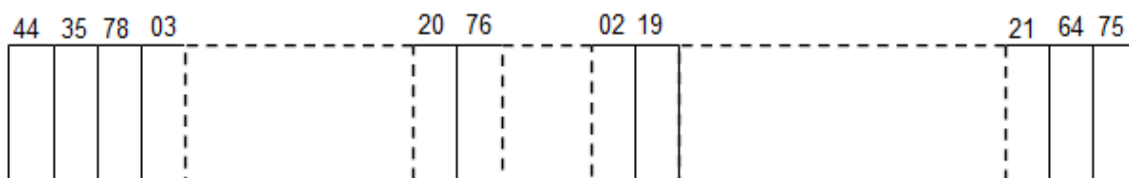

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 2.5. Description of Test Software

The test utility software used during testing was “Tera Term”, and the version was “v4.78”.

## 2.6. Test Configuration

The **Communication Module** was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.8. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labelling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labelling option, see Notice 2014–DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10 -2013), and the "Filing was used in the measurement of the device.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150KHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beamwidth of horn antenna, the horn antenna should be always directed to the EUT when rising height.

#### 4. TEST EQUIPMENT CALIBRATION DATE

##### Conducted Emissions - SR2

| Instrument                 | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR3        | MRTSUE06185 | 1 year         | 2019/04/20     |
| Two-Line V-Network         | R&S          | ENV 216     | MRTSUE06002 | 1 year         | 2019/06/15     |
| Two-Line V-Network         | R&S          | ENV 216     | MRTSUE06003 | 1 year         | 2019/06/15     |
| Thermohygrometer           | Testo        | 608-H1      | MRTSUE06404 | 1 year         | 2019/08/15     |
| Shielding Anechoic Chamber | Mikebang     | Chamber-SR2 | MRTSUE06214 | N/A            | N/A            |

##### Conducted Test Equipment - TR3

| Instrument                     | Manufacturer | Type No.   | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------------------|--------------|------------|-------------|----------------|----------------|
| EXA Signal Analyzer            | KEYSIGHT     | N9010B     | MRTSUE06452 | 1 year         | 2019/07/20     |
| Spectrum Analyzer              | Agilent      | N9020A     | MRTSUE06106 | 1 year         | 2019/04/20     |
| USB wideband power sensor      | KEYSIGHT     | U2021XA    | MRTSUE06446 | 1 year         | 2019/07/20     |
| Attenuator                     | MVE          | MVE2211-10 | MRTSUE06800 | 1 year         | 2019/07/10     |
| Temperature & Humidity Chamber | BAOYT        | BYH-150CL  | MRTSUE06051 | 1 year         | 2019/12/06     |
| Thermohygrometer               | testo        | 608-H1     | MRTSUE06401 | 1 year         | 2019/08/15     |

##### Radiated Emissions - AC1

| Instrument                       | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver                | R&S          | ESR7        | MRTSUE06001 | 1 year         | 2019/08/14     |
| PXA Signal Analyzer              | Keysight     | 9030B       | MRTSUE06395 | 1 year         | 2019/09/14     |
| Loop Antenna                     | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2019/11/20     |
| Bilog Period Antenna             | Schwarzbeck  | VULB 9168   | MRTSUE06172 | 1 year         | 2019/04/12     |
| Broad Band Horn Antenna          | Schwarzbeck  | BBHA 9120D  | MRTSUE06023 | 1 year         | 2019/10/20     |
| Broad Band Horn Antenna          | Schwarzbeck  | BBHA 9170   | MRTSUE06024 | 1 year         | 2019/12/17     |
| Broadband Coaxial Preamplifier   | Agilent      | 83017A      | MRTSUE06076 | 1 year         | 2019/11/16     |
| Preamplifier                     | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2019/06/12     |
| Digital Thermometer & Hygrometer | Testo        | 608-H1      | MRTSUE06403 | 1 year         | 2019/08/15     |
| Anechoic Chamber                 | TDK          | Chamber-AC1 | MRTSUE06213 | 1 year         | 2019/05/02     |

## Radiated Emissions - AC2

| Instrument                        | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|-----------------------------------|--------------|-------------|-------------|----------------|----------------|
| Spectrum Analyzer                 | Keysight     | N9038A      | MRTSUE06125 | 1 year         | 2019/08/14     |
| Loop Antenna                      | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2019/11/09     |
| Bilog Period Antenna              | Schwarzbeck  | VULB 9162   | MRTSUE06022 | 1 year         | 2019/10/20     |
| Horn Antenna                      | Schwarzbeck  | BBHA9120D   | MRTSUE06171 | 1 year         | 2019/11/09     |
| Broadband Horn Antenna            | Schwarzbeck  | BBHA9170    | MRTSUE06024 | 1 year         | 2019/12/17     |
| Broadband Coaxial<br>Preamplifier | Schwarzbeck  | BBV 9718    | MRTSUE06176 | 1 year         | 2019/11/16     |
| Preamplifier                      | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2019/06/13     |
| Temperature/Humidity Meter        | Minggao      | ETH529      | MRTSUE06170 | 1 year         | 2019/12/13     |
| Anechoic Chamber                  | RIKEN        | Chamber-AC2 | MRTSUE06213 | 1 year         | 2019/05/02     |

| Software | Version | Function          |
|----------|---------|-------------------|
| e3       | V 8.3.5 | EMI Test Software |

## 5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission Measurement - SR2</b>                                                                        |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>150kHz~30MHz: 3.46dB                        |
| <b>Radiated Emission Measurement - AC1</b>                                                                            |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>9kHz ~ 1GHz: 4.18dB<br>1GHz ~ 25GHz: 4.76dB |
| <b>Radiated Emission Measurement - AC2</b>                                                                            |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>9kHz ~ 1GHz: 3.86dB<br>1GHz ~ 25GHz: 4.33dB |
| <b>Spurious Emissions, Conducted - TR3</b>                                                                            |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.78dB                                      |
| <b>Output Power - TR3</b>                                                                                             |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.13dB                                      |
| <b>Power Spectrum Density - TR3</b>                                                                                   |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>1.15dB                                      |
| <b>Occupied Bandwidth - TR3</b>                                                                                       |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ):<br>0.28%                                       |

## 6. TEST RESULT

### 6.1. Summary

**Company Name:** Murata Manufacturing Co., Ltd.  
**FCC ID:** VPYLBEE59B1LV  
**IC:** 772C-LBEE59B1LV

| FCC Part Section(s) | IC Section(s)    | Test Description                                                                 | Test Limit                                                                     | Test Condition | Test Result | Reference                   |
|---------------------|------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-----------------------------|
| 15.247(a)(1)        | RSS-247 [5.1]    | 20dB Bandwidth                                                                   | N/A                                                                            | Conducted      | PASS        | Section 6.2                 |
| 15.247(b)(1)        | RSS-247 [5.4(b)] | Peak Transmitter Output Power                                                    | <0.125 Watt                                                                    |                | PASS        | Section 6.3                 |
| 15.247(a)(1)        | RSS-247 [5.1]    | Channel Separation                                                               | > 2/3 of 20 dB BW for systems with Output Power < 125mW                        |                | PASS        | Section 6.4                 |
| 15.247(a)(1) (iii)  | RSS-247 [5.1]    | Number of Channels                                                               | > 15 Channels                                                                  |                | PASS        | Section 6.5                 |
| 15.247(a)(1) (iii)  | RSS-247 [5.1]    | Time of Occupancy                                                                | < 0.4 sec in 31.6 sec period                                                   |                | PASS        | Section 6.6                 |
| 15.247(d)           | RSS-247 [5.5]    | Band Edge / out-of-Band Emissions                                                | Conducted $\leq$ 20dBc                                                         |                | PASS        | Section 6.7<br>Section 6.8  |
| 15.205,<br>15.209   | RSS-247 [5.5]    | General Field Strength Limits<br>(Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | PASS        | Section 6.9<br>Section 6.10 |
| 15.207              | RSS-Gen [8.8]    | AC Conducted Emissions<br>150kHz - 30MHz                                         | < FCC 15.207 limits                                                            | Line Conducted | N/A         | Section 6.11                |

#### Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- N/A means Not Applicable.

## 6.2. 20dB Bandwidth Measurement

### 6.2.1. Test Limit

N/A


### 6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.2

### 6.2.3. Test Setting

1. Set RBW  $\geq 1\%$  of the 20dB bandwidth
2. VBW  $\geq 3 \times$  RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


### 6.2.4. Test Setup

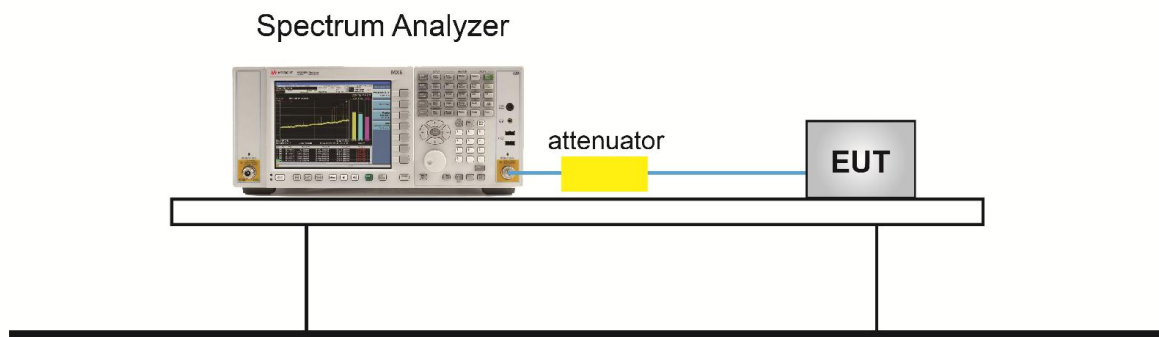

## 6.2.5. Test Result

|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/03/07 |

| Test Mode | Channel No. | Frequency (MHz) | 20dB Bandwidth (kHz) | 99% Bandwidth (kHz) | Result |
|-----------|-------------|-----------------|----------------------|---------------------|--------|
| DH5       | 00          | 2402            | 944.9                | 888.1               | Pass   |
| DH5       | 39          | 2441            | 946.4                | 888.6               | Pass   |
| DH5       | 78          | 2480            | 944.8                | 886.5               | Pass   |
| 2DH5      | 00          | 2402            | 1342.0               | 1191.6              | Pass   |
| 2DH5      | 39          | 2441            | 1344.0               | 1192.5              | Pass   |
| 2DH5      | 78          | 2480            | 1347.0               | 1196.0              | Pass   |
| 3DH5      | 00          | 2402            | 1311.0               | 1199.3              | Pass   |
| 3DH5      | 39          | 2441            | 1310.0               | 1200.7              | Pass   |
| 3DH5      | 78          | 2480            | 1207.2               | 1207.2              | Pass   |

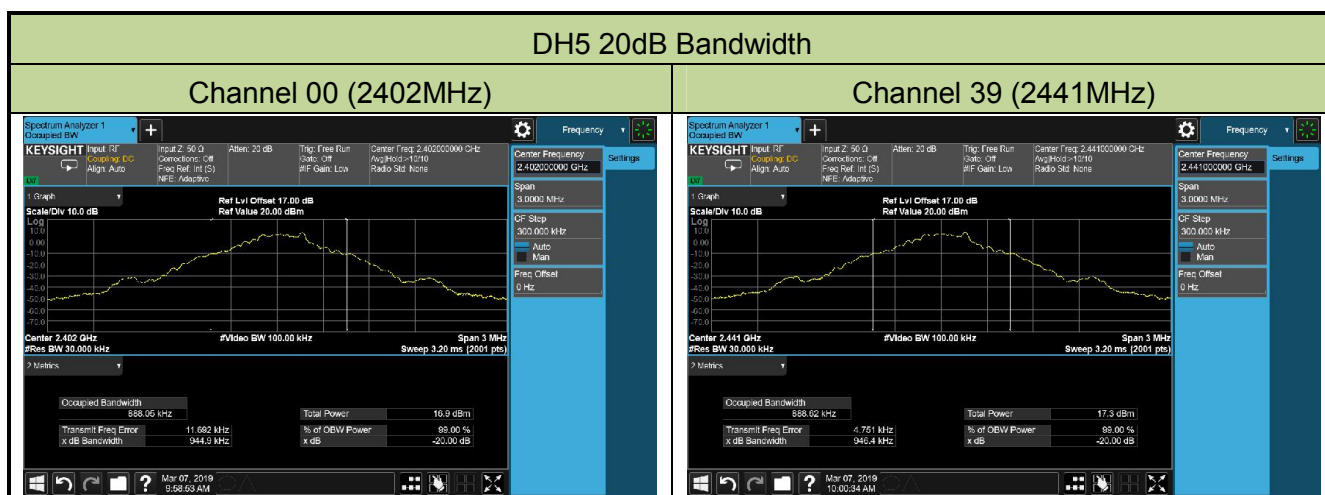

### Channel 78 (2480MHz)



### 2DH5 20dB Bandwidth

### Channel 00 (2402MHz)



### Channel 39 (2441MHz)



### Channel 78 (2480MHz)



## 3DH5 20dB Bandwidth


## Channel 00 (2402MHz)



## Channel 39 (2441MHz)



## Channel 78 (2480MHz)

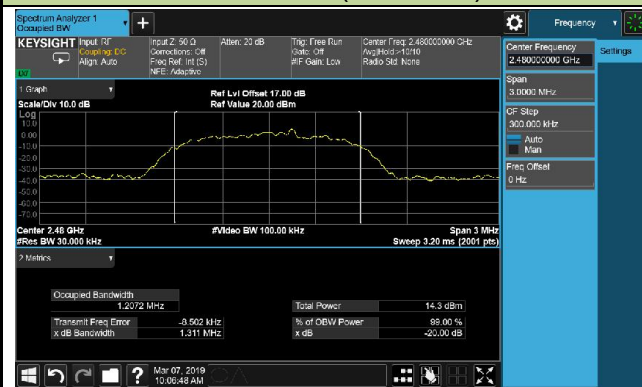

### 6.3. Output Power Measurement

#### 6.3.1. Test Limit

For frequency hopping systems operating in the 2400-2483.5MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band: 0.125 watts.

The e.i.r.p. shall not exceed 4 W


#### 6.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.5

#### 6.3.3. Test Setting

1. Set RBW  $\geq$  the 20 dB bandwidth of the emission being measured.
2. VBW  $\geq 3 \times$  RBW
3. Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss)

#### 6.3.4. Test Setup

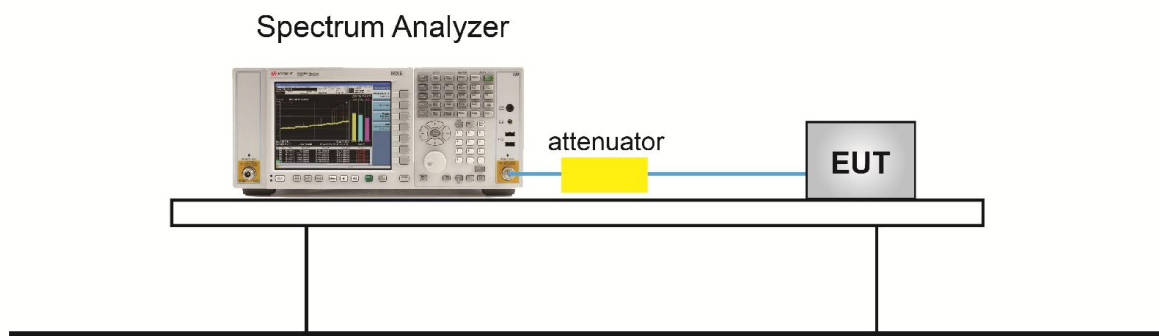

### 6.3.5. Test Result

|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/03/07 |

| Test Mode | Channel No. | Frequency (MHz) | Peak Power (dBm) | Peak Power Limit (dBm) | EIRP (dBm) | EIRP Limit (dBm) | Result |
|-----------|-------------|-----------------|------------------|------------------------|------------|------------------|--------|
| DH5       | 00          | 2402            | 9.59             | ≤ 20.97                | 10.49      | ≤ 36.0           | Pass   |
| DH5       | 39          | 2441            | 9.93             | ≤ 20.97                | 10.83      | ≤ 36.0           | Pass   |
| DH5       | 78          | 2480            | 9.50             | ≤ 20.97                | 10.40      | ≤ 36.0           | Pass   |
| 2DH5      | 00          | 2402            | 7.75             | ≤ 20.97                | 8.65       | ≤ 36.0           | Pass   |
| 2DH5      | 39          | 2441            | 7.76             | ≤ 20.97                | 8.66       | ≤ 36.0           | Pass   |
| 2DH5      | 78          | 2480            | 8.05             | ≤ 20.97                | 8.95       | ≤ 36.0           | Pass   |
| 3DH5      | 00          | 2402            | 8.24             | ≤ 20.97                | 9.14       | ≤ 36.0           | Pass   |
| 3DH5      | 39          | 2441            | 8.20             | ≤ 20.97                | 9.10       | ≤ 36.0           | Pass   |
| 3DH5      | 78          | 2480            | 8.45             | ≤ 20.97                | 9.35       | ≤ 36.0           | Pass   |

Note: EIRP (dBm) = Peak Power (dBm) + Antenna Gain (dBi), Antenna Gain = 0.9 dBi.

## DH5 Output Power

### Channel 00 (2402MHz)



### Channel 39 (2441MHz)



### Channel 78 (2480MHz)



## 2DH5 Output Power

### Channel 00 (2402MHz)



### Channel 39 (2441MHz)



### Channel 78 (2480MHz)



### 3DH5 Output Power

#### Channel 00 (2402MHz)



#### Channel 39 (2441MHz)



#### Channel 78 (2480MHz)



## 6.4. Carrier Frequency Separation Measurement

### 6.4.1. Test Limit

The minimum permissible channel separation for this system is  $\frac{2}{3}$  the value of the 20dB BW.


### 6.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.2

### 6.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. RBW  $\geq 1\%$  of the span
3. VBW  $\geq$  RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.4.4. Test Setup

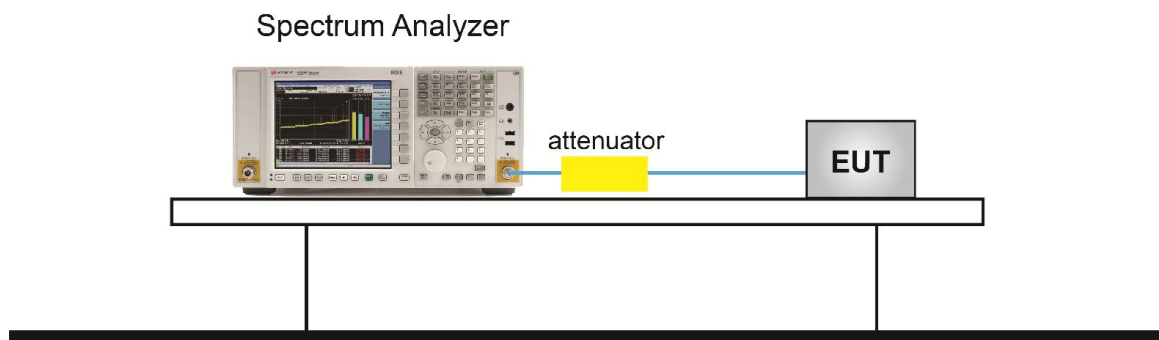

#### 6.4.5. Test Result


|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/03/07 |

| Test Mode | Channel No. | Frequency (MHz) | Limit (kHz)   | Result |
|-----------|-------------|-----------------|---------------|--------|
| DH5       | 00          | 2402            | $\geq 629.93$ | Pass   |
| DH5       | 39          | 2441            | $\geq 630.93$ | Pass   |
| DH5       | 78          | 2480            | $\geq 629.87$ | Pass   |
| 2DH5      | 00          | 2402            | $\geq 894.67$ | Pass   |
| 2DH5      | 39          | 2441            | $\geq 896.00$ | Pass   |
| 2DH5      | 78          | 2480            | $\geq 898.00$ | Pass   |
| 3DH5      | 00          | 2402            | $\geq 874.00$ | Pass   |
| 3DH5      | 39          | 2441            | $\geq 873.33$ | Pass   |
| 3DH5      | 78          | 2480            | $\geq 804.80$ | Pass   |


Note: The Limit is 2/3 the value of the 20dB BW.

## DH5 Carrier Frequency Separation

### Channel 00 (2402MHz)

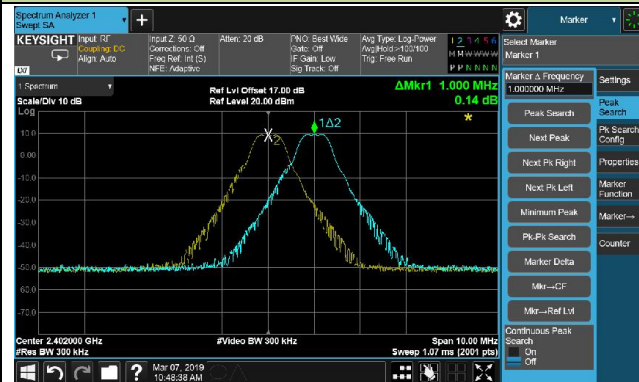

### Channel 39 (2441MHz)

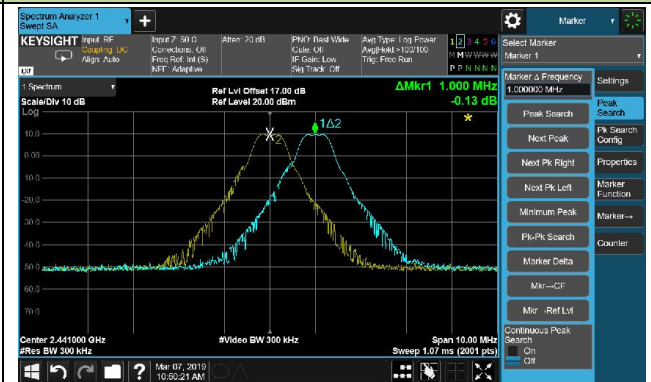


### Channel 78 (2480MHz)




## 2DH5 Carrier Frequency Separation

### Channel 00 (2402MHz)

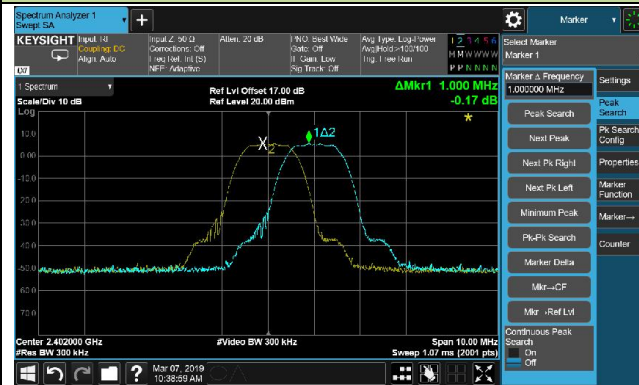

### Channel 39 (2441MHz)

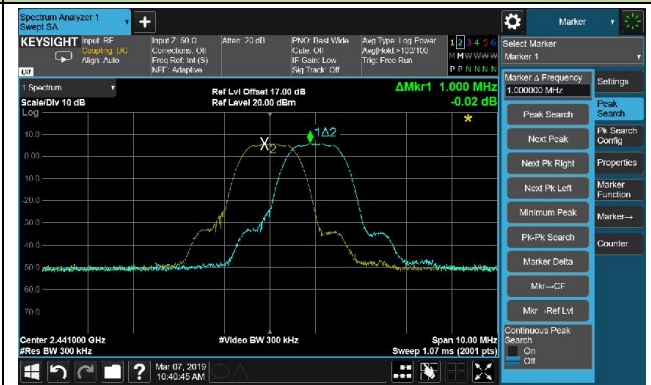


### Channel 78 (2480MHz)



### 3DH5 Carrier Frequency Separation

#### Channel 00 (2402MHz)

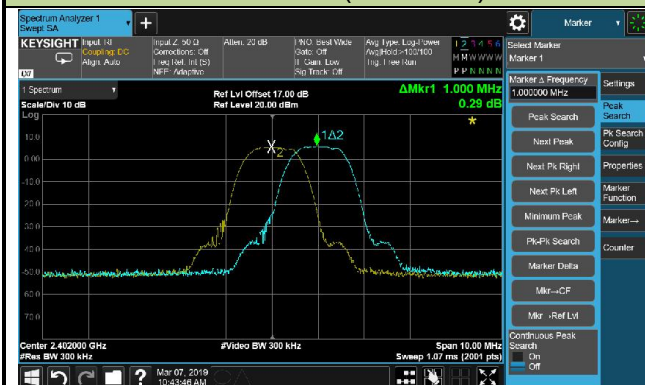

#### Channel 39 (2441MHz)



#### Channel 78 (2480MHz)



## 6.5. Number of Hopping Channels Measurement

### 6.5.1. Test Limit

This frequency hopping system must employ a minimum of 15 hopping channels.


### 6.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.3

### 6.5.3. Test Setting

1. Span = the frequency band of operation.
2. RBW  $\geq$  1 % of the span
3. VBW  $\geq$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize


### 6.5.4. Test Setup

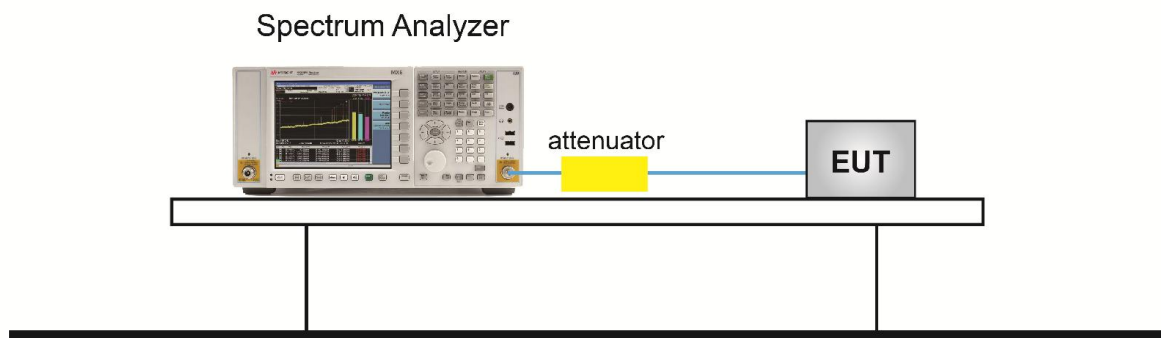

### 6.5.5. Test Result


|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/09/07 |

| Test Mode (Hopping) | Channel Numbers | Frequency (MHz) | Limit (Hopping Channels) | Result |
|---------------------|-----------------|-----------------|--------------------------|--------|
| DH5                 | 79              | 2402~2480       | $\geq 15$                | Pass   |
| 2DH5                | 79              | 2402~2480       | $\geq 15$                | Pass   |
| 3DH5                | 79              | 2402~2480       | $\geq 15$                | Pass   |

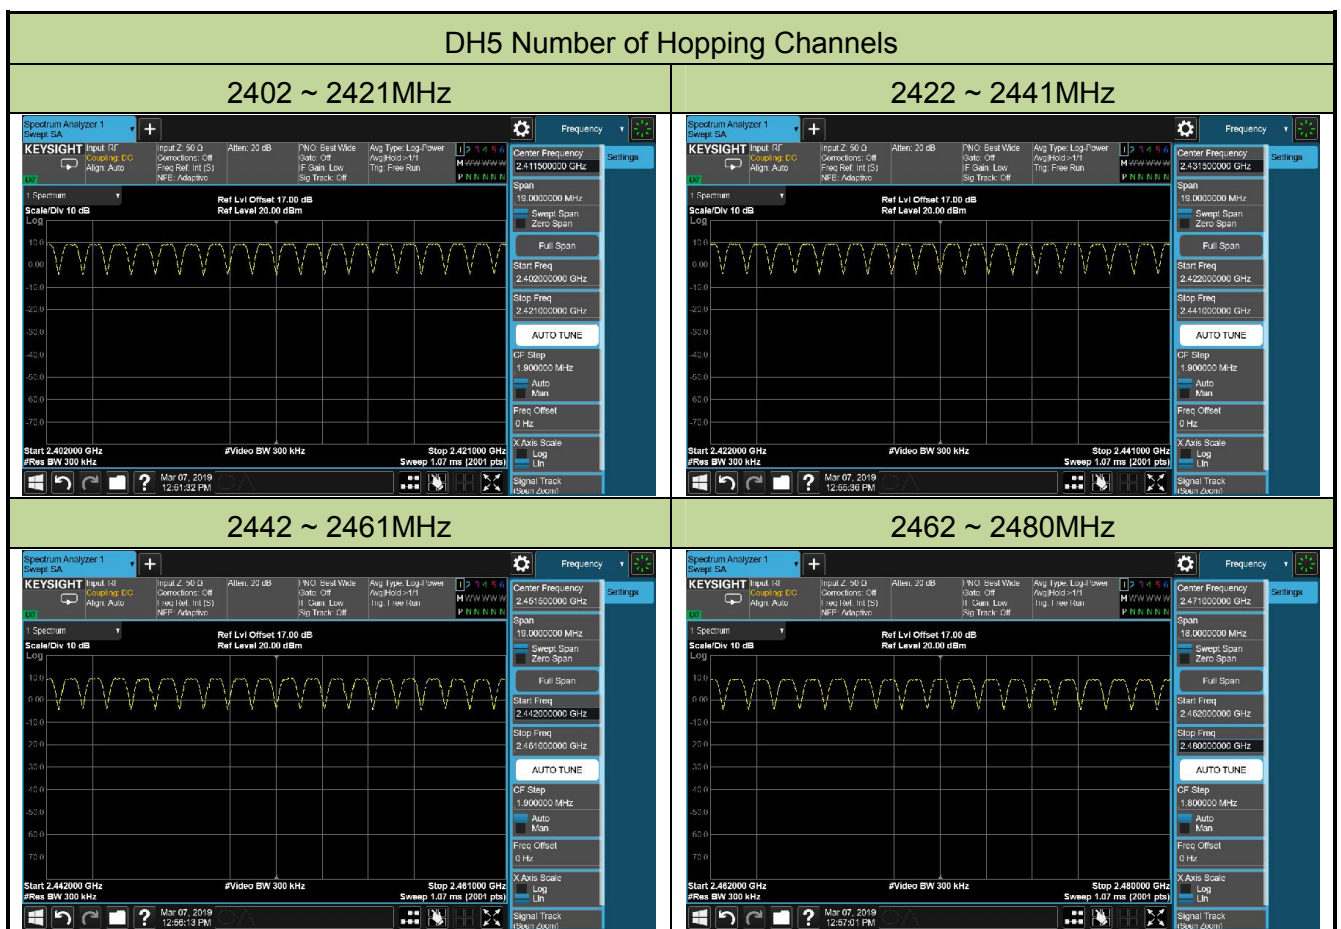


## 2DH5 Number of Hopping Channels

2402 ~ 2421MHz

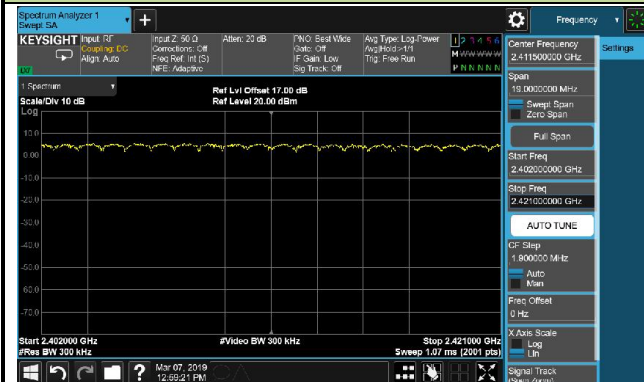


2422 ~ 2441MHz

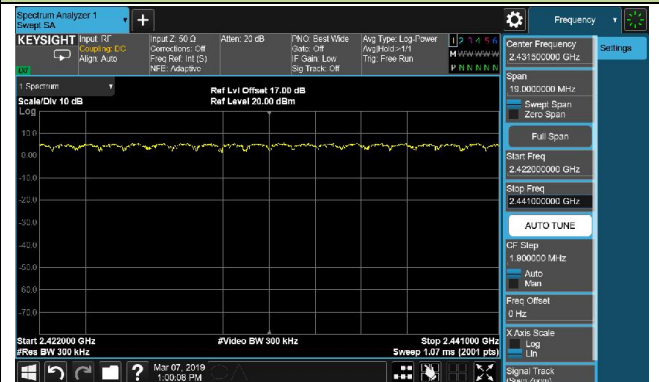

2442 ~ 2461MHz



2462 ~ 2480MHz

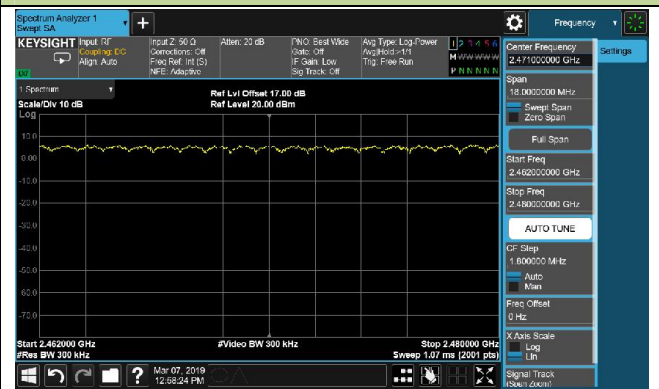


### 3DH5 Number of Hopping Channels

2402 ~ 2421MHz



2422 ~ 2441MHz

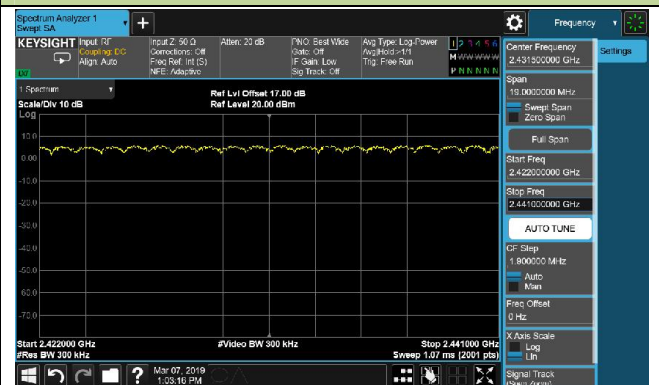

2442 ~ 2461MHz



2462 ~ 2480MHz



## 6.6. Time of Occupancy Measurement

### 6.6.1. Test Limit

The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.


### 6.6.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.4

### 6.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW = 1MHz
3. VBW  $\geq$  RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold
7. If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (data rate, modulation format, etc.), repeat this test for each variation. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


### 6.6.4. Test Setup

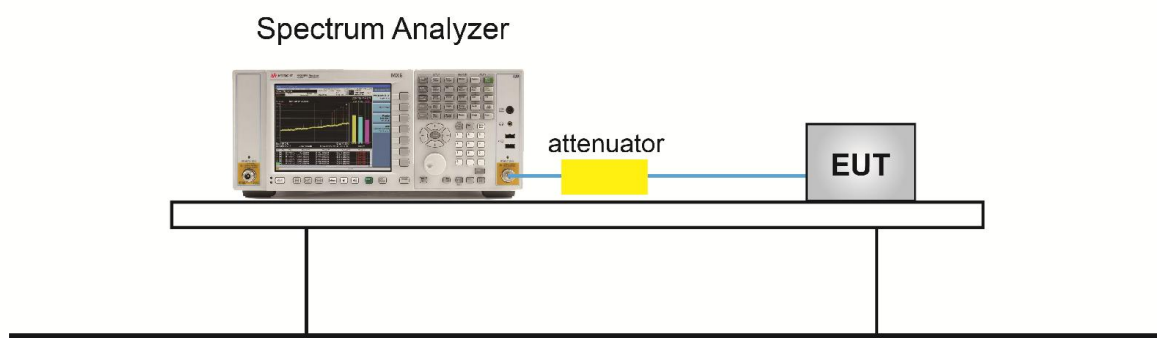

### 6.6.5. Test Result

|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/03/07 |

| Test Mode | Channel No. | Frequency (MHz) | Hops Over Occupancy Time(Hops) | Packet Transfer Time (ms) | Time of Occupancy (ms) | Limit (ms) | Result |
|-----------|-------------|-----------------|--------------------------------|---------------------------|------------------------|------------|--------|
| 3DH1      | 39          | 2441            | 320                            | 0.38                      | 121.6                  | < 400      | Pass   |
| 3DH3      | 39          | 2441            | 160                            | 1.64                      | 262.4                  | < 400      | Pass   |
| 3DH5      | 39          | 2441            | 107                            | 2.88                      | 308.2                  | < 400      | Pass   |

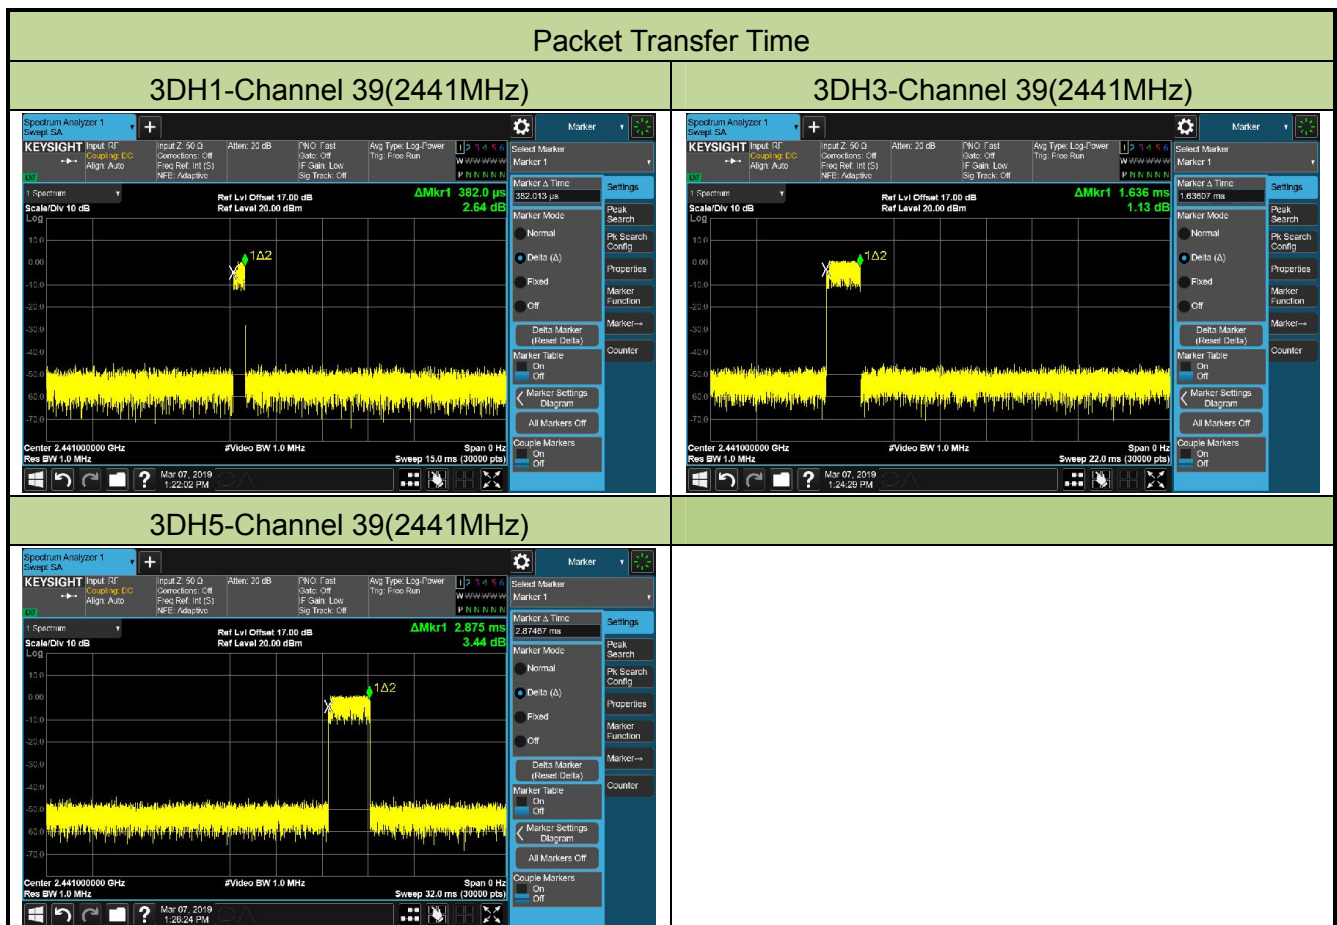

Note 1: According the Bluetooth Standard Specification, the nominal hop rate is 1600 hops/s. All

Bluetooth unit participating in the piconet are time and hop synchronized to the channel.

Hops Over Occupancy Time in 31.6s for 3DH1 =  $1600 / 2 / 79 * 31.6 = 320$ .

Hops Over Occupancy Time in 31.6s for 3DH3 =  $1600 / 4 / 79 * 31.6 = 160$ .

Hops Over Occupancy Time in 31.6s for 3DH5 =  $1600 / 6 / 79 * 31.6 = 107$ .

Note 2: Time of Occupancy = Packet Transfer Time \* Hops Over Occupancy Time in 31.6s.

## **6.7. Band-edge Compliance Measurement**

### **6.7.1. Test Limit**

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


### **6.7.2. Test Procedure Used**

ANSI C63.10-2013 - Section 6.10.4

### **6.7.3. Test Setting**

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW  $\geq$  1% of spectrum analyzer display span
3. VBW  $\geq$  RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

### 6.7.4. Test Setup

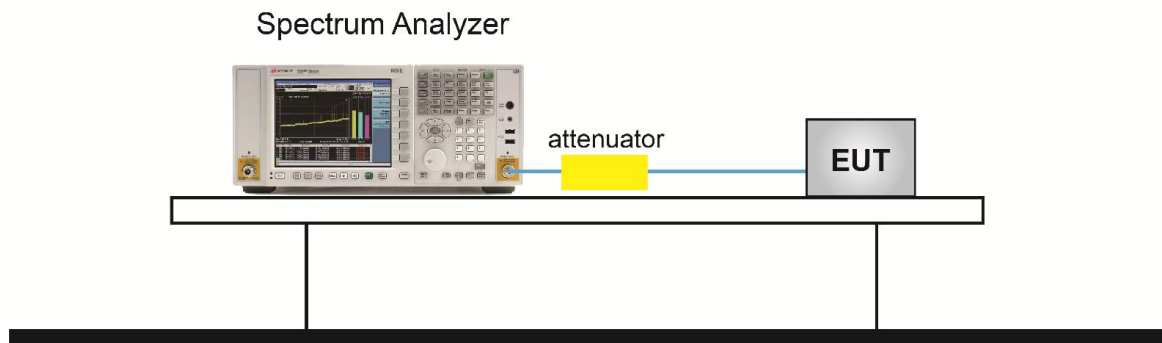

### 6.7.5. Test Result

|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/03/07 |


| Test Mode | Channel No. | Frequency (MHz) | Limit | Result |
|-----------|-------------|-----------------|-------|--------|
| DH5       | 00          | 2402            | 20dBc | Pass   |
| DH5       | 78          | 2480            | 20dBc | Pass   |
| 2DH5      | 00          | 2402            | 20dBc | Pass   |
| 2DH5      | 78          | 2480            | 20dBc | Pass   |
| 3DH5      | 00          | 2402            | 20dBc | Pass   |
| 3DH5      | 78          | 2480            | 20dBc | Pass   |

## DH5 Band-edge Compliance

### Channel 00 (2402MHz)



### Channel 78 (2480MHz)

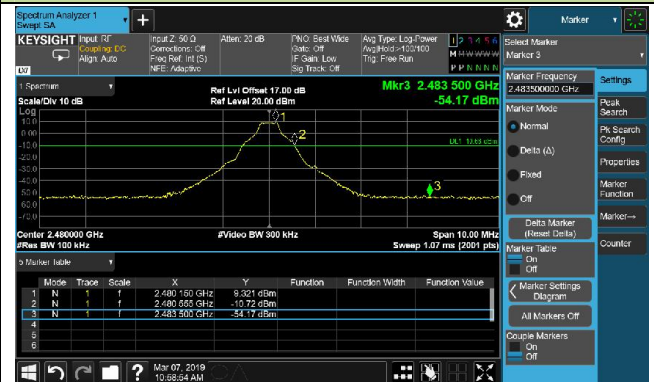

## 2DH5 Band-edge Compliance

### Channel 00 (2402MHz)



### Channel 78 (2480MHz)



## 3DH5 Band-edge Compliance

### Channel 00 (2402MHz)




### Channel 78 (2480MHz)




## DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

### Channel 00 (2402MHz)

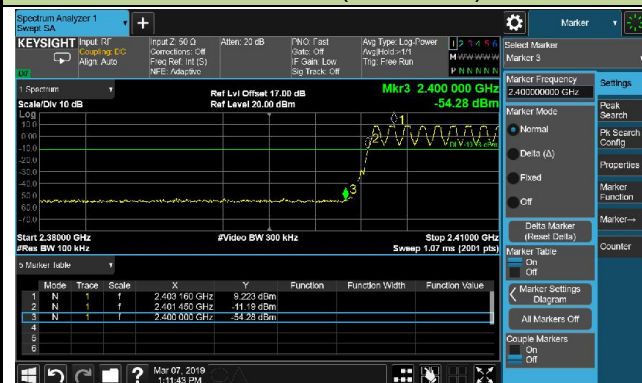

### Channel 78 (2480MHz)

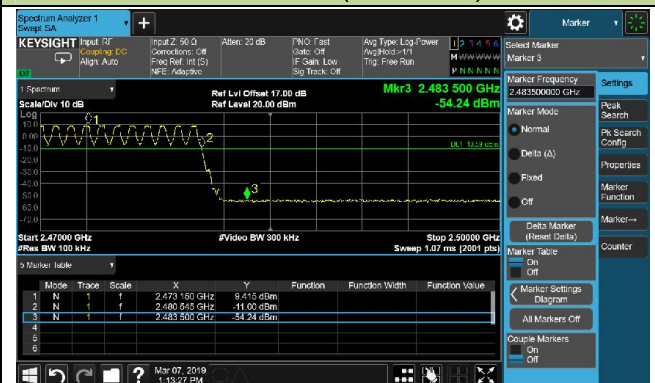

## 2DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

### Channel 00 (2402MHz)




### Channel 78 (2480MHz)



## DH5 Operation Frequency Range of 20dB Bandwidth within Hopping Mode

### Channel 00 (2402MHz)

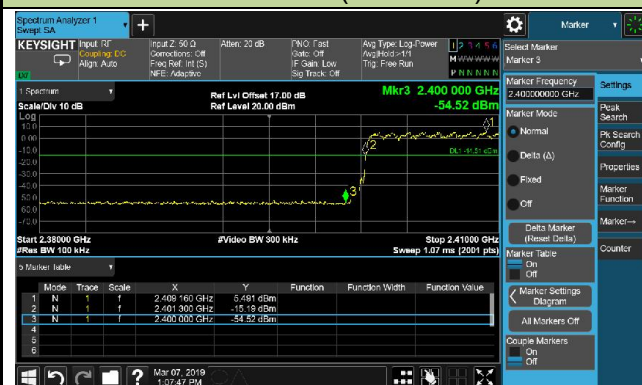

### Channel 78 (2480MHz)



## **6.8. Conducted Spurious Emissions Measurement**

### **6.8.1. Test Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### **6.8.2. Test Procedure Used**

ANSI C63.10-2013 - Section 7.8.8

### **6.8.3. Test Setting**

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.  
Typically, several plots are required to cover this entire span.
2. RBW = 100 KHz
3. VBW  $\geq$  RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


#### 6.8.4. Test Setup

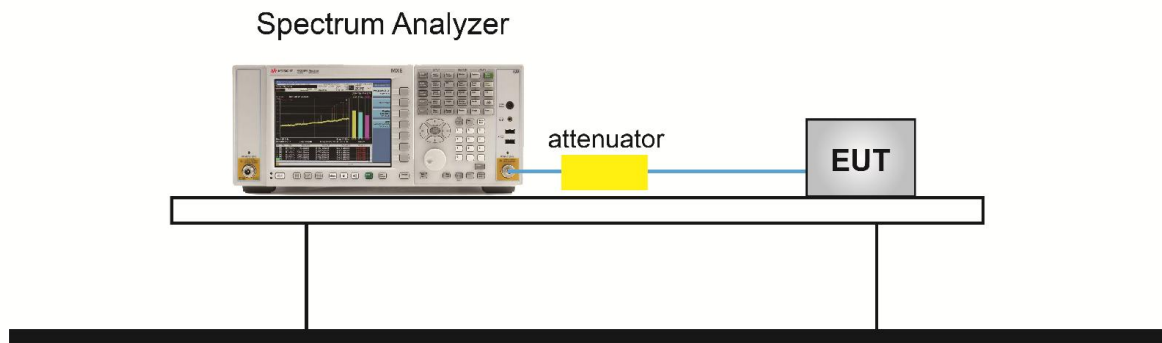

### 6.8.5. Test Result

|               |                      |                   |            |
|---------------|----------------------|-------------------|------------|
| Product       | Communication Module | Temperature       | 25°C       |
| Test Engineer | Dandy Li             | Relative Humidity | 52%        |
| Test Site     | TR3                  | Test Date         | 2019/03/07 |

| Test Mode | Channel No. | Frequency (MHz) | Limit (MHz) | Result |
|-----------|-------------|-----------------|-------------|--------|
| DH5       | 00          | 2402            | 20dBc       | Pass   |
| DH5       | 39          | 2441            | 20dBc       | Pass   |
| DH5       | 78          | 2480            | 20dBc       | Pass   |
| 2DH5      | 00          | 2402            | 20dBc       | Pass   |
| 2DH5      | 39          | 2441            | 20dBc       | Pass   |
| 2DH5      | 78          | 2480            | 20dBc       | Pass   |
| 3DH5      | 00          | 2402            | 20dBc       | Pass   |
| 3DH5      | 39          | 2441            | 20dBc       | Pass   |
| 3DH5      | 78          | 2480            | 20dBc       | Pass   |

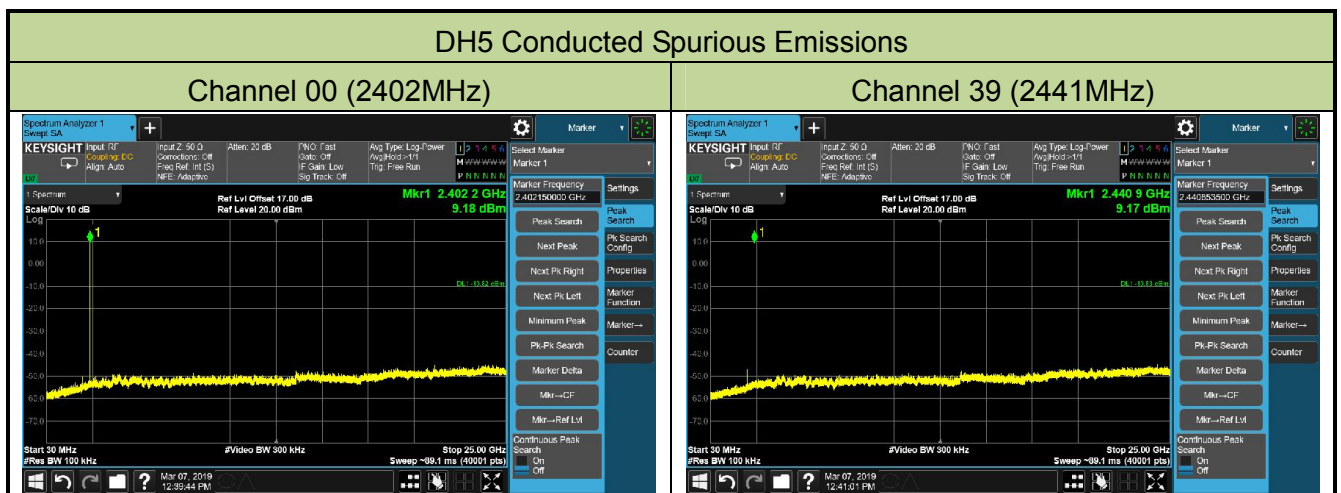


### Channel 78 (2480MHz)




### 2DH5 Conducted Spurious Emissions


### Channel 00 (2402MHz)

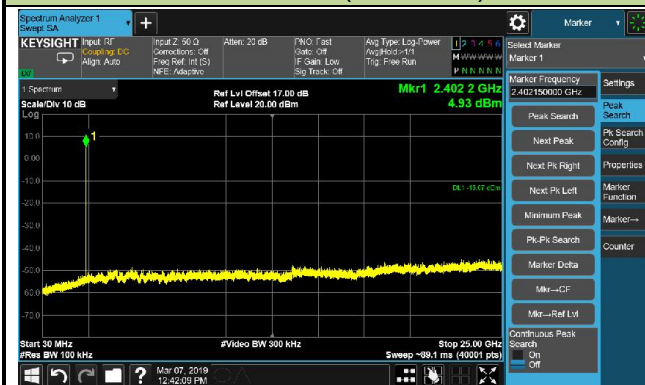

### Channel 39 (2441MHz)

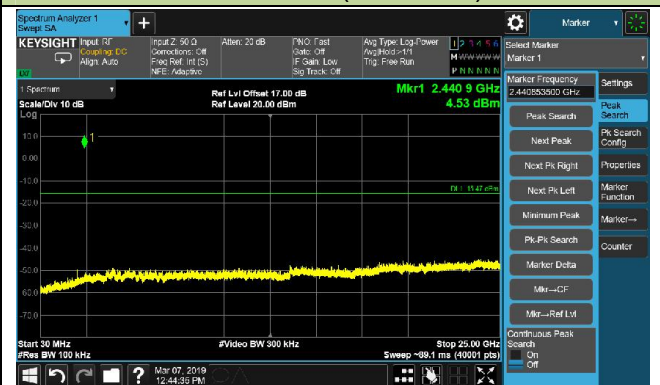


### Channel 78 (2480MHz)

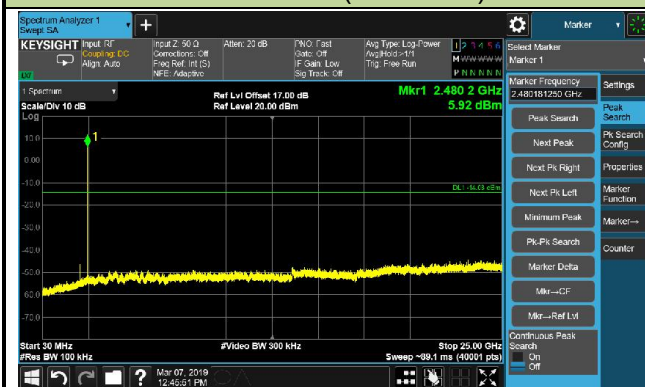


### 3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

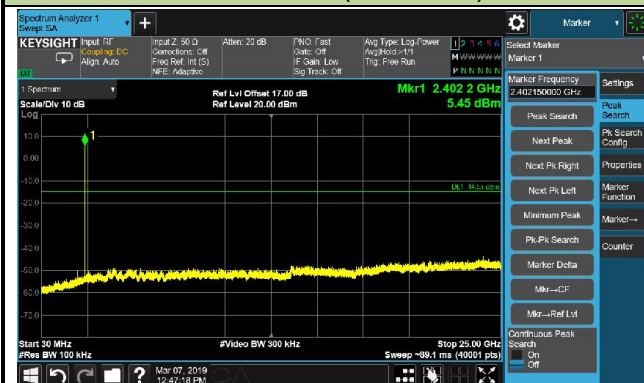

Channel 39 (2441MHz)

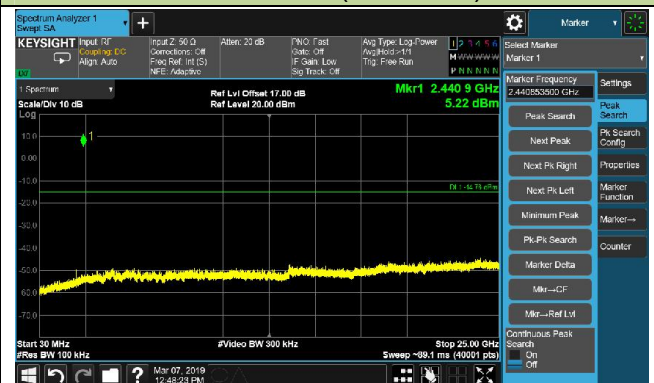

Channel 78 (2480MHz)

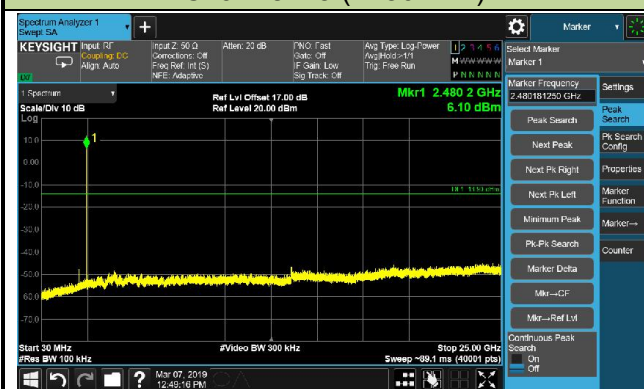

## 6.9. Radiated Spurious Emission Measurement

### 6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 6.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 6.9.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 6.9.4. Test Setup

##### Below 1GHz Test Setup:

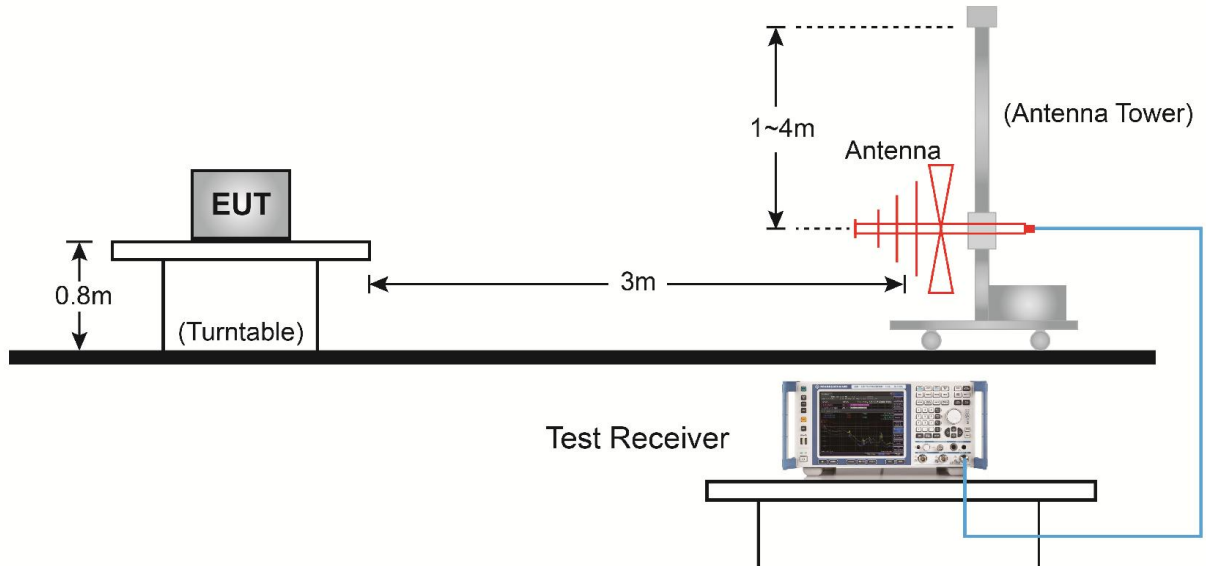

##### Above 1GHz Test Setup:

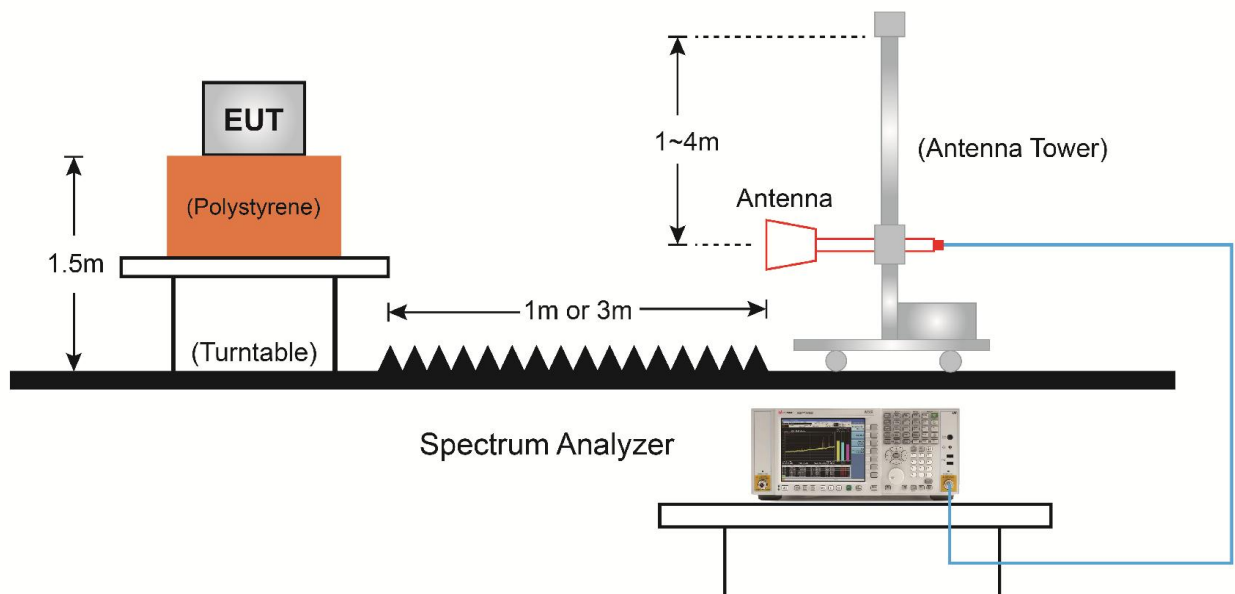

### 6.9.5. Test Result

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | DH5                                                                                                                                                                               | Test Channel:     | 00         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4808.0          | 37.9                 | 5.9         | 43.8                   | 74.0           | -30.2       | Peak     | Horizontal   |
|      | 7451.5          | 36.8                 | 12.9        | 49.7                   | 74.0           | -24.3       | Peak     | Horizontal   |
| *    | 9942.0          | 35.0                 | 16.8        | 51.8                   | 82.8           | -31.0       | Peak     | Horizontal   |
| *    | 10375.5         | 34.6                 | 17.4        | 52.0                   | 82.8           | -30.8       | Peak     | Horizontal   |
|      | 4255.5          | 37.6                 | 4.2         | 41.8                   | 74.0           | -32.2       | Peak     | Vertical     |
|      | 4978.0          | 36.8                 | 6.2         | 43.0                   | 74.0           | -31.0       | Peak     | Vertical     |
| *    | 6601.5          | 36.2                 | 10.2        | 46.4                   | 82.8           | -36.4       | Peak     | Vertical     |
| *    | 9993.0          | 34.5                 | 16.7        | 51.2                   | 82.8           | -31.6       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (102.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | DH5                                                                                                                                                                               | Test Channel:     | 39         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4221.5          | 38.4                 | 4.1         | 42.5                   | 74.0           | -31.5       | Peak     | Horizontal   |
|      | 4808.0          | 37.6                 | 5.9         | 43.5                   | 74.0           | -30.5       | Peak     | Horizontal   |
| *    | 6542.0          | 35.8                 | 10.1        | 45.9                   | 83.0           | -37.1       | Peak     | Horizontal   |
| *    | 10154.5         | 34.7                 | 17.0        | 51.7                   | 83.0           | -31.3       | Peak     | Horizontal   |
|      | 4094.0          | 39.3                 | 3.6         | 42.9                   | 74.0           | -31.1       | Peak     | Vertical     |
|      | 4995.0          | 36.7                 | 6.3         | 43.0                   | 74.0           | -31.0       | Peak     | Vertical     |
| *    | 6074.5          | 36.5                 | 8.0         | 44.5                   | 83.0           | -38.5       | Peak     | Vertical     |
| *    | 9967.5          | 34.7                 | 16.7        | 51.4                   | 83.0           | -31.6       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (103.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | DH5                                                                                                                                                                               | Test Channel:     | 78         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4136.5          | 38.5                 | 3.8         | 42.3                   | 74.0           | -31.7       | Peak     | Horizontal   |
|      | 5063.0          | 36.8                 | 6.5         | 43.3                   | 74.0           | -30.7       | Peak     | Horizontal   |
| *    | 6567.5          | 36.2                 | 10.2        | 46.4                   | 81.6           | -35.2       | Peak     | Horizontal   |
| *    | 10018.5         | 35.0                 | 16.6        | 51.6                   | 81.6           | -30.0       | Peak     | Horizontal   |
|      | 4000.5          | 38.1                 | 3.3         | 41.4                   | 74.0           | -32.6       | Peak     | Vertical     |
|      | 5063.0          | 36.5                 | 6.5         | 43.0                   | 74.0           | -31.0       | Peak     | Vertical     |
| *    | 6516.5          | 35.9                 | 9.9         | 45.8                   | 81.6           | -35.8       | Peak     | Vertical     |
| *    | 10333.0         | 35.7                 | 17.3        | 53.0                   | 81.6           | -28.6       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level 101.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | 2DH5                                                                                                                                                                              | Test Channel:     | 00         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4085.5          | 37.7                 | 3.5         | 41.2                   | 74.0           | -32.8       | Peak     | Horizontal   |
|      | 4663.5          | 36.6                 | 5.4         | 42.0                   | 74.0           | -32.0       | Peak     | Horizontal   |
| *    | 6244.5          | 37.2                 | 8.6         | 45.8                   | 80.6           | -34.8       | Peak     | Horizontal   |
| *    | 9984.5          | 34.7                 | 16.7        | 51.4                   | 80.6           | -29.2       | Peak     | Horizontal   |
|      | 4000.5          | 37.9                 | 3.3         | 41.2                   | 74.0           | -32.8       | Peak     | Vertical     |
|      | 4859.0          | 36.6                 | 5.9         | 42.5                   | 74.0           | -31.5       | Peak     | Vertical     |
| *    | 6389.0          | 36.1                 | 9.2         | 45.3                   | 80.6           | -35.3       | Peak     | Vertical     |
| *    | 10180.0         | 34.5                 | 17.1        | 51.6                   | 80.6           | -29.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (100.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | 2DH5                                                                                                                                                                              | Test Channel:     | 39         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4060.0          | 38.0                 | 3.5         | 41.5                   | 74.0           | -32.5       | Peak     | Horizontal   |
|      | 4867.5          | 36.5                 | 6.0         | 42.5                   | 74.0           | -31.5       | Peak     | Horizontal   |
| *    | 6533.5          | 35.4                 | 10.0        | 45.4                   | 80.4           | -35.0       | Peak     | Horizontal   |
| *    | 10188.5         | 34.7                 | 17.1        | 51.8                   | 80.4           | -28.6       | Peak     | Horizontal   |
|      | 4111.0          | 37.6                 | 3.7         | 41.3                   | 74.0           | -32.7       | Peak     | Vertical     |
|      | 4910.0          | 36.6                 | 6.1         | 42.7                   | 74.0           | -31.3       | Peak     | Vertical     |
| *    | 6576.0          | 36.0                 | 10.2        | 46.2                   | 80.4           | -34.2       | Peak     | Vertical     |
| *    | 9976.0          | 34.7                 | 16.7        | 51.4                   | 80.4           | -29.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (100.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | 2DH5                                                                                                                                                                              | Test Channel:     | 78         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3992.0          | 39.0                 | 3.2         | 42.2                   | 74.0           | -31.8       | Peak     | Horizontal   |
|      | 4680.5          | 36.6                 | 5.4         | 42.0                   | 74.0           | -32.0       | Peak     | Horizontal   |
| *    | 6610.0          | 36.2                 | 10.2        | 46.4                   | 79.7           | -33.3       | Peak     | Horizontal   |
| *    | 9950.5          | 34.4                 | 16.7        | 51.1                   | 79.7           | -28.6       | Peak     | Horizontal   |
|      | 3941.0          | 38.1                 | 3.2         | 41.3                   | 74.0           | -32.7       | Peak     | Vertical     |
|      | 4842.0          | 36.1                 | 5.9         | 42.0                   | 74.0           | -32.0       | Peak     | Vertical     |
| *    | 7086.0          | 36.4                 | 11.9        | 48.3                   | 79.7           | -31.4       | Peak     | Vertical     |
| *    | 10035.5         | 34.8                 | 16.7        | 51.5                   | 79.7           | -28.2       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | 3DH5                                                                                                                                                                              | Test Channel:     | 00         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3745.5          | 37.8                 | 2.4         | 40.2                   | 74.0           | -33.8       | Peak     | Horizontal   |
|      | 4833.5          | 36.8                 | 5.9         | 42.7                   | 74.0           | -31.3       | Peak     | Horizontal   |
| *    | 6635.5          | 36.2                 | 10.1        | 46.3                   | 80.6           | -34.3       | Peak     | Horizontal   |
| *    | 10078.0         | 34.1                 | 17.0        | 51.1                   | 80.6           | -29.5       | Peak     | Horizontal   |
|      | 4264.0          | 37.9                 | 4.2         | 42.1                   | 74.0           | -31.9       | Peak     | Vertical     |
|      | 5029.0          | 35.8                 | 6.4         | 42.2                   | 74.0           | -31.8       | Peak     | Vertical     |
| *    | 6567.5          | 36.0                 | 10.2        | 46.2                   | 80.6           | -34.4       | Peak     | Vertical     |
| *    | 10358.5         | 34.3                 | 17.4        | 51.7                   | 80.6           | -28.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (100.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | 3DH5                                                                                                                                                                              | Test Channel:     | 39         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3983.5          | 38.1                 | 3.2         | 41.3                   | 74.0           | -32.7       | Peak     | Horizontal   |
|      | 4799.5          | 36.4                 | 5.8         | 42.2                   | 74.0           | -31.8       | Peak     | Horizontal   |
| *    | 6329.5          | 36.7                 | 9.0         | 45.7                   | 80.3           | -34.6       | Peak     | Horizontal   |
| *    | 10307.5         | 33.9                 | 17.3        | 51.2                   | 80.3           | -29.1       | Peak     | Horizontal   |
|      | 4034.5          | 37.9                 | 3.4         | 41.3                   | 74.0           | -32.7       | Peak     | Vertical     |
|      | 5080.0          | 36.6                 | 6.5         | 43.1                   | 74.0           | -30.9       | Peak     | Vertical     |
| *    | 6304.0          | 35.9                 | 8.8         | 44.7                   | 80.3           | -35.6       | Peak     | Vertical     |
| *    | 10095.0         | 33.3                 | 16.9        | 50.2                   | 80.3           | -30.1       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (100.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | Communication Module                                                                                                                                                              | Temperature       | 26°C       |
| Test Engineer | Messiah Li                                                                                                                                                                        | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/02 |
| Test Mode:    | 3DH5                                                                                                                                                                              | Test Channel:     | 78         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4094.0          | 37.0                 | 3.6         | 40.6                   | 74.0           | -33.4       | Peak     | Horizontal   |
|      | 5037.5          | 35.9                 | 6.5         | 42.4                   | 74.0           | -31.6       | Peak     | Horizontal   |
| *    | 6499.5          | 36.0                 | 9.9         | 45.9                   | 79.7           | -33.8       | Peak     | Horizontal   |
| *    | 10146.0         | 33.8                 | 17.0        | 50.8                   | 79.7           | -28.9       | Peak     | Horizontal   |
|      | 4034.5          | 37.3                 | 3.4         | 40.7                   | 74.0           | -33.3       | Peak     | Vertical     |
|      | 4884.5          | 36.1                 | 6.0         | 42.1                   | 74.0           | -31.9       | Peak     | Vertical     |
| *    | 6550.5          | 36.2                 | 10.2        | 46.4                   | 79.7           | -33.3       | Peak     | Vertical     |
| *    | 10205.5         | 34.7                 | 17.1        | 51.8                   | 79.7           | -27.9       | Peak     | Vertical     |


Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (99.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Worst Case of Radiated Emission below 1GHz:

|                               |                          |
|-------------------------------|--------------------------|
| Site: AC1                     | Time: 2019/03/06 - 01:14 |
| Limit: FCC_Part15.209_RSE(3m) | Engineer: Messiah Li     |
| Probe: VULB 9168 _20-2000MHz  | Polarity: Horizontal     |
| EUT: Communication Module     | Power: DC 3.3V           |
| <b>Test Mode: Worst case</b>  |                          |

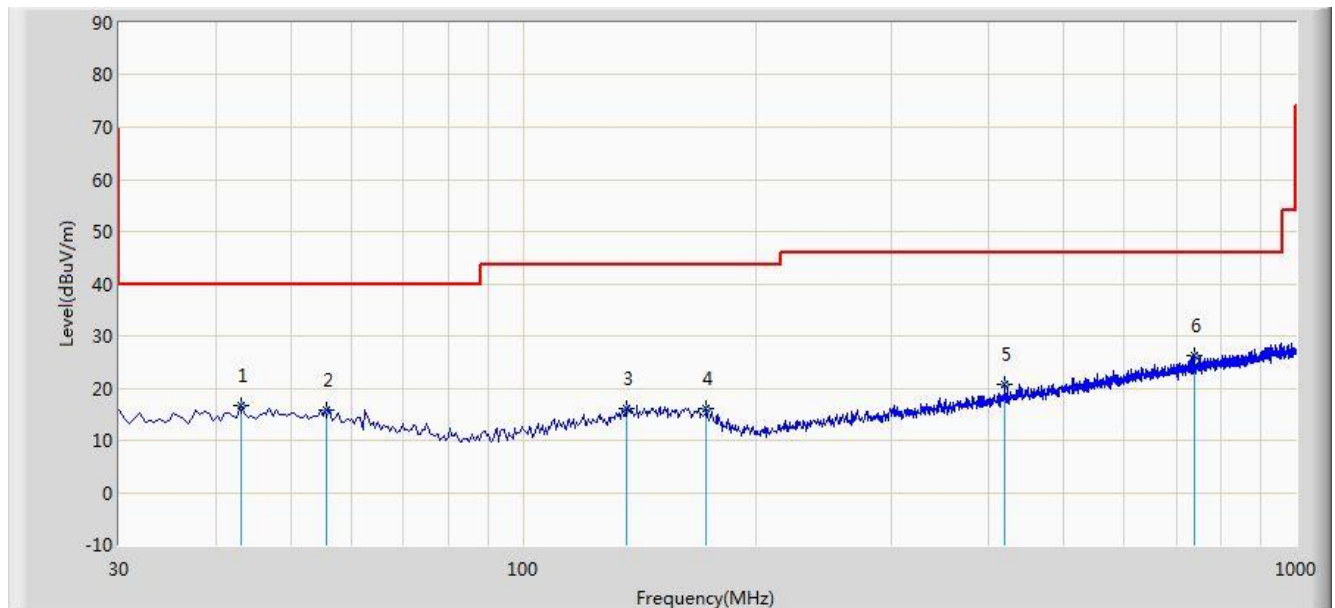


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 43.095          | 16.585                 | 2.169                | -23.415         | 40.000         | 14.416      | QP   |
| 2  |      |      | 55.705          | 15.740                 | 1.965                | -24.260         | 40.000         | 13.775      | QP   |
| 3  |      |      | 136.215         | 16.068                 | 1.762                | -27.432         | 43.500         | 14.306      | QP   |
| 4  |      |      | 172.590         | 15.957                 | 1.958                | -27.543         | 43.500         | 13.999      | QP   |
| 5  |      |      | 419.940         | 20.610                 | 3.467                | -25.390         | 46.000         | 17.143      | QP   |
| 6  |      | *    | 738.100         | 26.190                 | 3.556                | -19.810         | 46.000         | 22.634      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|                               |                          |
|-------------------------------|--------------------------|
| Site: AC1                     | Time: 2019/03/06 - 01:15 |
| Limit: FCC_Part15.209_RSE(3m) | Engineer: Messiah Li     |
| Probe: VULB 9168 _20-2000MHz  | Polarity: Vertical       |
| EUT: Communication Module     | Power: DC 3.3V           |
| <b>Test Mode: Worst case</b>  |                          |

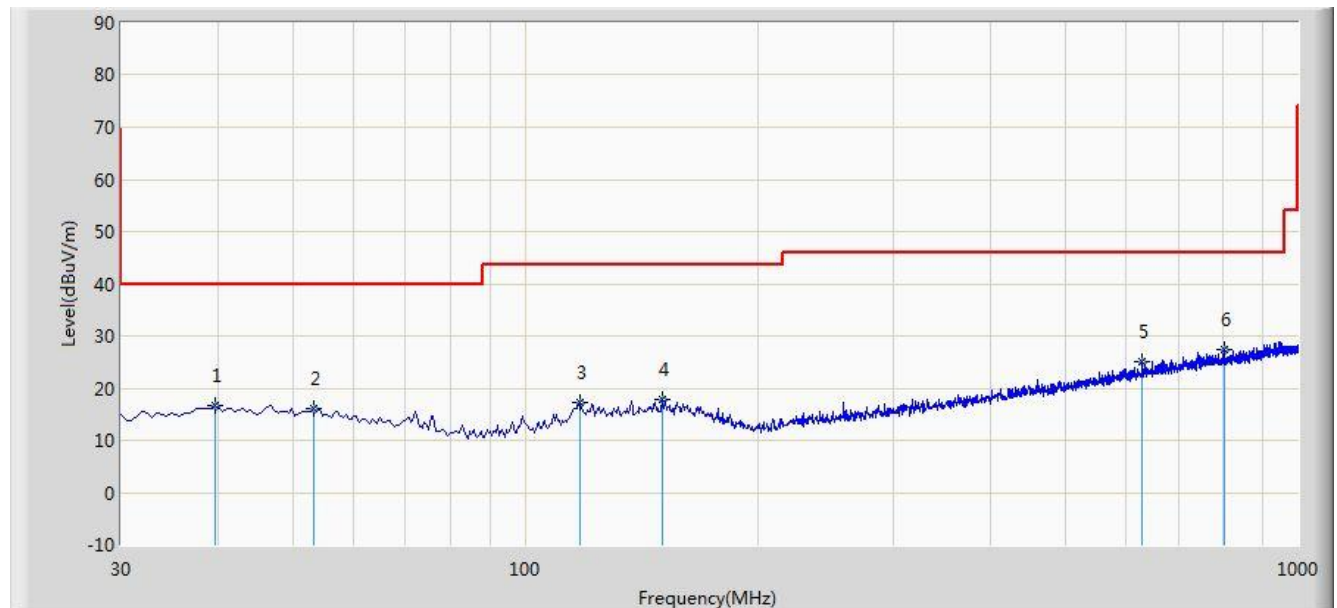

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 39.700          | 16.696                 | 2.083                | -23.304         | 40.000         | 14.613      | QP   |
| 2  |      |      | 53.280          | 16.053                 | 2.098                | -23.947         | 40.000         | 13.955      | QP   |
| 3  |      |      | 117.785         | 17.142                 | 4.156                | -26.358         | 43.500         | 12.986      | QP   |
| 4  |      |      | 150.280         | 17.687                 | 2.422                | -25.813         | 43.500         | 15.265      | QP   |
| 5  |      |      | 627.520         | 24.961                 | 3.821                | -21.039         | 46.000         | 21.140      | QP   |
| 6  |      | *    | 803.090         | 27.369                 | 4.027                | -18.631         | 46.000         | 23.342      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 6.10. Radiated Restricted Band Edge Measurement

### 6.10.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)  | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9       | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17   | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2      | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285           | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4         | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                  | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### **For RSS-Gen Section 8.10 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

| Frequency (MHz)     | Frequency (MHz)        | Frequency (GHz) |
|---------------------|------------------------|-----------------|
| 0.090 - 0.110       | 149.9 -150.5           | 9.0 - 9.2       |
| 0.495 -0.505        | 156.52475 - 156.525225 | 9.3 - 9.5       |
| 2.1735 - 2.1905     | 156.7 - 156.9          | 10.6 - 12.7     |
| 3.020 - 3.026       | 162.0125 - 167.17      | 13.25 - 13.4    |
| 4.125 - 4.128       | 167.72 - 173.2         | 14.47 - 14.5    |
| 4.17725 - 4.17775   | 240 - 285              | 15.35 - 16.2    |
| 4.20725 - 4.20775   | 322 - 335.4            | 17.7 - 21.4     |
| 5.677 - 5.683       | 399.9 - 410            | 22.01 - 23.12   |
| 6.215 - 6.218       | 608 - 614              | 23.6 - 24.0     |
| 6.26775 - 6.26825   | 960 - 1427             | 31.2 - 31.8     |
| 6.31175 - 6.31225   | 1435 - 1626.5          | 36.43 - 36.5    |
| 8.291 - 8.294       | 1645.5 - 1646.5        | Above 38.6      |
| 8.362 - 8.366       | 1660 - 1710            | --              |
| 8.37625 - 8.38675   | 1718.8 -1722.2         |                 |
| 8.41425 - 8.41475   | 2200 - 2300            |                 |
| 12.29 - 12.293      | 2310 -2390             |                 |
| 12.51975 - 12.52025 | 2483.5 - 2500          |                 |
| 12.57675 - 12.57725 | 2655 - 2900            |                 |
| 13.36 -13.41        | 3260 - 3267            |                 |
| 16.42 - 16.423      | 3332 -3339             |                 |
| 16.69475 - 16.69525 | 334.5 - 3358           |                 |
| 16.80425 - 16.80475 | 3500 - 4400            |                 |
| 25.5 - 25.67        | 4500 - 5150            |                 |
| 37.5 - 38.25        | 5350 - 5460            |                 |
| 73 - 74.6           | 7250 - 7750            |                 |
| 74.8 - 75.2         | 8025 - 8500            |                 |
| 108 - 138           | --                     |                 |

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

| RSS-Gen Section 8.9 |                                             |                          |                               |
|---------------------|---------------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]  | Magnetic field strength<br>(H-Field) [uA/m] | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490       | 6.37/F(F in kHz)                            | --                       | 300                           |
| 0.490 - 1.705       | 63.7/F(F in kHz)                            | --                       | 30                            |
| 1.705 - 30          | 0.08                                        | --                       | 30                            |
| 30 - 88             | --                                          | 100                      | 3                             |
| 88 - 216            | --                                          | 150                      | 3                             |
| 216 - 960           | --                                          | 200                      | 3                             |
| Above 960           | --                                          | 500                      | 3                             |

#### 6.10.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### 6.10.3.Test Setting


##### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 6.10.4.Test Setup

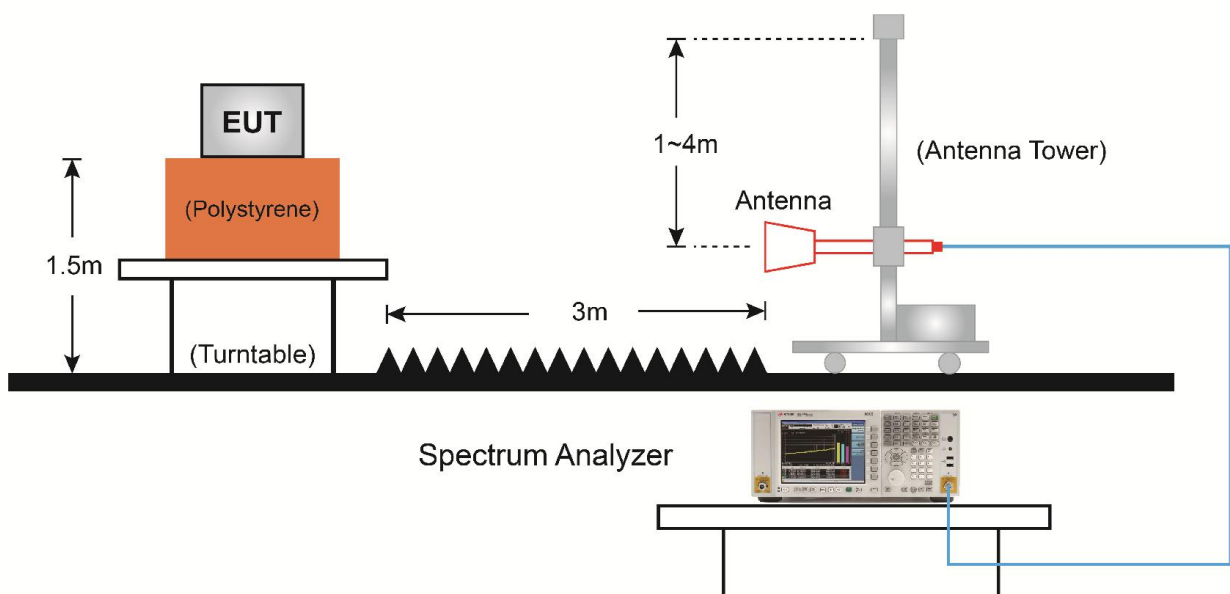

### 6.10.5.Test Result

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:00 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2402MHz |                          |

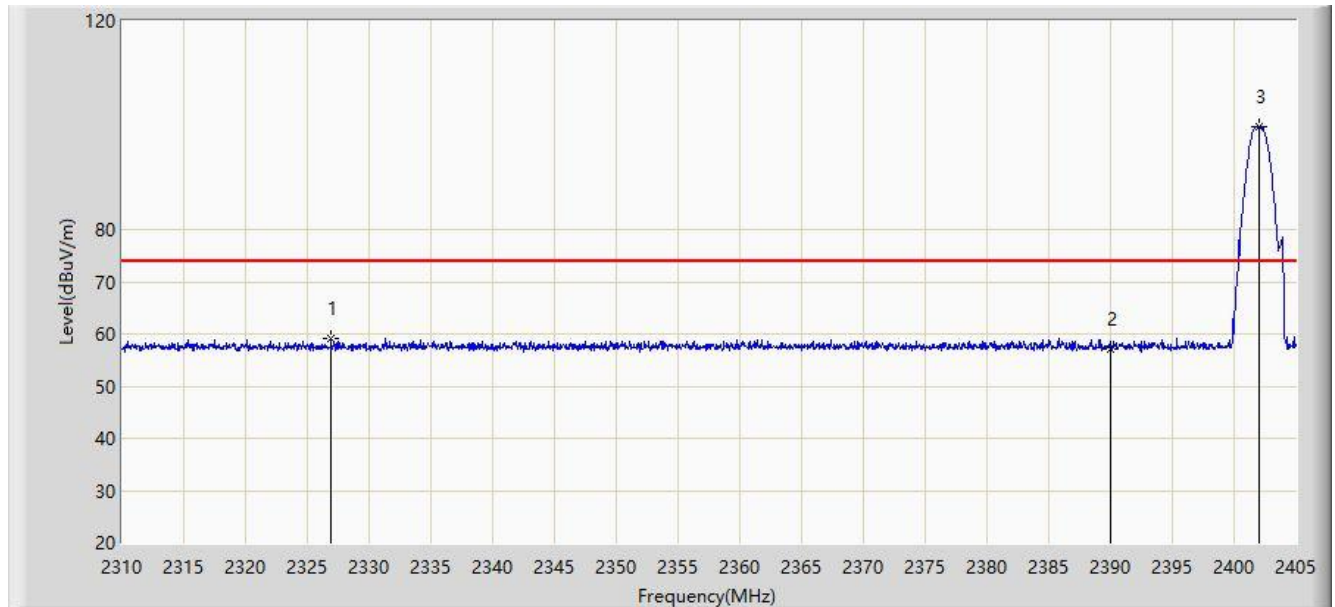


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2326.910        | 59.074                 | 26.585               | -14.926         | 74.000         | 32.490      | PK   |
| 2  |      |      | 2390.000        | 57.111                 | 24.784               | -16.889         | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2402.008        | 99.803                 | 67.499               | N/A             | N/A            | 32.305      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:04 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2402MHz |                          |

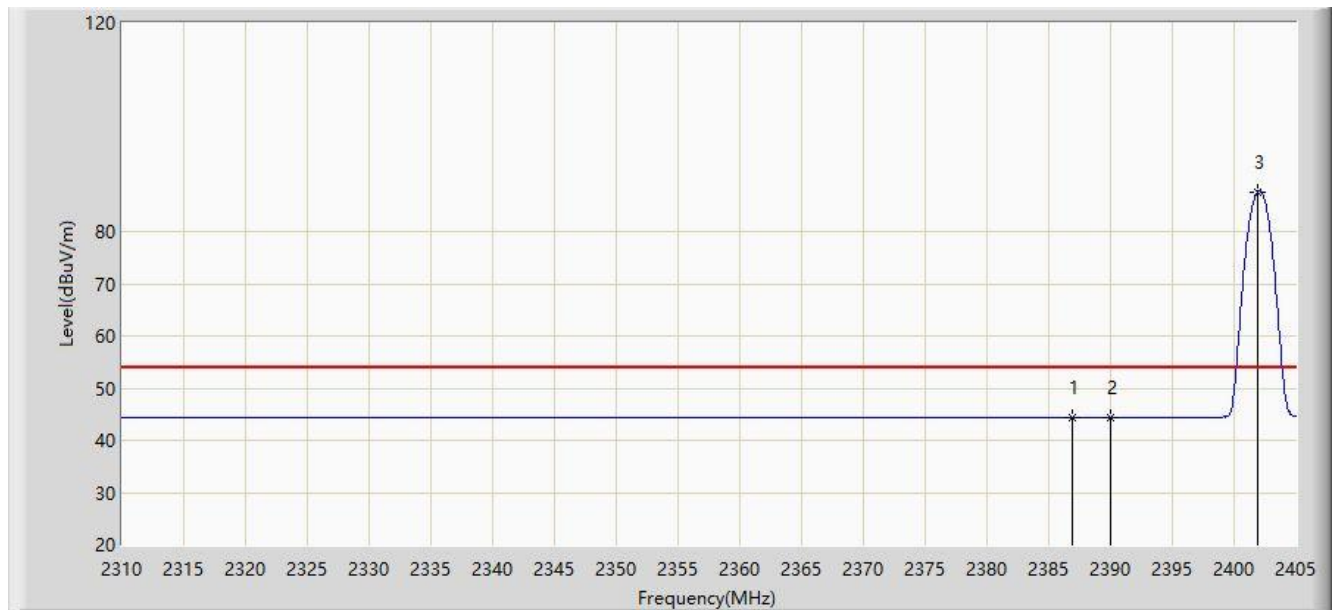


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2386.950        | 44.454                 | 12.123               | -9.546          | 54.000         | 32.331      | AV   |
| 2  |      |      | 2390.000        | 44.403                 | 12.076               | -9.597          | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2401.913        | 87.664                 | 55.359               | N/A             | N/A            | 32.305      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:05 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2402MHz |                          |

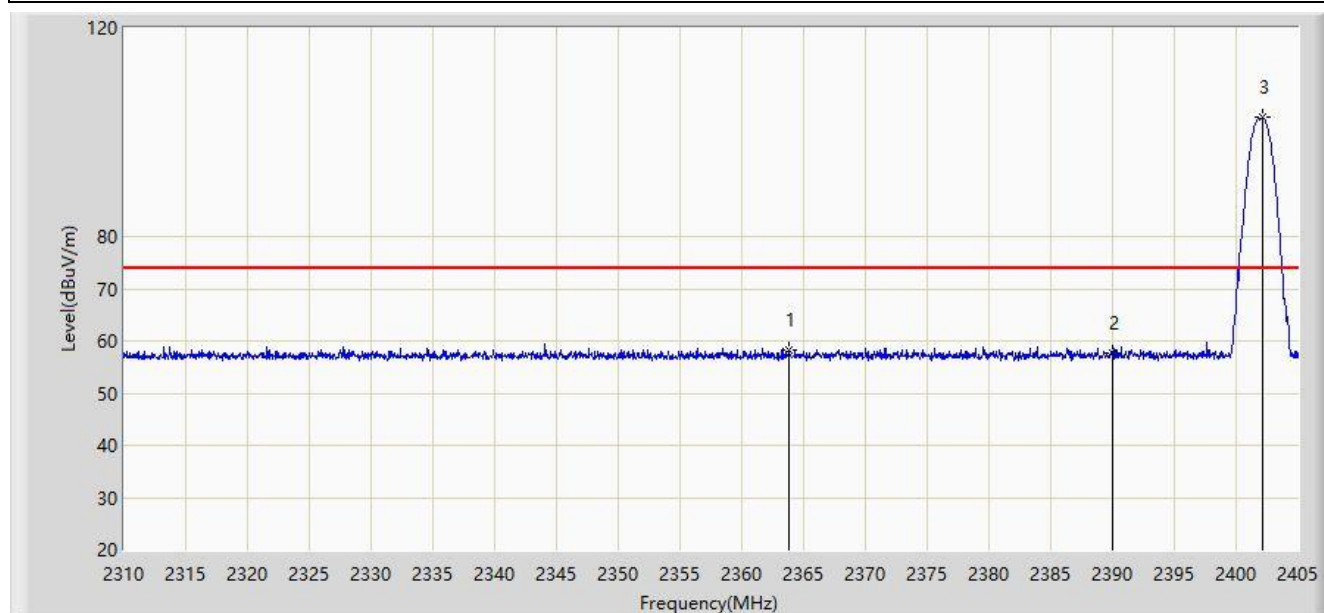


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2363.817        | 58.377                 | 26.007               | -15.623         | 74.000         | 32.370      | PK   |
| 2  |      |      | 2390.000        | 57.777                 | 25.450               | -16.223         | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2402.103        | 102.793                | 70.489               | N/A             | N/A            | 32.304      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:06 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2402MHz |                          |

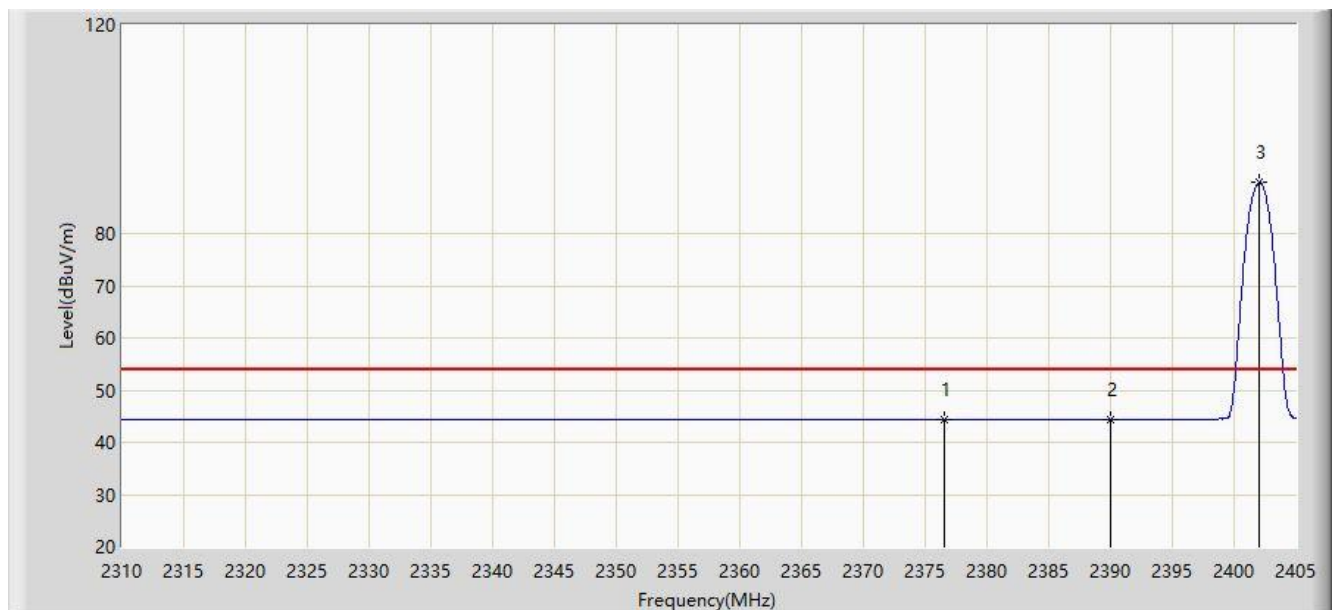


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2376.595        | 44.410                 | 12.065               | -9.590          | 54.000         | 32.346      | AV   |
| 2  |      |      | 2390.000        | 44.382                 | 12.055               | -9.618          | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2402.008        | 89.728                 | 57.424               | N/A             | N/A            | 32.305      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:08 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2480MHz |                          |

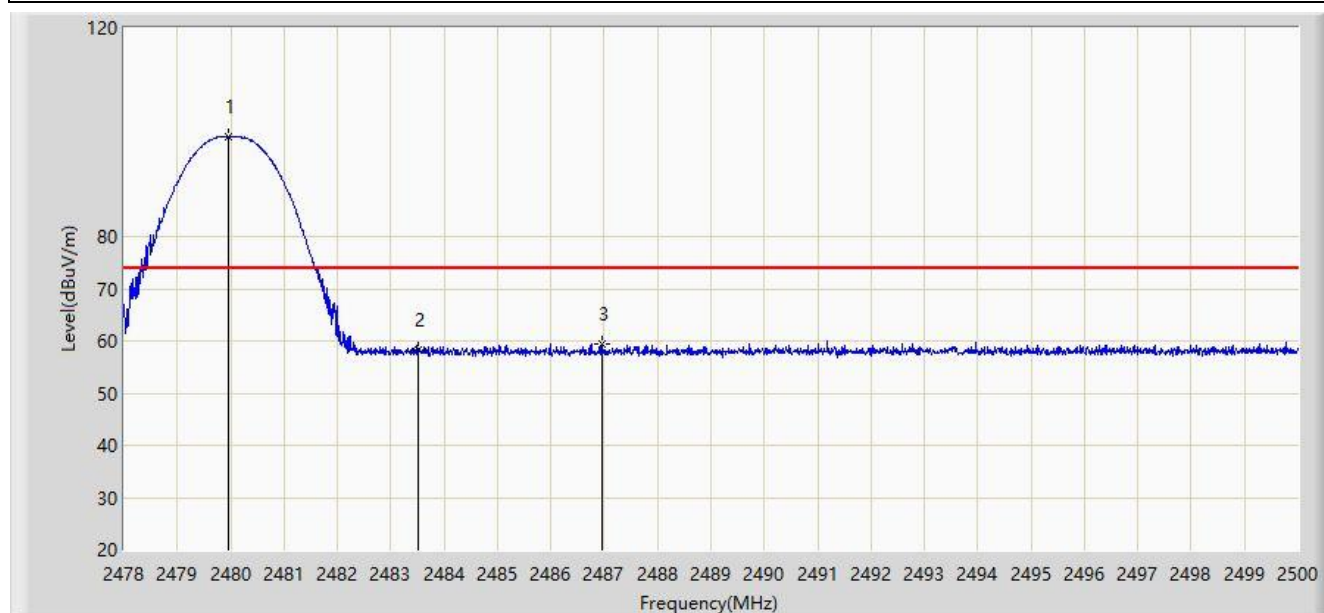


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.969        | 99.123                 | 66.798               | N/A             | N/A            | 32.325      | PK   |
| 2  |      |      | 2483.500        | 58.361                 | 26.022               | -15.639         | 74.000         | 32.340      | PK   |
| 3  |      |      | 2486.965        | 59.361                 | 27.008               | -14.639         | 74.000         | 32.353      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:15 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Horizontal     |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2480MHz |                          |

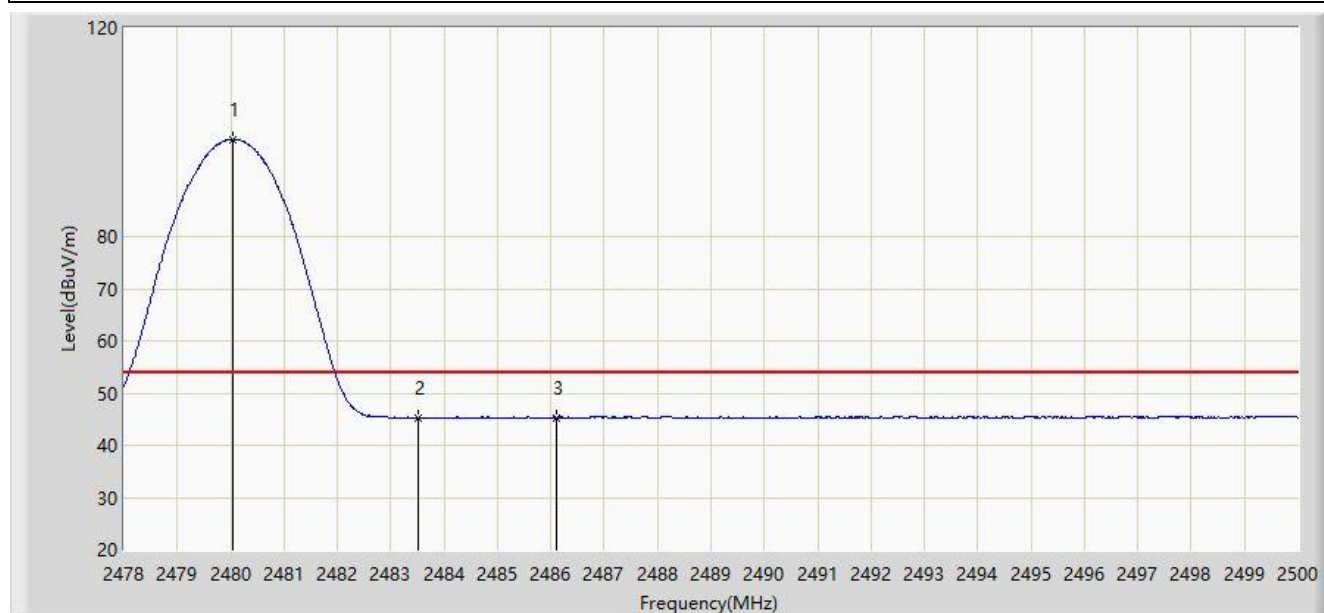


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2480.046        | 98.642                 | 66.316               | N/A             | N/A            | 32.325      | AV   |
| 2  |      |      | 2483.500        | 45.218                 | 12.879               | -8.782          | 54.000         | 32.340      | AV   |
| 3  |      |      | 2486.096        | 45.316                 | 12.967               | -8.684          | 54.000         | 32.349      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:17 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2480MHz |                          |

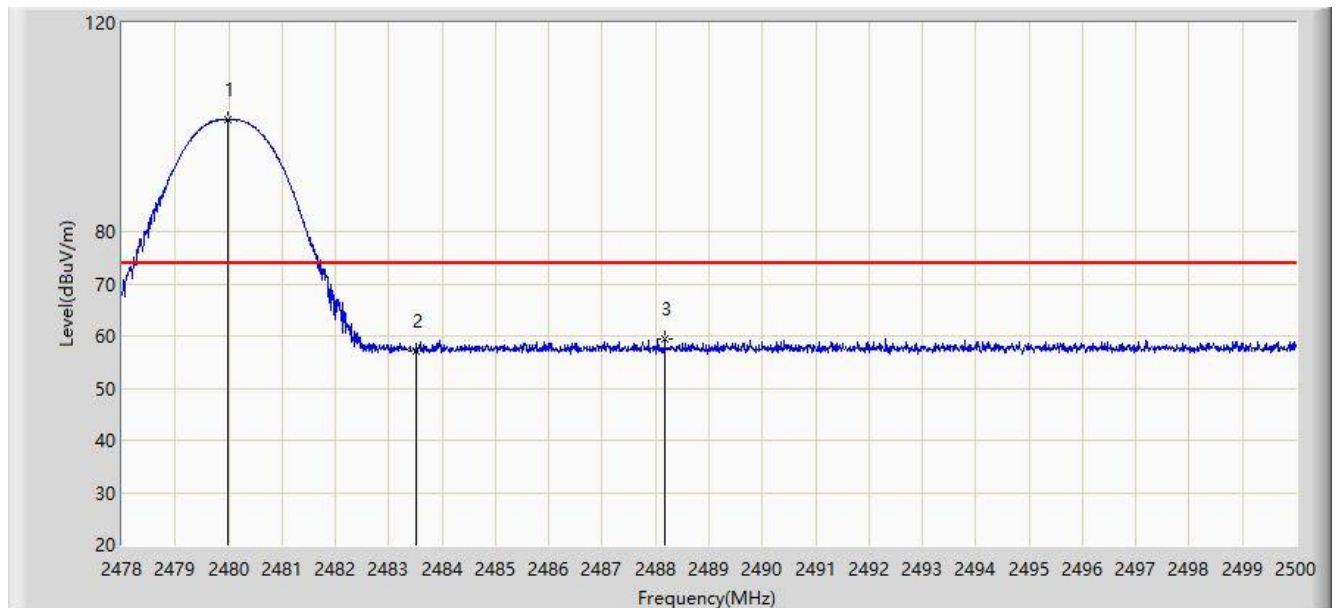


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.980        | 101.551                | 69.226               | N/A             | N/A            | 32.325      | PK   |
| 2  |      |      | 2483.500        | 57.152                 | 24.813               | -16.848         | 74.000         | 32.340      | PK   |
| 3  |      |      | 2488.175        | 59.355                 | 26.998               | -14.645         | 74.000         | 32.357      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                          |                          |
|------------------------------------------|--------------------------|
| Site: AC1                                | Time: 2019/03/02 - 03:18 |
| Limit: FCC_Part15_Band Edge(3m)          | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                 | Polarity: Vertical       |
| EUT: Communication Module                | Power: DC 3.3V           |
| Note: Transmit by DH5 at channel 2480MHz |                          |

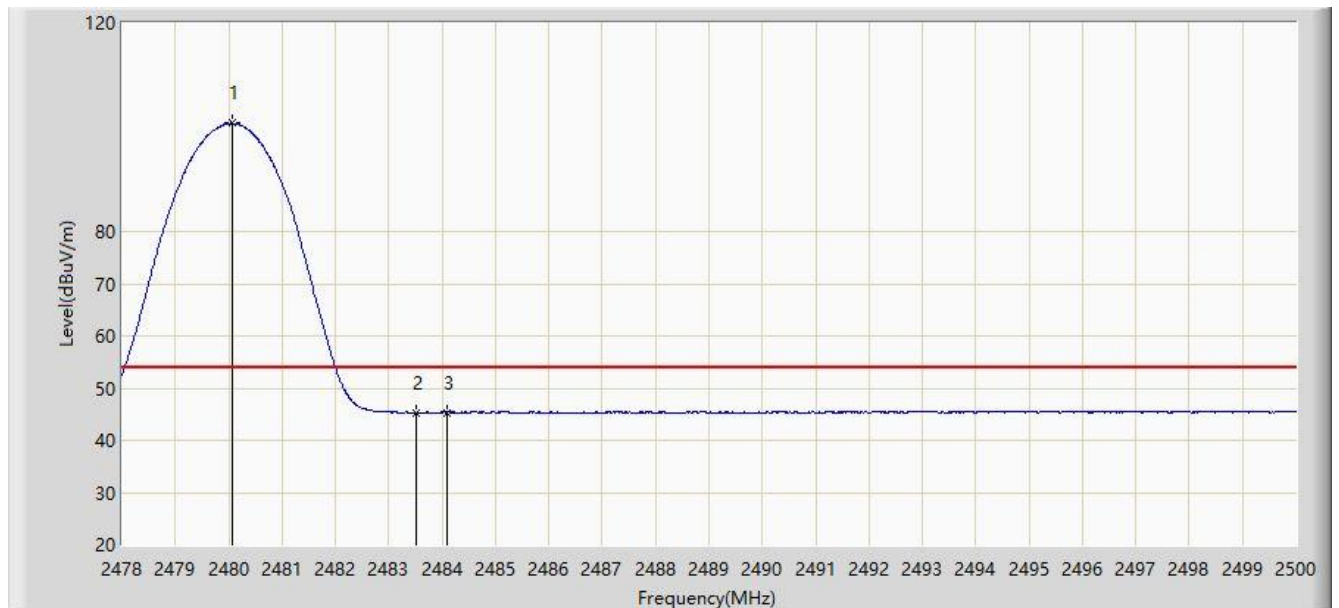


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2480.079        | 100.731                | 68.405               | N/A             | N/A            | 32.325      | AV   |
| 2  |      |      | 2483.500        | 45.331                 | 12.992               | -8.669          | 54.000         | 32.340      | AV   |
| 3  |      |      | 2484.083        | 45.346                 | 13.005               | -8.654          | 54.000         | 32.342      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:19 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2402MHz |                          |

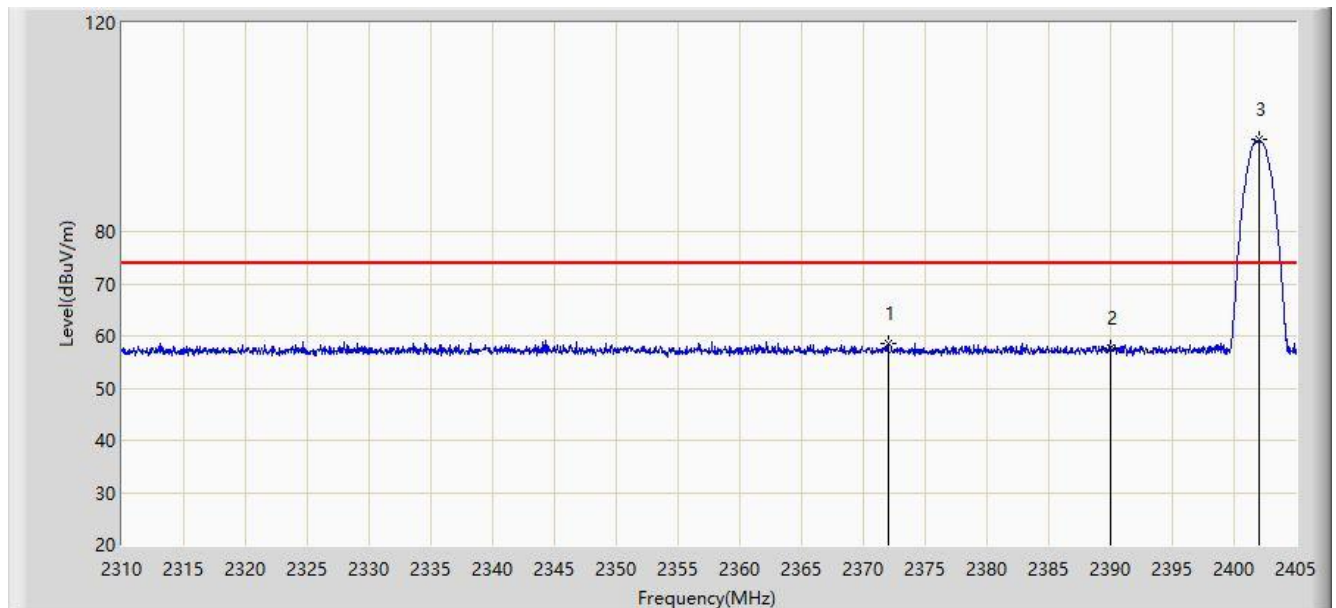


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2371.988        | 58.494                 | 26.140               | -15.506         | 74.000         | 32.354      | PK   |
| 2  |      |      | 2390.000        | 57.789                 | 25.462               | -16.211         | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2402.008        | 97.538                 | 65.234               | N/A             | N/A            | 32.305      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:22 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2402MHz |                          |

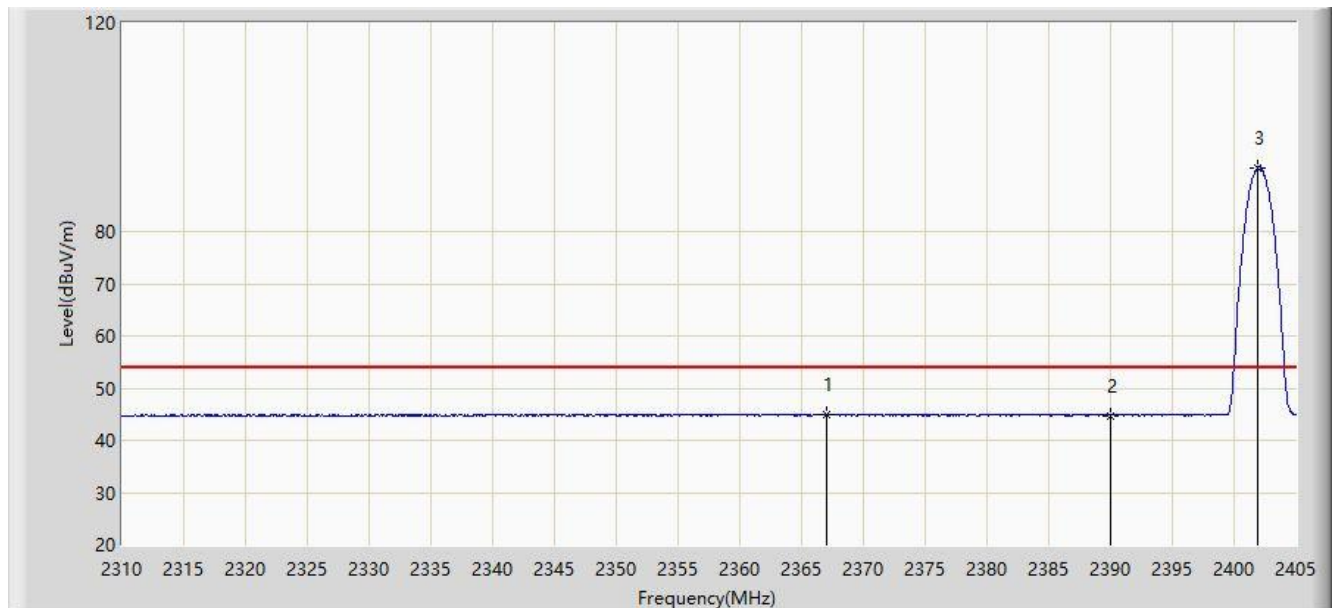


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2367.048        | 45.013                 | 12.650               | -8.987          | 54.000         | 32.363      | AV   |
| 2  |      |      | 2390.000        | 44.763                 | 12.436               | -9.237          | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2401.865        | 92.270                 | 59.965               | N/A             | N/A            | 32.305      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:24 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2402MHz |                          |

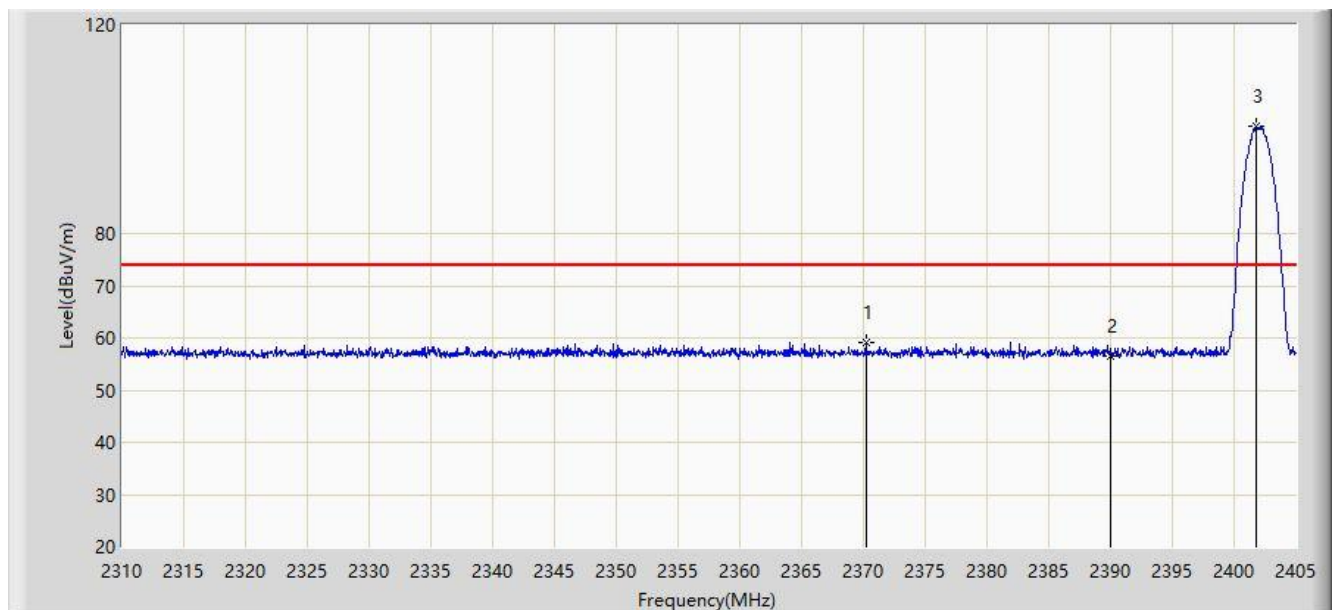


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2370.183        | 59.084                 | 26.727               | -14.916         | 74.000         | 32.357      | PK   |
| 2  |      |      | 2390.000        | 56.552                 | 24.225               | -17.448         | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2401.770        | 100.597                | 68.292               | N/A             | N/A            | 32.305      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:25 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2402MHz |                          |

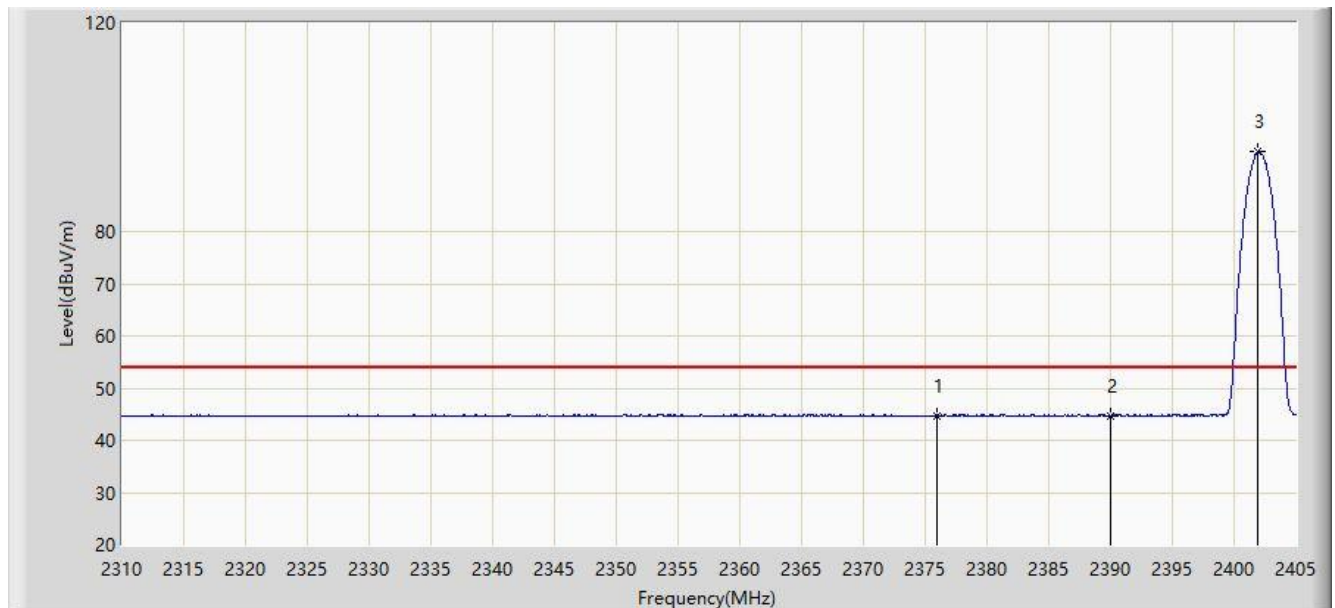


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2375.978        | 44.739                 | 12.392               | -9.261          | 54.000         | 32.346      | AV   |
| 2  |      |      | 2390.000        | 44.671                 | 12.344               | -9.329          | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2401.960        | 95.378                 | 63.073               | N/A             | N/A            | 32.305      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:26 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2480MHz |                          |

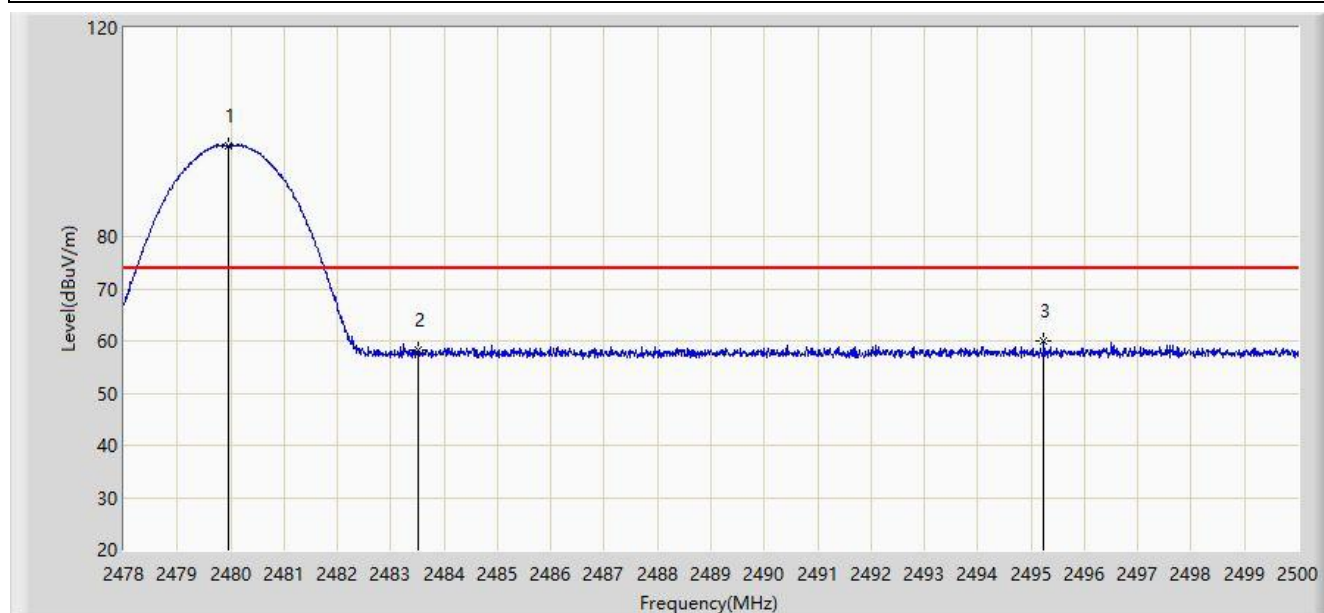


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.969        | 97.279                 | 64.954               | N/A             | N/A            | 32.325      | PK   |
| 2  |      |      | 2483.500        | 58.274                 | 25.935               | -15.726         | 74.000         | 32.340      | PK   |
| 3  |      |      | 2495.237        | 60.025                 | 27.640               | -13.975         | 74.000         | 32.385      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:28 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2480MHz |                          |

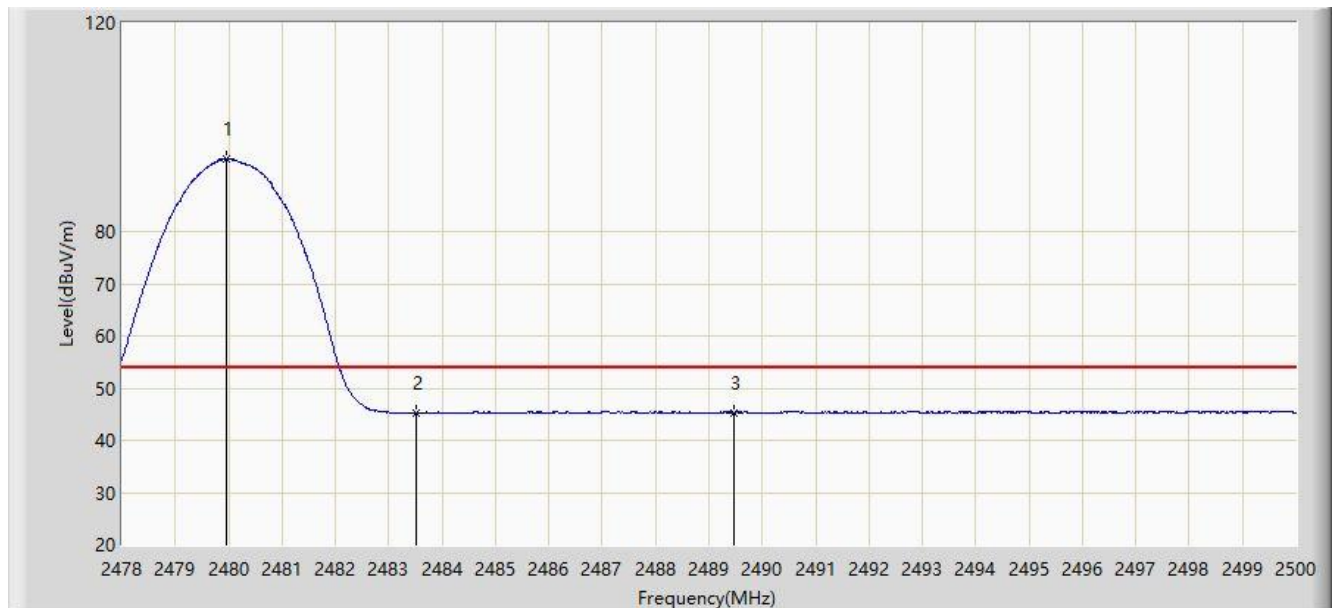


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.969        | 93.852                 | 61.527               | N/A             | N/A            | 32.325      | AV   |
| 2  |      |      | 2483.500        | 45.312                 | 12.973               | -8.688          | 54.000         | 32.340      | AV   |
| 3  |      |      | 2489.462        | 45.315                 | 12.952               | -8.685          | 54.000         | 32.362      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:28 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2480MHz |                          |

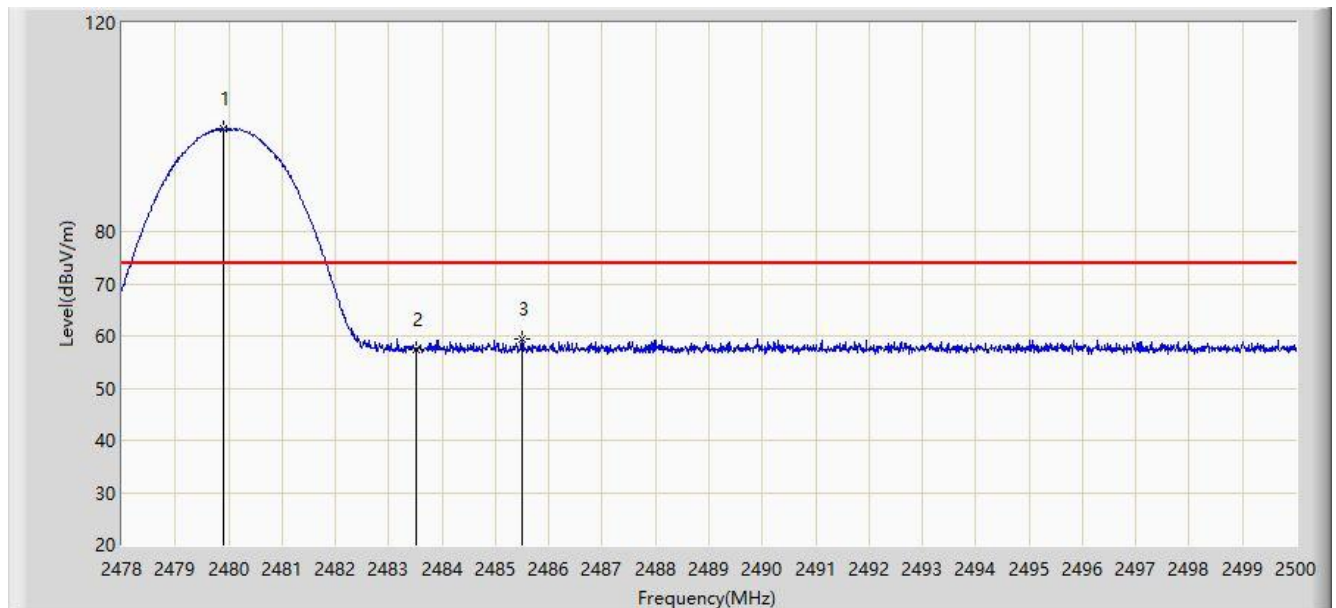


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.892        | 99.672                 | 67.347               | N/A             | N/A            | 32.325      | PK   |
| 2  |      |      | 2483.500        | 57.320                 | 24.981               | -16.680         | 74.000         | 32.340      | PK   |
| 3  |      |      | 2485.502        | 59.354                 | 27.007               | -14.646         | 74.000         | 32.347      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:29 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 2DH5 at channel 2480MHz |                          |

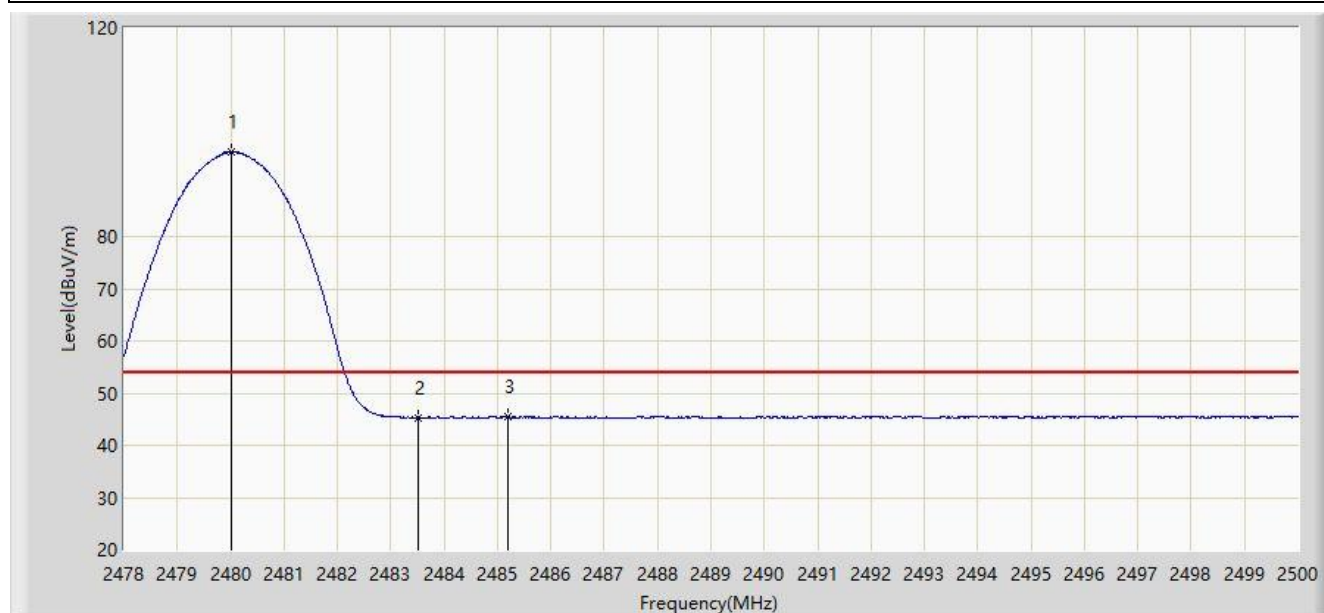


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2480.002        | 96.164                 | 63.839               | N/A             | N/A            | 32.325      | AV   |
| 2  |      |      | 2483.500        | 45.362                 | 13.023               | -8.638          | 54.000         | 32.340      | AV   |
| 3  |      |      | 2485.194        | 45.565                 | 13.219               | -8.435          | 54.000         | 32.346      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:31 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2402MHz |                          |

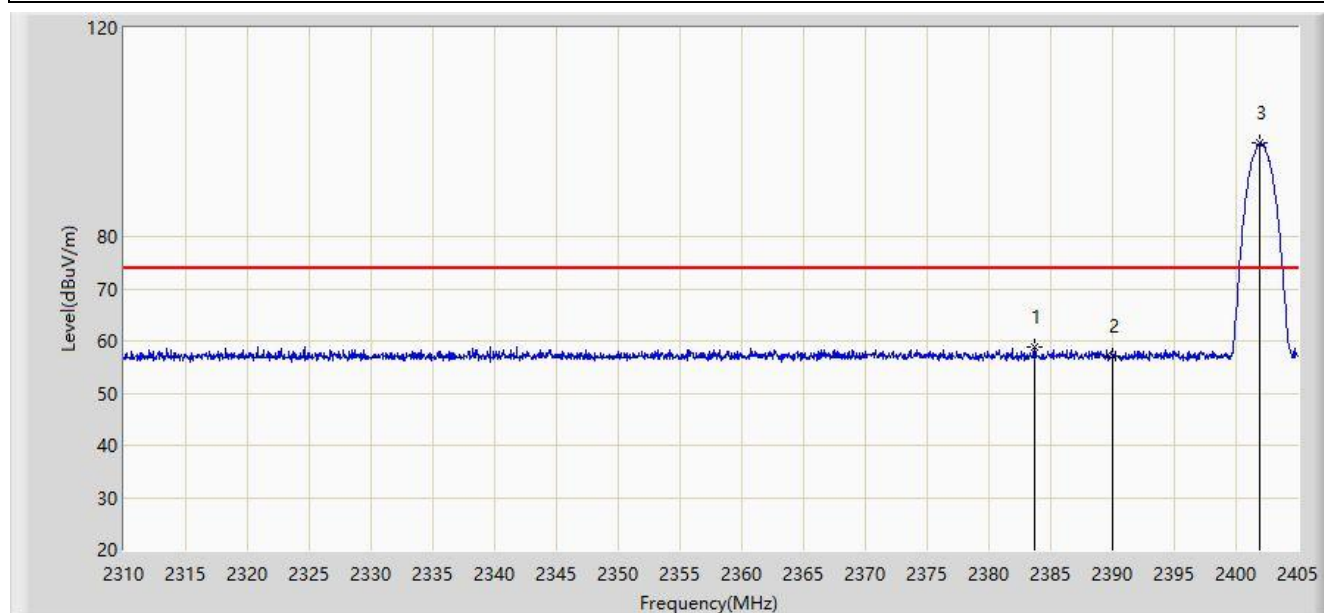


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2383.720        | 58.783                 | 26.448               | -15.217         | 74.000         | 32.335      | PK   |
| 2  |      |      | 2390.000        | 57.235                 | 24.908               | -16.765         | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2401.960        | 97.918                 | 65.613               | N/A             | N/A            | 32.305      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:33 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2402MHz |                          |

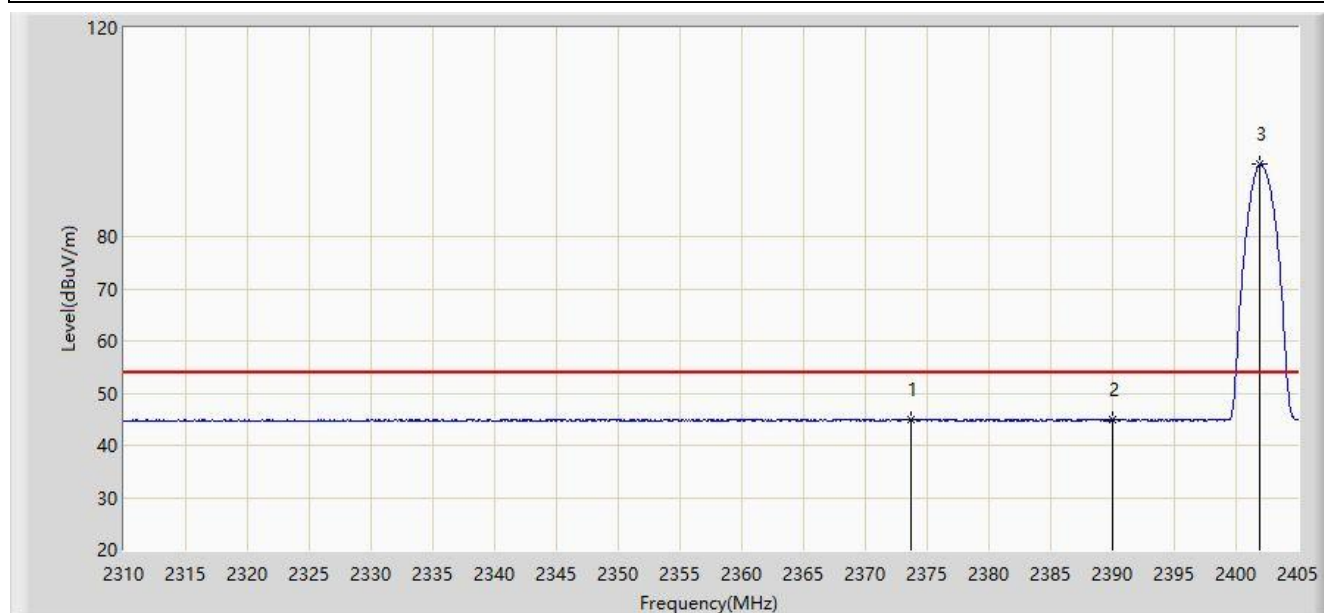


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2373.745        | 45.068                 | 12.717               | -8.932          | 54.000         | 32.351      | AV   |
| 2  |      |      | 2390.000        | 44.832                 | 12.505               | -9.168          | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2401.960        | 93.854                 | 61.549               | N/A             | N/A            | 32.305      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:34 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2402MHz |                          |

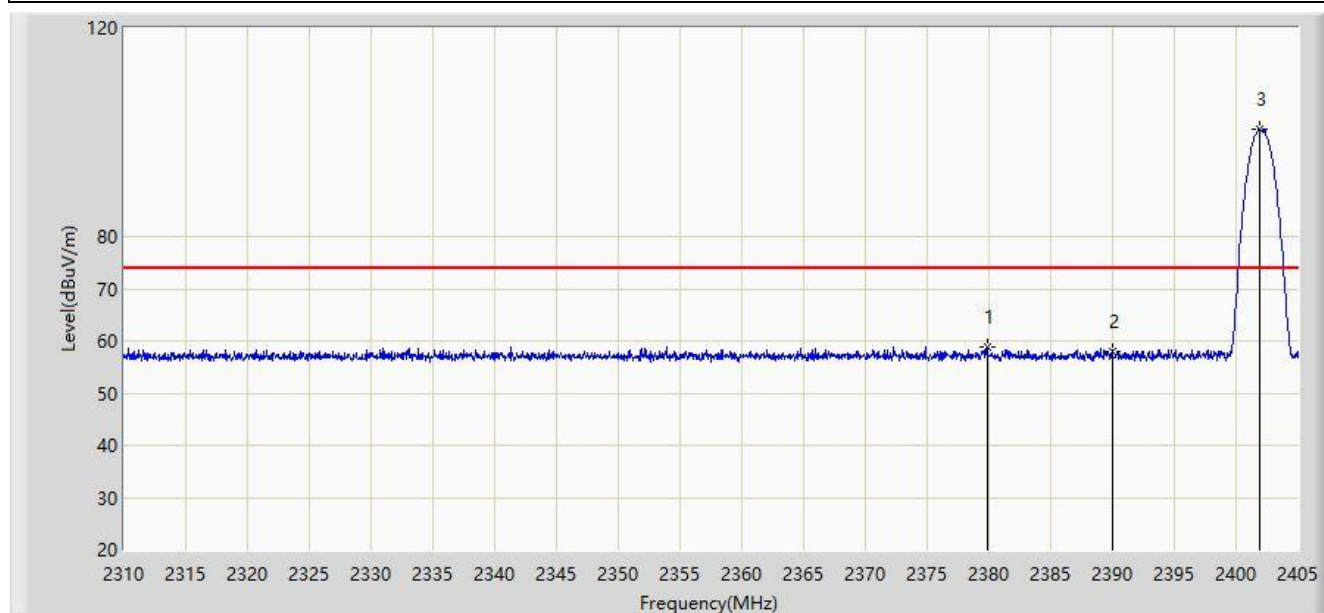


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2379.825        | 58.949                 | 26.608               | -15.051         | 74.000         | 32.340      | PK   |
| 2  |      |      | 2390.000        | 57.941                 | 25.614               | -16.059         | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2401.865        | 100.598                | 68.293               | N/A             | N/A            | 32.305      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:35 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2402MHz |                          |

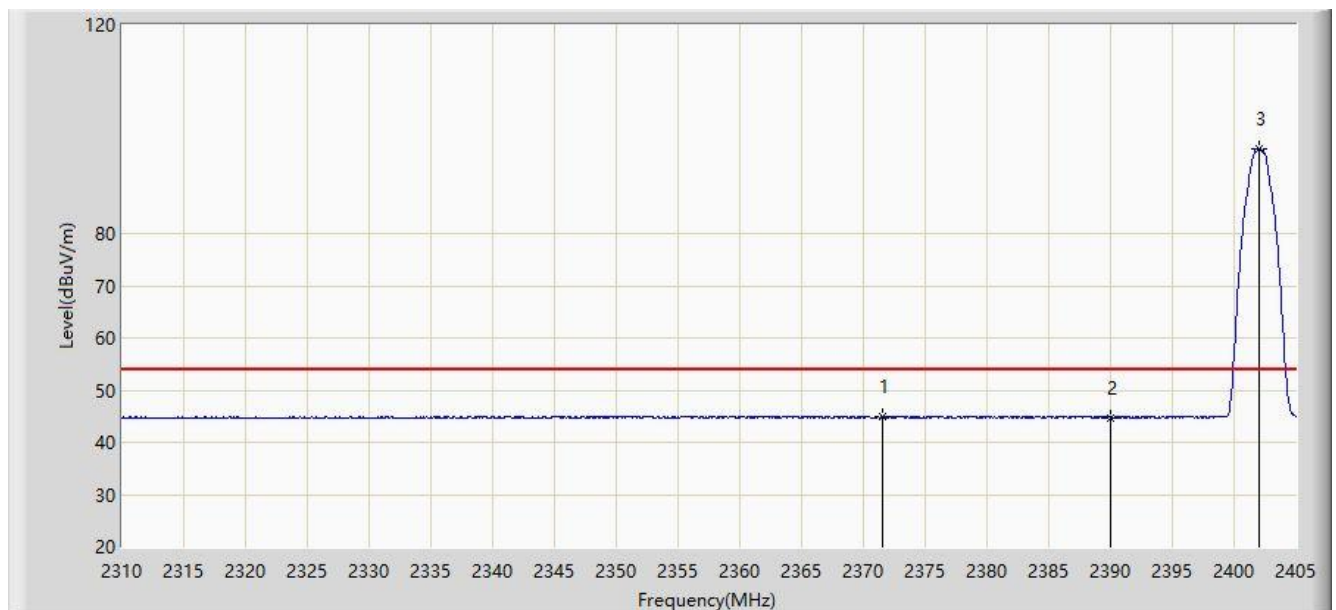


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 2371.607        | 45.004                 | 12.649               | -8.996          | 54.000         | 32.355      | AV   |
| 2  |      |      | 2390.000        | 44.772                 | 12.445               | -9.228          | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2402.008        | 96.313                 | 64.009               | N/A             | N/A            | 32.305      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:37 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2480MHz |                          |

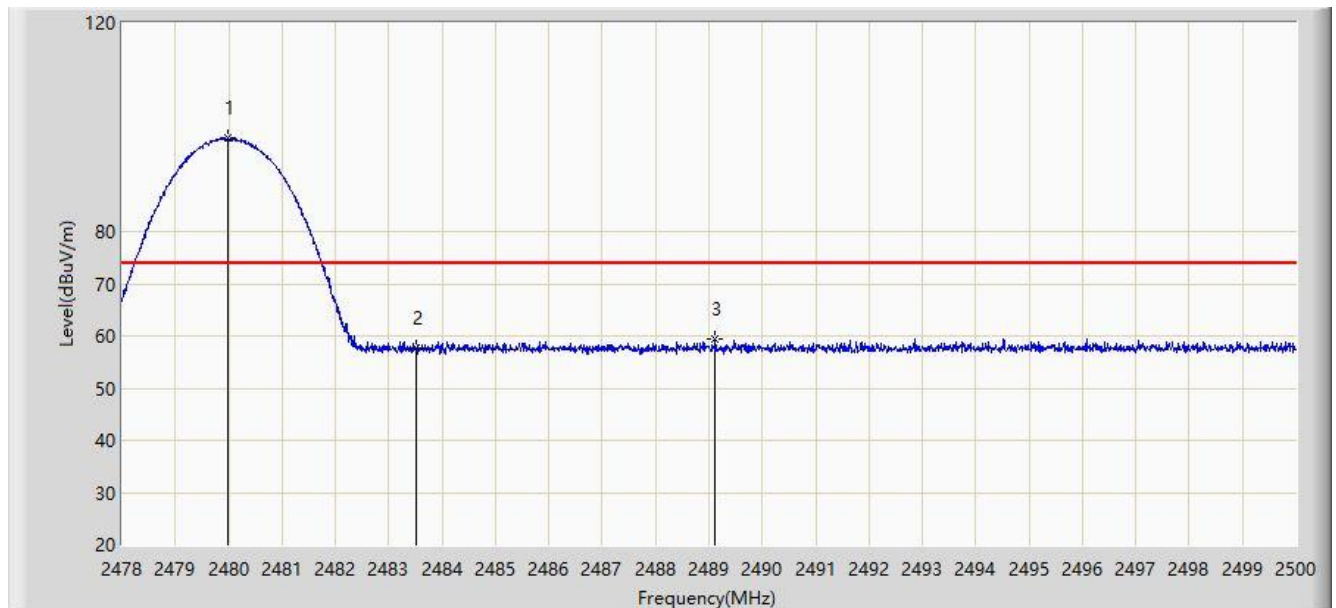


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.980        | 97.889                 | 65.564               | N/A             | N/A            | 32.325      | PK   |
| 2  |      |      | 2483.500        | 57.545                 | 25.206               | -16.455         | 74.000         | 32.340      | PK   |
| 3  |      |      | 2489.121        | 59.339                 | 26.978               | -14.661         | 74.000         | 32.361      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:39 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Horizontal     |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2480MHz |                          |

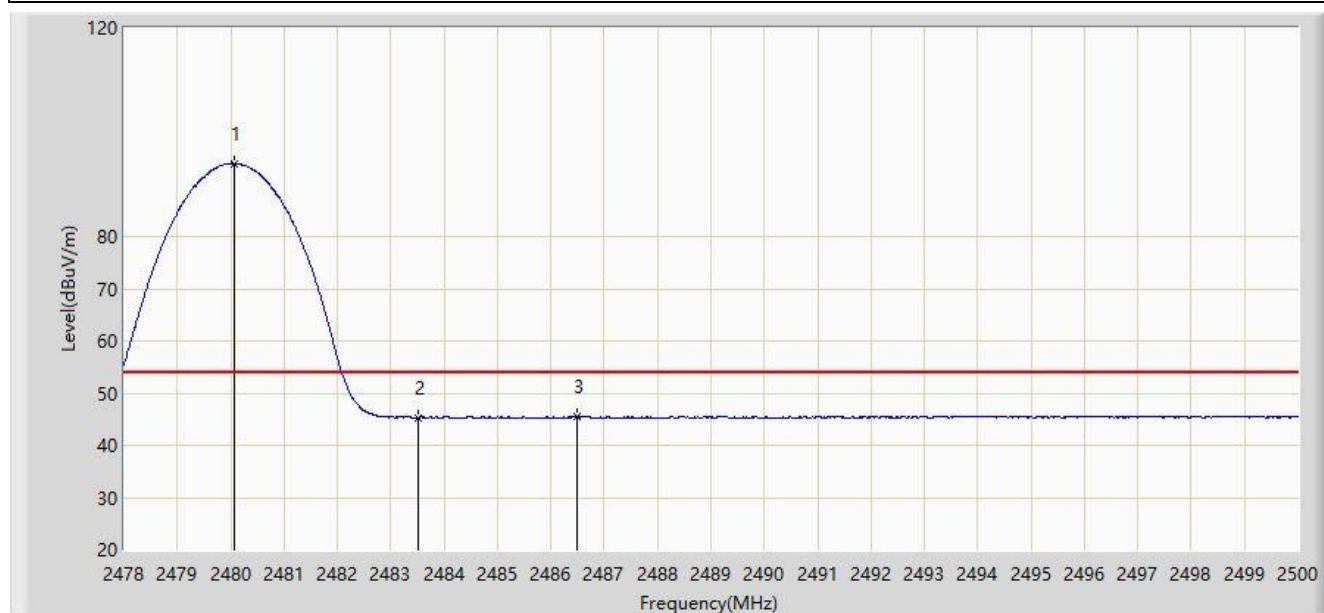


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2480.079        | 94.038                 | 61.712               | N/A             | N/A            | 32.325      | AV   |
| 2  |      |      | 2483.500        | 45.239                 | 12.900               | -8.761          | 54.000         | 32.340      | AV   |
| 3  |      |      | 2486.503        | 45.375                 | 13.024               | -8.625          | 54.000         | 32.351      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:40 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2480MHz |                          |

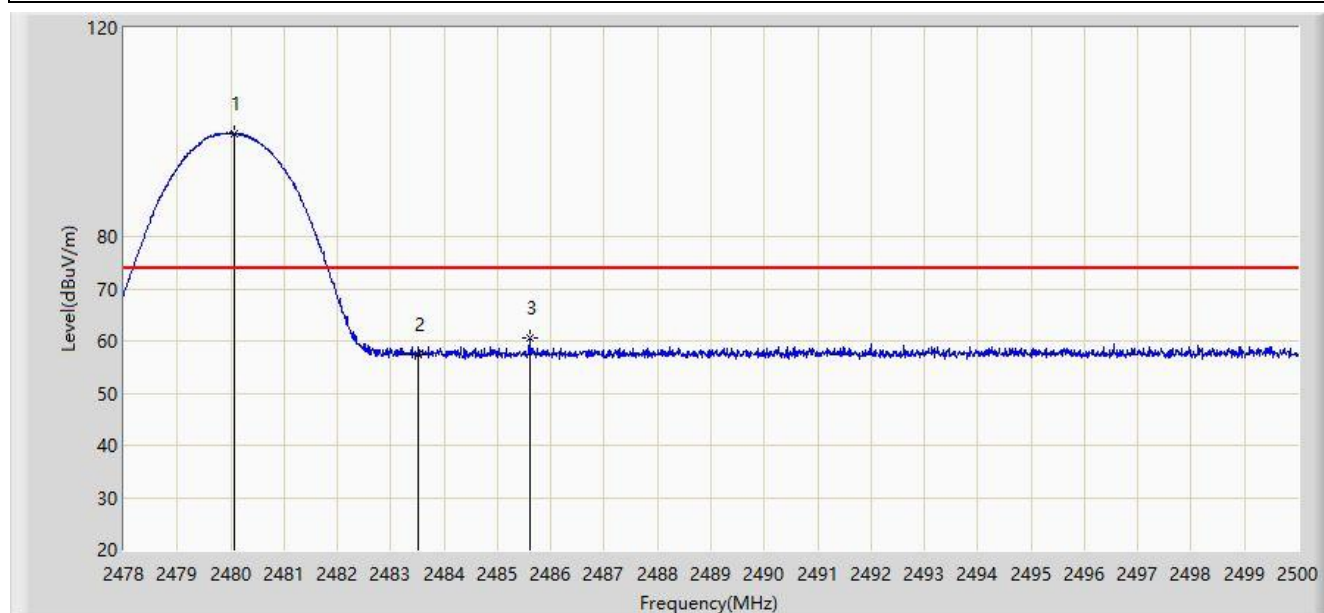


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2480.079        | 99.674                 | 67.348               | N/A             | N/A            | 32.325      | PK   |
| 2  |      |      | 2483.500        | 57.474                 | 25.135               | -16.526         | 74.000         | 32.340      | PK   |
| 3  |      |      | 2485.601        | 60.703                 | 28.356               | -13.297         | 74.000         | 32.347      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                           |                          |
|-------------------------------------------|--------------------------|
| Site: AC1                                 | Time: 2019/03/02 - 03:41 |
| Limit: FCC_Part15_Band Edge(3m)           | Engineer: Messiah Li     |
| Probe: BBHA9120D_1-18GHz                  | Polarity: Vertical       |
| EUT: Communication Module                 | Power: DC 3.3V           |
| Note: Transmit by 3DH5 at channel 2480MHz |                          |

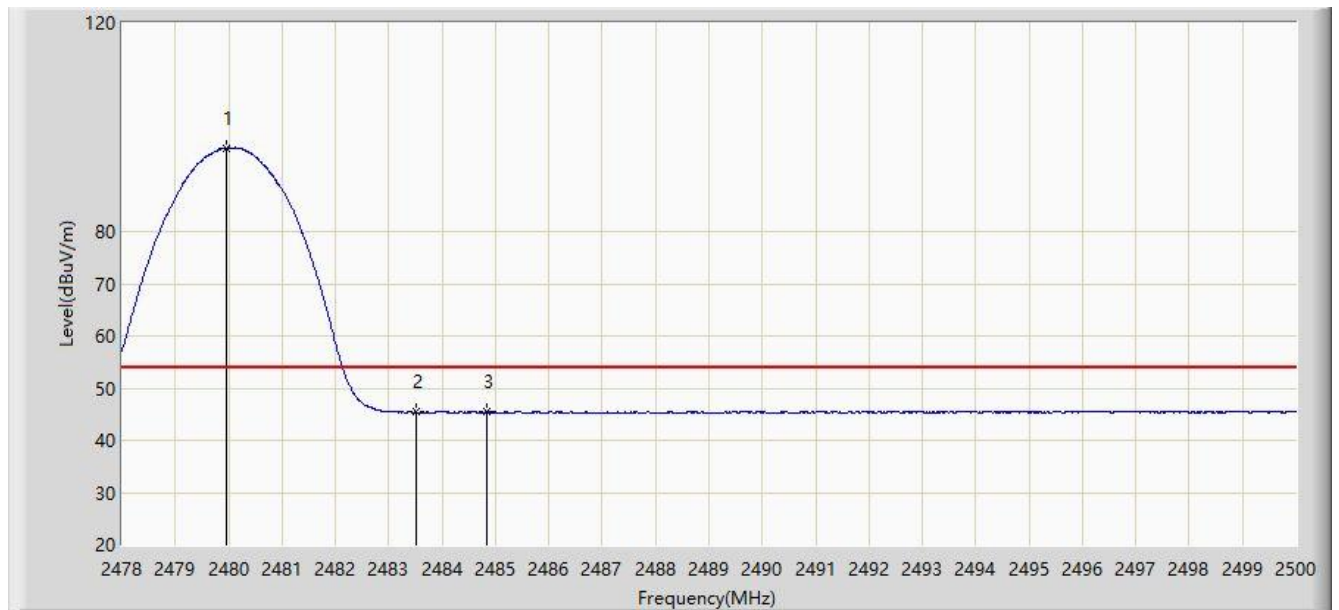

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 2479.969        | 96.007                 | 63.682               | N/A             | N/A            | 32.325      | AV   |
| 2  |      |      | 2483.500        | 45.420                 | 13.081               | -8.580          | 54.000         | 32.340      | AV   |
| 3  |      |      | 2484.831        | 45.471                 | 13.127               | -8.529          | 54.000         | 32.344      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 6.11.AC Conducted Emissions Measurement


### 6.11.1.Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 ~ 0.50                                   | 66 ~ 56   | 56 ~ 46   |
| 0.50 ~ 5.0                                    | 56        | 46        |
| 5.0 ~ 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.11.2.Test Setup

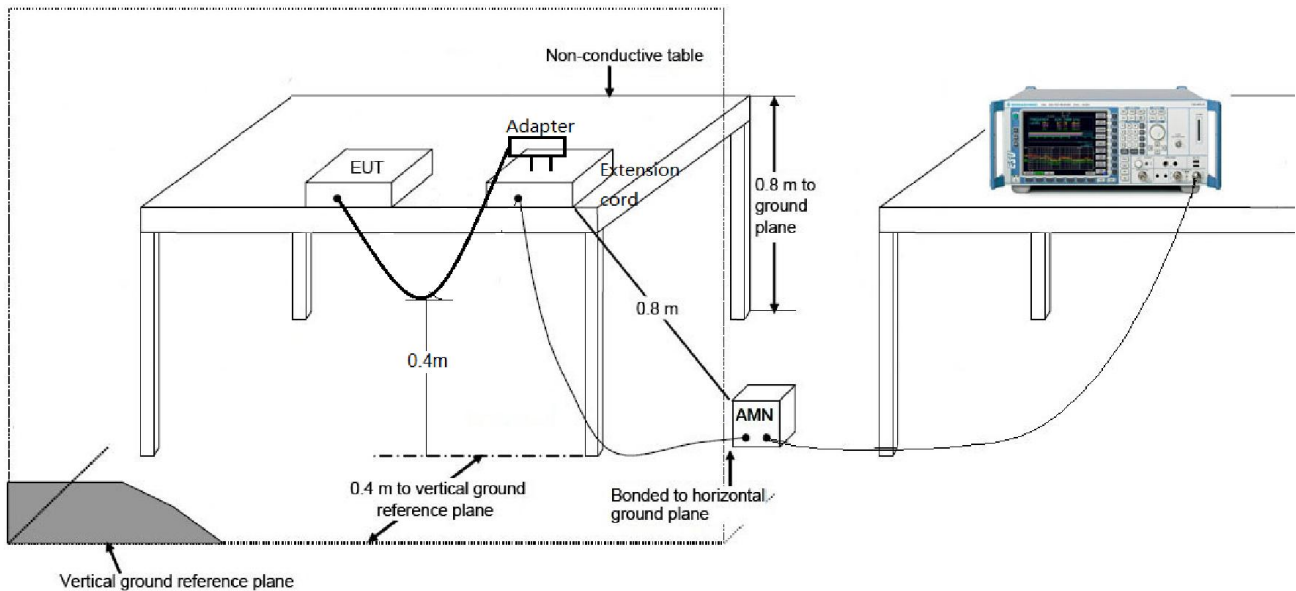

### 6.11.3.Test Result

Power supply of this device is by DC Source, so this item is not assessed.

## 7. CONCLUSION

The data collected relate only the item(s) tested and show that the **Communication Module** is in compliance with Part 15C of the FCC Rules and RSS-247 Issue 2 of ISED Rules.

---

The End

## **Appendix A – Test Setup Photograph**

Refer to “ 1901WSU002-UT” file.

## **Appendix B – EUT Photograph**

Refer to “1901WSU002-UE” file.