



## CNX-WIFI PORTFOLIO

# CNX-WIFI Features and Draft Product Label



## ♦ Wi-Fi Networking


- Wi-Fi 6 supporting three (3) distinct SSIDs
  - APN1 for Customer Use
  - APN2 for Customer Use
  - Intellian SSID for Management
- Internal Wi-Fi Antennas

## ♦ Wired Networking

- One dedicated RJ45 GbE interface for APN1
- One dedicated RJ45 GbE interface for APN2
- One dedicated RJ45 GbE interface for Management
- One RJ45 GbE interface for daisy-chain connection to another CNX-WIFI (future capability)

## ♦ Data and power connection to outdoor unit

- F-type Connector supporting a MoCA (Multimedia over Coax Alliance) 2.0 standard interface
- +56VDC output over RG6 (maximum of 10 meters) or RG11 (maximum of 50 meters)

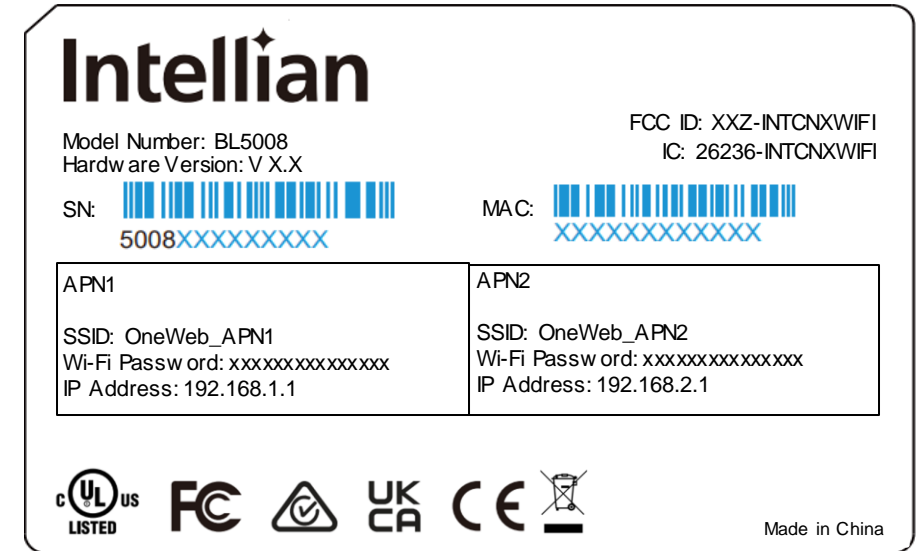



Specifications	
Dimensions	21 cm x 17.3 cm x 8 cm
Weight	0.7kg
Data Interface	Wi-Fi 6 and GigE RJ45
Management Interface	Wi-Fi 6 and Gig-E RJ45
PSA	Adapter Tech ATM450A2-P560 450W AC 100 – 240VAC to +56VDC, 450W, 8.05A Power Supply
Transceiver Interface	F-Type connector – RG6 or RG11 Coaxial Cable