


FCC TEST REPORT

Report No. : NTC-ER2404061

Applicant's name : ETi Solid State Lighting, Inc

Address : 720 Northgate Parkway Wheeling, IL60090

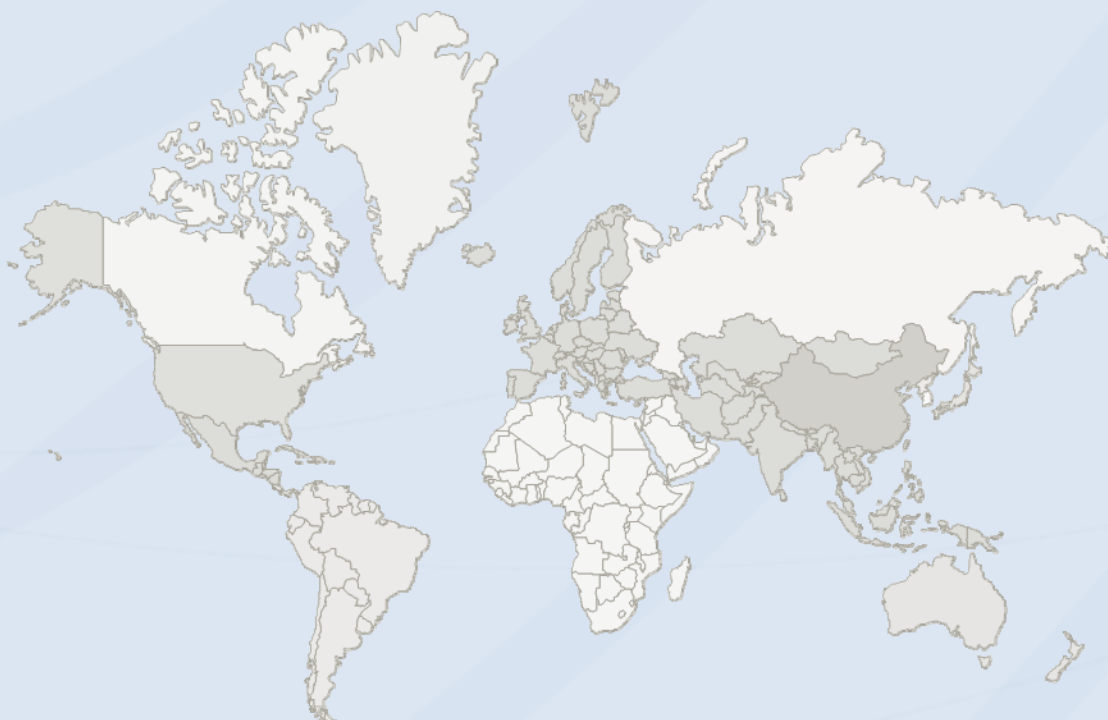

DONGGUAN NEW TESTING CENTRE CO., LTD

Address: 1F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People's Republic of China 523808

Tel: +86-769-22212079

Web: <http://www.ntc-cert.com>

E-mail: dave@ntc-cert.com

TABLE OF CONTENTS

Test Report Declare	3
1. Summary of test results	4
2. General test information	4
2.1. Description of EUT.....	4
2.2. Support Equipment.....	5
2.3. Block diagram EUT configuration for test.....	5
2.4. Test environment conditions	5
2.5. Measurement uncertainty	5
3. Power Line Conducted Emission Test.....	6
3.1. Test equipment	6
3.2. Block diagram of test setup	6
3.3. Power Line Conducted Emission Limits (Class B)	6
3.4. Test Procedure.....	7
3.5. Test Result.....	7
4. Radiated emission test.....	10
4.1. Test equipment	10
4.2. Block diagram of test setup	11
4.3. Limit.....	13
4.4. Test Procedure.....	14
4.5. Test result	14
5. -20dB Bandwidth.....	20
5.1. Test equipment	20
5.2. Block diagram of test setup	20
5.3. Limit.....	20
5.4. Test Procedure.....	20
5.5. Test result	21
6. Test setup photograph	23
6.1. Photos of power line conducted emission test	23
6.2. Photos of radiated emission test	23
7. Photos of the EUT	25

TEST REPORT DECLARE

FCC ID	:	XZH-C011782024
Applicant	:	ETi Solid State Lighting, Inc.
Address	:	720 Northgate Parkway Wheeling, IL60090
Equipment under Test	:	LED ceiling light
Model No	:	C01178XXXX, C01179XXXX where the "X" may be digits from 0 to 9 for different LED color temperature; the "XX" may be digits from 00 to 99 for commercial used code; the "X" may be blank or letter from A to Z for manufacturer internal needs
Trade Mark	:	ETI, Commercial Electric, Hampton Bay, Menards, patriot
Manufacturer1	:	ETI Solid State Lighting (Zhuhai) Ltd.
Address1	:	No.1, Zhongzhu Road South, Science & Technology Innovation Coast, High Tech District, Zhuhai City, Guangdong Prov., China
Manufacturer2	:	NVC VIETNAM TECHNOLOGY AND LIGHTING COMPANY LIMITED
Address2	:	PLOT CN9-6, YEN PHONG INDUSTRIAL ZONE (EXPANSION PHASE), YEN TRUNG COMMUNE, YEN PHONG DISTRICT, BAC NINH PROVINCE
Test Laboratory	:	Dongguan New Testing Centre Co., Ltd.
Address	:	1F & 3F, No. 1 the 1st North Industry Road Songshan Lake Science & Technology Park Dongguan, People's Republic of China 523808

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C: 2024 15.249, ANSI C63.10:2013.

We Declare:

The equipment described above is tested by Dongguan New Testing Centre Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan New Testing Centre Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	NTC-ER2404061		
Date of Test:	Apr.25, 2024 to May.07, 2024	Date of Report:	May.08, 2024

Prepared By:

Taylor chen

Taylor Chen /Engineer



Dave

Dave Gou/LAB Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan New Testing Centre Co., Ltd

1. Summary of test results

Applied Standard: FCC Part 15 Subpart C §15.249		
FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249 (d)	Band Edges Measurement	Compliant
§15.215(c)	20 dB Bandwidth	Compliant

Remark: N/A* - Not Applicable for this device!

2. General test information

2.1. Description of EUT

EUT* Name	:	LED ceiling light
Test model	:	C01178401A
EUT function description	:	Please reference user manual of this device
Power supply	:	AC 120V, 60Hz, 21W
Trade mark	:	N/A
Operation frequency	:	5750 - 5825MHz
Antenna Type	:	Patch antenna
Antenna Gain	:	2 dBi


Note: EUT is the ab. of equipment under test.

2.2. Support Equipment

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
-	-	-	-	--	--

2.3. Block diagram EUT configuration for test

For EUT Tx mode:



2.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-24°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.5. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.44dB
Uncertainty for Radiation Emission test (30MHz – 1GHz)	3.14 dB (Polarize: V)
	3.16 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz – 26GHz)	4.27 dB (Polarize: V)
	4.51 dB (Polarize: H)
Uncertainty for Radiation Emission test (26GHz – 40GHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Bandwidth	±1.2%


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Power Line Conducted Emission Test

3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESCS30	8341151006	2023-05-19	1 Year
2	LISN	R&S	ENV216	3650.6550.06	2023-05-19	1 Year
3	Pulse Limiter	R&S	ESH3-Z2	0357-8810.54	2023-05-19	1 Year
4	RF Cable	HUBER	SUCOFLEX100	30722/4E	2023-05-19	1 Year
5	MEASUREMENT SOFTWARE	FARAD	EZ-EMC(VER:1.1.4.2)	N/A	N/A	N/A

3.2. BLOCK DIAGRAM OF TEST SETUP

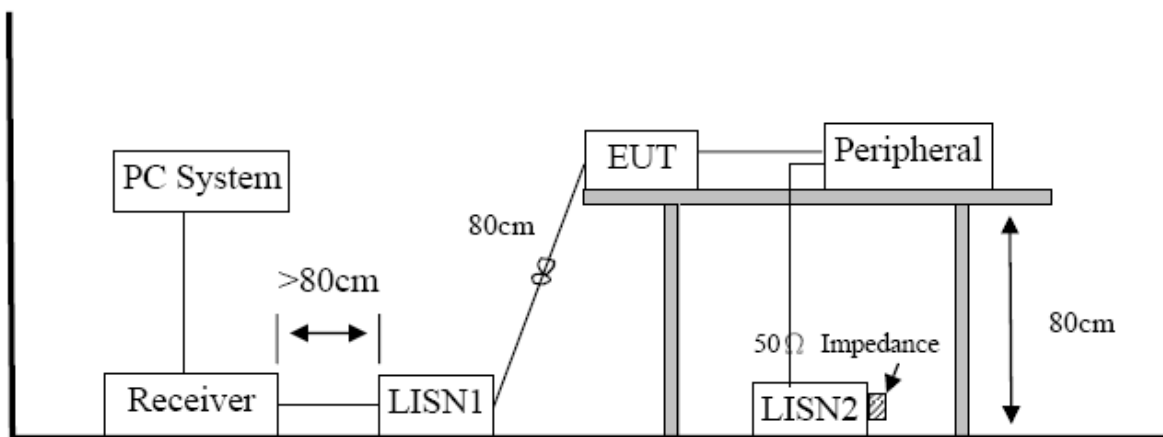

3.3. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

3.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 3.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

3.5. Test Result


PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means Peak detection; "-----" mans Average detection


Note3: Measurement = Reading Level + Factor, Margin= Measurement-Limit

Conducted Emission Test Result

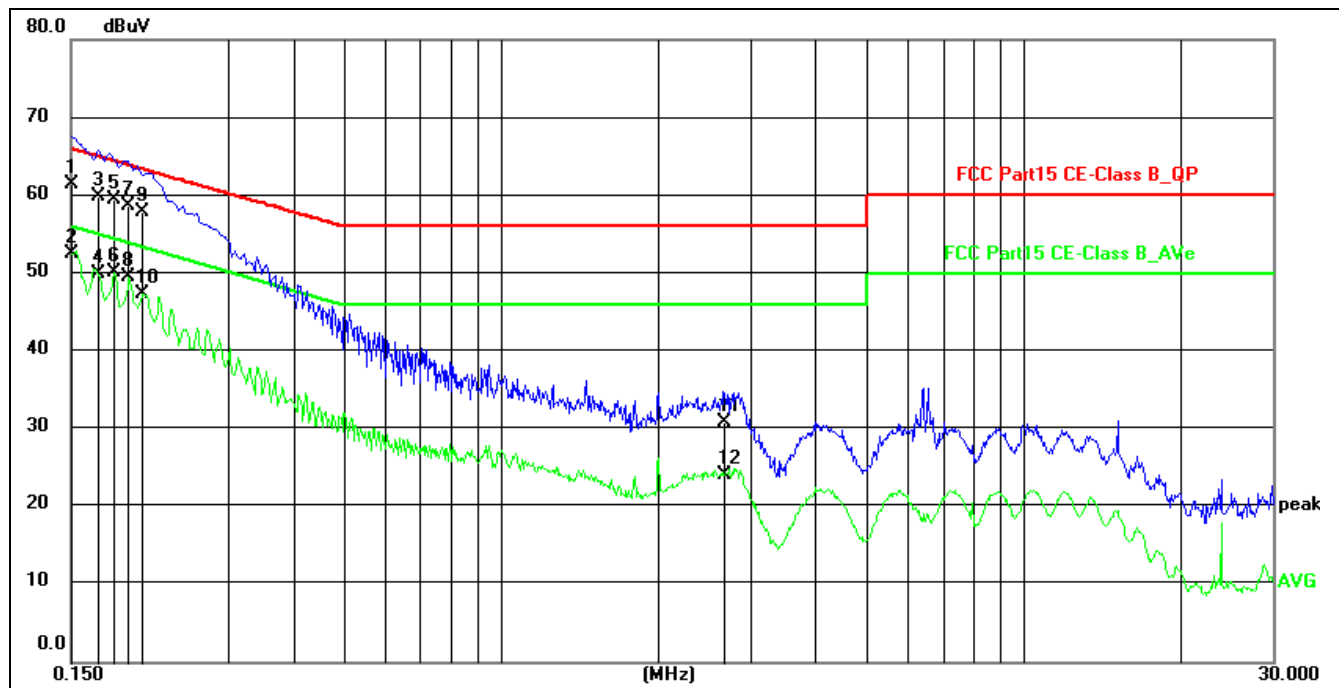

Site:	844LAB	Phase:L1	Temperature(C):24(C)
Limit:	FCC Part15 CE-Class B_QP		Humidity(%):63%
EUT:	LED ceiling light	Test Time:	2024/4/11 13:41:36
M/N.:	C01178401A	Power Rating:	AC120V/60Hz
Mode:	Tx (5750MHz-Worst Case)	Test Engineer:	
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1505	50.38	11.14	61.52	65.97	-4.45	QP	
2 *	0.1505	41.29	11.14	52.43	55.97	-3.54	AVG	
3	0.1692	48.66	11.14	59.80	65.00	-5.20	QP	
4	0.1692	38.74	11.14	49.88	55.00	-5.12	AVG	
5	0.1814	48.27	11.14	59.41	64.42	-5.01	QP	
6	0.1814	39.06	11.14	50.20	54.42	-4.22	AVG	
7	0.1934	47.61	11.14	58.75	63.89	-5.14	QP	
8	0.1934	38.40	11.14	49.54	53.89	-4.35	AVG	
9	0.2061	46.70	11.14	57.84	63.36	-5.52	QP	
10	0.2061	36.20	11.14	47.34	53.36	-6.02	AVG	
11	2.6740	19.61	11.23	30.84	56.00	-25.16	QP	
12	2.6740	12.82	11.23	24.05	46.00	-21.95	AVG	

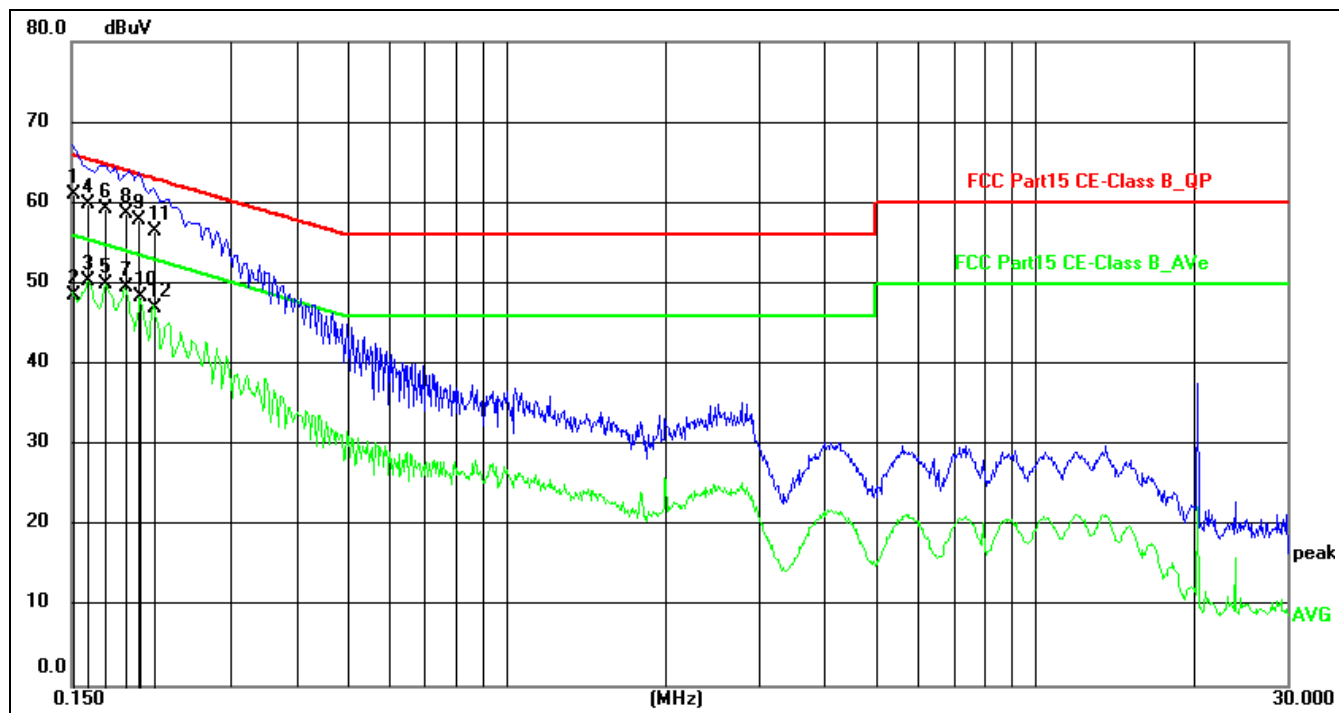

Site:	844LAB	Phase:	N	Temperature(C):	24(C)
Limit:	FCC Part15 CE-Class B_QP			Humidity(%):	63%
EUT:	LED ceiling light	Test Time:	2024/4/11 13:44:45		
M/N.:	C01178401A	Power Rating:	AC120V/60Hz		
Mode:	Tx (5750MHz-Worst Case)	Test Engineer:			
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1508	49.87	11.15	61.02	65.96	-4.94	QP	
2	0.1508	37.44	11.15	48.59	55.96	-7.37	AVG	
3	0.1614	39.14	11.16	50.30	55.39	-5.09	AVG	
4	0.1615	48.74	11.16	59.90	65.39	-5.49	QP	
5	0.1737	38.76	11.16	49.92	54.78	-4.86	AVG	
6	0.1737	48.09	11.16	59.25	64.78	-5.53	QP	
7 *	0.1899	38.37	11.16	49.53	54.04	-4.51	AVG	
8	0.1901	47.41	11.16	58.57	64.03	-5.46	QP	
9	0.2017	46.67	11.17	57.84	63.54	-5.70	QP	
10	0.2019	37.16	11.17	48.33	53.53	-5.20	AVG	
11	0.2141	45.36	11.18	56.54	63.04	-6.50	QP	
12	0.2141	35.73	11.18	46.91	53.04	-6.13	AVG	


4. Radiated emission test

4.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	EMI Test Receiver	R&S	ESR	7250-30406 7528	2023-05-19	1Year
2	EMI Test Receiver	R&S	FSP40	101289	2023-07-28	1Year
3	Trilog Broadband Antenna	Schwarzbeck	VULB9168	00969	2023-05-19	2 Year
4	Pre-amplifier	R&S	8447F	3113A04553	2023-05-19	1Year
5	Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	2023-05-19	2Year
6	Horn antenna	Schwarzbeck	BBHA9120D	453	2023-05-19	2Year
7	Double Ridged Horn Antenna	A.H. System	SAS-574	584	2023-05-19	2Year
8	Pre-amplifier	R&S	SCU18	105326	2023-05-19	1Year
9	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 3	2023-05-19	1Year
10	RF Cable	GORE	OSQ01Q010 78.7	SN1545847 4	2023-05-19	1Year
11	RF Cable	ESCO	ETS-LINGR EN	RFC-SMS-1 00-SMS-340 -IN	2023-05-19	1Year
12	Measurement software	Farad	EZ-EMC(VE R:1.1.4.2)	N/A	N/A	N/A

4.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz to 30MHz:

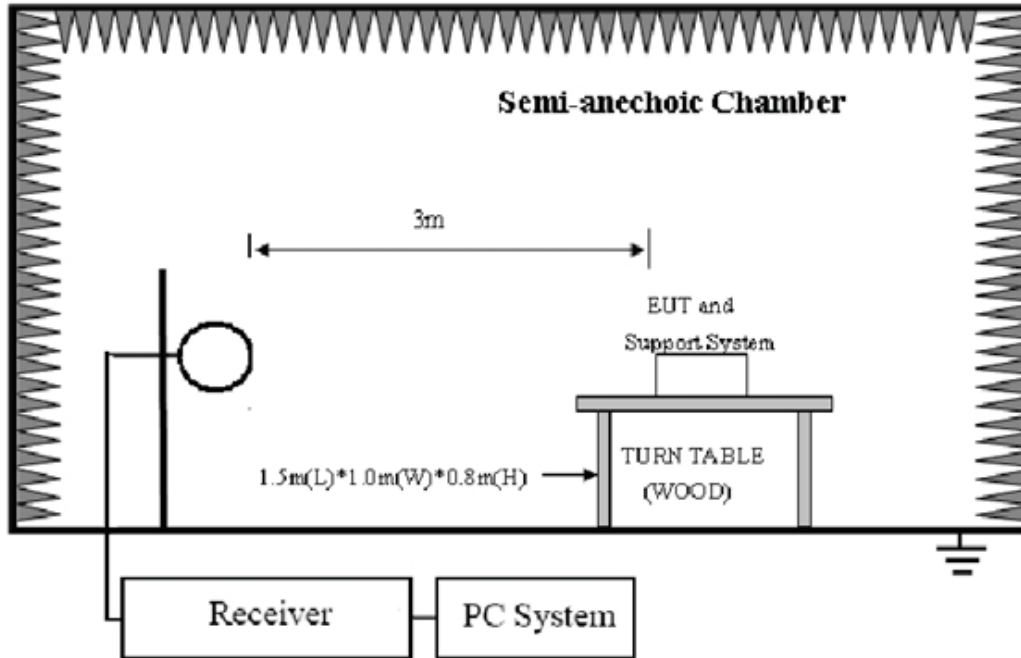

In 3m Anechoic Chamber Test Setup Diagram for 30MHz to 1GHz:

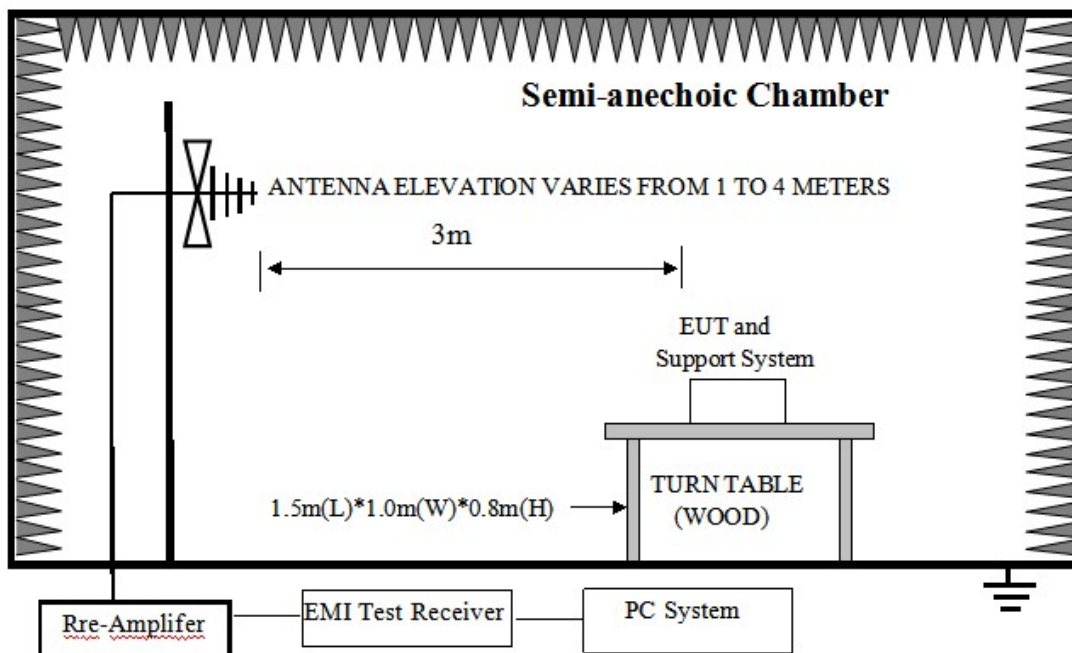

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz:

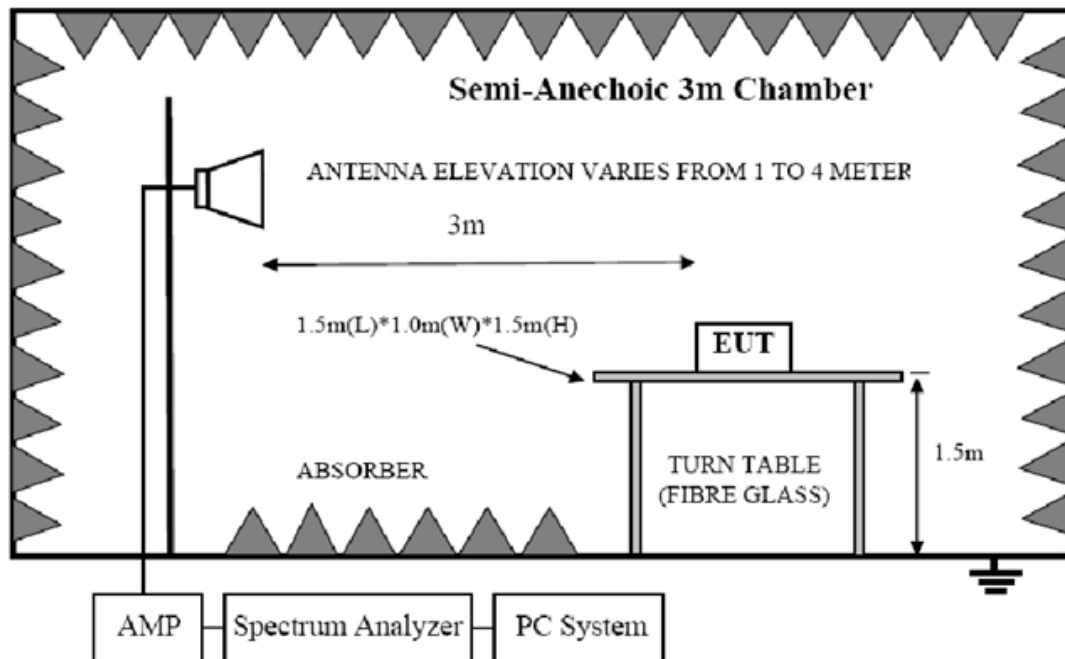

4.3. Limit

FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

FCC 15.109 Limit

Frequency (MHz)	Distance (Meters)	Field Strengths Limits dB(μV)/m
30--88	3	40.0
88--216	3	43.5
216--960	3	46.0
960--1000	3	54.0
Above 1GHz	3	Peak: 74.0
	3	Average: 54.0

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

(3) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(4) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit } 3\text{m(dBuV/m)} = \text{Limit } 30\text{m(dBuV/m)} + 40\text{Log}(30\text{m}/3\text{m})$$

(5) All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.109, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.109 limits.

4.4. Test Procedure

Procedure of Preliminary Test

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 4.2 of this report.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

EUT height should be 0.8m for below 1GHz and 1.5m for above 1GHz at ground with absorbers.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The X, Y, Z three axial are tested and the report only the worst case.

The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure.


4.5. Test result

PASS. (See below detailed test result)

9K-30MHz: Emission detected are more than 20dB below the limit line.


18~40GHz at least have 20dB margin. No recording in the test report.

Radiated Emission Test Result

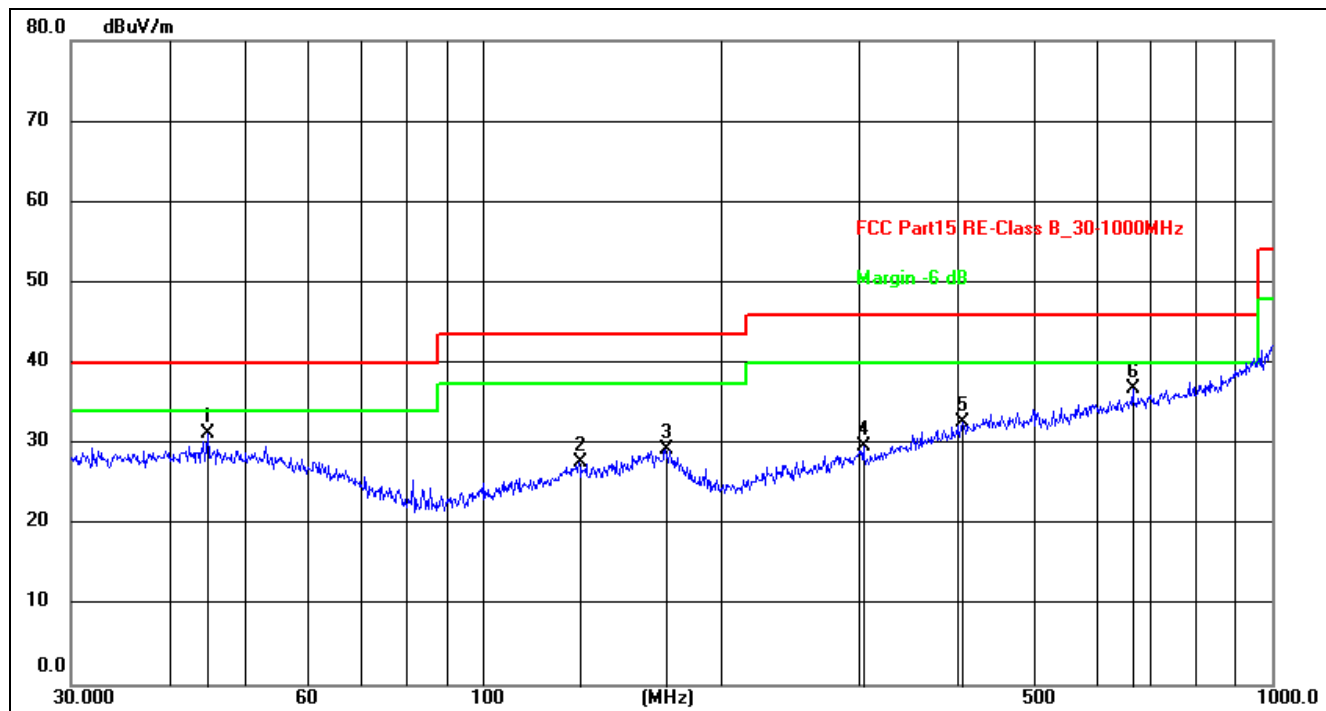

Site: 966LAB Antenna::Horizontal Temperature(C):24(C)
Limit: FCC Part15 RE-Class B_30-1000MHz Humidity(%):60%
EUT: LED ceiling light Test Time: 2024/4/11 13:29:47
M/N.: C01178401A Power Rating: AC 120V/60Hz
Mode: Tx (5750MHz-Worst Case) Test Engineer:
Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	44.7433	16.96	14.34	31.30	40.00	-8.70	peak	100	239	
2	132.2206	13.69	13.93	27.62	43.50	-15.88	peak	200	269	
3	170.1948	14.76	14.50	29.26	43.50	-14.24	peak	200	315	
4	303.5437	14.94	14.64	29.58	46.00	-16.42	peak	200	173	
5	406.0880	15.74	16.92	32.66	46.00	-13.34	peak	200	356	
6	665.8035	14.79	22.12	36.91	46.00	-9.09	peak	200	356	

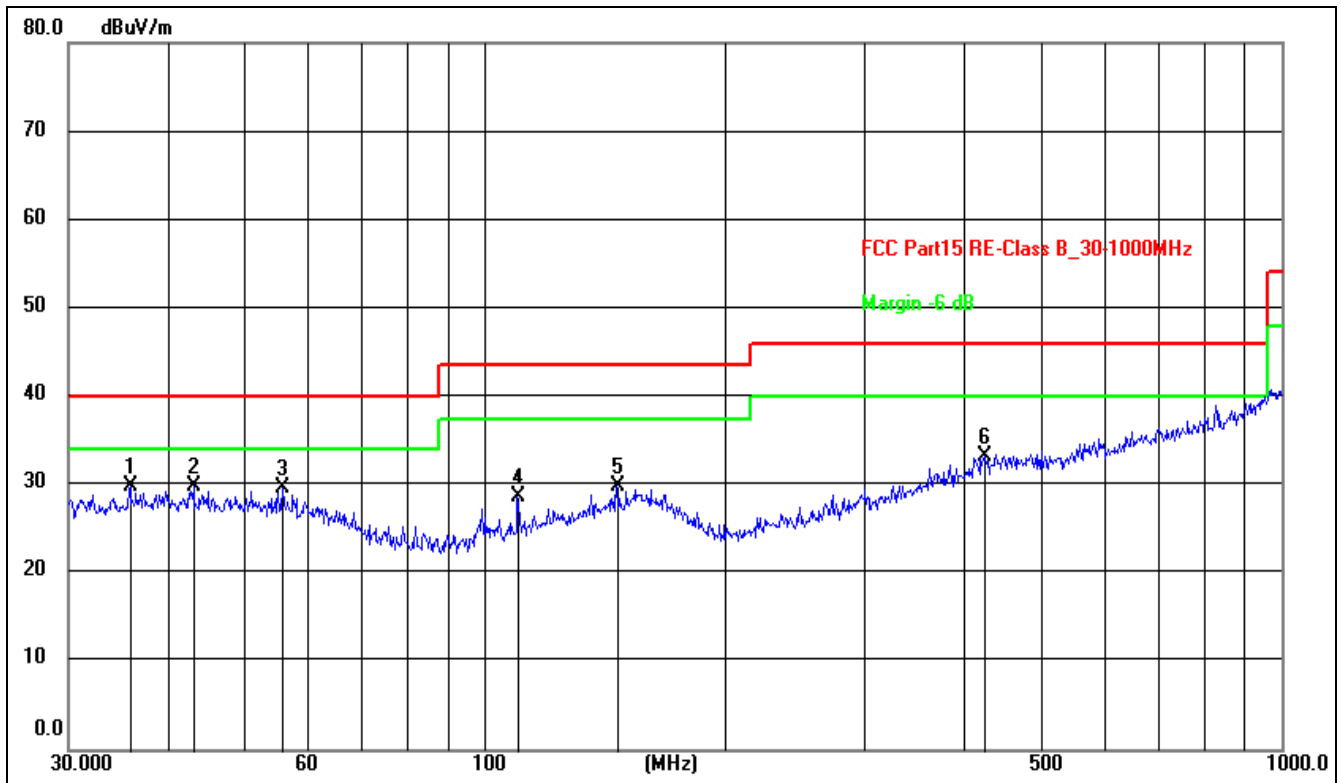

Site: 966LAB Antenna::Vertical Temperature(C):24(C)
Limit: FCC Part15 RE-Class B_30-1000MHz Humidity(%):60%
EUT: LED ceiling light Test Time: 2024/4/11 13:23:28
M/N.: C01178401A Power Rating: AC 120V/60Hz
Mode: Tx (5750MHz-Worst Case) Test Engineer:
Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	35.8746	15.67	14.11	29.78	40.00	-10.22	peak	200	180	
2*	43.0505	15.44	14.48	29.92	40.00	-10.08	peak	200	80	
3	55.8047	15.81	13.86	29.67	40.00	-10.33	peak	200	180	
4	109.7960	16.44	12.26	28.70	43.50	-14.80	peak	200	350	
5	146.3735	14.63	15.20	29.83	43.50	-13.67	peak	200	214	
6	425.0280	15.88	17.44	33.32	46.00	-12.68	peak	200	206	

Site:	966LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.249		Humidity(%):60%
EUT:	LED ceiling light	Test Time:	2024/4/11
M/N.:	C01178401A	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (5750MHz)	Test Engineer:	
Note:			

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-am p (dB)	Cable loss (dB)	Result (dBuV/ m)	Limit (dBuV/ m)	Margin (dB)	Detect	Antenna polarizati on
5150.00	49.40	31.32	40.32	11.21	51.61	74.00	-22.39	Peak	H
5150.00	40.85	31.32	40.32	11.21	43.06	54.00	-10.94	Average	H
5725.00	45.05	31.96	40.28	11.64	48.37	74.00	-25.63	Peak	H
5725.00	40.34	31.96	40.28	11.64	43.66	54.00	-10.34	Average	H
5750.00	78.67	32.11	40.26	11.68	82.20	114.00	-31.80	Peak	H
5750.00	70.75	32.11	40.26	11.68	74.28	94.00	-19.72	Average	H
5875.00	40.43	32.26	40.15	12.14	44.68	74.00	-29.32	Peak	H
5875.00	37.60	32.26	40.15	12.14	41.85	54.00	-12.15	Average	H
11500.00	32.23	39.81	40.37	16.81	48.48	74.00	-25.52	Peak	H
11500.00	26.75	39.81	40.37	16.81	43.00	54.00	-11.00	Average	H
5150.00	46.02	31.32	40.32	11.21	48.23	74.00	-25.77	Peak	V
5150.00	40.85	31.32	40.32	11.21	43.06	54.00	-10.94	Average	V
5725.00	43.27	31.96	40.28	11.64	46.59	74.00	-27.41	Peak	V
5725.00	34.99	31.96	40.28	11.64	38.31	54.00	-15.69	Average	V
5750.00	70.92	32.11	40.26	11.68	74.45	114.00	-39.55	Peak	V
5750.00	60.97	32.11	40.26	11.68	64.50	94.00	-29.50	Average	V
5875.00	46.10	32.26	40.15	12.14	50.35	74.00	-23.65	Peak	V
5875.00	36.01	32.26	40.15	12.14	40.26	54.00	-13.74	Average	V
11500.00	35.22	39.81	40.37	16.81	51.47	74.00	-22.53	Peak	V
11500.00	23.74	39.81	40.37	16.81	39.99	54.00	-14.01	Average	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.249		Humidity(%):60%
EUT:	LED ceiling light	Test Time:	2024/4/11
M/N.:	C01178401A	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (5785MHz)	Test Engineer:	
Note:			

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-am p (dB)	Cable loss (dB)	Result (dBuV/ m)	Limit (dBuV/ m)	Margin (dB)	Detect	Antenna polarizati on
5150.00	49.40	31.32	40.32	11.21	51.61	74.00	-22.39	Peak	H
5150.00	42.18	31.32	40.32	11.21	44.39	54.00	-9.61	Average	H
5725.00	45.56	31.96	40.28	11.64	48.88	74.00	-25.12	Peak	H
5725.00	38.50	31.96	40.28	11.64	41.82	54.00	-12.18	Average	H
5785.00	75.13	32.11	40.26	11.68	78.66	114.00	-35.34	Peak	H
5785.00	69.29	32.11	40.26	11.68	72.82	94.00	-21.18	Average	H
5875.00	42.27	32.26	40.15	12.14	46.52	74.00	-27.48	Peak	H
5875.00	33.22	32.26	40.15	12.14	37.47	54.00	-16.53	Average	H
11570.00	34.77	39.81	40.37	16.81	51.02	74.00	-22.98	Peak	H
11570.00	25.21	39.81	40.37	16.81	41.46	54.00	-12.54	Average	H
5150.00	47.56	31.32	40.32	11.21	49.77	74.00	-24.23	Peak	V
5150.00	42.69	31.32	40.32	11.21	44.90	54.00	-9.10	Average	V
5725.00	38.89	31.96	40.28	11.64	42.21	74.00	-31.79	Peak	V
5725.00	37.53	31.96	40.28	11.64	40.85	54.00	-13.15	Average	V
5785.00	69.25	32.11	40.26	11.68	72.78	114.00	-41.22	Peak	V
5785.00	63.48	32.11	40.26	11.68	67.01	94.00	-26.99	Average	V
5875.00	43.72	32.26	40.15	12.14	47.97	74.00	-26.03	Peak	V
5875.00	39.39	32.26	40.15	12.14	43.64	54.00	-10.36	Average	V
11570.00	33.38	39.81	40.37	16.81	49.63	74.00	-24.37	Peak	V
11570.00	25.07	39.81	40.37	16.81	41.32	54.00	-12.68	Average	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.

2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

Site:	966LAB	Antenna::H / V	Temperature(C):24(C)
Limit:	FCC Part 15.249		Humidity(%):60%
EUT:	LED ceiling light	Test Time:	2024/4/11
M/N.:	C01178401A	Power Rating:	AC 120V/60Hz
Mode:	Tx mode (5825MHz)	Test Engineer:	
Note:			

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Pre-am p (dB)	Cable loss (dB)	Result (dBuV/ m)	Limit (dBuV/ m)	Margin (dB)	Detect	Antenna polarizati on
5150.00	49.40	31.32	40.32	11.21	51.61	74.00	-22.39	Peak	H
5150.00	42.31	31.32	40.32	11.21	44.52	54.00	-9.48	Average	H
5725.00	43.72	31.96	40.28	11.64	47.04	74.00	-26.96	Peak	H
5725.00	40.34	31.96	40.28	11.64	43.66	54.00	-10.34	Average	H
5825.00	71.13	32.11	40.26	11.68	74.66	114.00	-39.34	Peak	H
5825.00	66.29	32.11	40.26	11.68	69.82	94.00	-24.18	Average	H
5875.00	38.89	32.26	40.15	12.14	43.14	74.00	-30.86	Peak	H
5875.00	35.76	32.26	40.15	12.14	40.01	54.00	-13.99	Average	H
11648.00	36.61	39.81	40.37	16.81	52.86	74.00	-21.14	Peak	H
11648.00	24.21	39.81	40.37	16.81	40.46	54.00	-13.54	Average	H
5150.00	47.56	31.32	40.32	11.21	49.77	74.00	-24.23	Peak	V
5150.00	39.18	31.32	40.32	11.21	41.39	54.00	-12.61	Average	V
5725.00	42.27	31.96	40.28	11.64	45.59	74.00	-28.41	Peak	V
5725.00	37.53	31.96	40.28	11.64	40.85	54.00	-13.15	Average	V
5825.00	69.38	32.11	40.26	11.68	72.91	114.00	-41.09	Peak	V
5825.00	62.64	32.11	40.26	11.68	66.17	94.00	-27.83	Average	V
5875.00	47.10	32.26	40.15	12.14	51.35	74.00	-22.65	Peak	V
5875.00	35.01	32.26	40.15	12.14	39.26	54.00	-14.74	Average	V
11648.00	33.38	39.81	40.37	16.81	49.63	74.00	-24.37	Peak	V
11648.00	22.20	39.81	40.37	16.81	38.45	54.00	-15.55	Average	V

Note: 1. Result Level = Reading Level + Antenna Factor + Cable loss – Pre-amp Factor.


2. Antenna polarization: “H” means Horizontal, “V” means Vertical.

5. -20dB Bandwidth

5.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	R&S	ESR	7250-304067 528	2023-05-19	1 Year

5.2. BLOCK DIAGRAM OF TEST SETUP

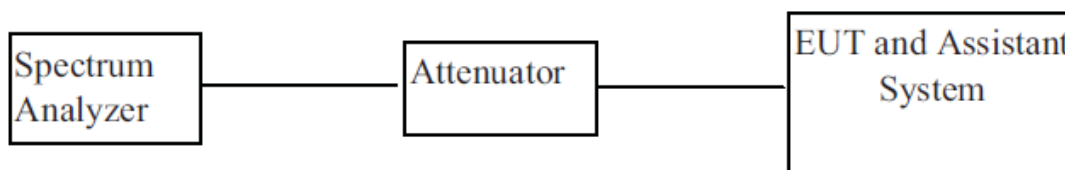

5.3. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained


in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.



5.4. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10 kHz RBW and 30 kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.5. Test result

Frequency	-20dB bandwidth
(MHz)	Result (KHz)
5750	135.50
5785	144.20
5825	138.70

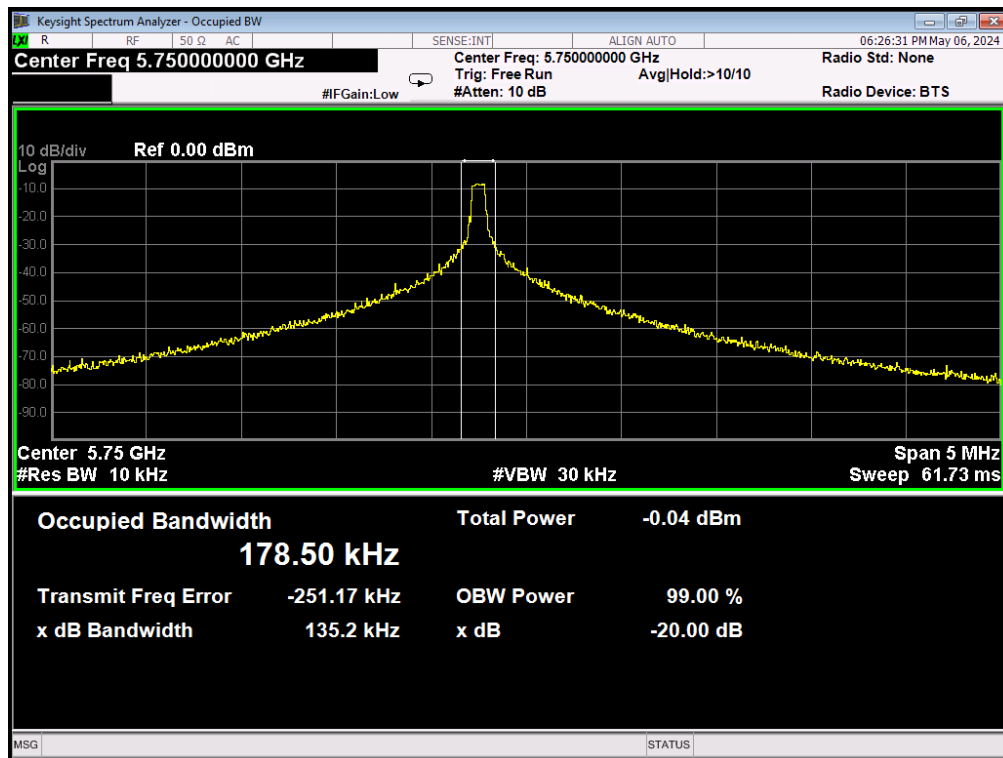

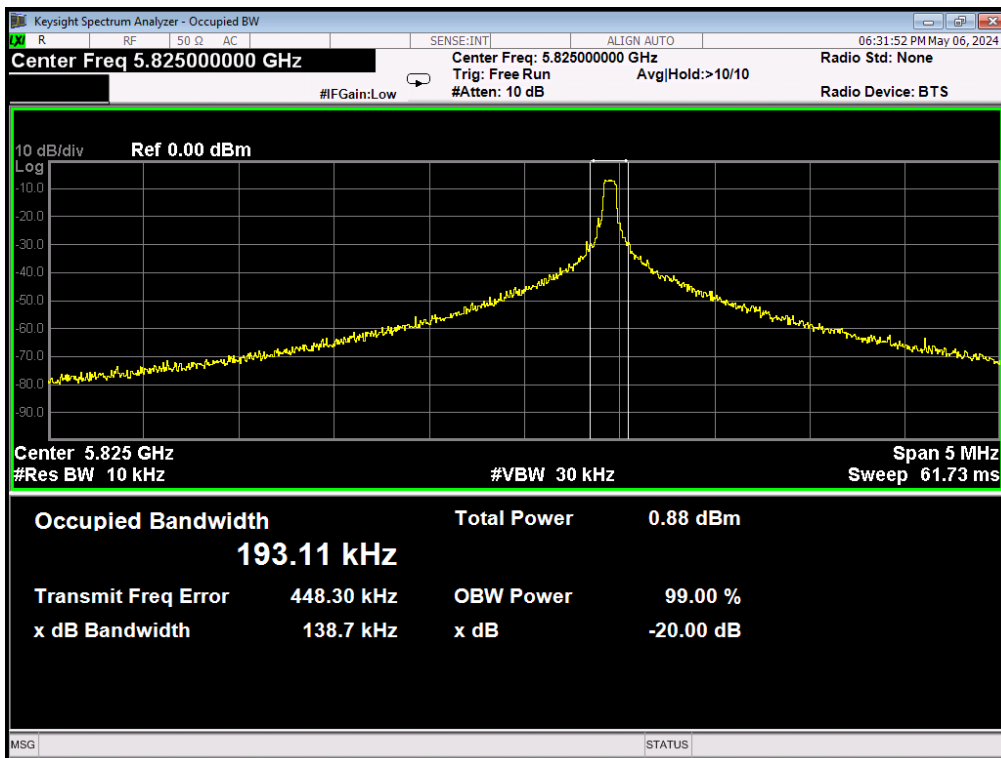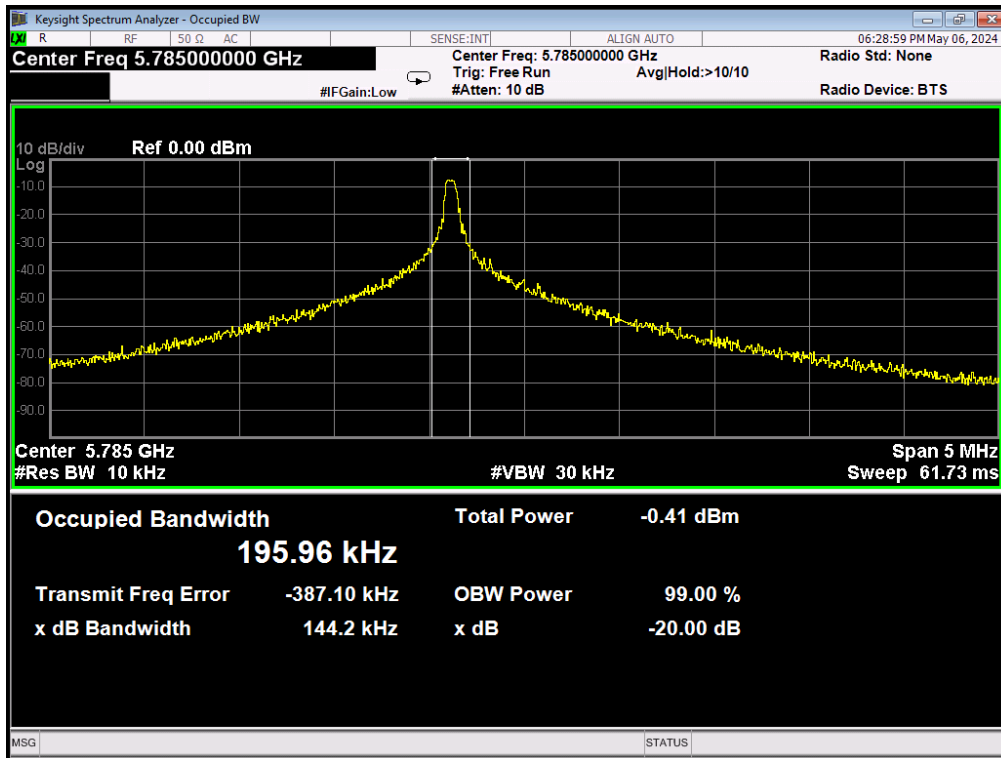

6. Test setup photograph

6.1. Photos of power line conducted emission test



6.2. Photos of radiated emission test

30MHz – 1GHz





Above 1GHz






7. Photos of the EUT





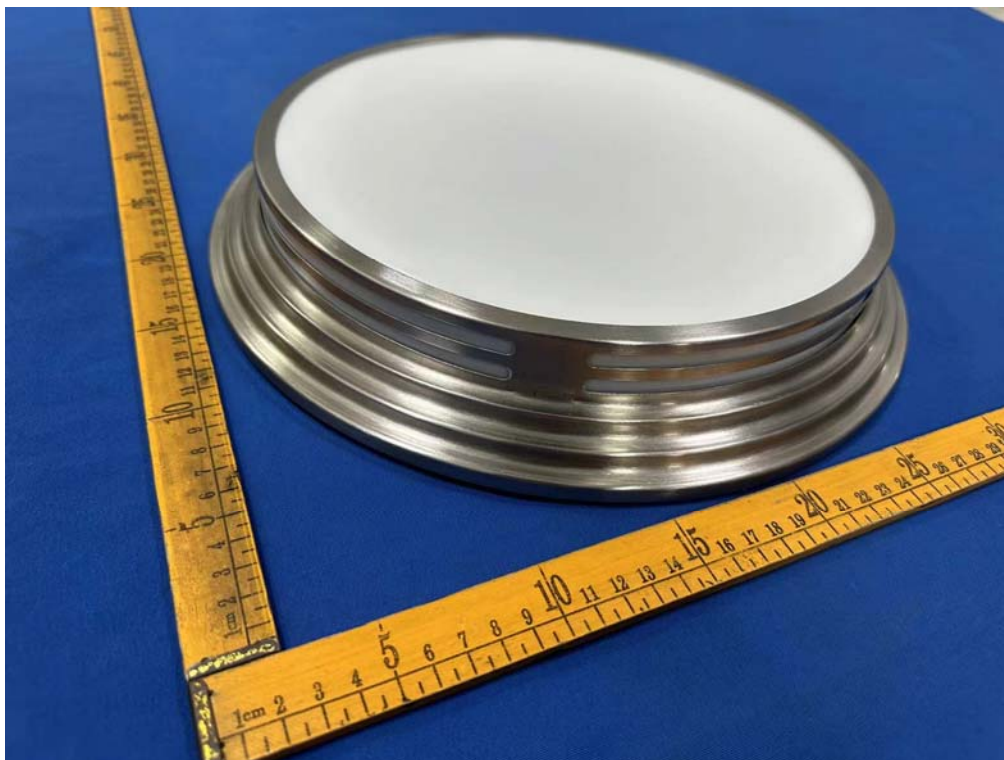

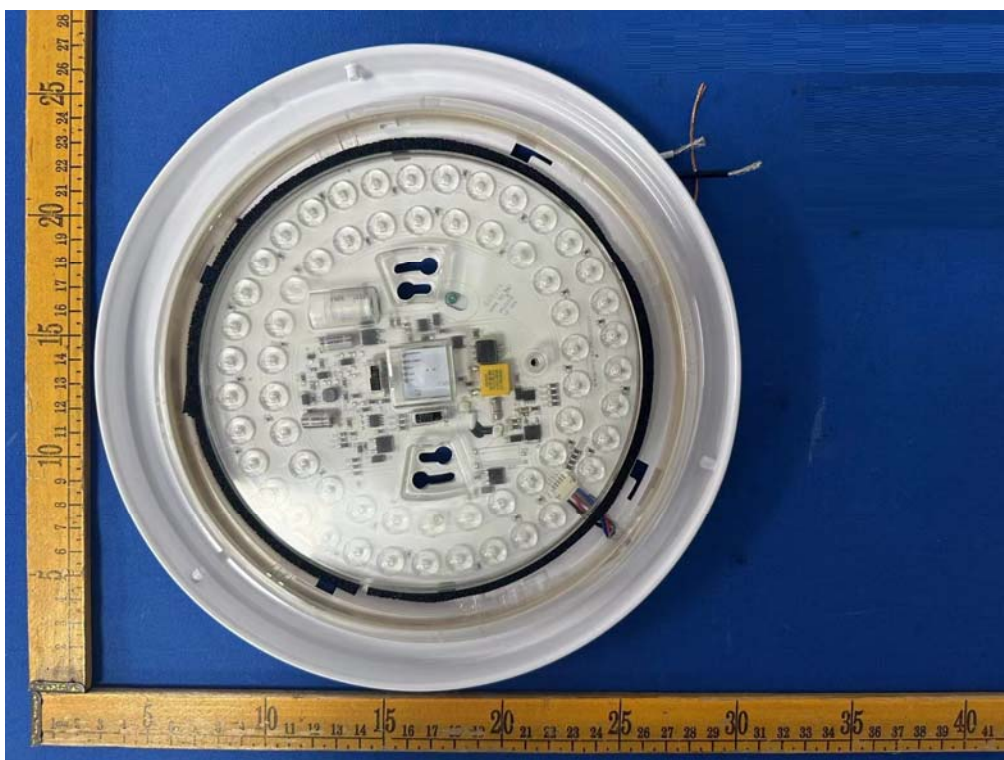

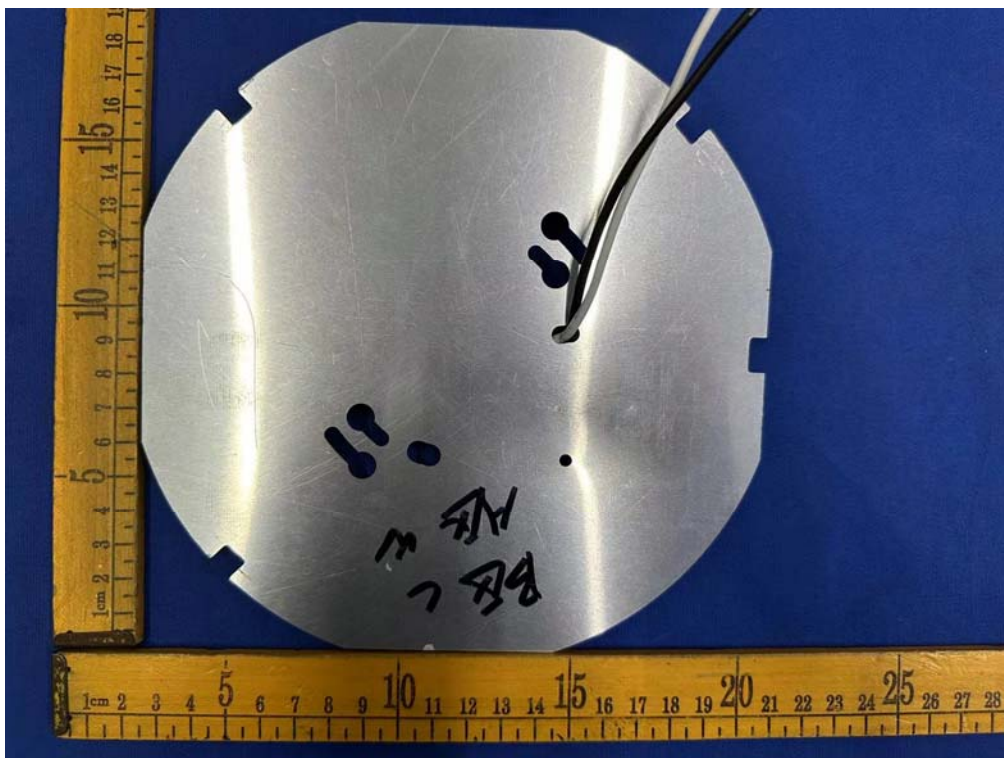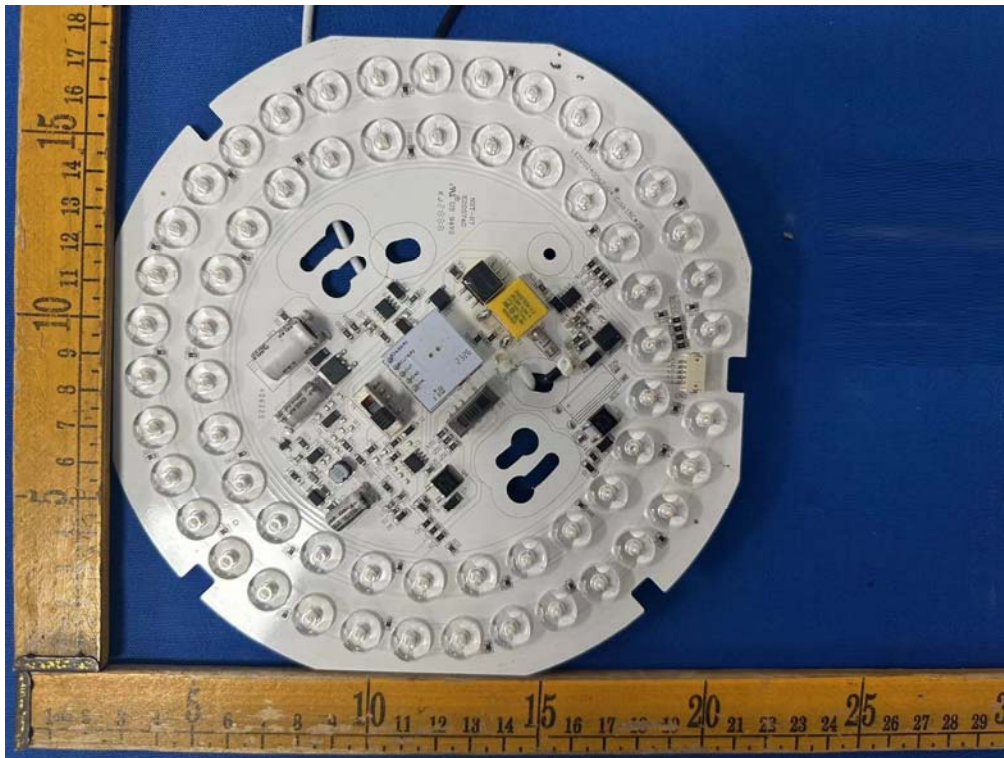

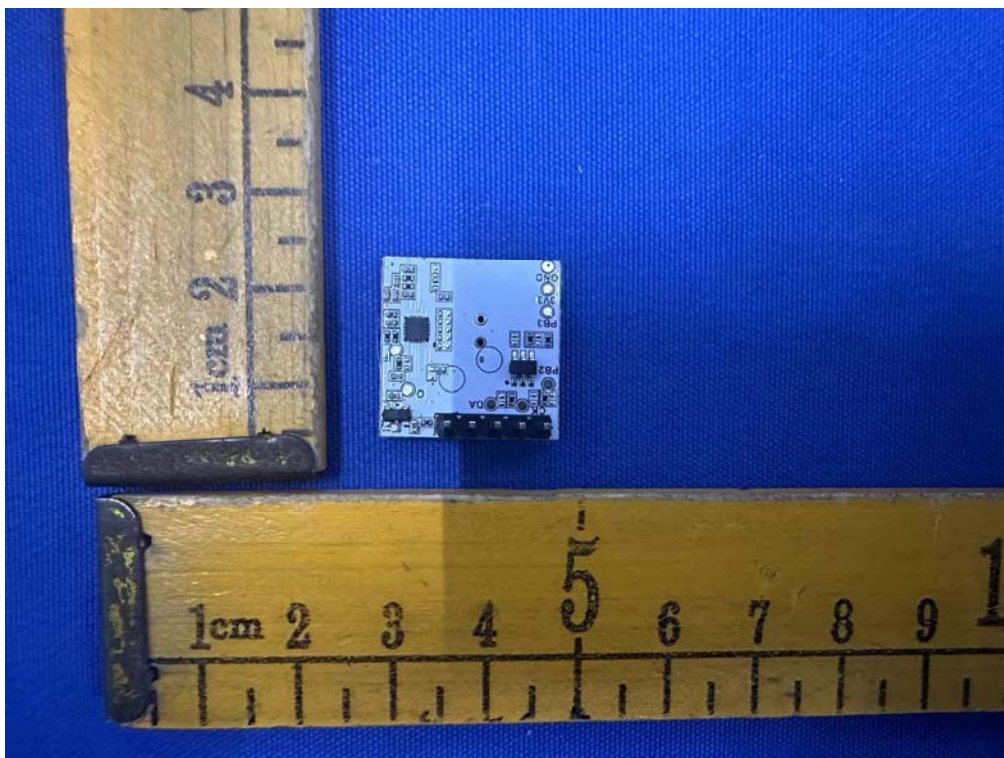

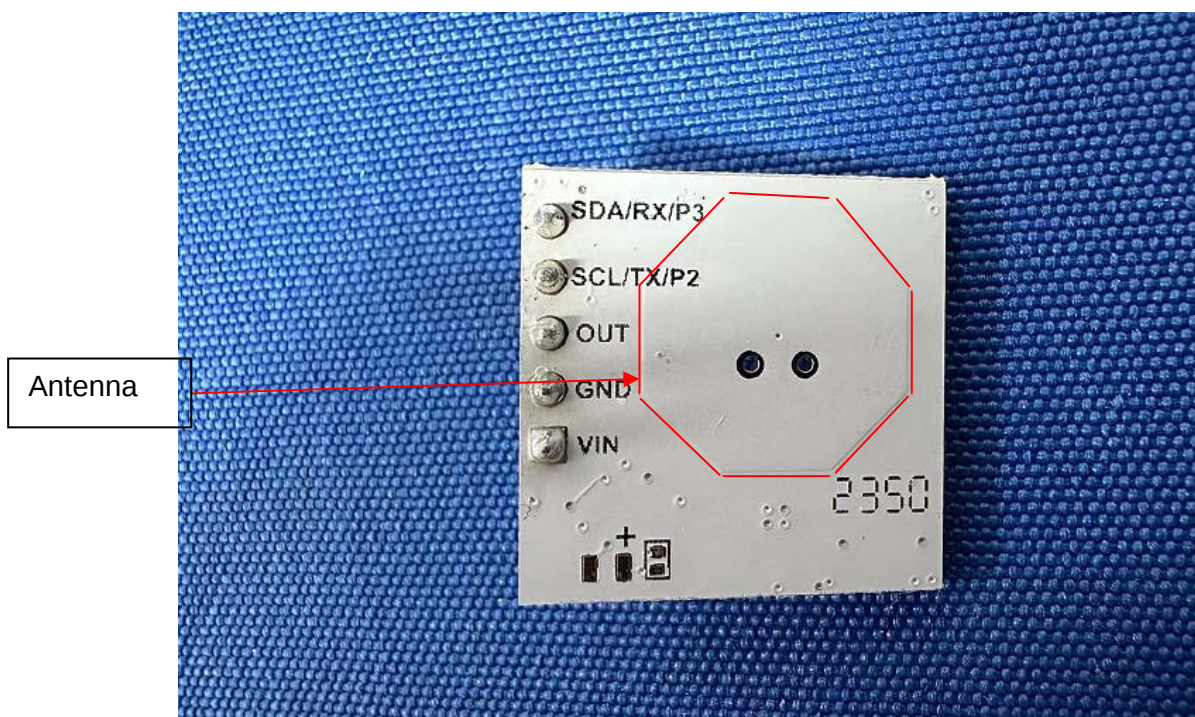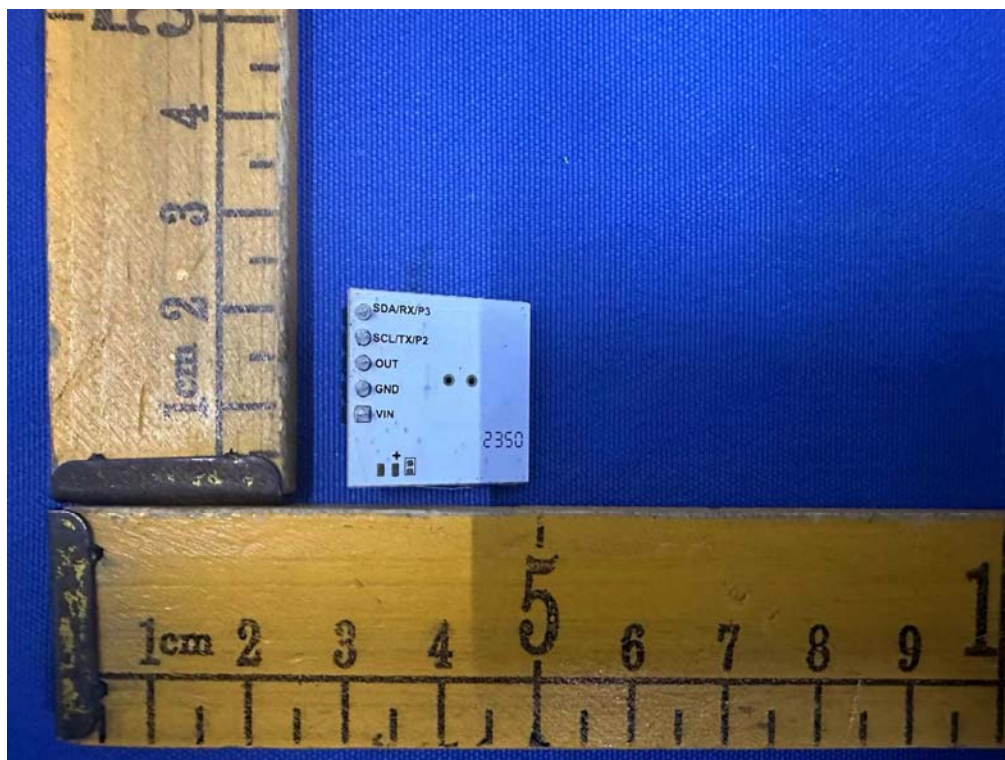

--END OF REPORT--