



FCC PART 90 TEST REPORT

FCC Part 90

Report Reference No.....: **WE11030045**

FCC ID.....: **YAMRD98XU2**

Compiled by

(position+printed name+signature)..: File administrators Eric Zhang

Eric Zhang

Supervised by

(position+printed name+signature)..: Test Engineer Wenliang Li

Wenliang Li

Approved by

(position+printed name+signature)..: Manager Jimmy Li

Jimmy Li

Date of issue.....: Apr 25, 2011

Testing Laboratory Name.....: **Shenzhen Huatongwei International Inspection Co., Ltd**

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name.....: **Hytera Communications Corporation Ltd.**

Address: HYT Tower, Hi-Tech Industrial Park North, Nanshan District, Shenzhen China. 518057

Test specification:

Standard.....: **FCC Part 90: PRIVATE LAND TWO-WAY RADIO SERVICES**

TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Digital Base Station Repeater

Trade Mark.....:



Manufacturer.....: **Hytera Communications Corporation Ltd.**

Model/Type reference.....: RD982 U(2)/ RD985 U(2)/ RD986 U(2)/ RD988 U(2)

Listed Models.....: /

Modulation.....: FM&4FSK

Channel Separation.....: 12.5KHz

Operation Frequency.....: From 450 MHz to 520 MHz

Ratings.....: DC 13.60 V

Rated Power.....: 5Watt(36.99dBm)-50Watt(46.99dBm) Continuous

Result.....: **Positive**

TEST REPORT

Test Report No. :	WE11030045	Apr 25, 2011
		Date of issue

Equipment under Test : Digital Base Station Repeater

Model /Type : RD982 U(2)/ RD985 U(2)/ RD986 U(2)/ RD988 U(2)

Listed Models : /

Applicant : **Hytera Communications Corporation Ltd.**

Address : HYT Tower,Hi-Tech Industrial Park North,Nanshan District,Shenzhen China.518057

Manufacturer : **Hytera Communications Corporation Ltd.**

Address : HYT Tower,Hi-Tech Industrial Park North,Nanshan District,Shenzhen China.518057

Test Result according to the standards on page 10:	Positive
---	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Product Description	5
2.3.	Equipment under Test	5
2.4.	Short description of the Equipment under Test (EUT)	6
2.5.	EUT Configuration	6
2.6.	EUT operation mode	6
2.7.	EUT configuration	6
2.8.	Related Submittal(s) / Grant (s)	6
2.9.	Modifications	6
2.10.	Note	7
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	9
3.4.	Configuration of Tested System	9
3.5.	Description of Tested Modes	9
3.6.	Statement of the measurement uncertainty	9
3.7.	Test Description	10
3.8.	Equipments Used during the Test	10
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
4.1.	Conducted Emissions Test	12
4.2.	Occupied Bandwidth and Emission Mask Test	18
4.3.	Transmitter Radiated Spurious Emission	38
4.4.	Spurious Emission on Antenna Port	43
4.5.	Modulation Characteristics	63
4.6.	Frequency Stability Test	66
4.7.	Maximum Transmitter Power	68
4.8.	Transmitter Frequency Behavior	75
4.9.	Receiver Radiated Spurious Emission	78
4.10.	Receiver Conducted Spurious Emission	88
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>95</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>99</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 90: PRIVATE LAND TWO-WAY RADIO SERVICES.

TIA/EIA 603: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.4-2009: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Mar 28, 2011
Testing commenced on	:	Mar 28, 2011
Testing concluded on	:	Apr 25, 2011

2.2. Product Description

The Hytera Communications Corporation Ltd.'s Model: RD982 U(2)/ RD985 U(2)/ RD986 U(2)/ RD988 U(2) or the "EUT" as referred to in this report; more general information as follows:

Name of EUT	Digital Base Station Repeater	
Model Number	RD982 U(2)/ RD985 U(2)/ RD986 U(2)/ RD988 U(2)	
FCC ID	YAMRD98XU2	
Rated Output Power	5Watt(36.99dBm)-50Watt(46.99dBm) Continuous	
Operation Type	The repeater cannot operate on multi-channels	
Support data rate	9.6kbps	
Modulation Type	FM for Analog Voice	
	4FSK for Digital Voice/Digital Data	
	Analog	11K0F3E for 12.5KHz Channel Separation
	Digital	7K60FXD for Digital Data only 7K60FXW for Digital Data & Digital Voice
Channel Separation	Analog Voice	12.5KHz
	Digital Voice/Data	12.5KHz
Antenna Type	External	
Frequency Range	From 450 MHz to 520 MHz	
Maximum Output Power	Analog	50.00 W for 12.5 KHz Channel Separation
	Digital	50.35 W for 12.5 KHz Channel Separation

Note: The product has the same digital working characters when operating in both two digitized voice/data mode (7K60FXD and 7K60FXW). So only one set of test results for digital modulation modes are provided in this test report.

2.3. Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 13.60 V

Test frequency list

Modulation Type	Test Channel	Test Frequency
Analog/FM	Low Channel	450.5000 MHz
	Middle Channel	485.0000 MHz
	High Channel	519.5000 MHz
Digital/4FSK	Low Channel	450.5000 MHz
	Middle Channel	485.0000 MHz
	High Channel	519.5000 MHz

2.4. Short description of the Equipment under Test (EUT)

450-520 MHz U frequency band Digital Base Station Repeater (RD982 U(2)/ RD985 U(2)/ RD986 U(2)/ RD988 U(2)).

The Digital Base Station Repeater (RD982 U(2)/ RD985 U(2)/ RD986 U(2)/ RD988 U(2)) can only operate on one signal channel.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.5. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.6. EUT operation mode

The EUT has been tested under typical operating condition. Using software provided by the client to control the EUT for staying in transmitting and receiving mode for testing.

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

●	Power Cable	Length (m) :	3
		Shield :	Unshield
		Detachable :	Detachable
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **YAMRD98XU2** filing to comply with FCC Part 90 Rules .

2.9. Modifications

No modifications were implemented to meet testing criteria.

2.10. Note

1. The EUT is a U frequency band (450-520MHz) Digital Base Station Repeater, The functions of the EUT listed as below:

	Test Standards	Reference Report
Radio	FCC Part 90	WE11030045
MPE	FCC Oet 65	WE11030046

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: August 02, 2007. Valid time is until March 29, 2012.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time to Sep 30, 2011.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date July 01, 2009.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on Jan 24th, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10; the Authorization is valid through July 07, 2011.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2009. Valid time is until December 19, 2012.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2009. Valid time is until December 19, 2012.

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until 24 August, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System

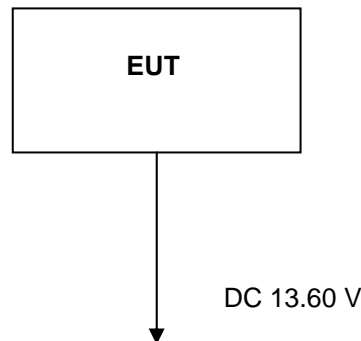


Table 2-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	---	----	----	----	----

3.5. Discription of Tested Modes

The EUT (Digital Base Station Repeater) has been tested under normal operating condition. Three channels (the high, the middle and the low) are chosen for testing at each channel separation (12.5 KHz).

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	150 Hz	(1)
Transmitter power conducted	0.30 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.7. Test Description

FCC Rules	Description of Test	Test Result
§ 15.107	Conducted Emission	Complies
§ 15.109	Receiver Radiated Spurious Emssion	Complies
§ 15.109	Receiver Conducted Spurious Emssion	Complies
§ 90.205	Maximum Transmitter Power	Complies
§ 90.207	Modulation Characteristic	Complies
§ 90.209	Occupied Bandwidth	Complies
§ 90.210	Emission Mask	Complies
§ 90.213	Frequency Stability	Complies
§ 90.214	Transmitter Frequency Behavior	Complies
§ 90.210	Transmitter Radiated Spurious Emssion	Complies
§ 90.210	Spurious Emssion On Antenna Port	Complies
§ 2.1091	RF Exposure Evaluation	Complies

3.8. Equipments Used during the Test

DC Power Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	23/10/2011
EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	23/10/2011
Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	23/10/2011
EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	23/10/2011

Modulation Characteristic				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Modulation Analyzer	HP	8901B	3104A03367	23/10/2011
Signal Generator	Rohde&Schwarz	SMT03	100059	23/10/2011
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	19/02/2012

Frequency Stability				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Communication Test Set	HP	HP8920B	US35010135	23/10/2011
Signal Generator	Rohde&Schwarz	SMT03	100059	23/10/2011
Climate Chamber	ESPEC	EL-10KA	05107008	23/10/2011

Transmitter Radiated Spurious Emission & Occupied Bandwidth & Emission Mask & Receiver Radiated Spurious Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Ultra-Broadband Antenna	Rohde&Schwarz	HL562	100015	23/10/2011
EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	23/10/2011
RF Test Panel	Rohde&Schwarz	TS / RSP	335015/ 0017	N/A
Turntable	ETS	2088	2149	23/10/2011
Antenna Mast	ETS	2075	2346	N/A
EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	23/10/2011
Vector Signal Generator	ROHDE & SCHWARZ	SMU200A	1141.2205.02	19/02/2012
ESG Vector Signal Generator	Agilent	E4438C	MY4271533	23/10/2011

Maximum Transmitter Power & Spurious Emission On Antenna Port				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	Rohde&Schwarz	ESI 26	100009	23/10/2011
Attenuator	R&S	ESH3-22	100449	23/10/2011
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	19/02//2012
High-Pass Filter	Anritsu	MP526B	6220875256	23/10/2011
High-Pass Filter	Anritsu	MP526D	6220878392	23/10/2011

Transient Frequency Behavior				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Signal Generator	Rohde&Schwarz	SMT03	100059	23/10/2011
Storage Oscilloscope	Tektronix	TDS3054B	B033027	23/10/2011
RF COMMUNICATION TEST SET	HP	8920A	3813A10206	19/02//2012


4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST APPLICABLE

The EUT was tested according to ANSI C63.4 - 2009. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u Henry as specified by section 5.1 of ANSI C63.4 - 2009. Cables and peripherals were moved to find the maximum emission levels for each frequency.

TEST CONFIGURATION

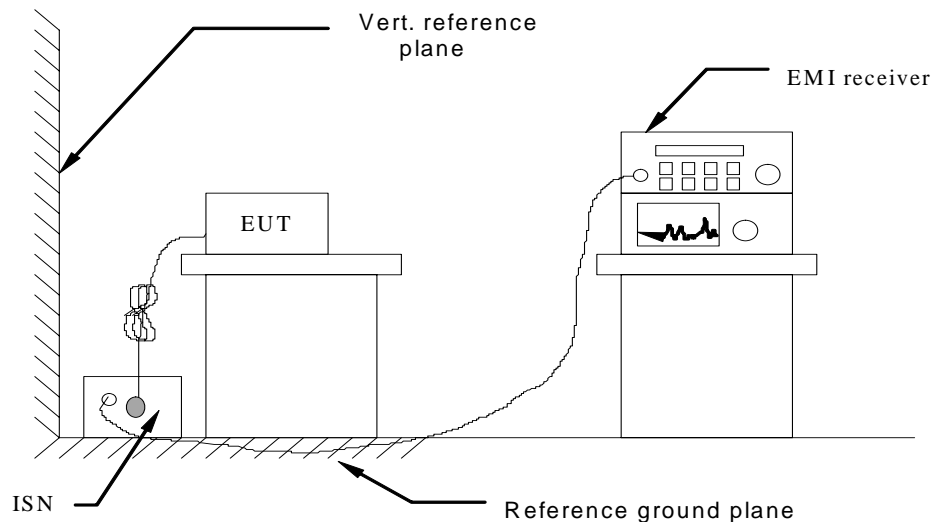

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009.
- 4 If a EUT received DC power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

For FM Modulation @ 12.5 KHz TX Mode**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

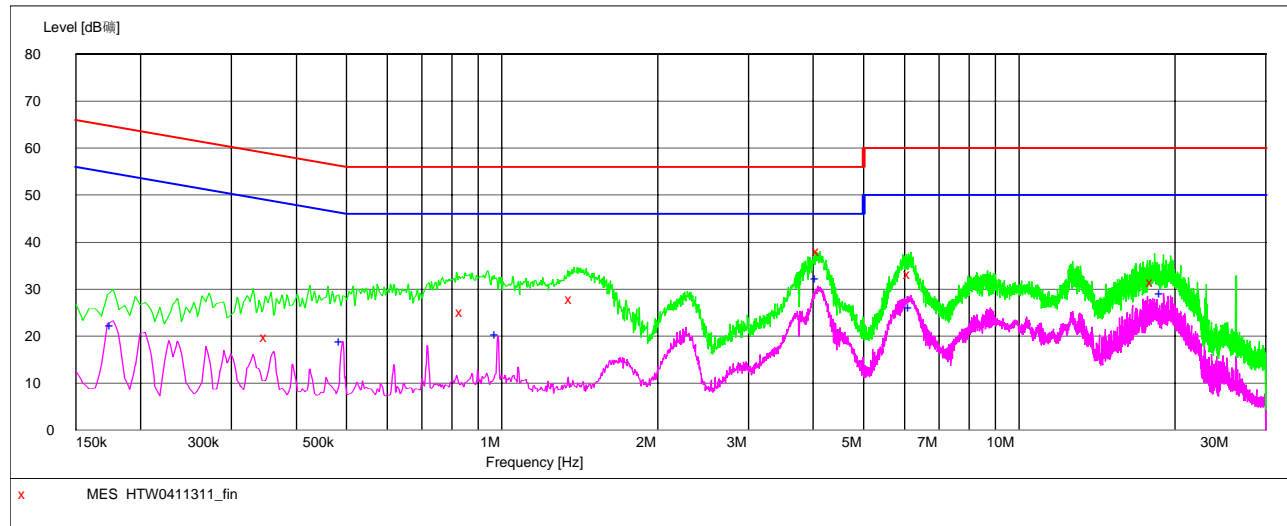**MEASUREMENT RESULT: "HTW0411311_fin"**

4/11/2011 1:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	19.80	10.1	59	39.1	QP	-	GND
0.843000	25.20	10.1	56	30.8	QP	-	GND
1.369500	27.90	10.2	56	28.1	QP	-	GND
4.128000	38.00	10.2	56	18.0	QP	-	GND
6.175500	33.20	10.2	60	26.8	QP	-	GND
18.226500	31.40	10.4	60	28.6	QP	-	GND


MEASUREMENT RESULT: "HTW0411311_fin2"

4/11/2011 1:28PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	22.30	10.1	55	32.3	AV	-	GND
0.492000	18.90	10.1	46	27.2	AV	-	GND
0.982500	20.30	10.2	46	25.7	AV	-	GND
4.087500	32.30	10.2	46	13.7	AV	-	GND
6.198000	26.10	10.2	50	23.9	AV	-	GND
18.960000	29.20	10.4	50	20.8	AV	-	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

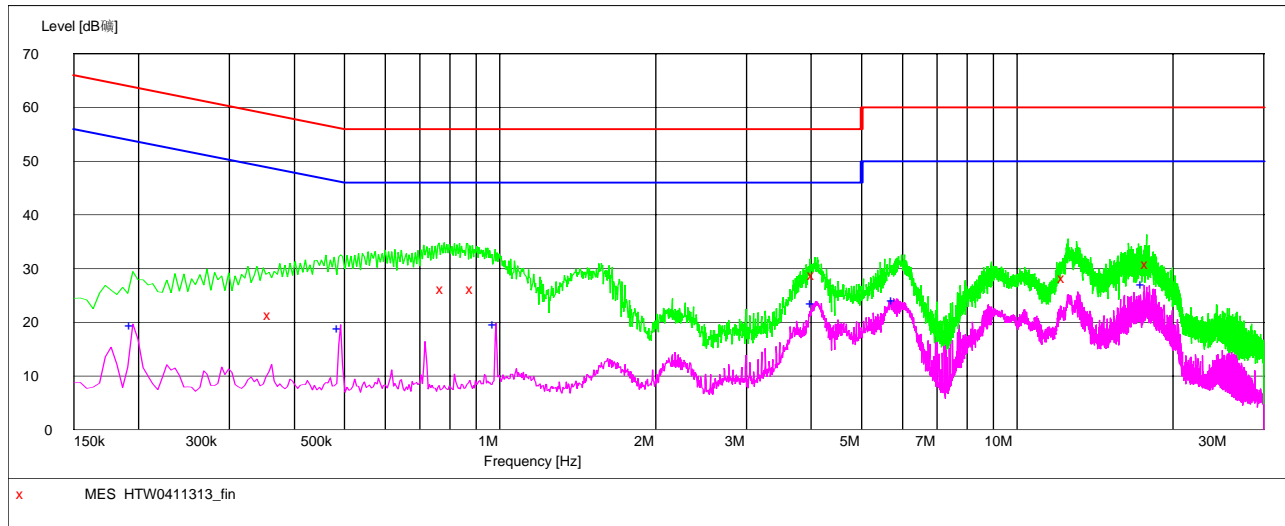**MEASUREMENT RESULT: "HTW0411313_fin"**

4/11/2011 1:32PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.361500	21.40	10.1	59	37.3	QP	+	GND
0.780000	26.20	10.1	56	29.8	QP	+	GND
0.888000	26.20	10.1	56	29.8	QP	+	GND
4.069500	28.80	10.2	56	27.2	QP	+	GND
12.417000	28.20	10.4	60	31.8	QP	+	GND
17.983500	30.90	10.4	60	29.1	QP	+	GND

MEASUREMENT RESULT: "HTW0411313_fin2"


4/11/2011 1:32PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	19.50	10.1	54	34.3	AV	+	GND
0.492000	19.00	10.1	46	27.1	AV	+	GND
0.982500	19.70	10.2	46	26.3	AV	+	GND
4.047000	23.50	10.2	46	22.5	AV	+	GND
5.811000	24.20	10.2	50	25.8	AV	+	GND
17.601000	27.10	10.4	50	22.9	AV	+	GND

For 4FSK Mudolation @ 12.5 KHz TX Mode**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description:

150K-30M Voltage

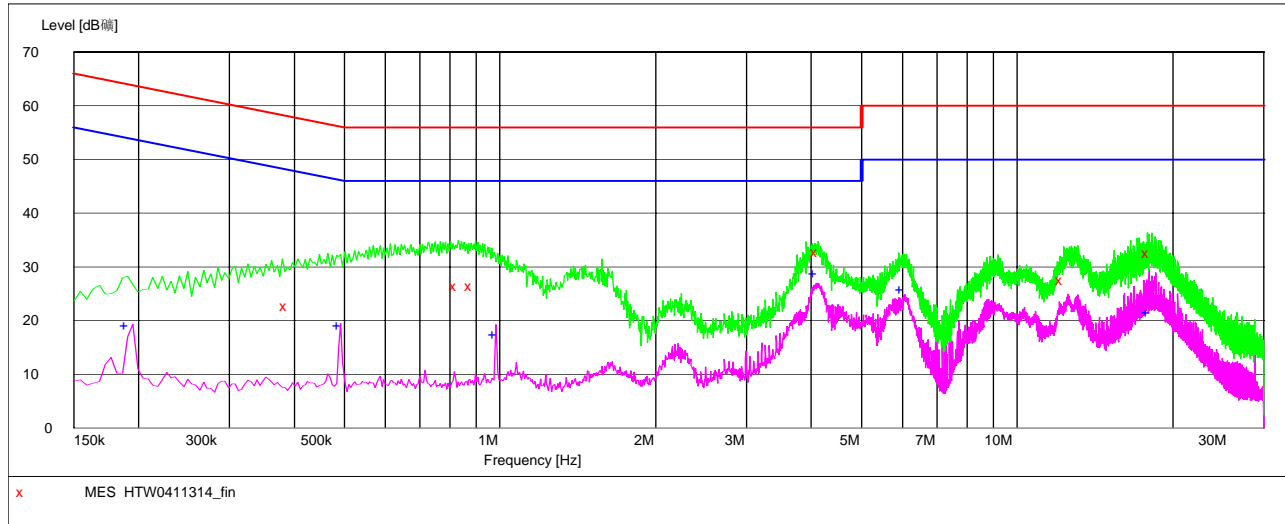**MEASUREMENT RESULT: "HTW0411314_fin"**

4/11/2011 1:35PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.388500	22.70	10.1	58	35.4	QP	+	GND
0.825000	26.50	10.1	56	29.5	QP	+	GND
0.883500	26.40	10.1	56	29.6	QP	+	GND
4.128000	32.80	10.2	56	23.2	QP	+	GND
12.286500	27.50	10.4	60	32.5	QP	+	GND
18.037500	32.50	10.4	60	27.5	QP	+	GND

MEASUREMENT RESULT: "HTW0411314_fin2"


4/11/2011 1:35PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	19.10	10.1	54	34.9	AV	+	GND
0.492000	19.10	10.1	46	27.0	AV	+	GND
0.982500	17.40	10.2	46	28.6	AV	+	GND
4.087500	28.80	10.2	46	17.2	AV	+	GND
6.018000	25.90	10.2	50	24.1	AV	+	GND
18.037500	21.60	10.4	50	28.4	AV	+	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description:

150K-30M Voltage

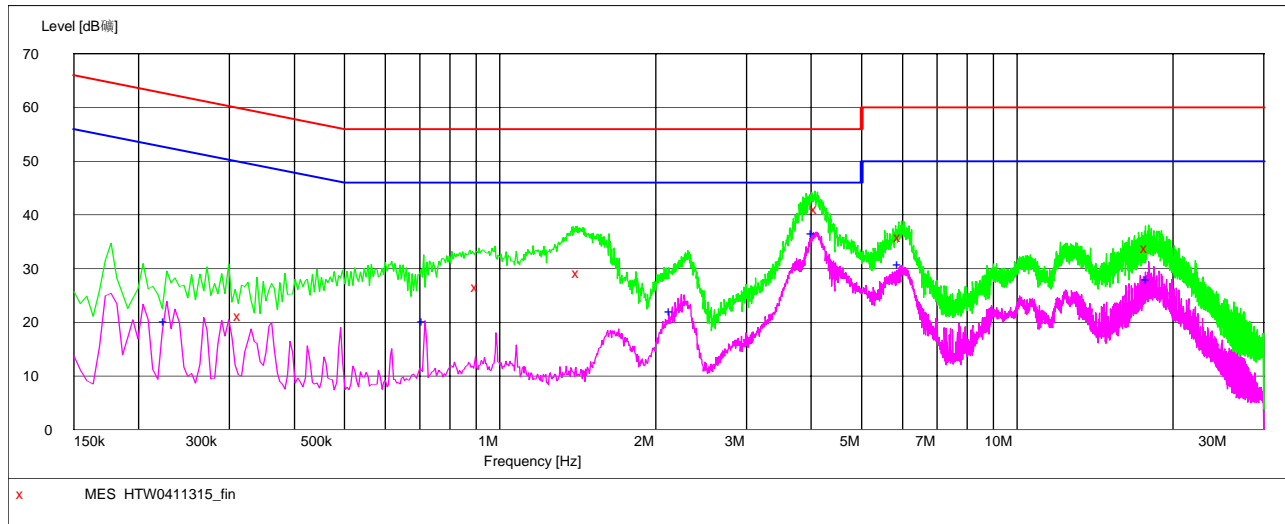**MEASUREMENT RESULT: "HTW0411315_fin"**

4/11/2011 1:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.316500	21.10	10.1	60	38.7	QP	-	GND
0.910500	26.50	10.1	56	29.5	QP	-	GND
1.428000	29.10	10.2	56	26.9	QP	-	GND
4.110000	41.10	10.2	56	14.9	QP	-	GND
5.973000	35.80	10.2	60	24.2	QP	-	GND
17.916000	33.80	10.4	60	26.2	QP	-	GND

MEASUREMENT RESULT: "HTW0411315_fin2"

4/11/2011 1:38PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.226500	20.20	10.1	53	32.4	AV	-	GND
0.717000	20.30	10.1	46	25.7	AV	-	GND
2.152500	22.20	10.2	46	23.8	AV	-	GND
4.051500	36.60	10.2	46	9.4	AV	-	GND
5.959500	30.80	10.2	50	19.2	AV	-	GND
18.037500	28.00	10.4	50	22.0	AV	-	GND


4.2. Occupied Bandwidth and Emission Mask Test

4.2.1 Occupied Bandwidth and Emission Mask at PPT function

TEST APPLICABLE

- (a). Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.
- (b). Emission Mask B: For transmitters that are equipped with an audio low-pass filter pursuant to §90.211(a), the power of any emission must be below the unmodulated carrier power (P) as follows:
- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
 - (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
 - (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.
- (c). Emission Mask D, 12.5 kHz channel bandwidth equipment: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
 - (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
 - (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

TEST CONFIGURATION

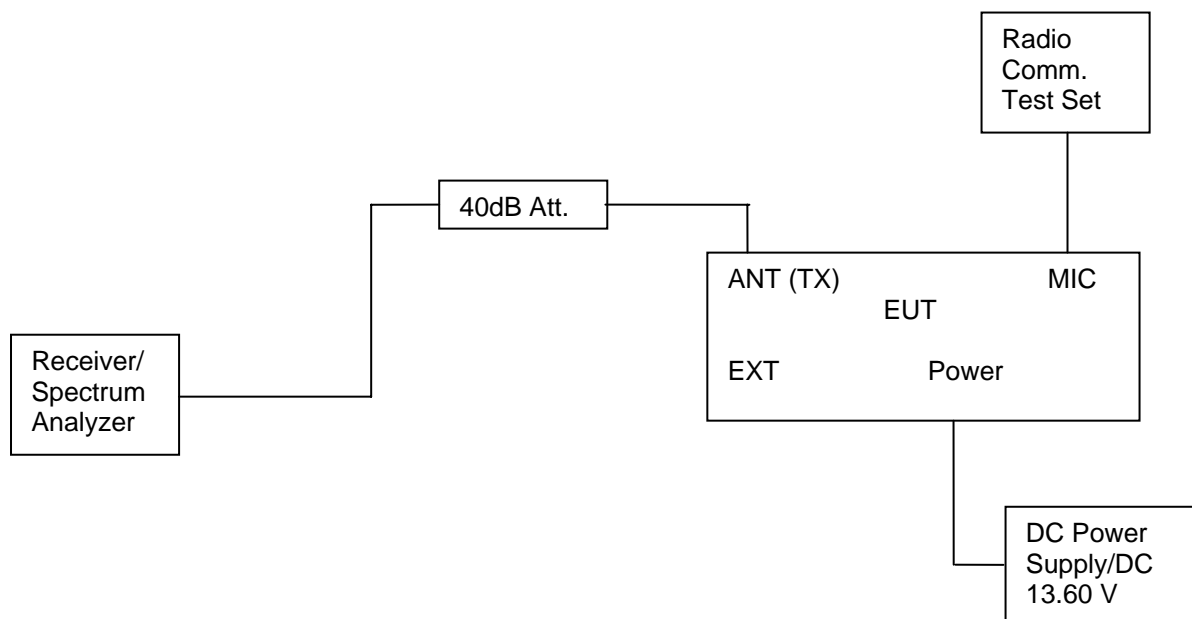

TEST PROCEDURE


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 The EUT was modulated by 2.5 KHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing).
- 3 Set EUT as normal operation.
- 4 Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 5 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 6 Set SPA Center Frequency=fundamental frequency, RBW=100Hz, VBW=1 KHz, span=50 KHz for 12.5 channel spacing.

TEST RESULTS**4.2.1.1 Occupied Bandwidth**


Modulation Type	Channel Sparation	Test Channel	Test Frequency	99% Occupied Bandwidth	26dB Occupied Bandwidth
FM	12.5KHz	Low	450.5000 MHz	9.82 KHz	10.52 KHz
		Middle	485.0000 MHz	9.82 KHz	10.52 KHz
		High	519.5000 MHz	9.82 KHz	10.52 KHz
4FSK	12.5KHz	Low	450.5000 MHz	7.92 KHz	10.22 KHz
		Middle	485.0000 MHz	7.92 KHz	10.62 KHz
		High	519.5000 MHz	7.92 KHz	10.12 KHz
Limit		11.25KHz for 12.5KHz Channel Separation			
Test Results		Compliance			

Plots of 99% and 26dB Bandwidth Measurement


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	450.5000	9.82	10.52	11.25	Compliance

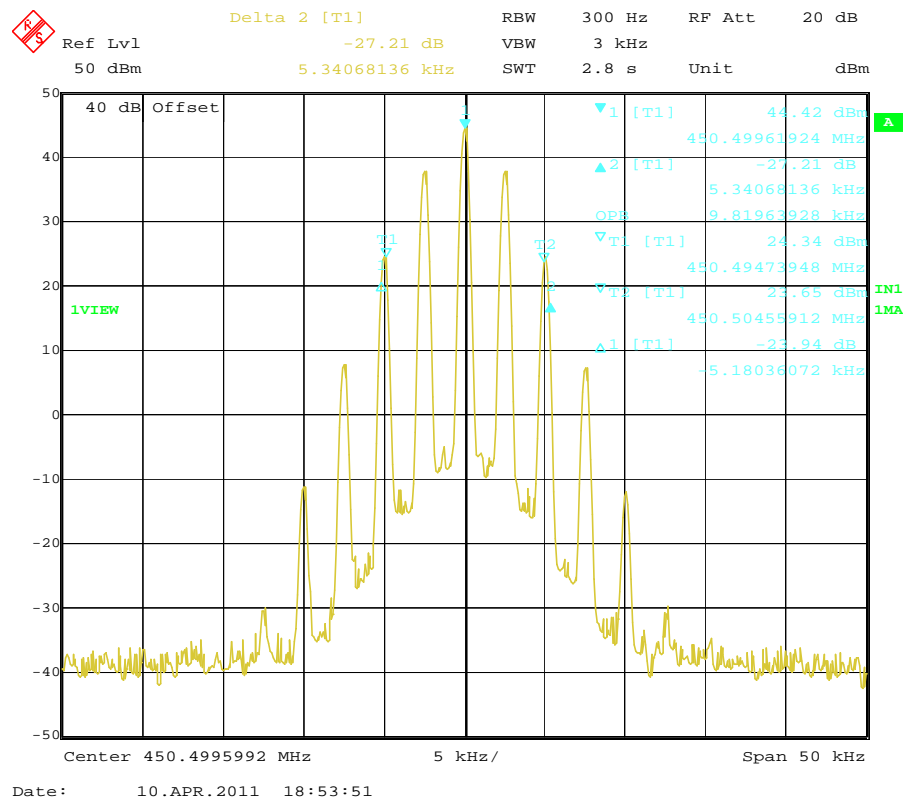


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	485.0000	9.82	10.52	11.25	Compliance

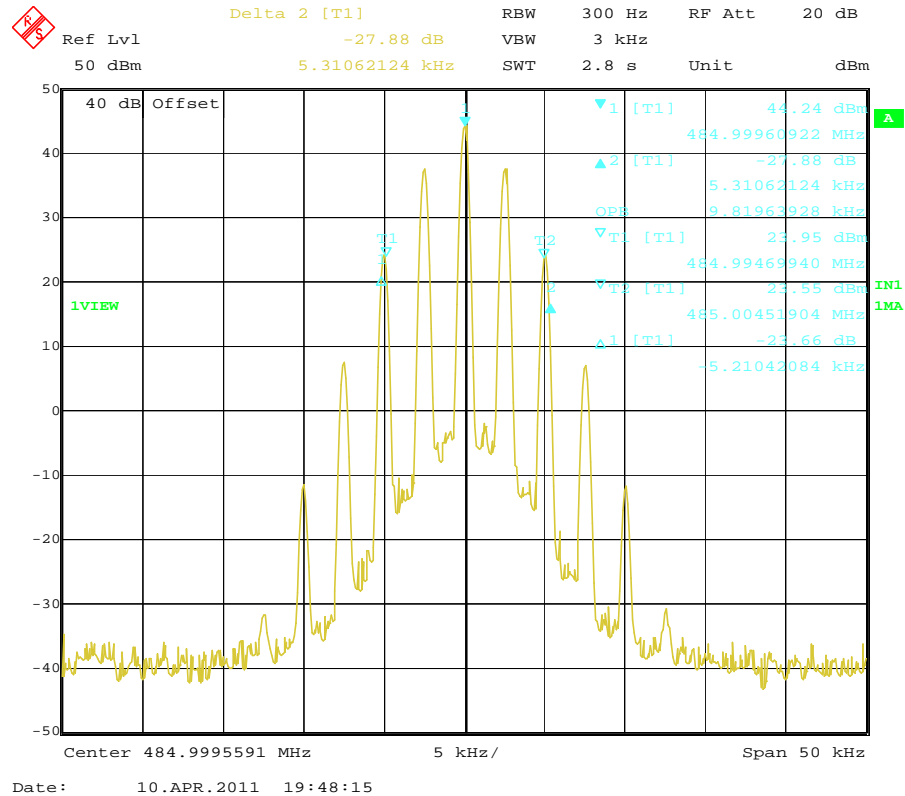


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	519.5000	9.82	10.52	11.25	Compliance

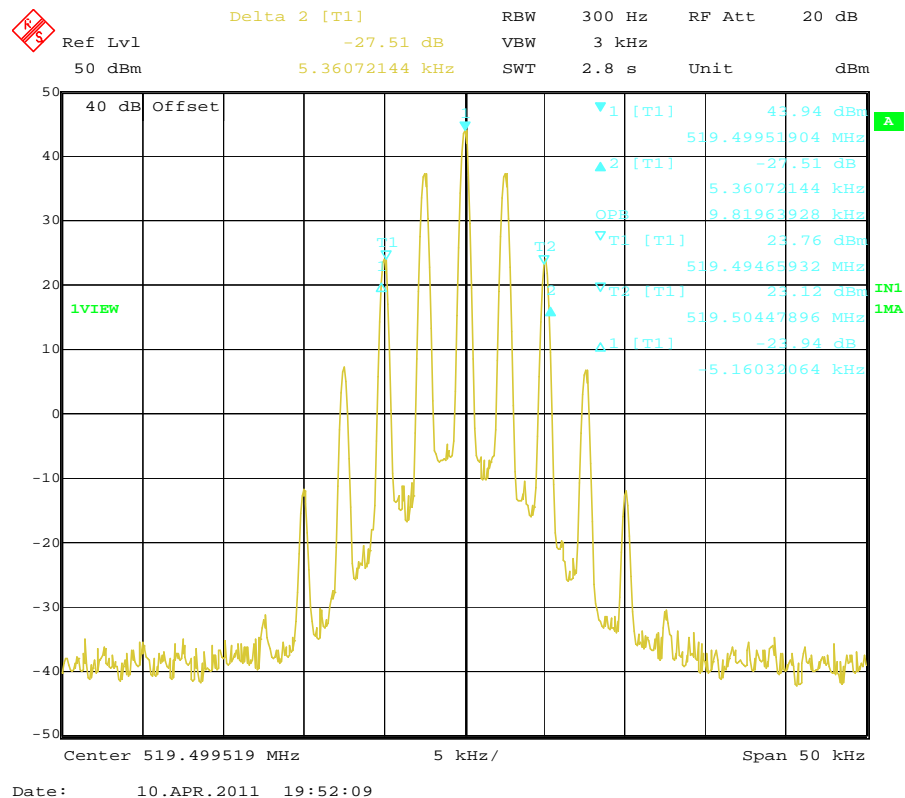


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	450.5000	7.92	10.22	11.25	Compliance

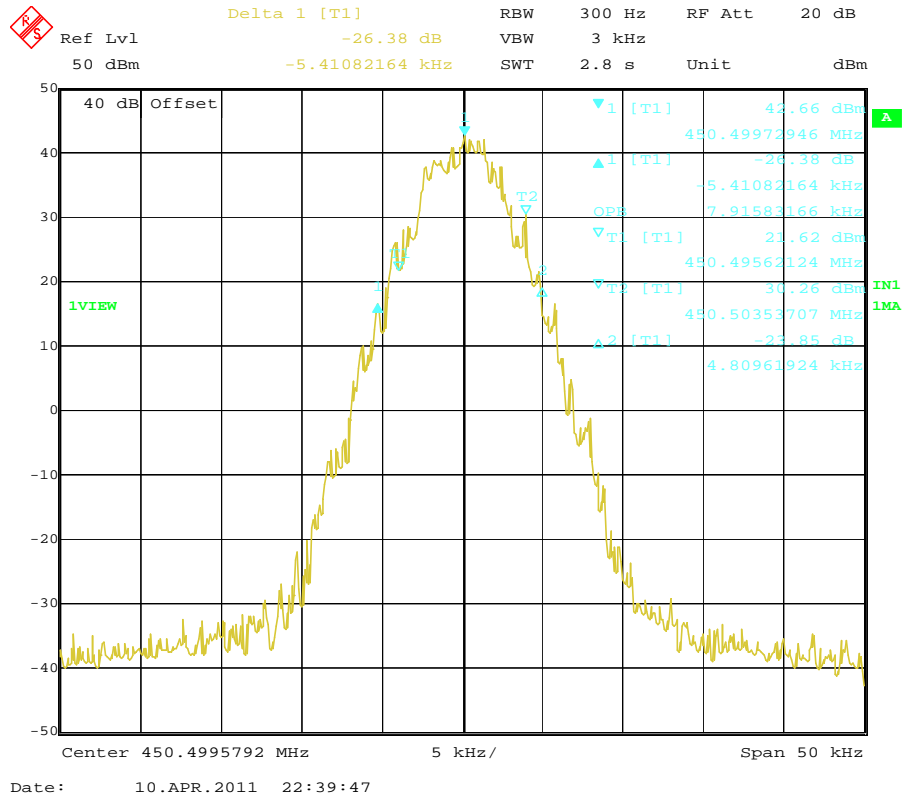

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	485.0000	7.92	10.62	11.25	Compliance

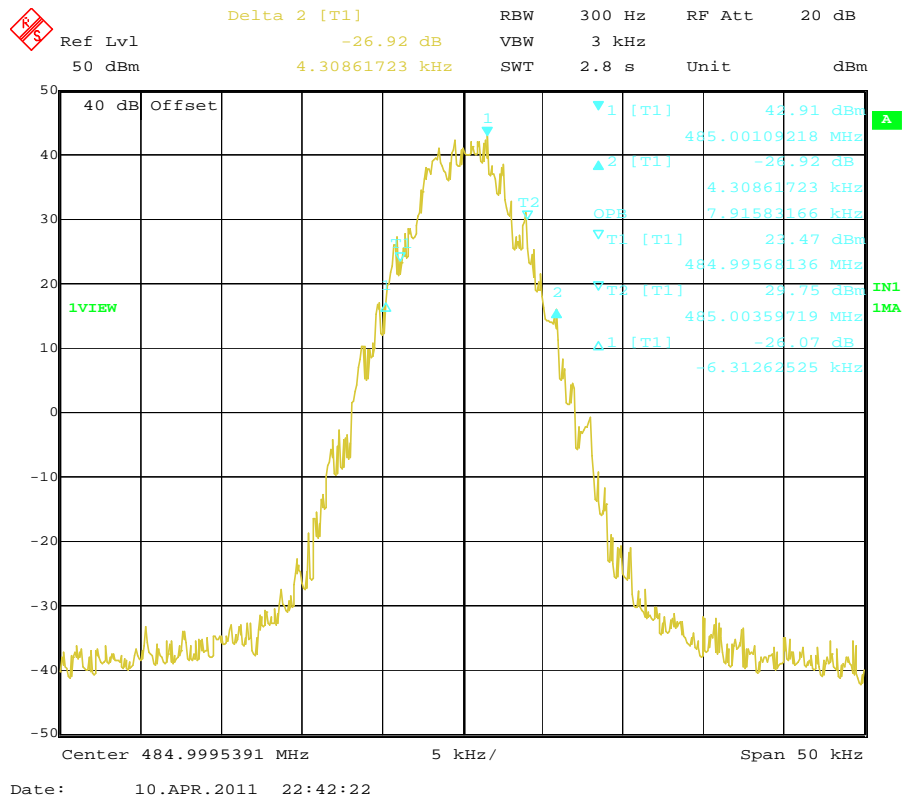

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	519.5000	7.92	10.12	11.25	Compliance

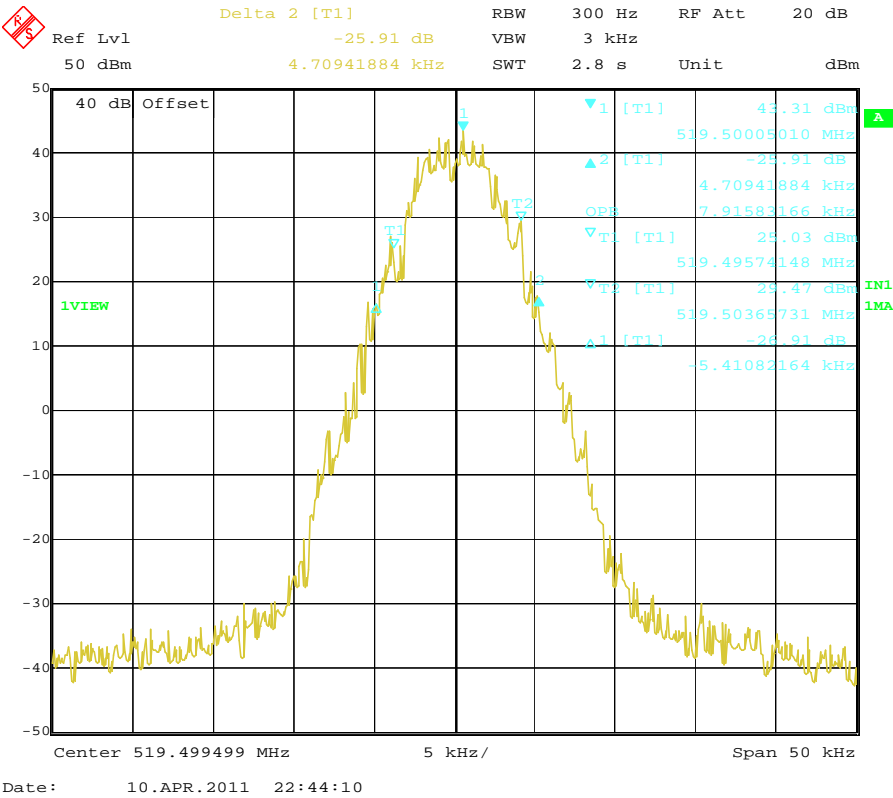

4.2.1.2 Emission Mask

Modulation Type	Channel Sparation	Test Channel	Test Frequency	FCC Applicable Mask	RBW
FM	12.5KHz	Low	450.5000 MHz	D	100Hz
		Middle	485.0000 MHz	D	100Hz
		High	519.5000 MHz	D	100Hz
4FSK	12.5KHz	Low	450.5000 MHz	D	100Hz
		Middle	485.0000 MHz	D	100Hz
		High	519.5000 MHz	D	100Hz
Test Results		Compliance			

Plots of Emission Mask Measurement

Referred as the attached plot hereinafter


Note: The yellow curve represents unmodulated signal.

The green curve represents modulated signal.

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	450.5000	D	100Hz	2.5	Compliance




Delta 2 [T2] RBW 100 Hz RF Att 20 dB
Ref Lvl -80.04 dB VBW 1 kHz
50 dBm 12.50000000 kHz SWT 25 s Unit dBm

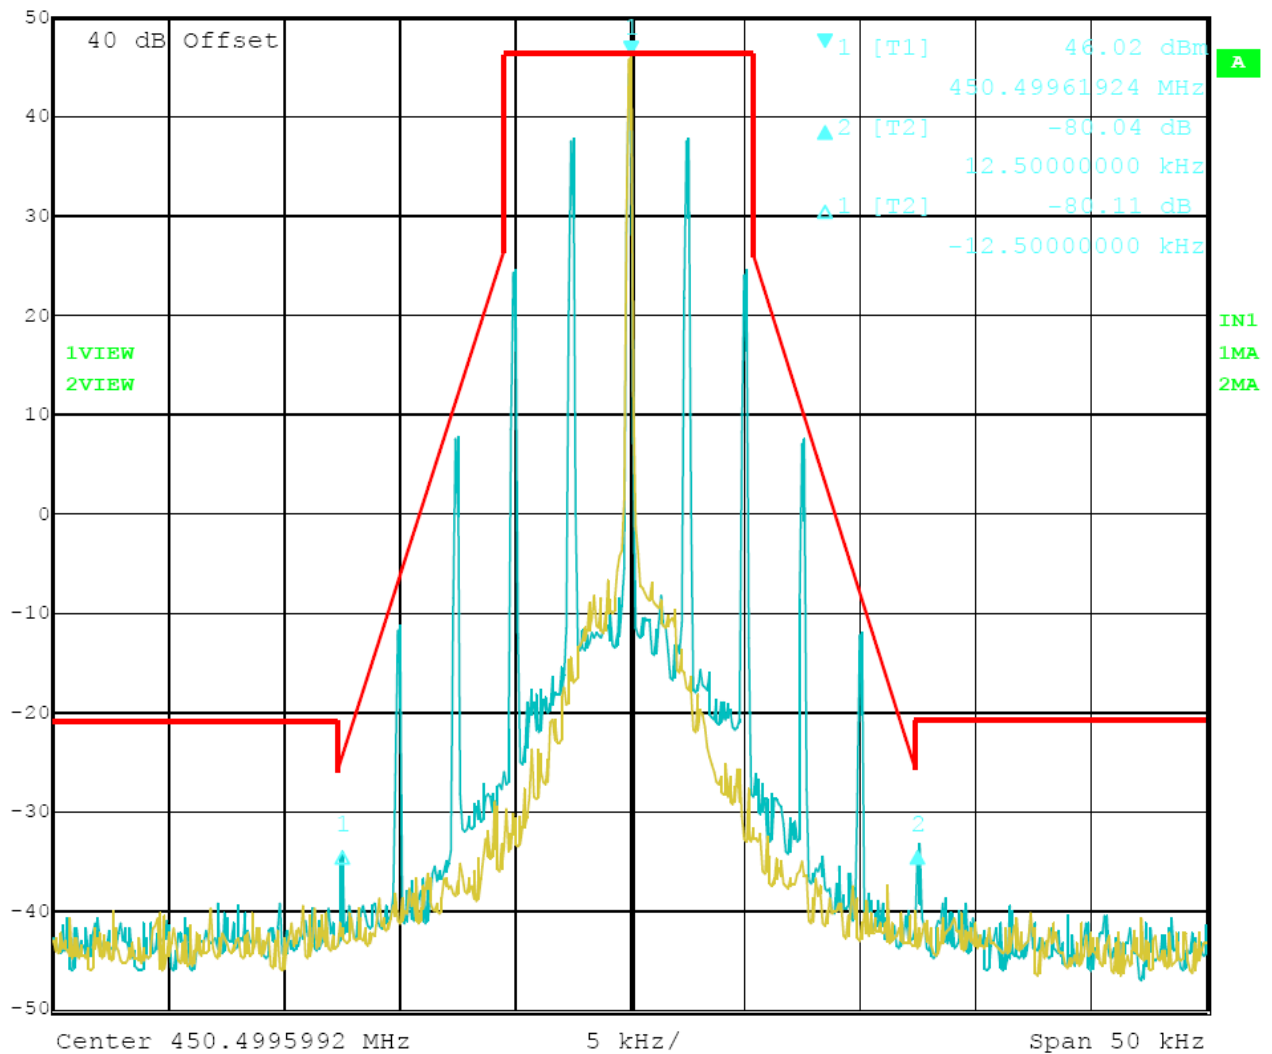

Date: 10.APR.2011 18:53:00

12.5 kHz Channel Spacing, 450.5000 MHz, 2500 Hz Audio Modulation Only

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	485.0000	D	100Hz	2.5	Compliance

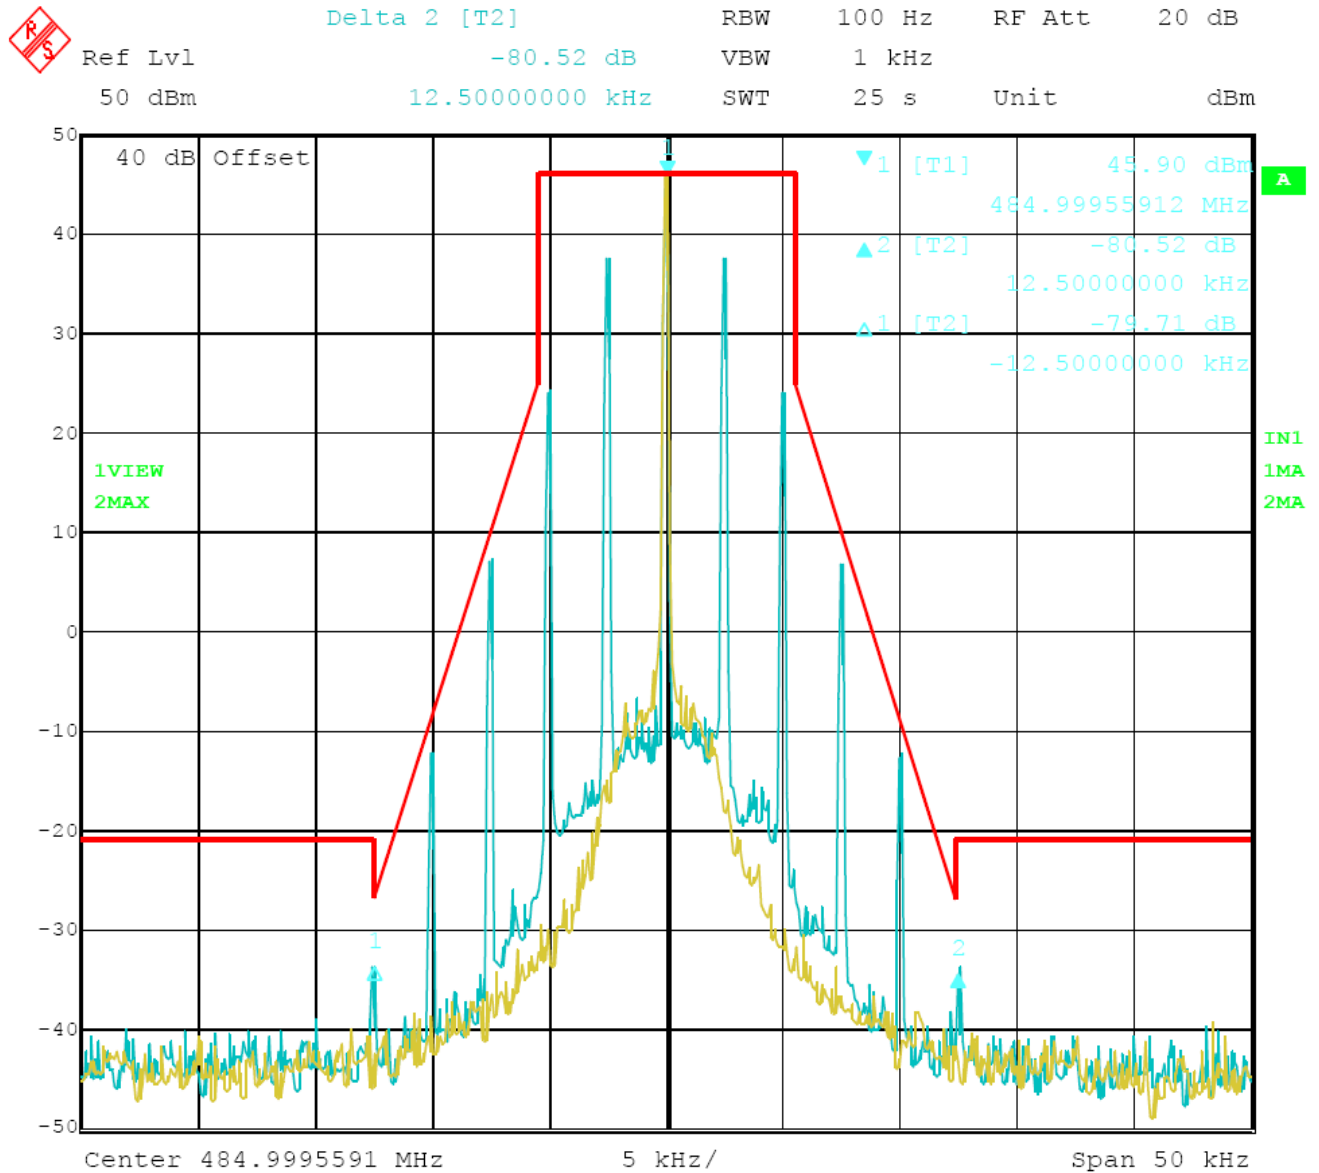


Date: 10.APR.2011 19:47:18

12.5 kHz Channel Spacing, 485.0000 MHz, 2500 Hz Audio Modulation Only

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Audio Freq. (KHz)	Results
FM	12.5 KHz	519.5000	D	100Hz	2.5	Compliance




Delta 2 [T2] RBW 100 Hz RF Att 20 dB
Ref Lvl -77.33 dB VBW 1 kHz
50 dBm 12.50000000 kHz SWT 25 s Unit dBm

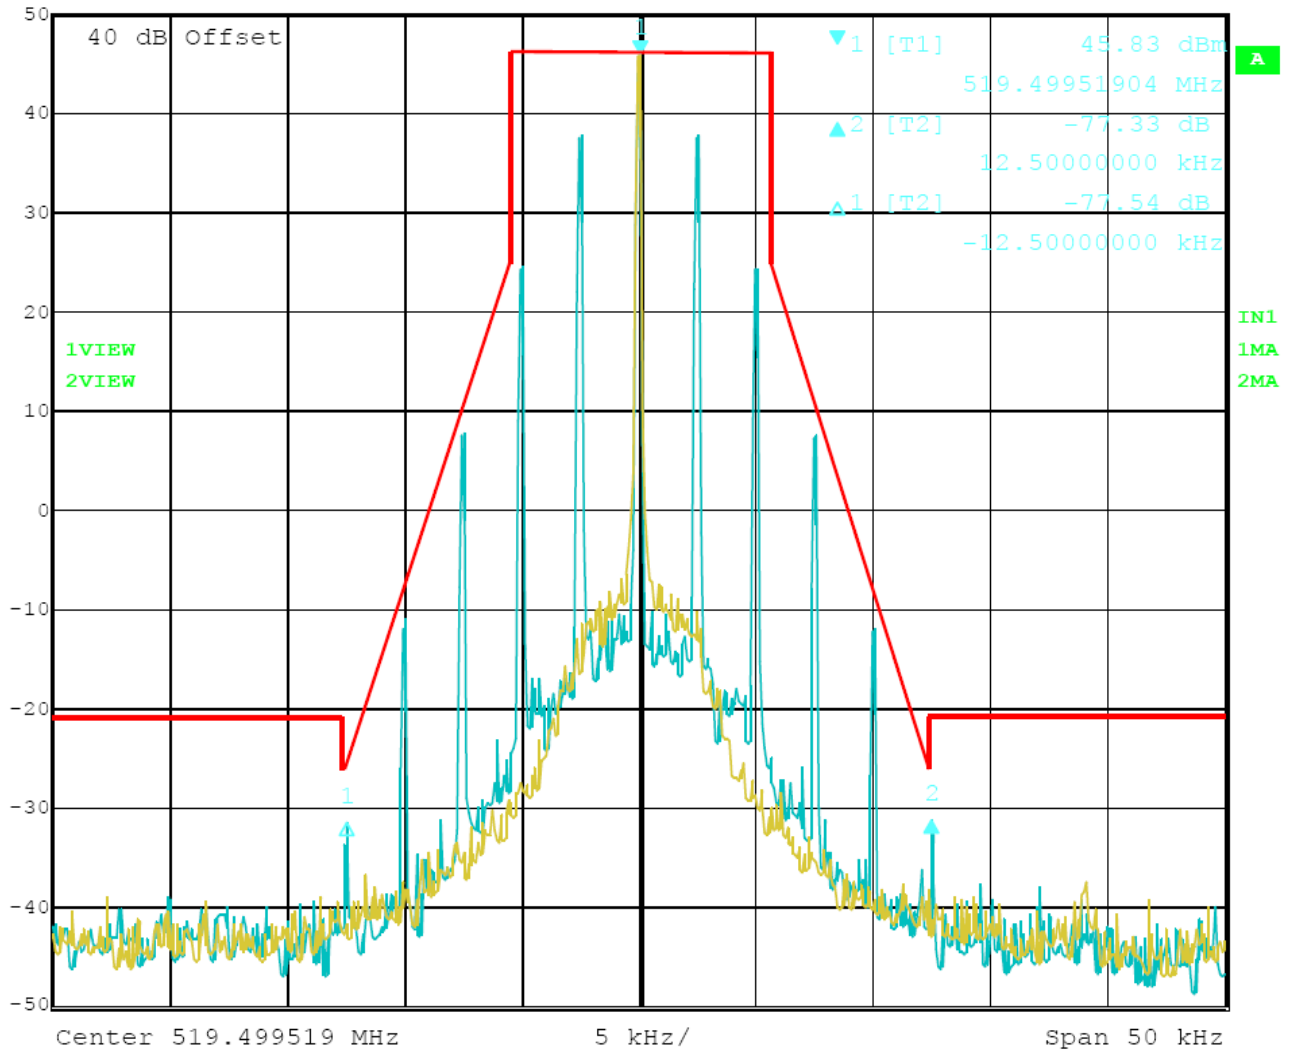

Date: 10.APR.2011 19:51:18

12.5 kHz Channel Spacing, 519.5000 MHz, 2500 Hz Audio Modulation Only


Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Results
4FSK	12.5 KHz	450.5000	D	100Hz	Compliance

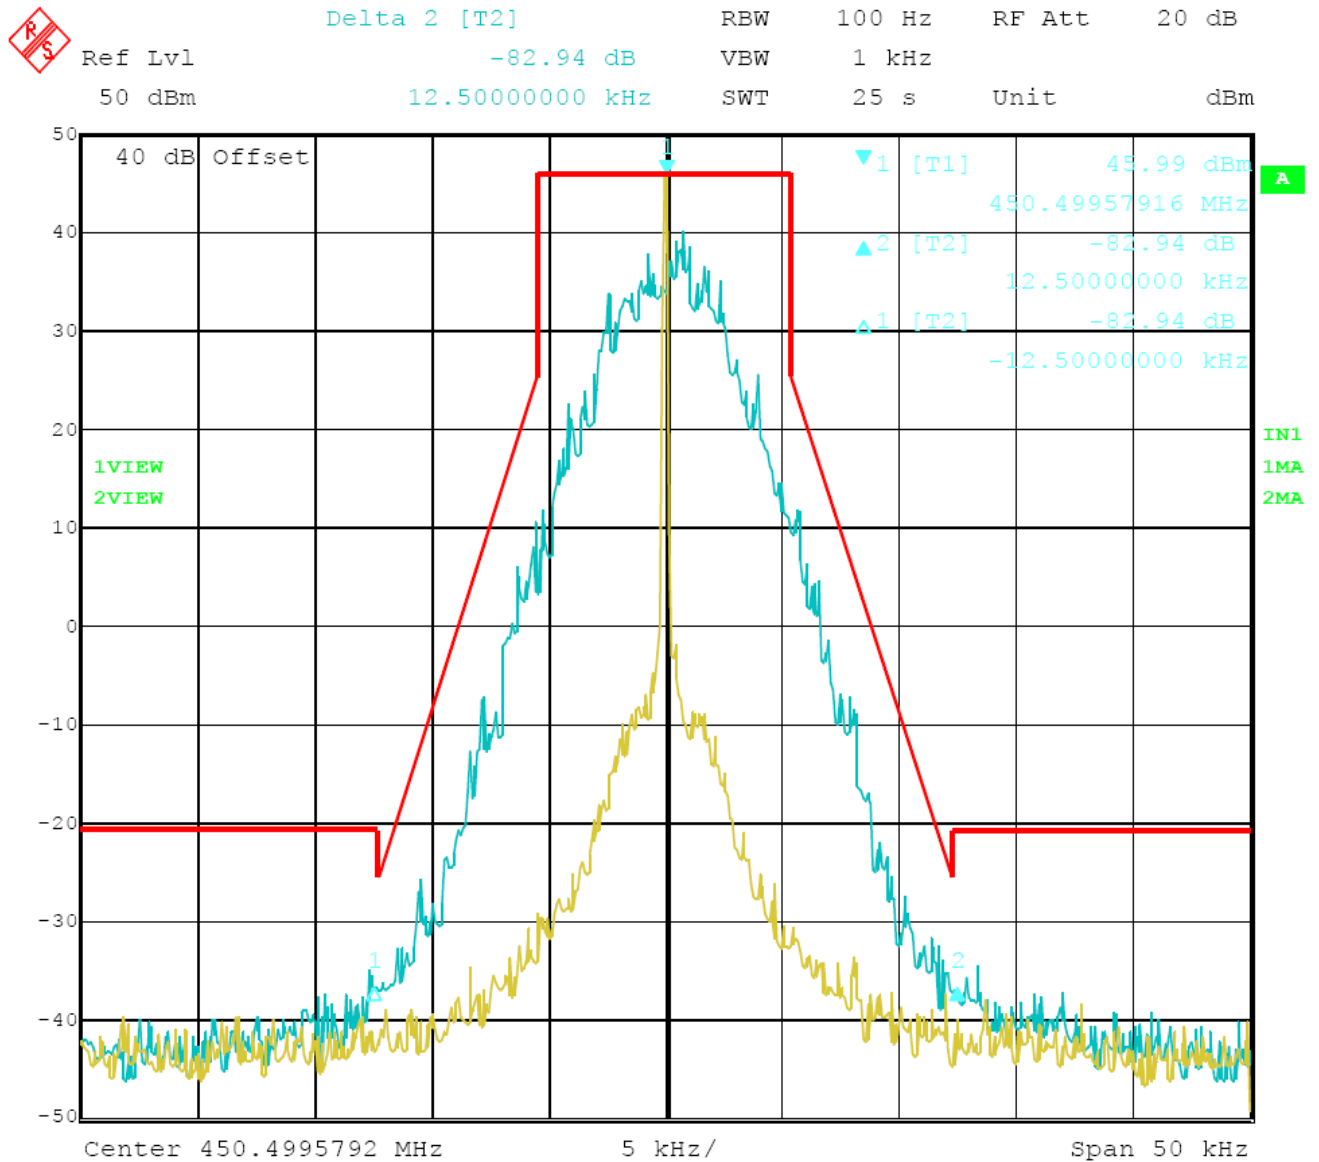

Date: 10.APR.2011 22:16:32

12.5 kHz Channel Spacing, 450.5000 MHz, 4FSK Modulation Only


Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Results
4FSK	12.5 KHz	485.0000	D	100Hz	Compliance

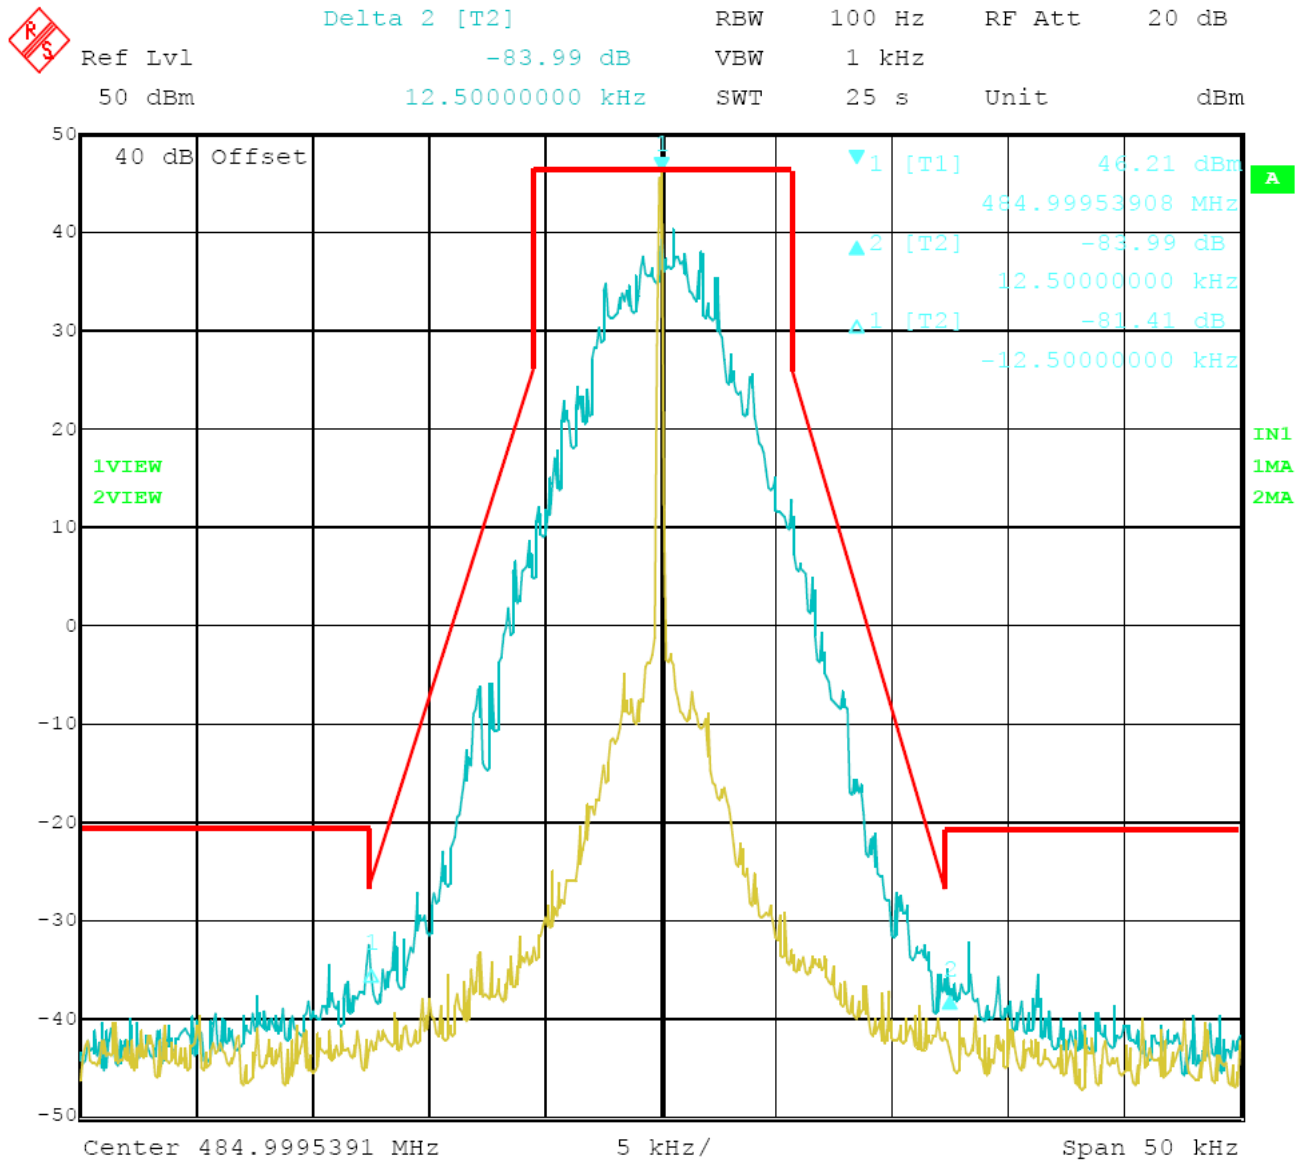

Date: 10.APR.2011 22:20:26

12.5 kHz Channel Spacing, 485.5000 MHz, 4FSK Modulation Only

Modulation Type	Channel Separation	Freq.(MHz)	FCC Applicable Mask	RBW	Results
4FSK	12.5 KHz	519.5000	D	100Hz	Compliance

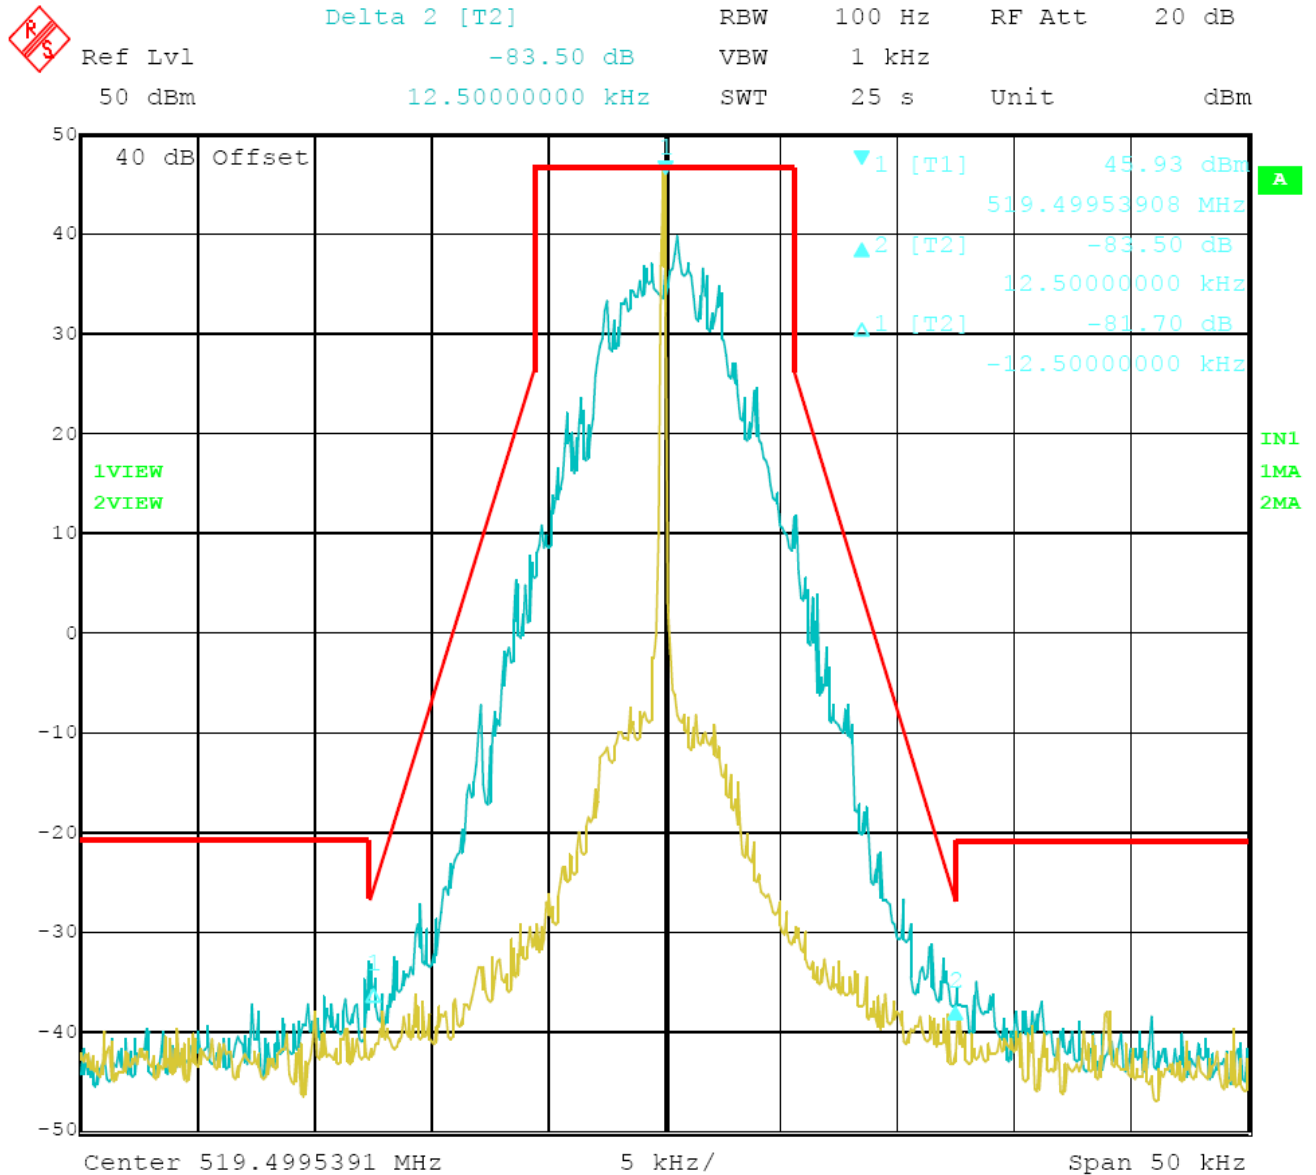

Date: 10.APR.2011 22:23:15


12.5 kHz Channel Spacing, 519.5000 MHz, 4FSK Modulation Only

4.2.2 Occupied Bandwidth at Repeater function

TEST APPLICABLE

(a). Occupied Bandwidth: The spectral shape of output should look similar to input for all modulations.

TEST CONFIGURATION

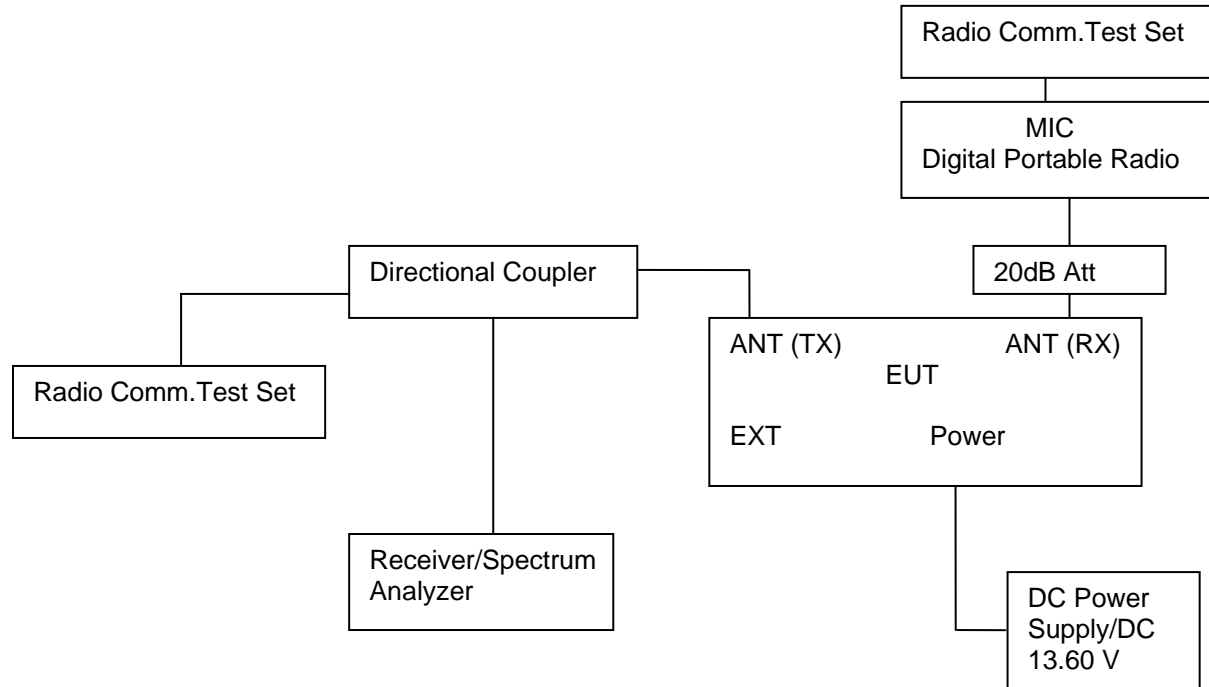

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 The Digital Portable Radio was modulated by 2.5 KHz Sine wave audio signal or Digital signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing).
- 3 Set EUT as normal operation.
- 4 Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 5 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 6 Set SPA Center Frequency=fundamental frequency, RBW=100Hz, VBW=1 KHz, span=50 KHz for 12.5 channel spacing.


TEST RESULTS

4.2.2.1 Occupied Bandwidth of Digital Portable Radio


Modulation Type	Channel Sparation	Test Channel	Test Frequency	99% Occupied Bandwidth	26dB Occupied Bandwidth
FM	12.5KHz	Low	450.0000 MHz	9.72 KHz	10.52 KHz
		Middle	485.5000 MHz	9.72 KHz	10.52 KHz
		High	519.0000 MHz	9.82 KHz	10.42 KHz
4FSK	12.5KHz	Low	450.0000 MHz	7.11 KHz	9.92 KHz
		Middle	485.5000 MHz	7.31 KHz	9.42 KHz
		High	519.0000 MHz	7.11 KHz	9.32 KHz
Limit		11.25KHz for 12.5KHz Channel Separion			
Test Results		Compliance			

Plots of 99% and 26dB Bandwidth Measurement


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	450.0000	9.72	10.52	11.25	Complicance

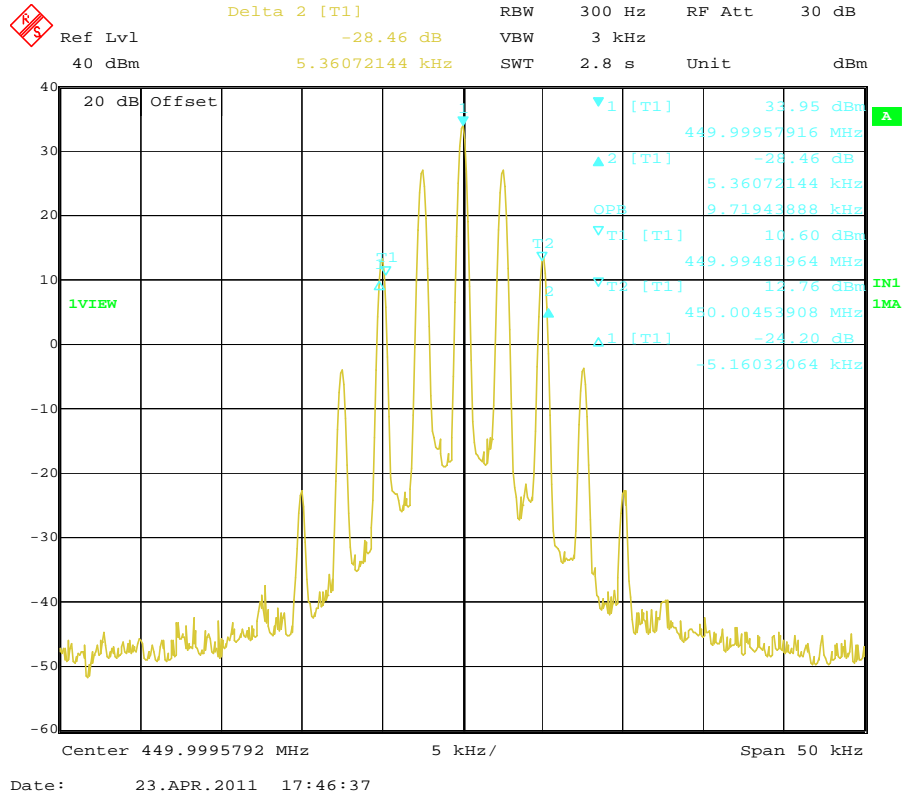


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	485.5000	9.72	10.52	11.25	Complicance

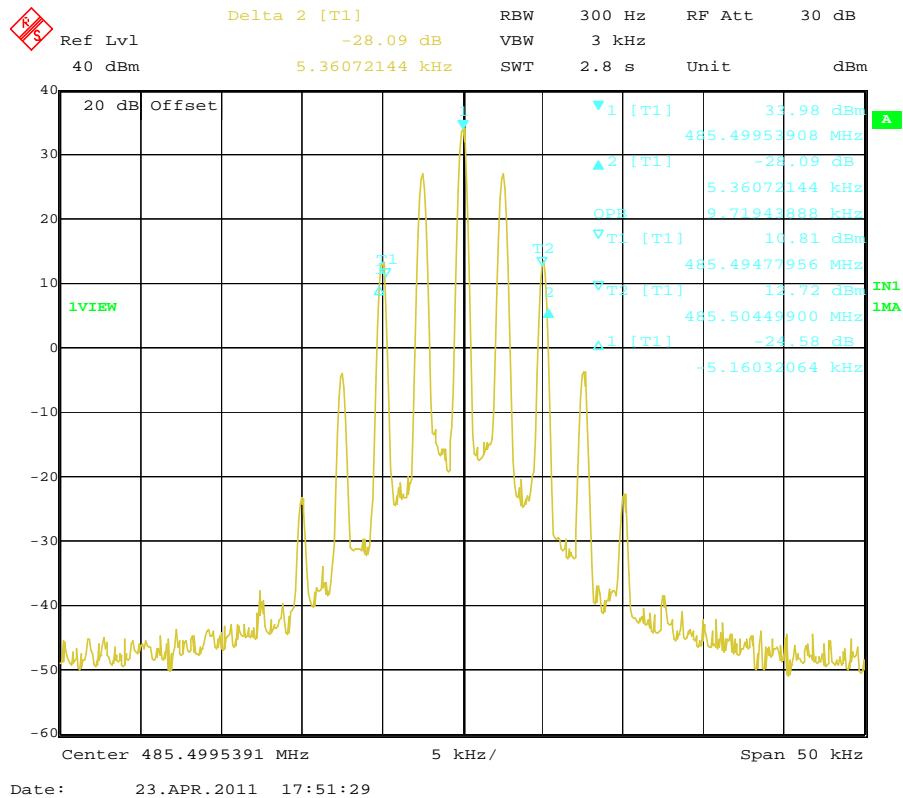


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	519.0000	9.82	10.42	11.25	Complicance

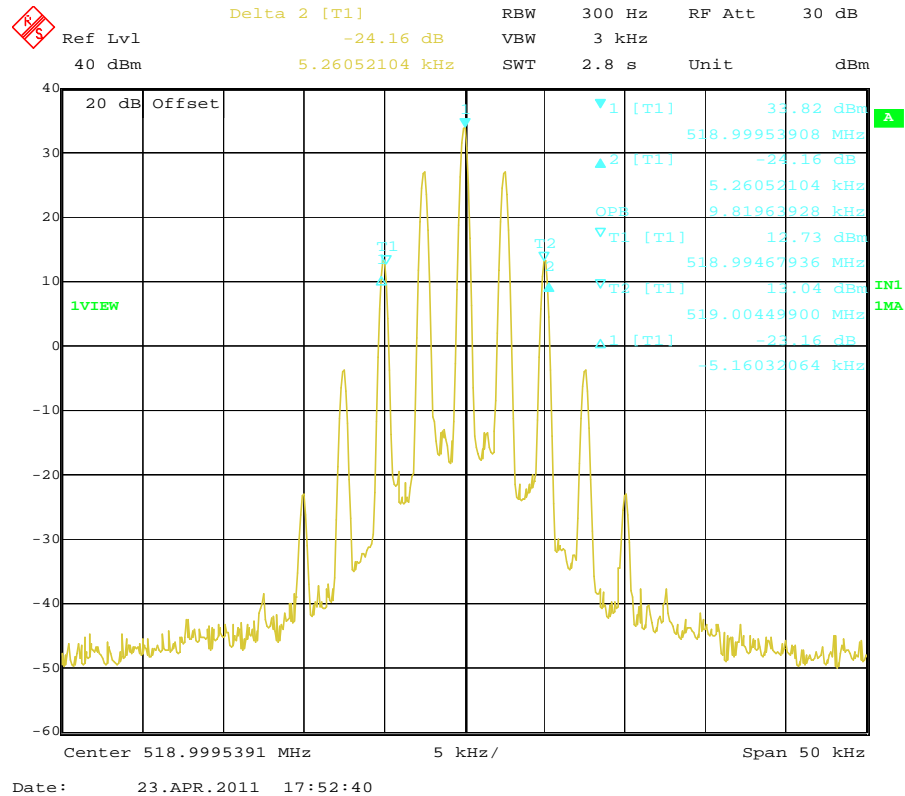


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	450.0000	7.11	9.92	11.25	Complicance

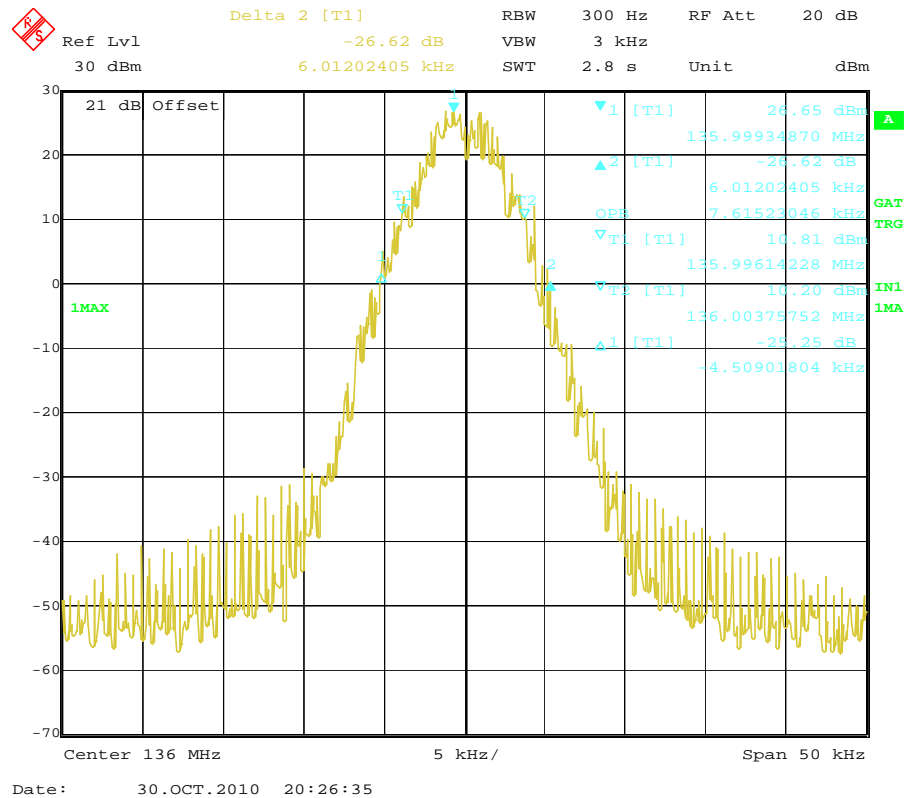

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	485.5000	7.31	9.42	11.25	Compliance

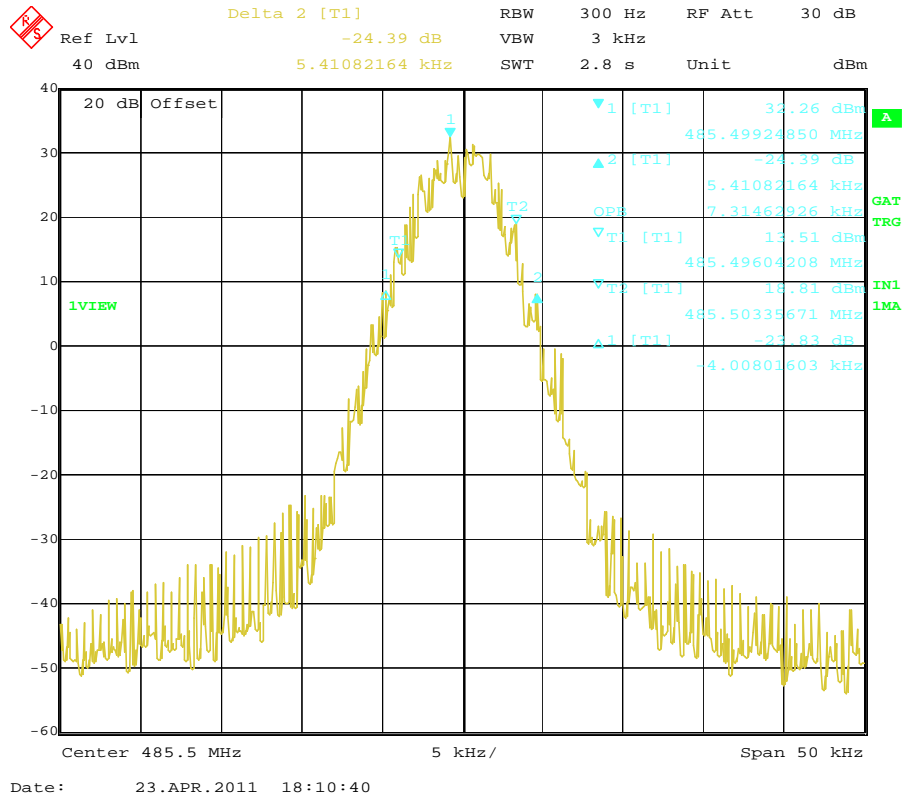

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	519.0000	7.11	9.32	11.25	Compliance

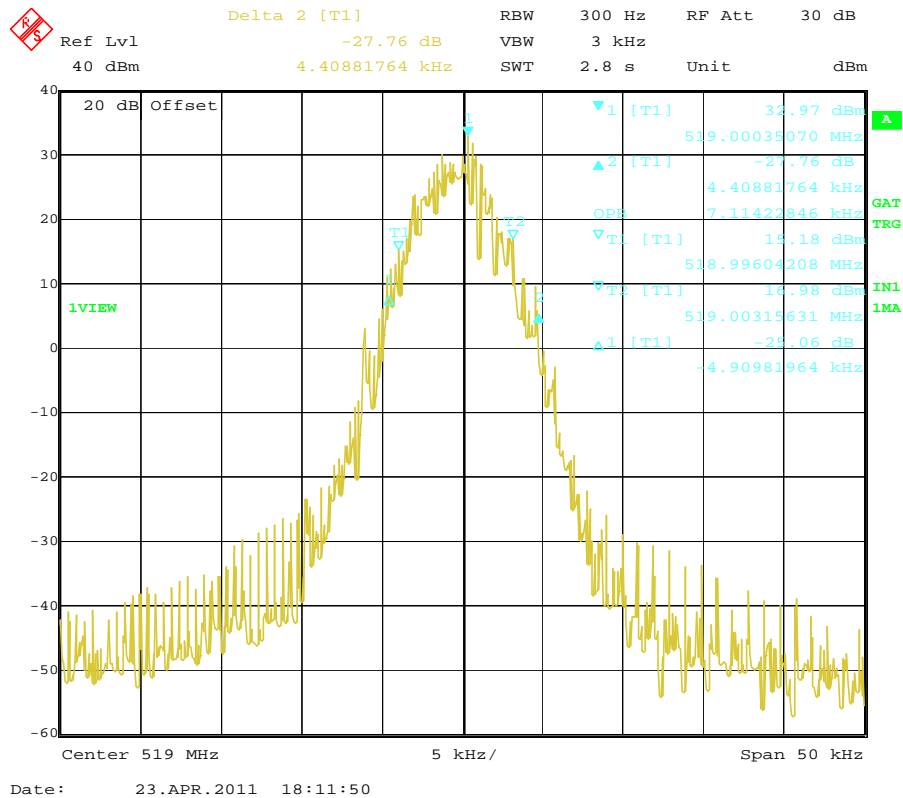


4.2.2.2 Occupied Bandwidth of EUT


Modulation Type	Channel Sparation	Test Channel	Test Frequency	99% Occupied Bandwidth	26dB Occupied Bandwidth
FM	12.5KHz	Low	450.5000 MHz	9.72 KHz	10.42 KHz
		Middle	485.0000 MHz	9.72 KHz	10.52 KHz
		High	519.5000 MHz	9.82 KHz	10.52 KHz
4FSK	12.5KHz	Low	450.5000 MHz	7.01 KHz	10.02 KHz
		Middle	485.0000 MHz	7.31 KHz	10.32 KHz
		High	519.5000 MHz	7.11 KHz	9.52 KHz
Limit		11.25KHz for 12.5KHz Channel Separation			
Test Results		Compliance			

Plots of 99% and 26dB Bandwidth Measurement


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	450.5000	9.72	10.42	11.25	Compliance

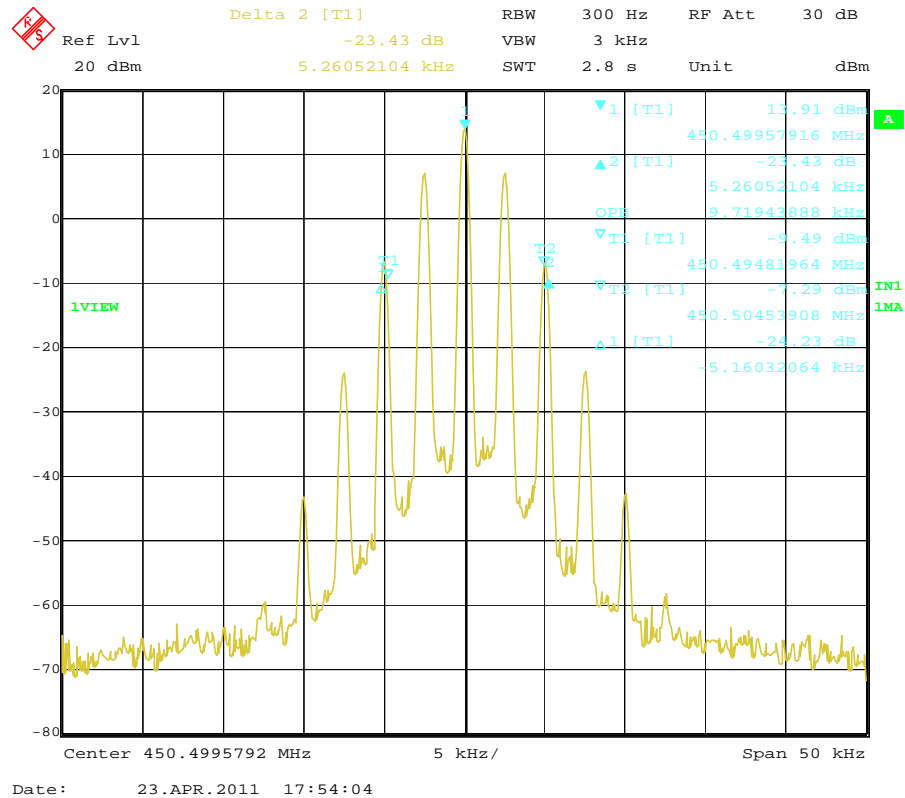


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	485.0000	9.72	10.52	11.25	Compliance

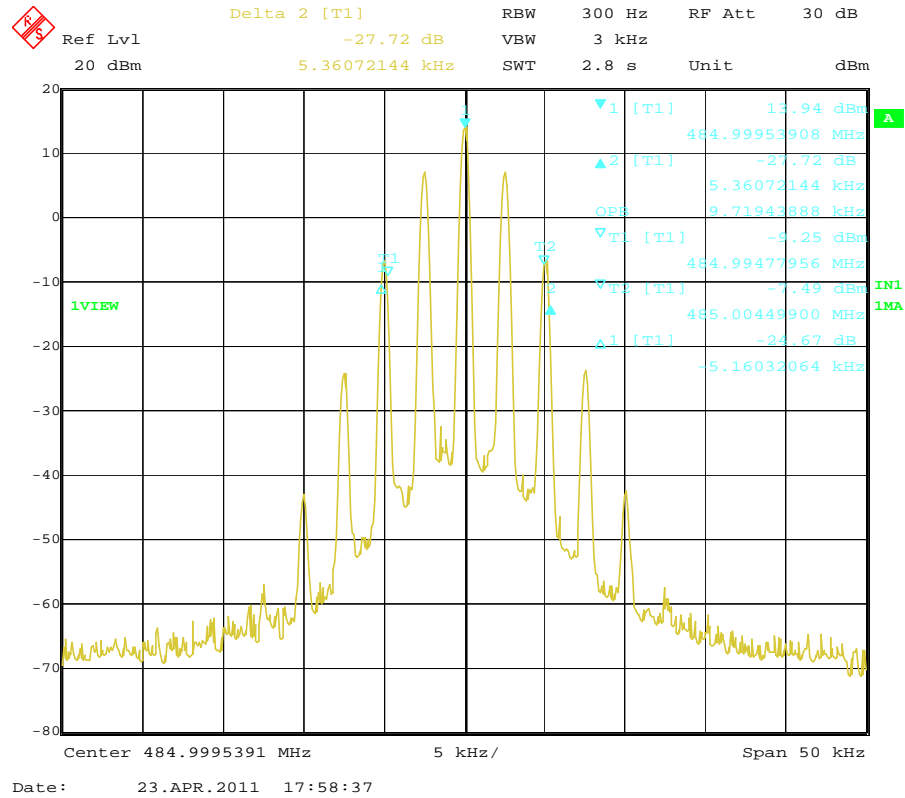


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
FM	12.5 KHz	519.5000	9.82	10.52	11.25	Compliance

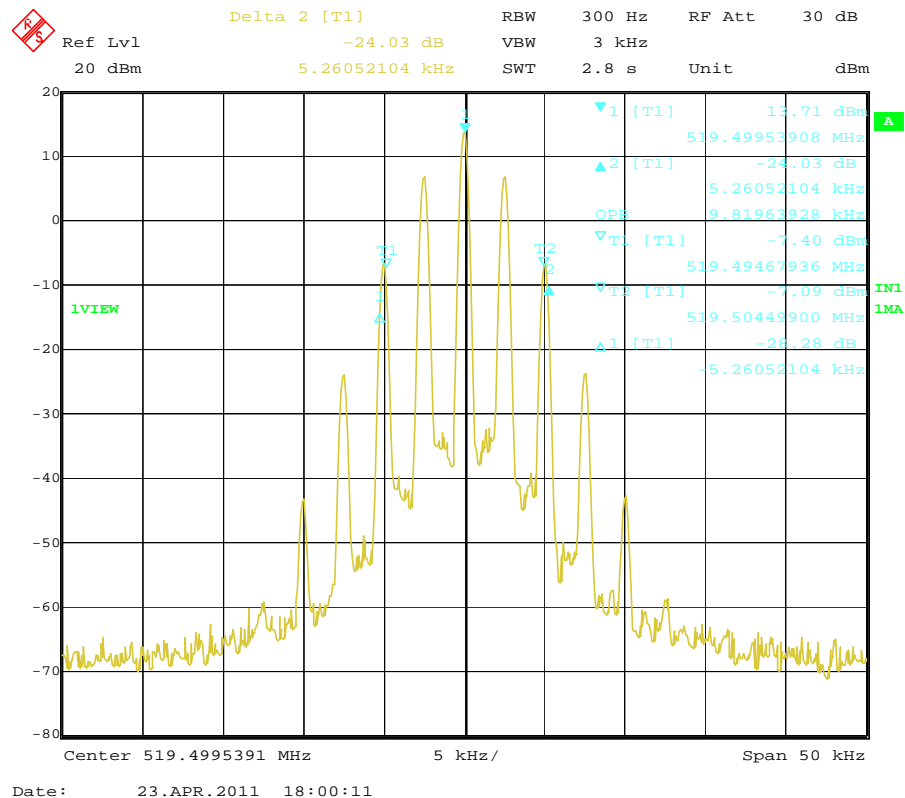


Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	450.5000	7.01	10.02	11.25	Complicance

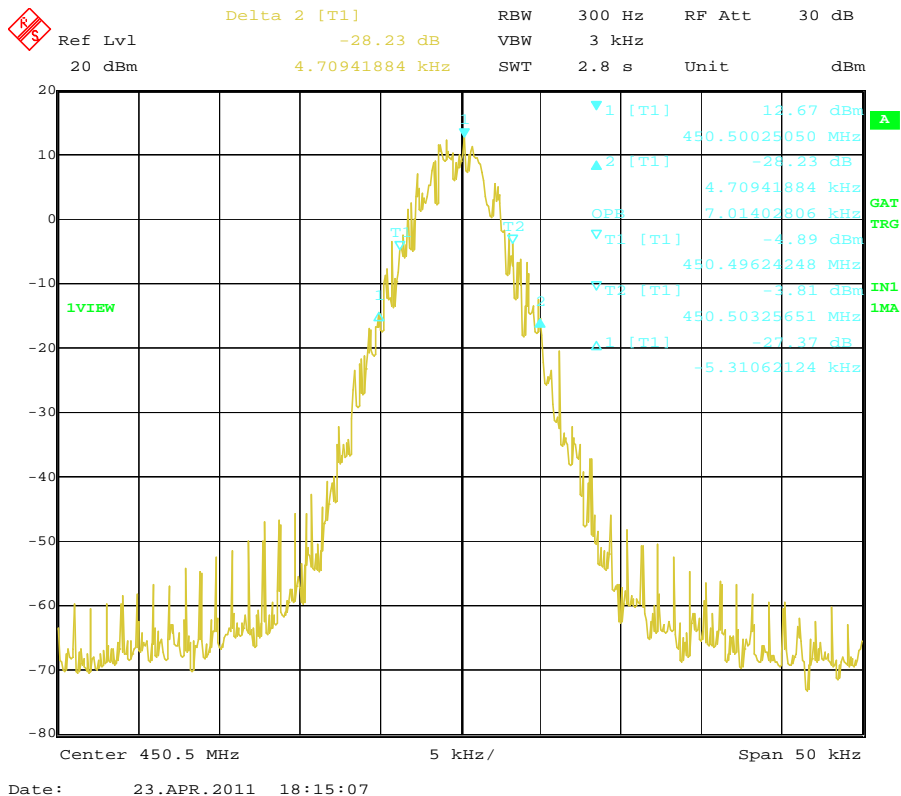

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	485.0000	7.31	10.32	11.25	Complicance

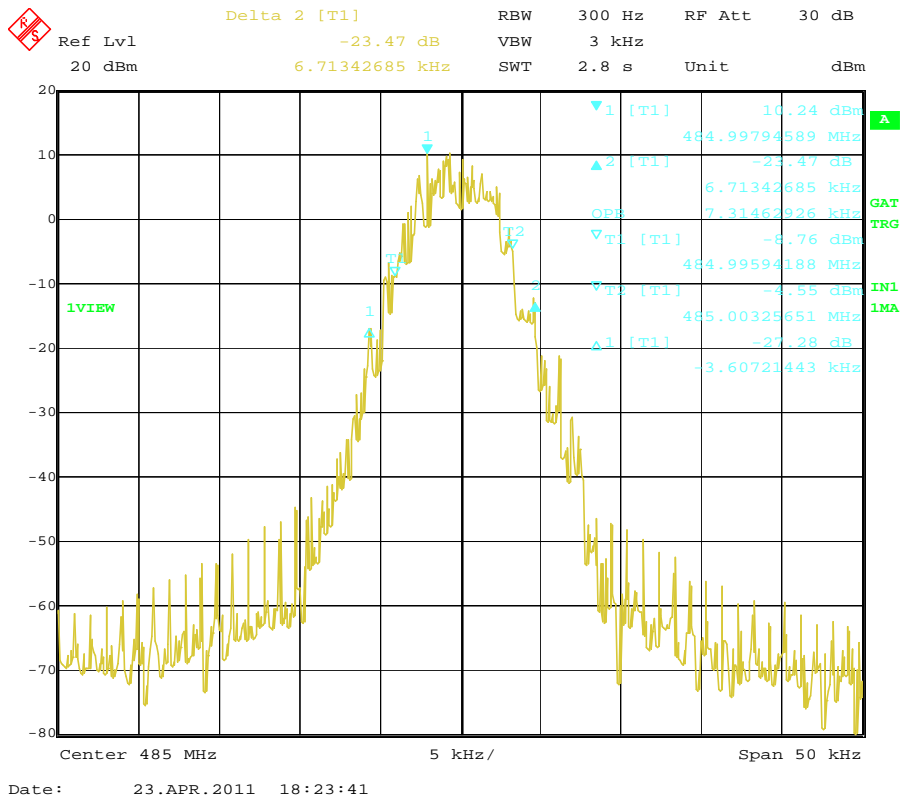

Modulation Type	Channel Separation	Freq.(MHz)	99% Bandwidth (KHz)	26dB Bandwidth (KHz)	FCC Limit (KHz)	Results
4FSK	12.5 KHz	519.5000	7.11	9.52	11.25	Complicance

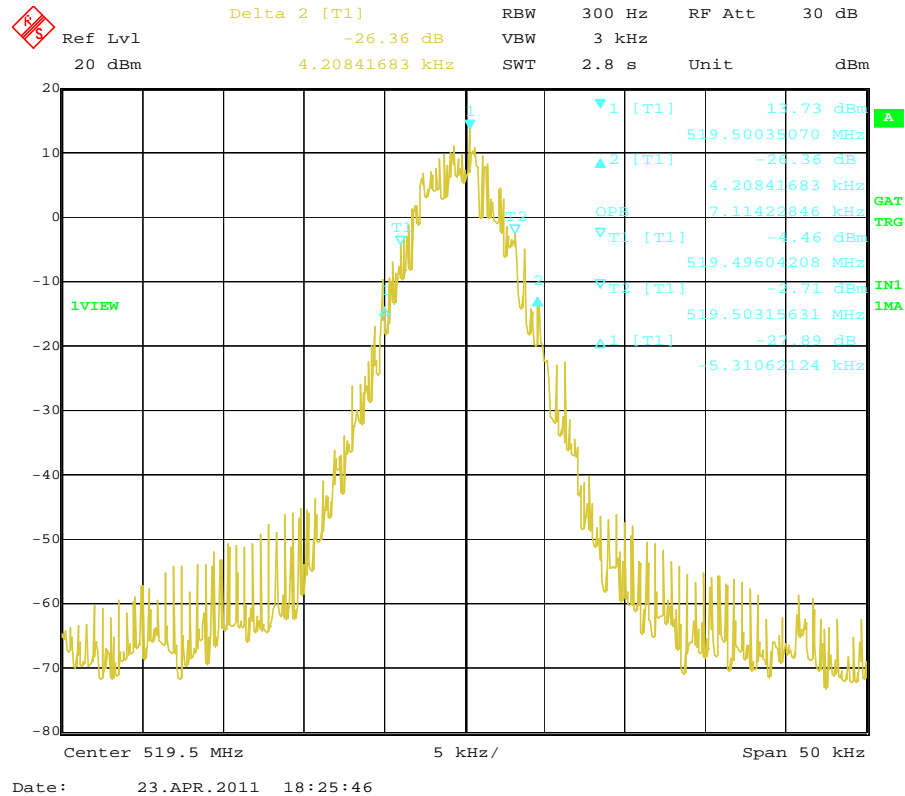

4.3. Transmitter Radiated Spurious Emission

TEST APPLICABLE



According to the TIA/EIA 603 test method, and according to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:



- 1 On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
 - 2 On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27dB
 - 3 On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50 + 10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.
- For transmitters designed to transmit with 25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:

- 1 On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2 On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3 On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

TEST CONFIGURATION

Below 1GHz

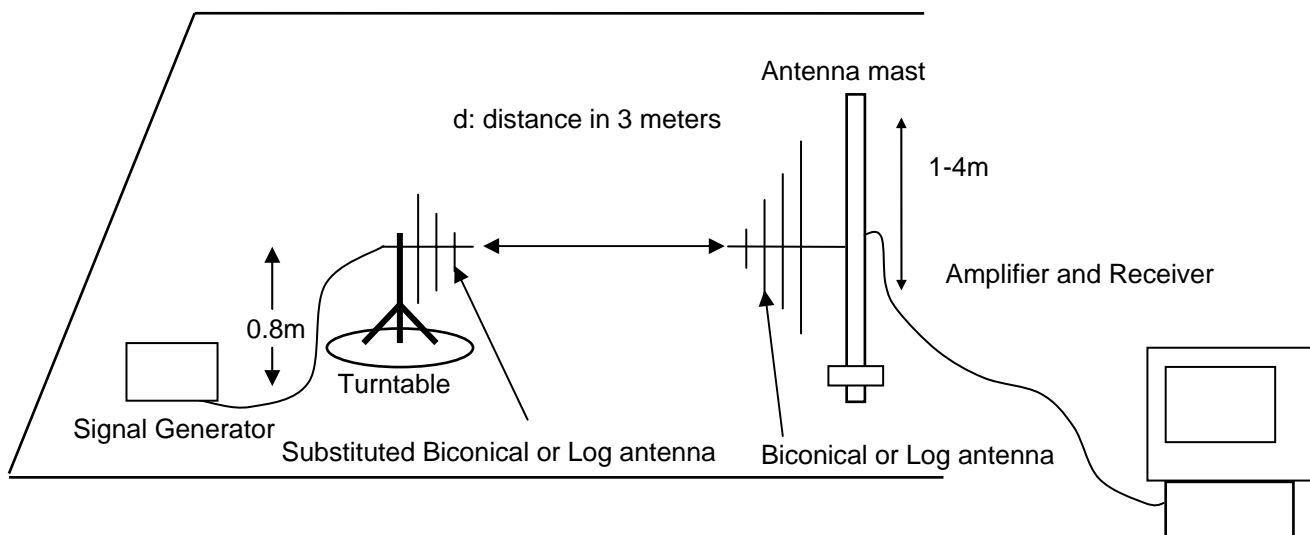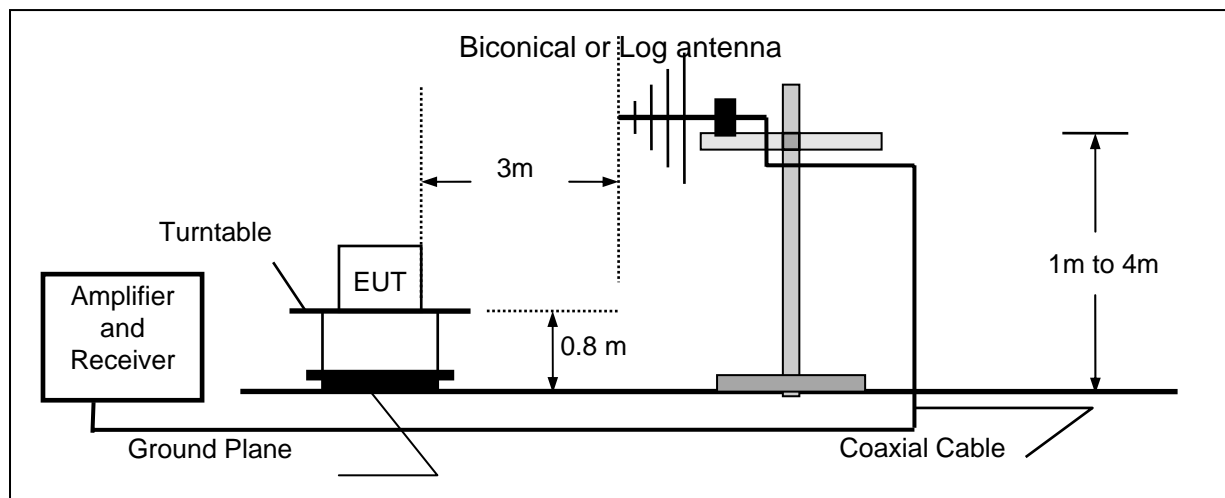

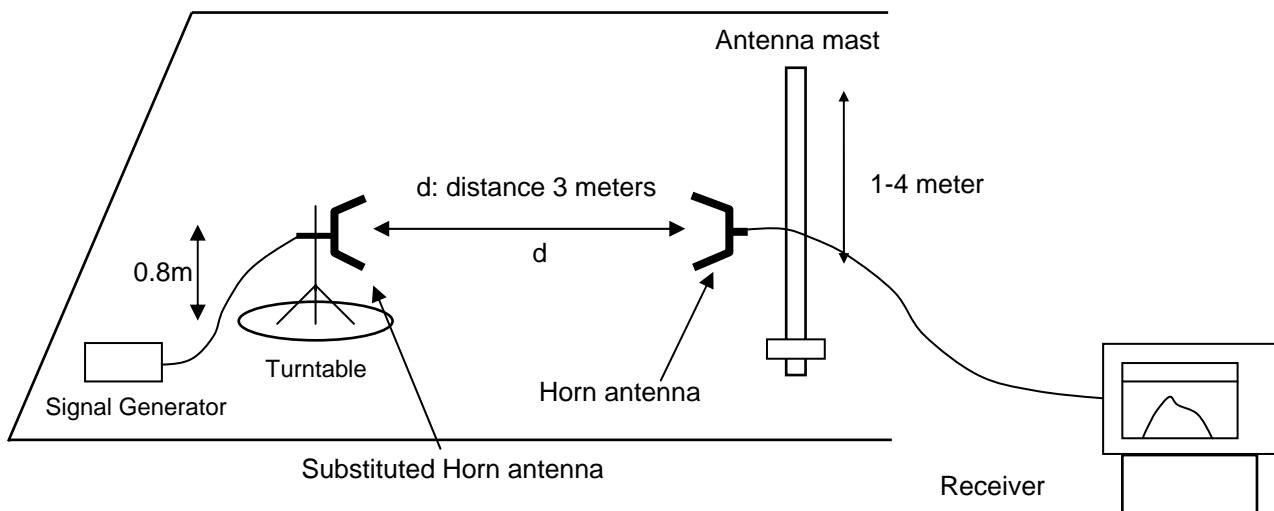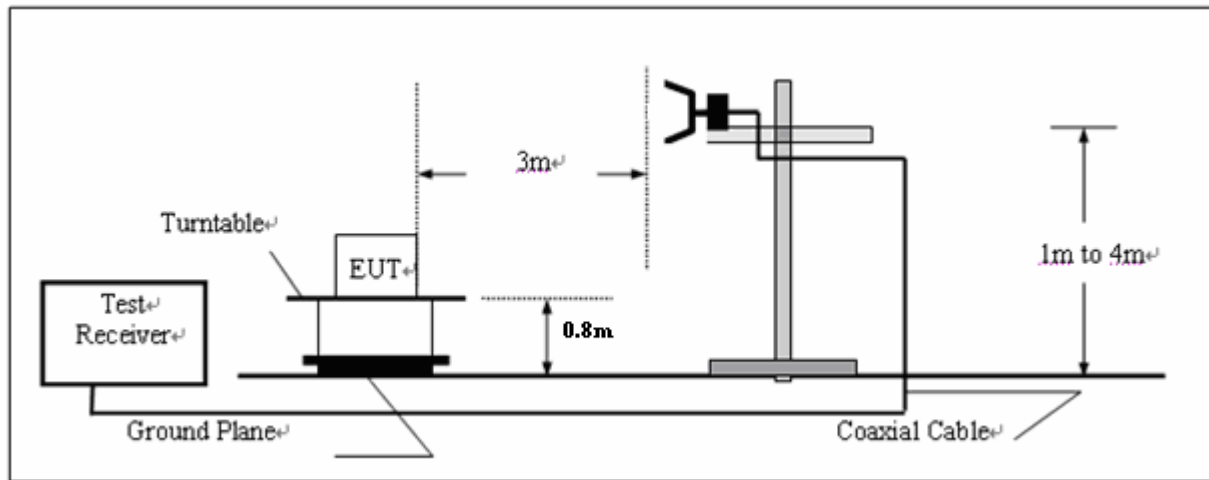Above 1GHz**TEST PROCEDURE**

- 1 Set the EMI Receiver (for measuring E-Field) and Receiver (for measuring EIRP) as follows:
 Center Frequency: equal to the signal source
 Resolution BW: 100 KHz
 Video BW: VBW > RBW
 Detector Mode: positive
 Average: off
 Span: 3 x the signal bandwidth
- 2 Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level
 Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor + Amplifier Gain
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB)}$
- 3 The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- 4 Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 DIPOLE antenna for frequency from 30-1000 MHz or
 HORN antenna for frequency above 1 GHz.
- 5 Mount the transmitting antenna at 1.0 meter high from the ground plane.
- 6 Use one of the following antenna as a receiving antenna:
 DIPOLE antenna for frequency from 30-1000 MHz or
 HORN antenna for frequency above 1 GHz.
- 7 If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- 8 Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- 9 Tune the EMI Receivers to the test frequency.
- 10 Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

- 11 The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- 12 Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- 13 Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- 14 Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P_1 - L_1 = (P_2 + L_2) - L_1 = P_3 + A + L_2 - L_1$$

$$\text{EIRP} = P + G_1 = P_3 + L_2 - L_1 + A + G_1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver} = L_2 - L_1 + G_1$$

Where:

 - P: Actual RF Power fed into the substitution antenna port after corrected.
 - P₁: Power output from the signal generator
 - P₂: Power measured at attenuator A input
 - P₃: Power reading on the Average Power Meter
 - EIRP: EIRP after correction
 - ERP: ERP after correction
- 15 Adjust both transmitting and receiving antenna in a Horizontal polarization, then repeat step (11) to (14).
- 16 Repeat step (4) to (16) for different test frequency
- 17 Repeat steps (3) to (12) with the substitution antenna oriented in horizontal polarization.
- 18 Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

TEST RESULTS

The Transmitter Radiated Spurious Emission was performed to the Rated high power (50Watt) and Rated low power (5Watt) the datum that reported below is the worst case (Rated high power) of the two rated power conditions.

Modulation Type: FM

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 9 (12.5 kHz bandwidth only): On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (48.08) = 66.82 \text{ dB}$

High: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (50.00) = 66.99 \text{ dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL - 50 - 10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,
In this application, the EL is 46.99 dBm.

Limit (dBm) = 46.99 - 50 - 10log10 (50.00) = -20 dBm

Modulation Type: 4FSK

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 9 (12.5 kHz Bandwidth only):

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (48.08) = 66.82 \text{ dB}$

High: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (50.35) = 67.02 \text{ dB}$

Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. The measurement frequency range from 30 MHz to 6 GHz.

3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		Low Channel		Test Frequency		450.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
3153.50	51.61	Peak	H	345	122	-45.39	-20	25.39
4505.00	54.08	Peak	H	198	59	-42.06	-20	22.06
5856.50	53.02	Peak	H	250	300	-42.85	-20	22.85
...	...		H					
3153.50	53.11	Peak	V	150	199	-43.71	-20	23.71
4505.00	51.25	Peak	V	100	255	-45.31	-20	25.31
5856.50	53.38	Peak	V	108	360	-43.25	-20	23.25
...	...		V					

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		Middle Channel		Test Frequency		485.0000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
3395.00	54.28	Peak	H	100	255	-42.08	-20	22.08
4365.00	62.41	Peak	H	300	89	-33.72	-20	13.72
5820.00	56.40	Peak	H	259	355	-40.07	-20	20.07
...	...		H					
3395.00	49.05	Peak	V	128	122	-46.94	-20	26.94
4365.00	60.33	Peak	V	104	100	-36.00	-20	16.00
5820.00	55.73	Peak	V	100	188	-40.82	-20	20.82
...	...		V					

Modulation		FM		Channel Separation		12.5KHz		
Test Channel		High Channel		Test Frequency		519.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
3117.00	54.29	Peak	H	400	100	-42.42	-20	22.42
4156.00	53.33	Peak	H	300	28	-43.70	-20	23.70
5195.00	51.08	Peak	H	300	331	-46.03	-20	26.03
...	...		H					
3117.00	55.59	Peak	V	100	330	-41.29	-20	21.29
4156.00	50.51	Peak	V	100	158	-45.88	-20	25.88
5195.00	55.07	Peak	V	150	158	-42.16	-20	22.16
...	...		V					

Modulation		4FSK		Channel Separation		12.5KHz		
Test Channel		Low Channel		Test Frequency		450.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
3153.50	50.72	Peak	H	364	300	-45.65	-20	25.65
4505.00	54.81	Peak	H	108	127	-42.19	-20	22.19
5856.50	54.42	Peak	H	150	124	-42.35	-20	22.35
...	...		H					
3153.50	53.23	Peak	V	128	66	-43.10	-20	23.10
4505.00	52.57	Peak	V	108	89	-44.48	-20	24.48
5856.50	52.38	Peak	V	108	255	-44.59	-20	24.59
...	...		V					

Modulation		4FSK		Channel Separation		12.5KHz		
Test Channel		Middle Channel		Test Frequency		485.0000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
3395.00	54.45	Peak	H	350	300	-42.36	-20	22.36
4365.00	62.88	Peak	H	300	288	-33.71	-20	13.71
5820.00	55.71	Peak	H	300	245	-40.88	-20	20.88
...	...		H					
3395.00	50.81	Peak	V	100	245	-46.28	-20	26.28
4365.00	60.28	Peak	V	128	117	-36.18	-20	16.18
5820.00	55.45	Peak	V	100	156	-41.61	-20	21.61
...	...		V					

Modulation		4FSK		Channel Separation		12.5KHz		
Test Channel		High Channel		Test Frequency		519.5000 MHz		
Frequency (MHz)	E-Field Level (dBuv/m)	EMI Detector (Peak/QP)	Antenna Polarization	Antenna Height (cm)	Table Angle (Degree)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
3117.00	55.82	Peak	H	250	222	-40.84	-20	20.84
4156.00	52.55	Peak	H	200	156	-44.52	-20	24.52
5195.00	53.57	Peak	H	300	23	-42.55	-20	22.55
...	...		H					
3117.00	54.72	Peak	V	100	92	-41.61	-20	21.61
4156.00	51.42	Peak	V	108	157	-45.02	-20	25.02
5195.00	54.08	Peak	V	108	330	-42.98	-20	22.98
...	...		V					

4.4. Spurious Emission on Antenna Port

TEST APPLICABLE


The same as Section 4.3

TEST PROCEDURE

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz. VBW=3MHz from the 1GHz to 10th Harmonic.

The audio input was set to 0 to get the unmodulated carrier, the resulting picture is print out for each channel separation.

TEST CONFIGURATION

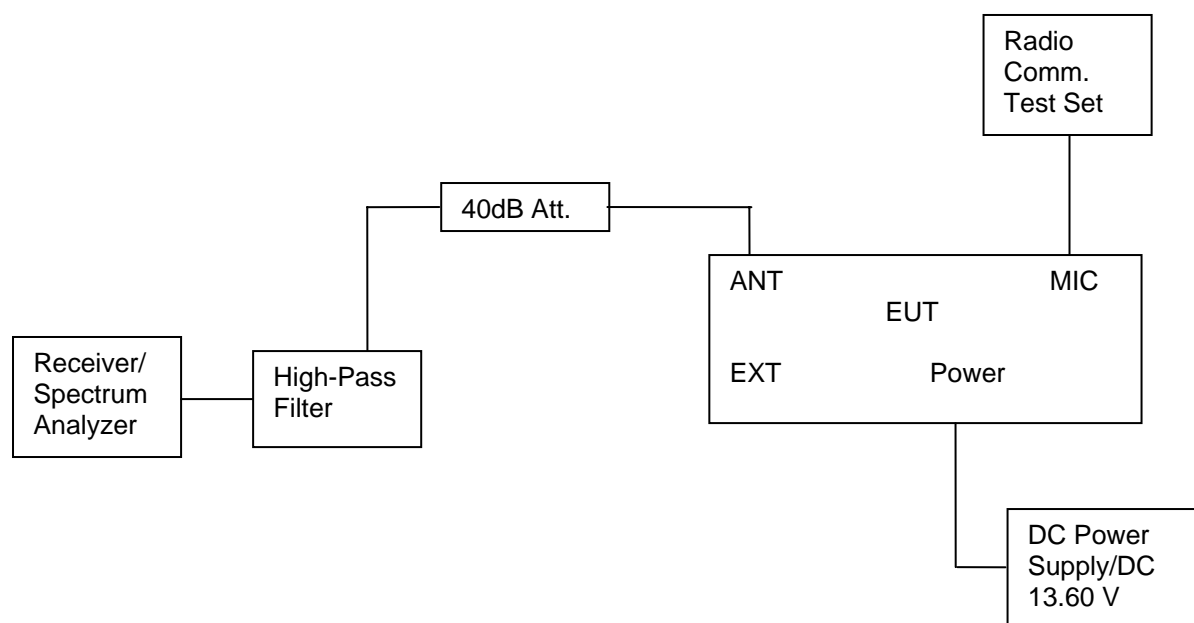

TEST RESULTS

Modulation Type: FM

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 9 (12.5 kHz bandwidth only): On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (48.08) = 66.82 \text{ dB}$

High: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (50.00) = 66.99 \text{ dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL-50-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,
In this application, the EL is 46.99 dBm.

Limit (dBm) = $46.99 - 50 - 10 \log_{10} (50.00) = -20 \text{ dBm}$

Modulation Type: 4FSK

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 9 (12.5 kHz Bandwidth only):

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (48.08) = 66.82 \text{ dB}$

High: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (50.35) = 67.02 \text{ dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL-50-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 46.99 dBm.

Limit (dBm) = 46.99-50-10log10 (50.35) = -20 dBm

Note: 1. In general, the worse case attenuation requirement shown above was applied.

2. The measurement frequency range from 30MHz to 6 GHz.

For Rated High Power (50Watt)

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz	
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)
FM	12.5KHz	Low	450.5000	799.22	-26.15	5929.86	-26.32
		Middle	485.0000	919.26	-26.24	5949.90	-29.45
		High	519.5000	867.55	-25.72	5939.88	-30.26
4FSK	12.5KHz	Low	450.5000	927.98	-26.13	5539.08	-26.51
		Middle	485.0000	896.77	-25.94	5509.02	-26.81
		High	519.5000	657.91	-26.45	5879.76	-26.88
Limit		-20dBm for 12.5KHz Channel Separation					
Test Results		Compliance					


For Rated Low Power (5Watt)

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz	
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)
FM	12.5KHz	Low	450.5000	986.39	-26.33	5979.96	-26.05
		Middle	485.0000	815.33	-26.29	5869.74	-26.44
		High	519.5000	918.36	-25.97	5649.30	-26.69
4FSK	12.5KHz	Low	450.5000	848.38	-26.48	5929.86	-26.92
		Middle	485.0000	663.71	-26.47	5979.96	-26.87
		High	519.5000	922.24	-26.56	5569.14	-26.41
Limit		-20dBm for 12.5KHz Channel Separation					
Test Results		Compliance					


Plots of Spurious Emission on Antenna Port Measurement

For Rated High Power (50Watt)



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	450.5000	799.22	-26.15	5929.86	-26.32	-20dBm
Test Results				Compliance				

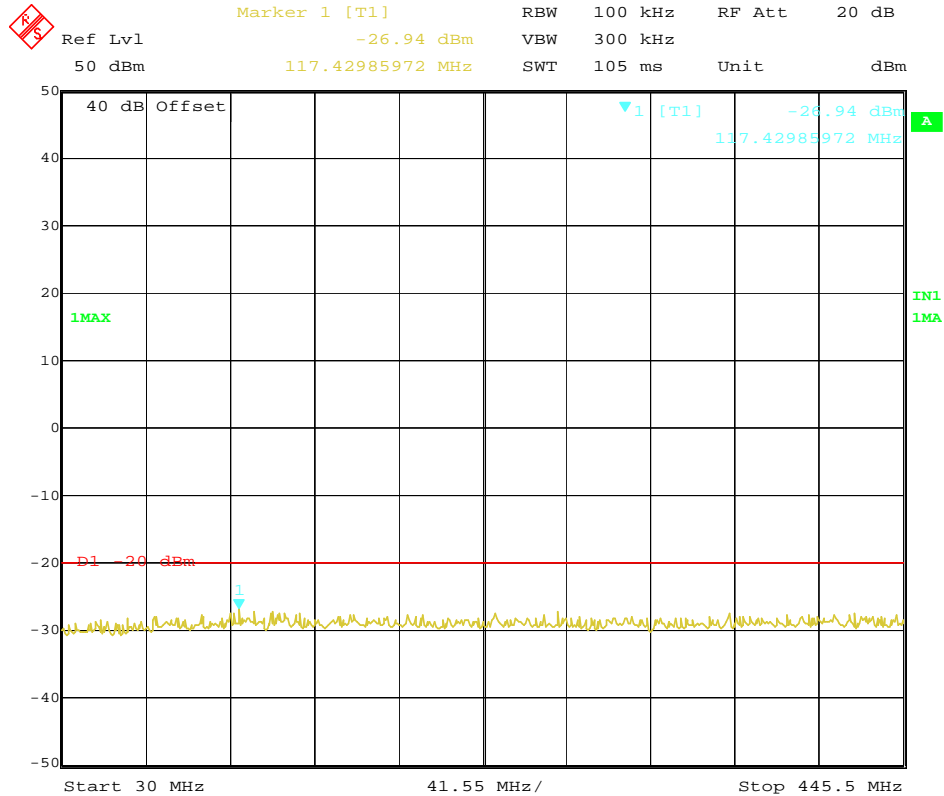


Date: 10.APR.2011 18:26:00

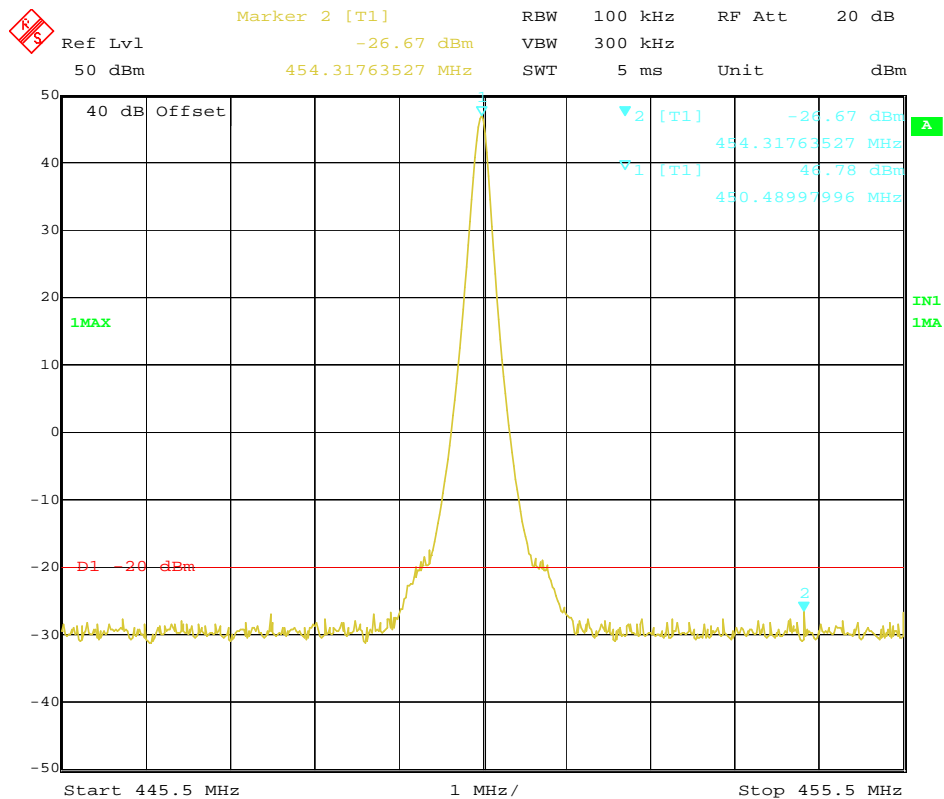


Date: 10.APR.2011 18:26:32

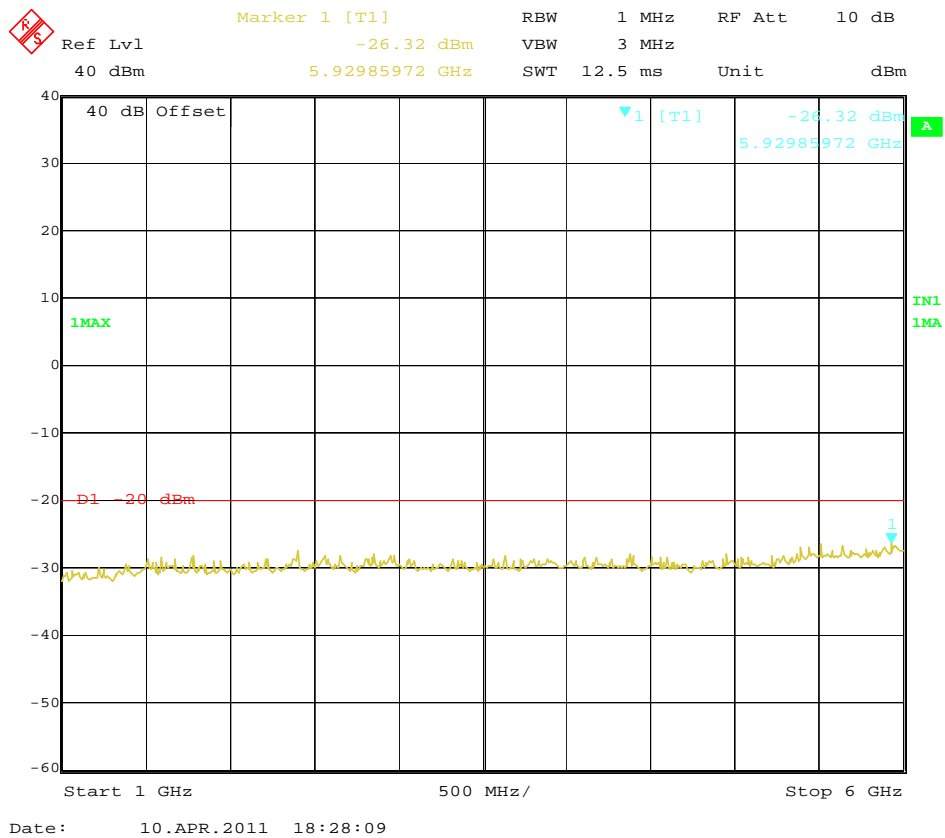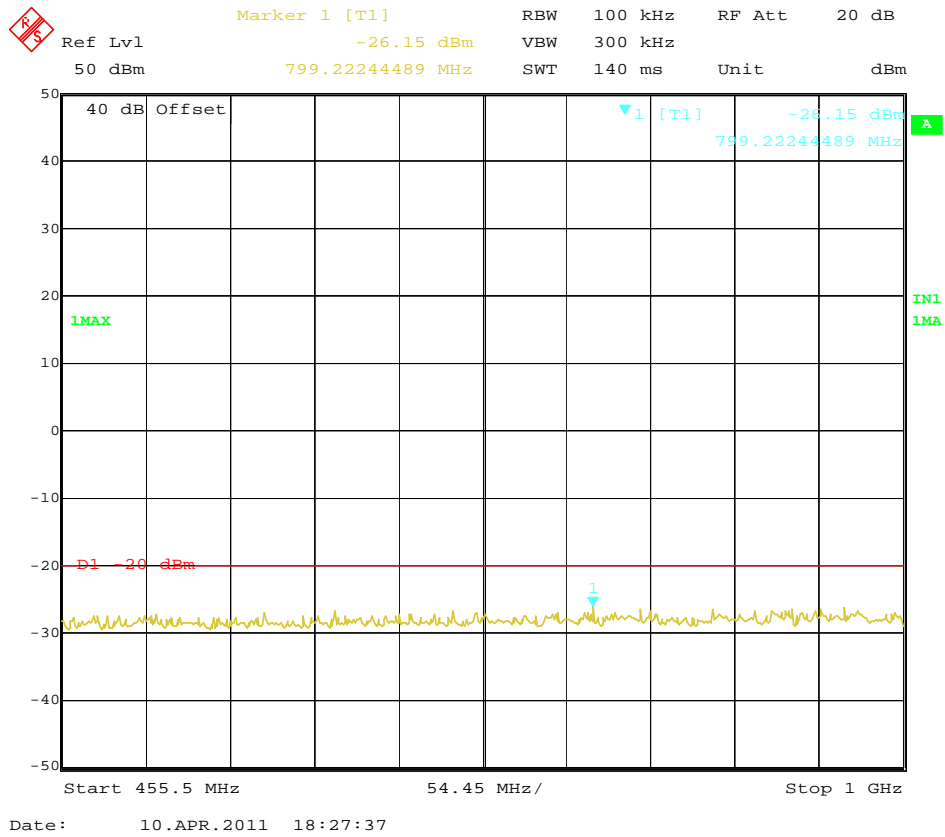



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Middle	485.0000	919.26	-26.24	5949.90	-2945	-20dBm
Test Results				Compliance				

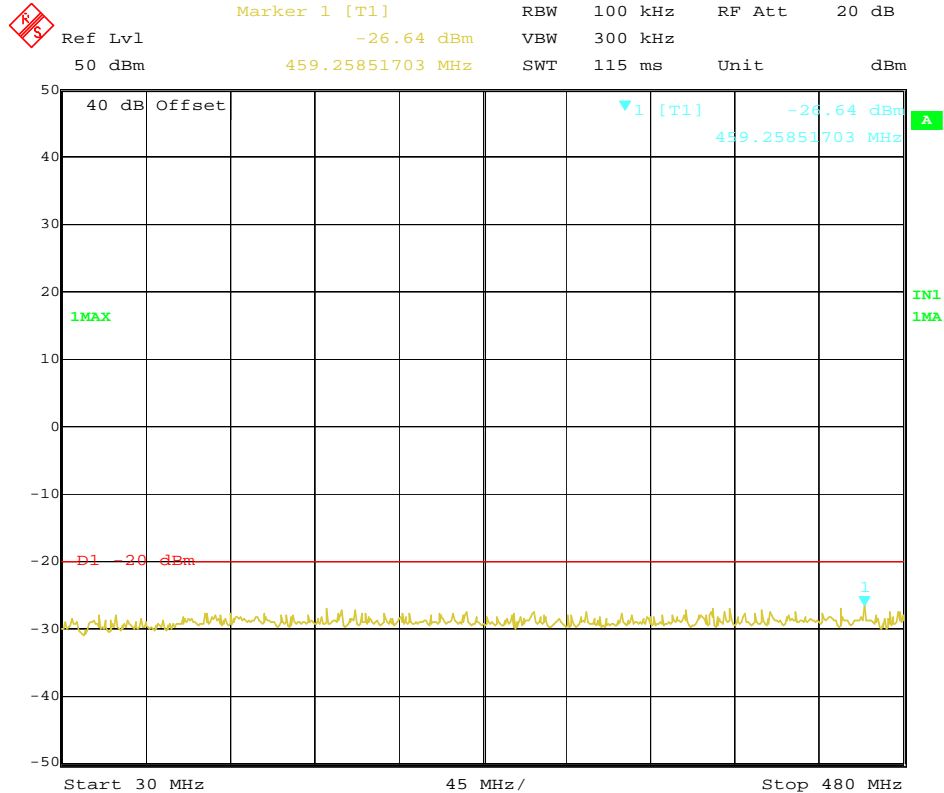


Date: 10.APR.2011 19:42:11

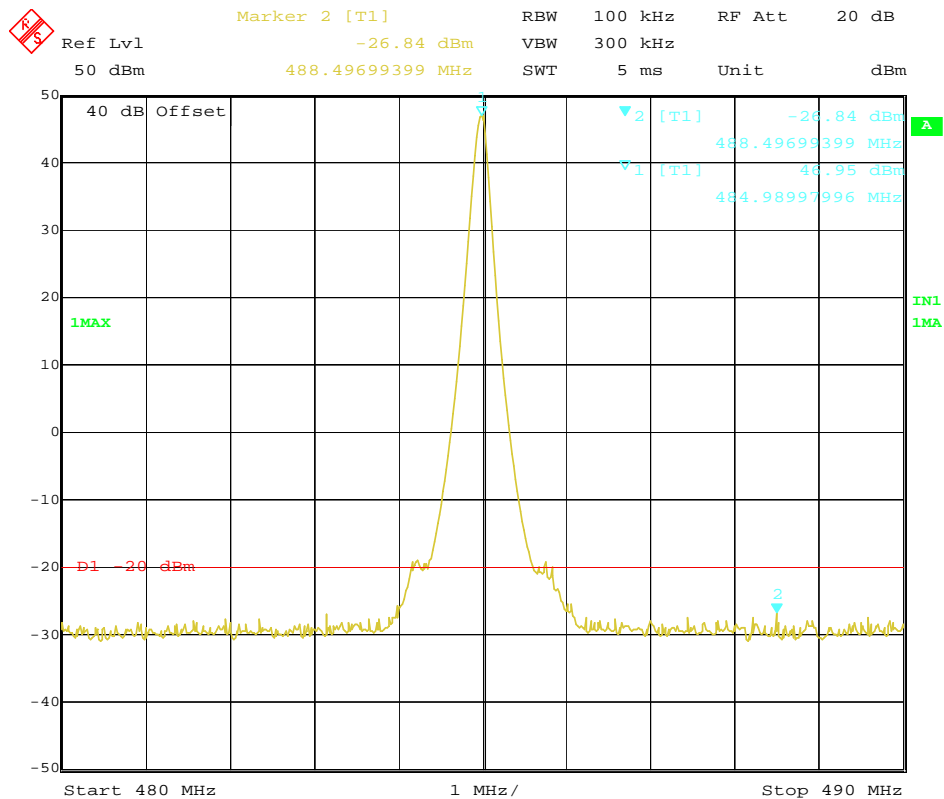


Date: 10.APR.2011 19:41:43

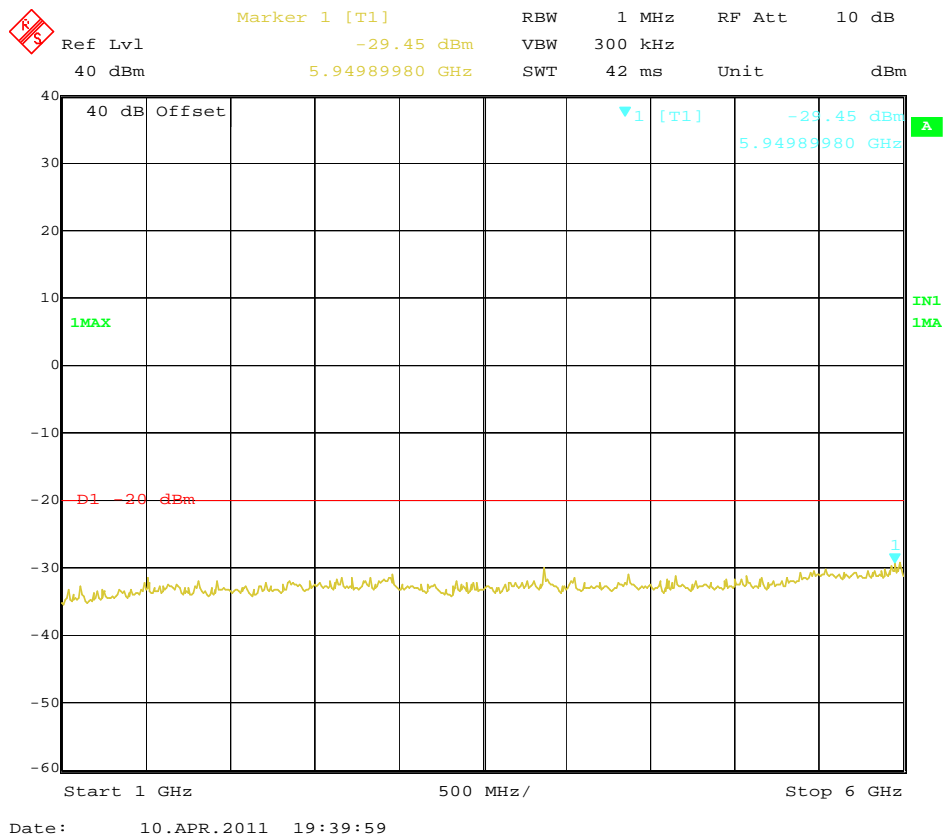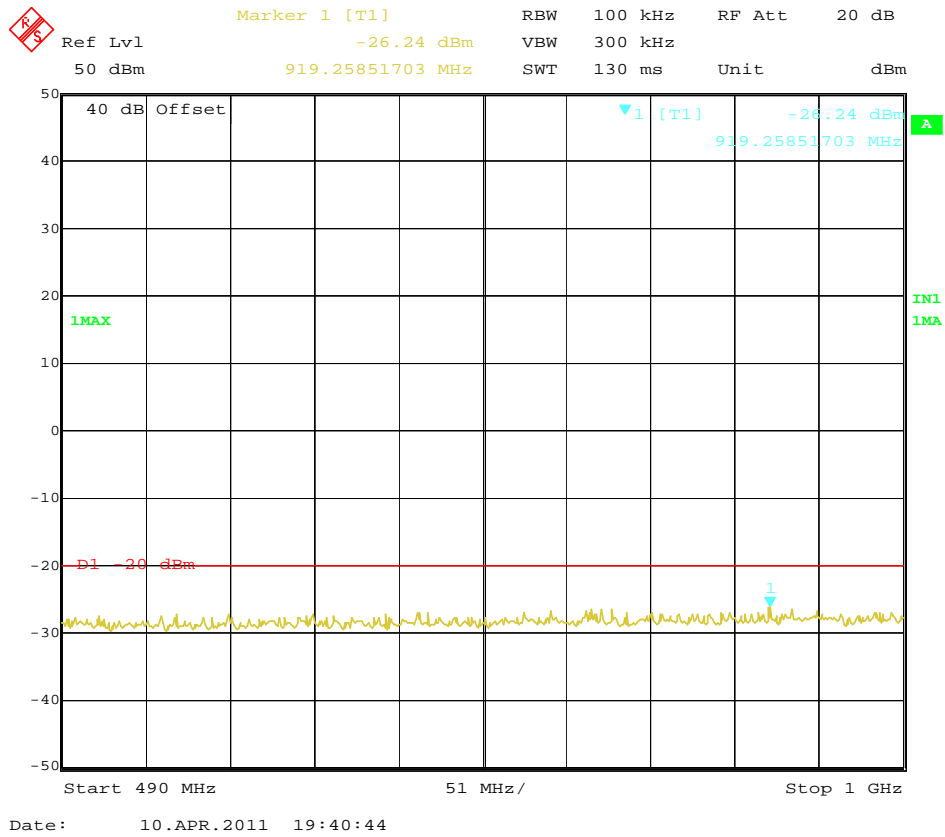



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	519.5000	867.55	-25.72	5939.88	-30.26	-20dBm
Test Results				Compliance				

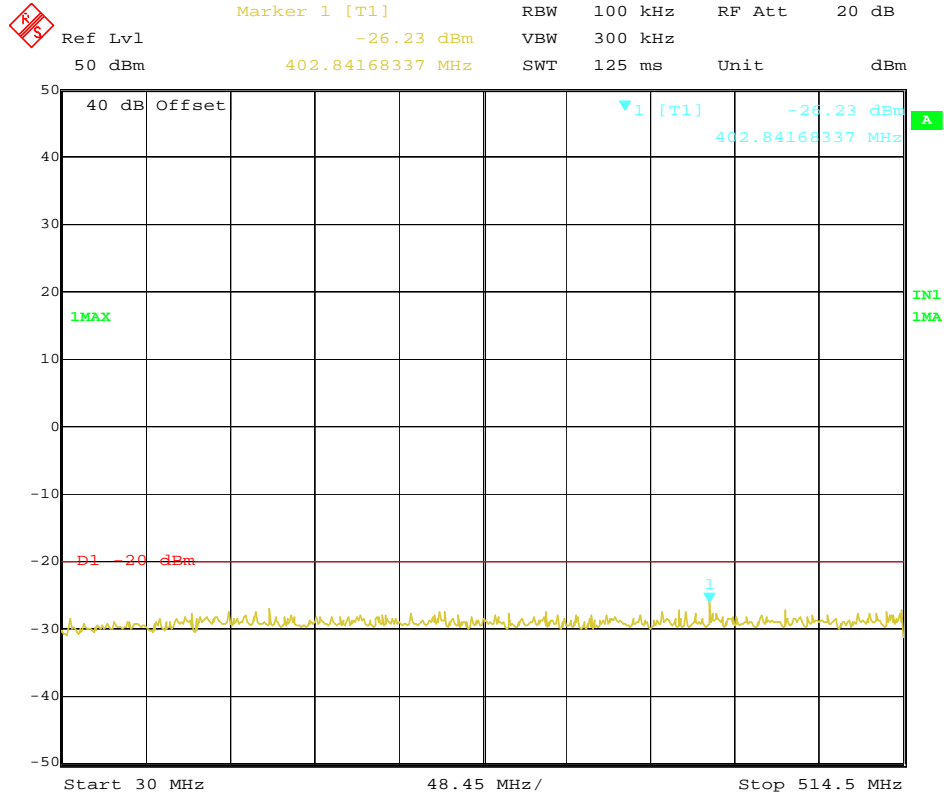


Date: 10.APR.2011 19:37:32

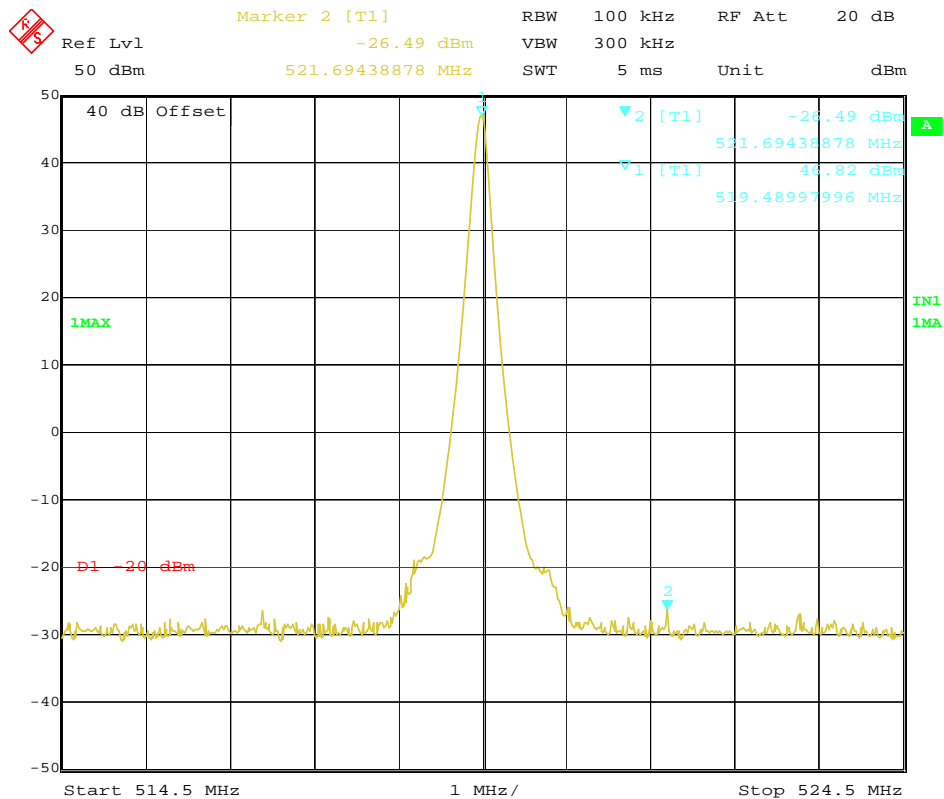


Date: 10.APR.2011 19:38:05

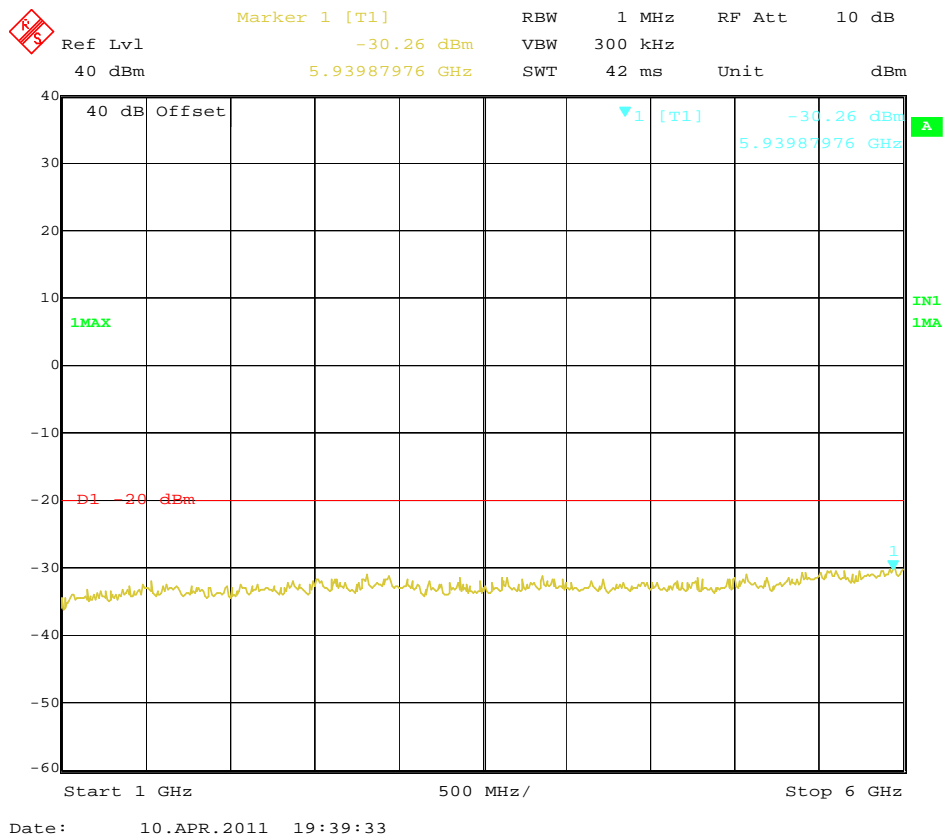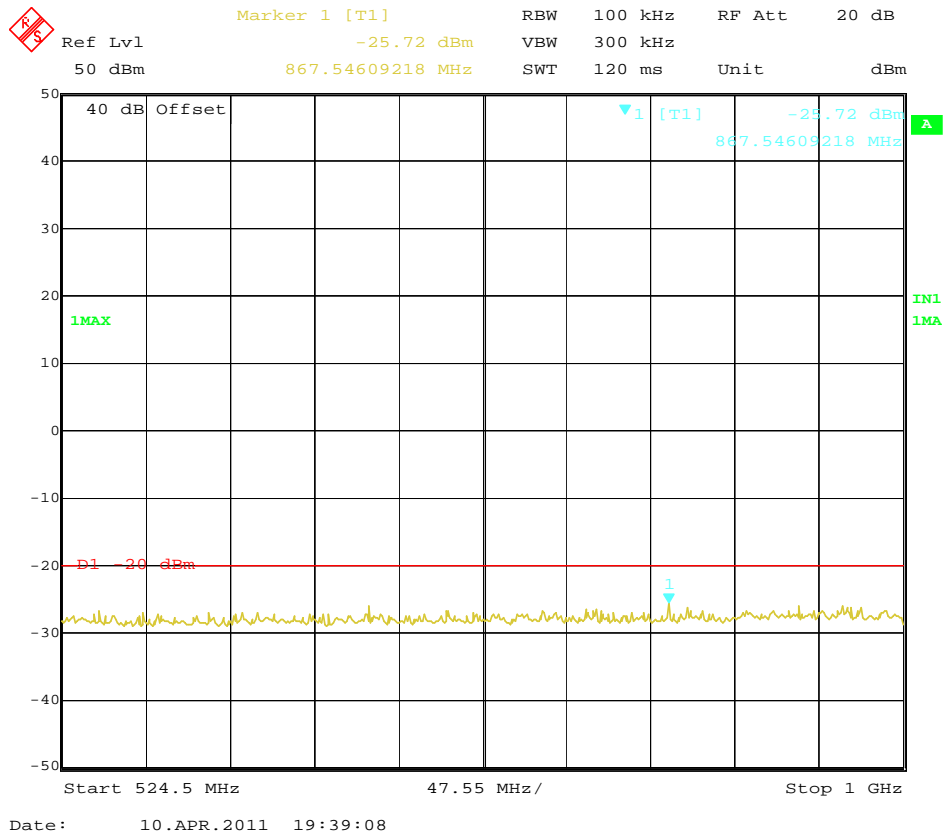



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
4FSK	12.5KHz	Low	450.5000	927.98	-26.13	5539.08	-26.51	-20dBm
Test Results				Compliance				

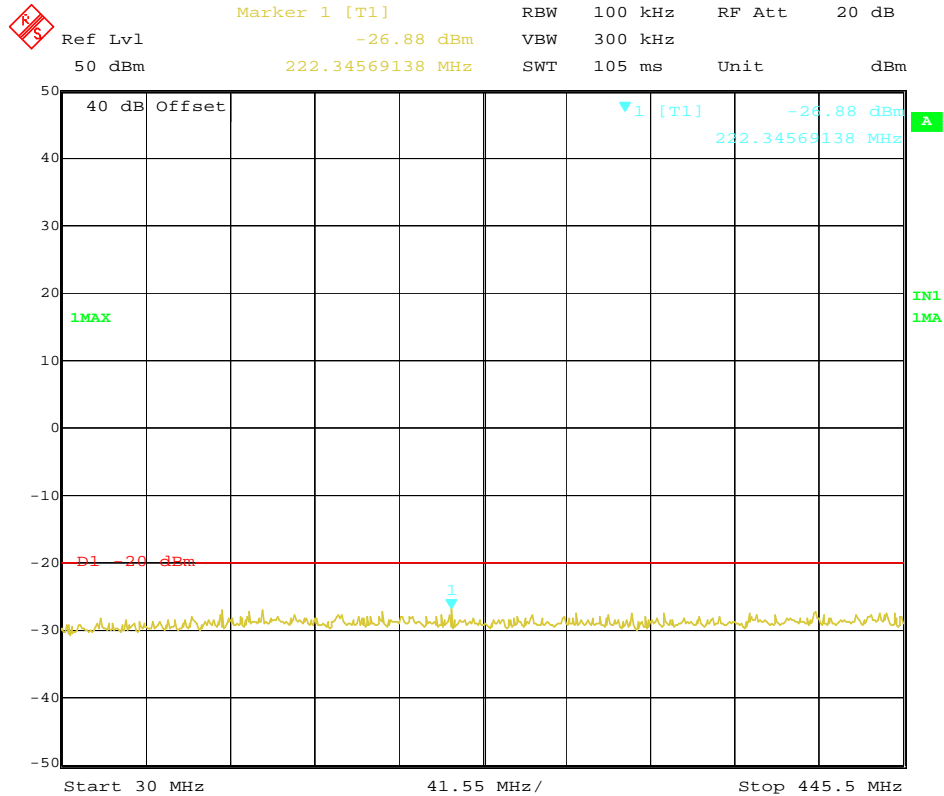


Date: 10.APR.2011 22:00:13

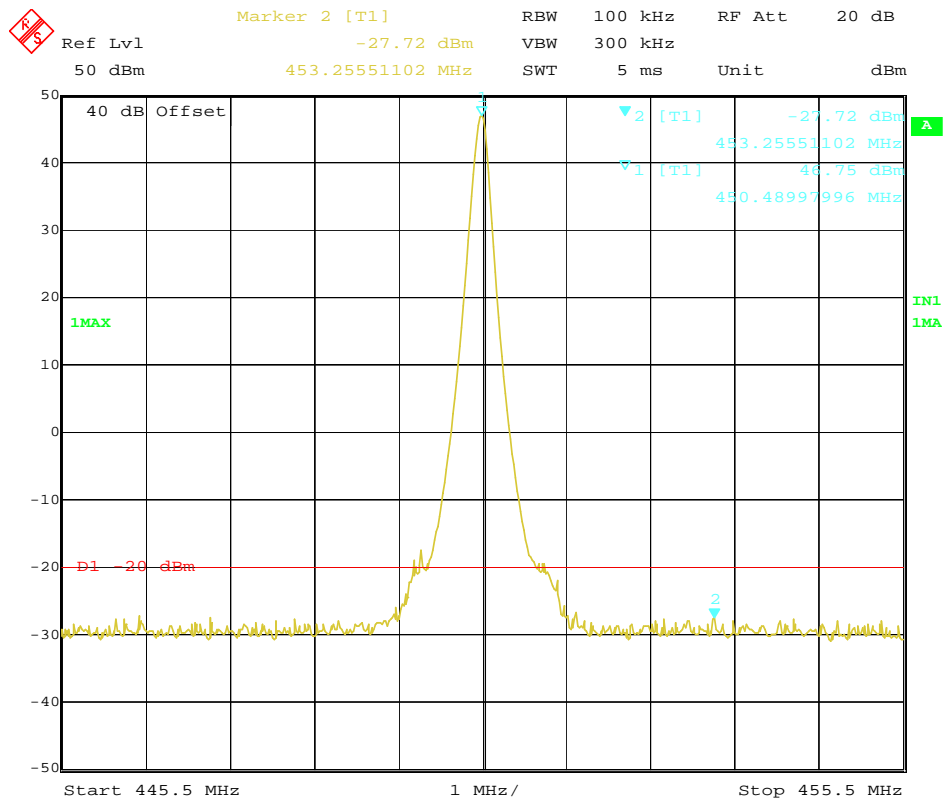


Date: 10.APR.2011 21:59:47

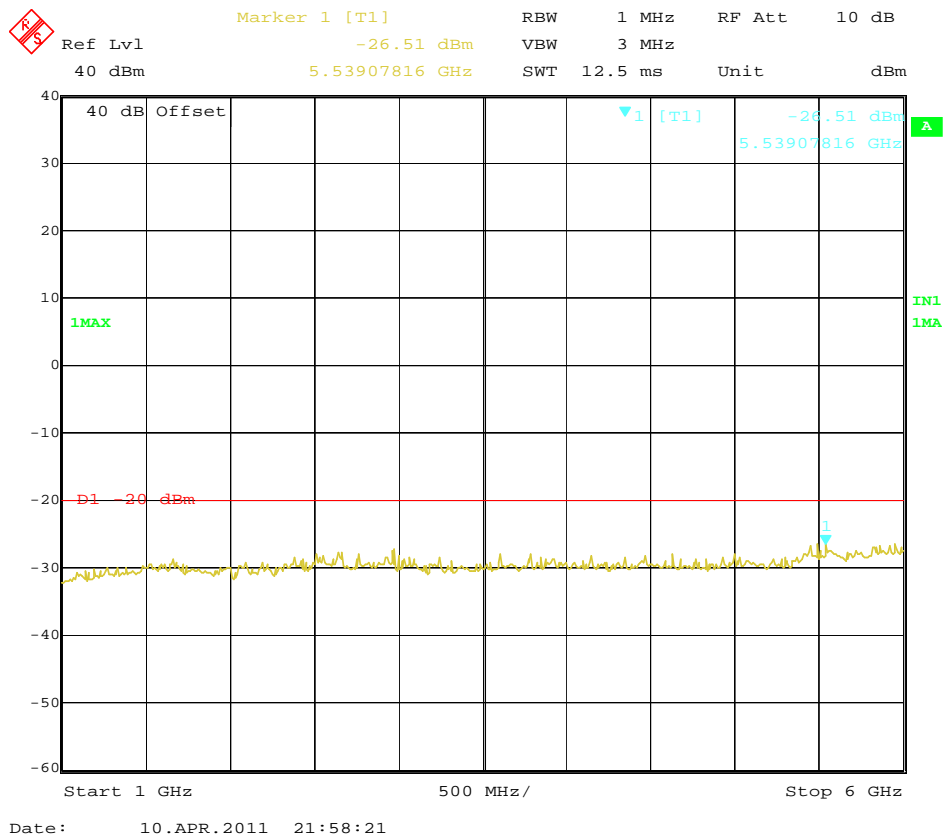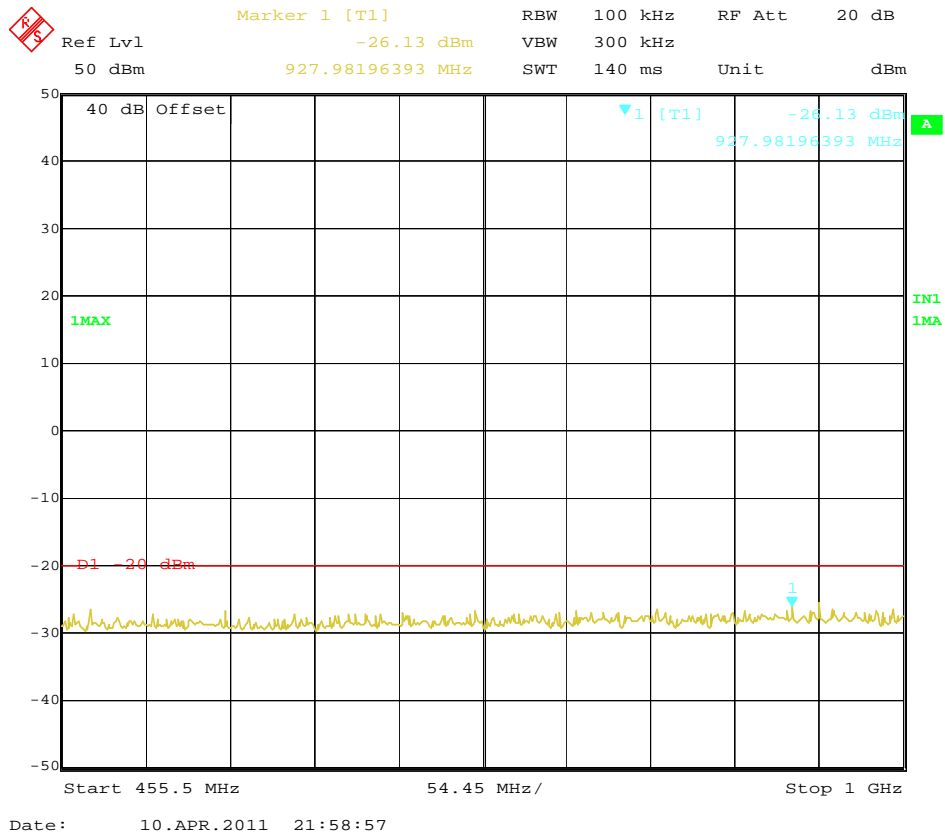



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
4FSK	12.5KHz	Middle	485.0000	896.77	-25.94	5509.02	-26.81	-20dBm
Test Results				Compliance				

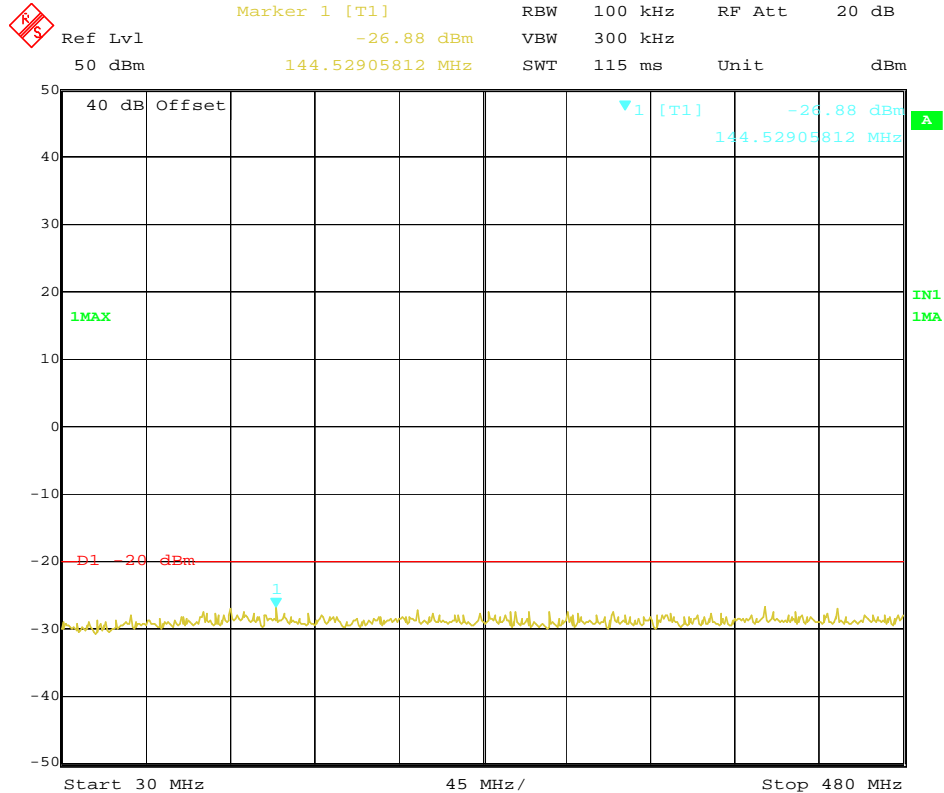


Date: 10.APR.2011 21:50:38

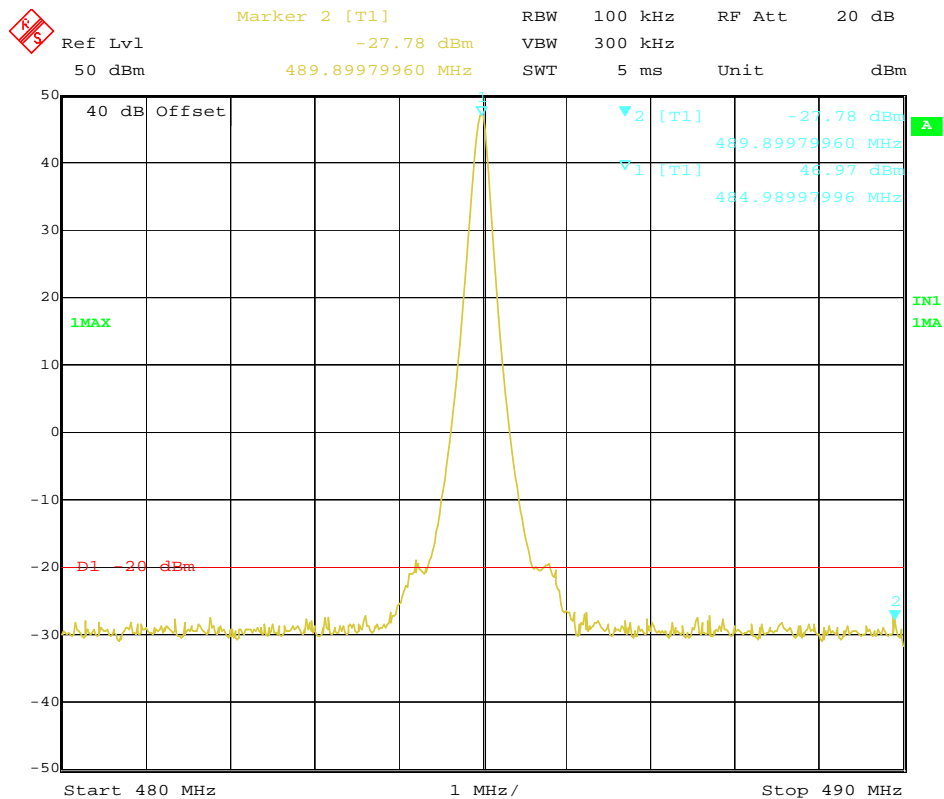


Date: 10.APR.2011 21:51:07

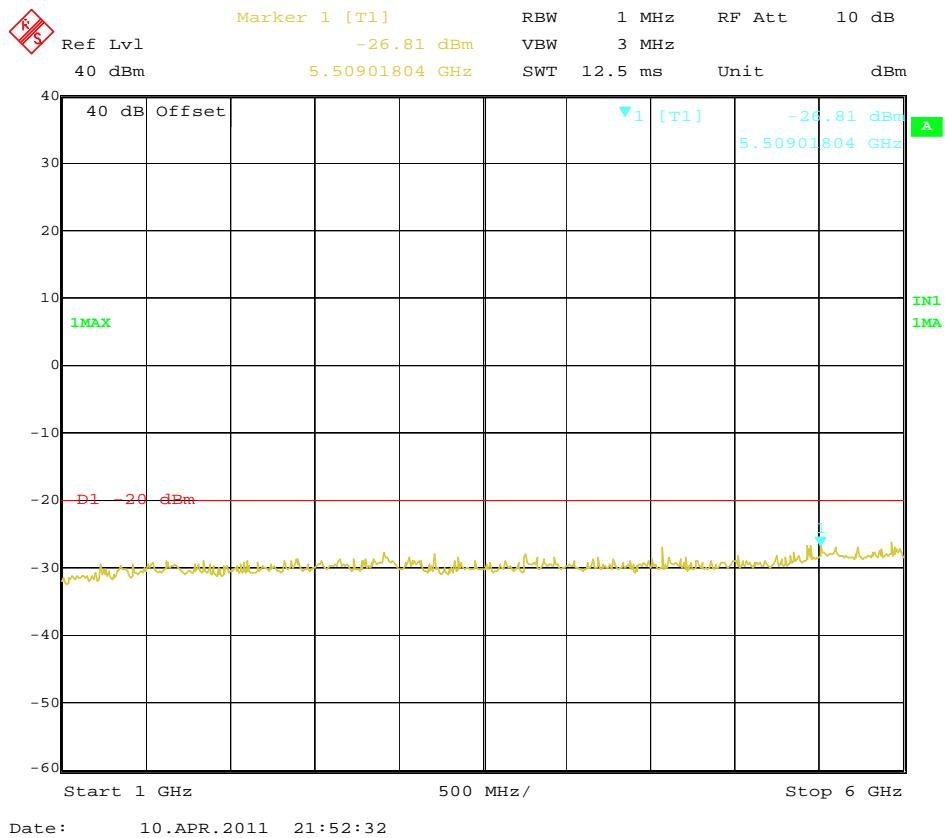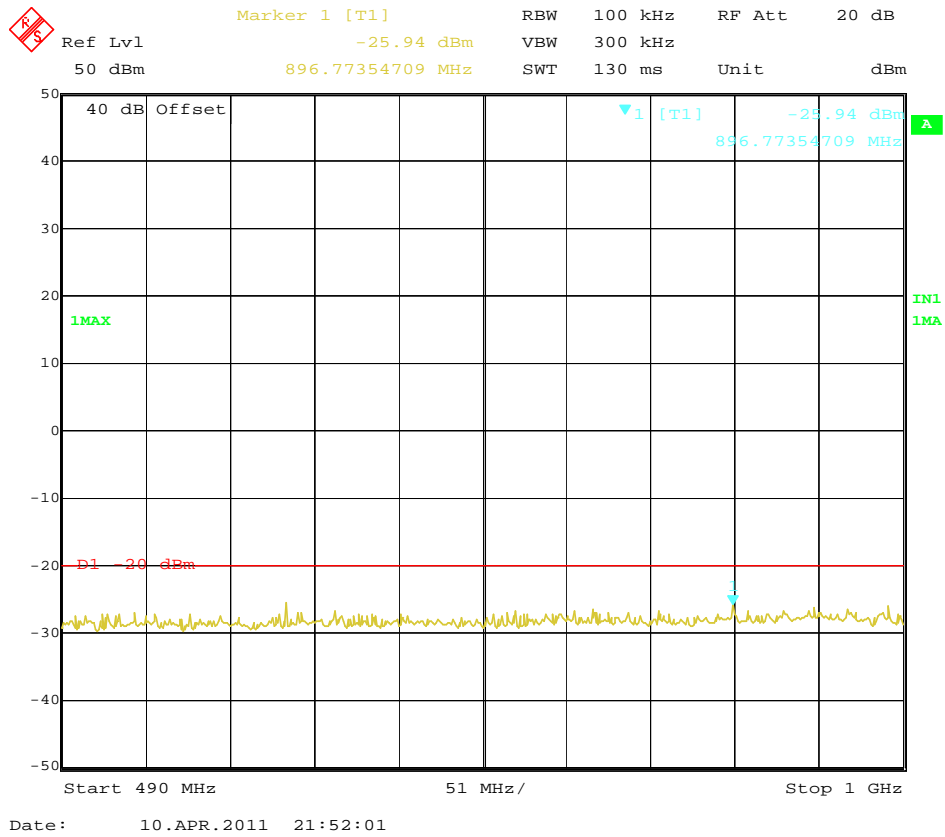



Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
4FSK	12.5KHz	High	519.5000	657.91	-26.45	5879.76	-26.88	-20dBm
Test Results				Compliance				

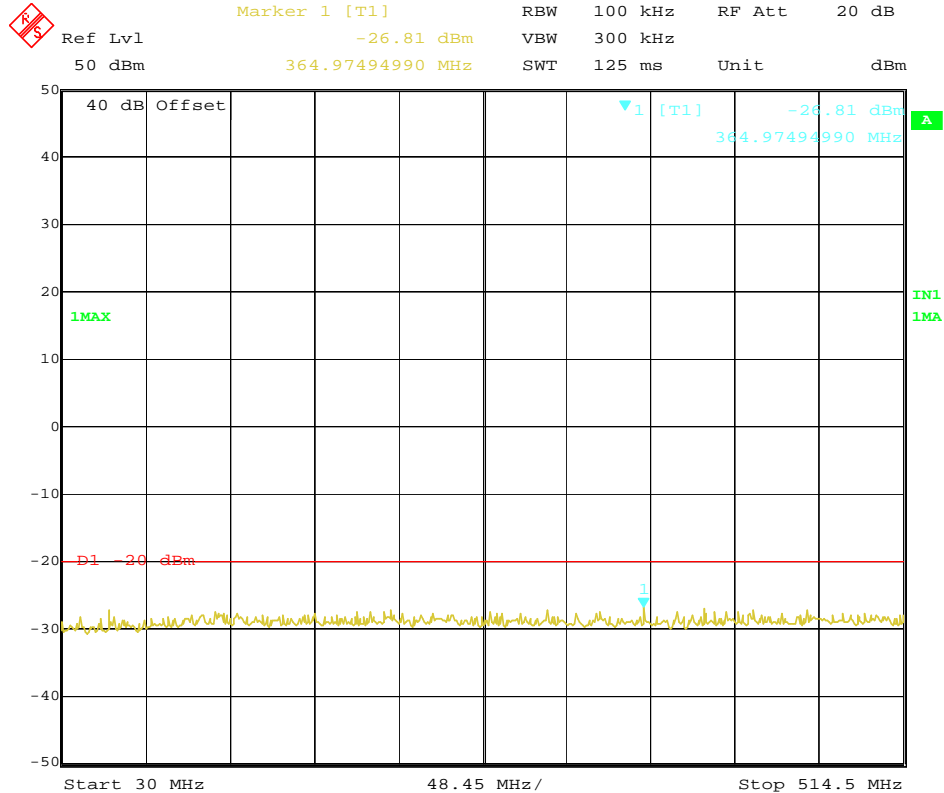

Date: 10.APR.2011 21:50:13

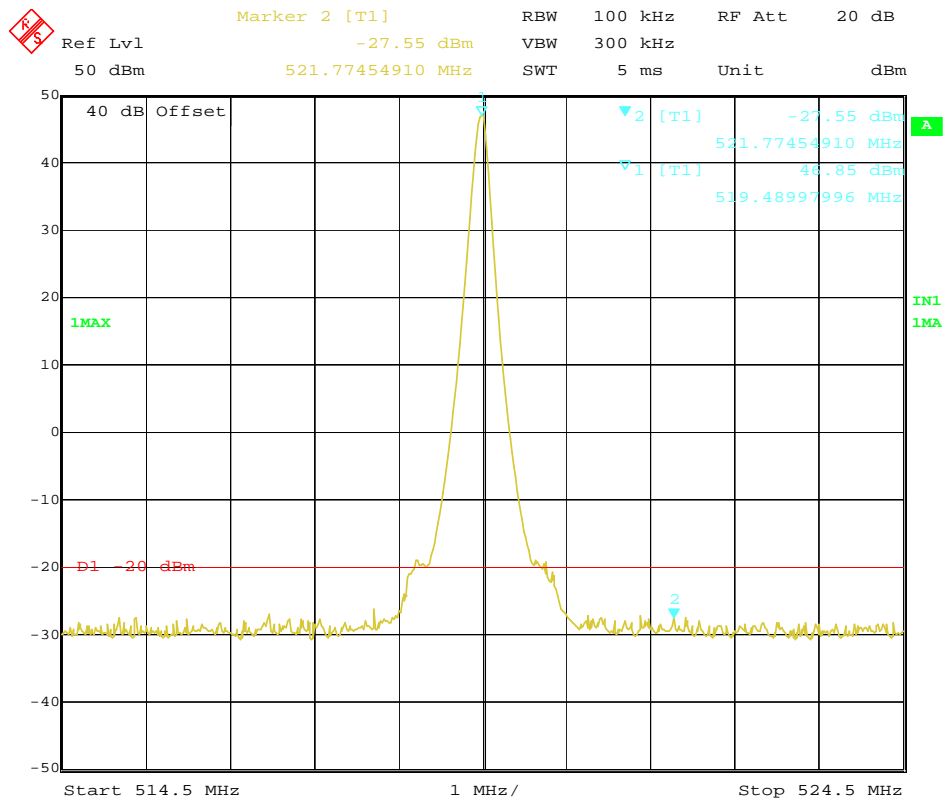


Date: 10.APR.2011 21:49:30

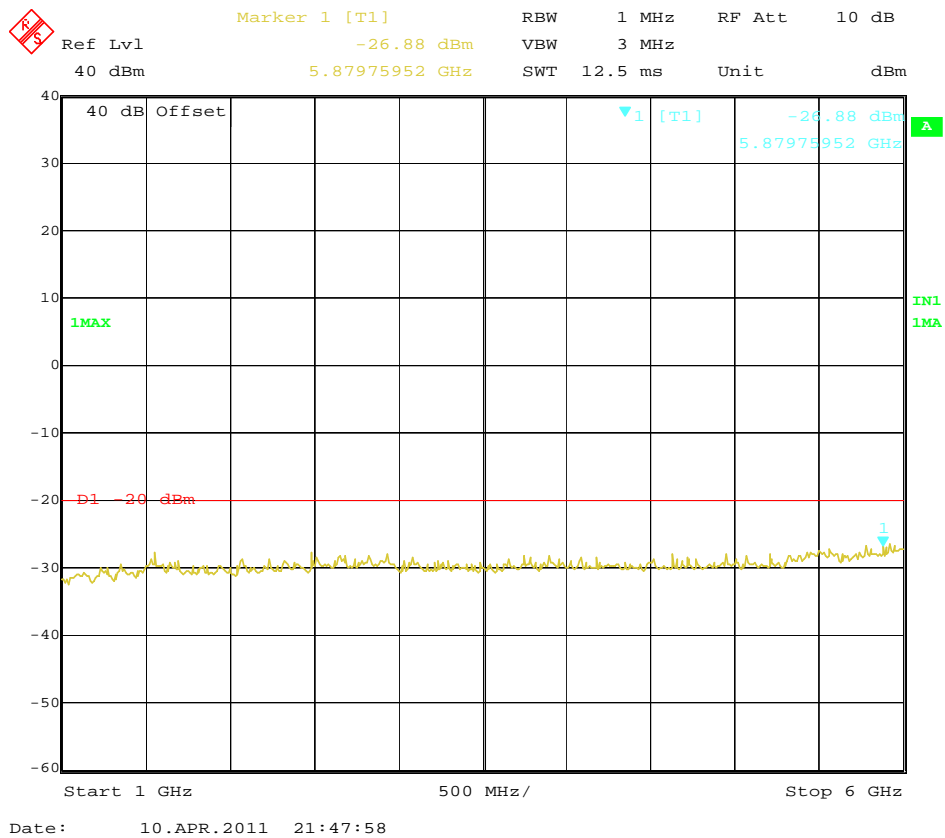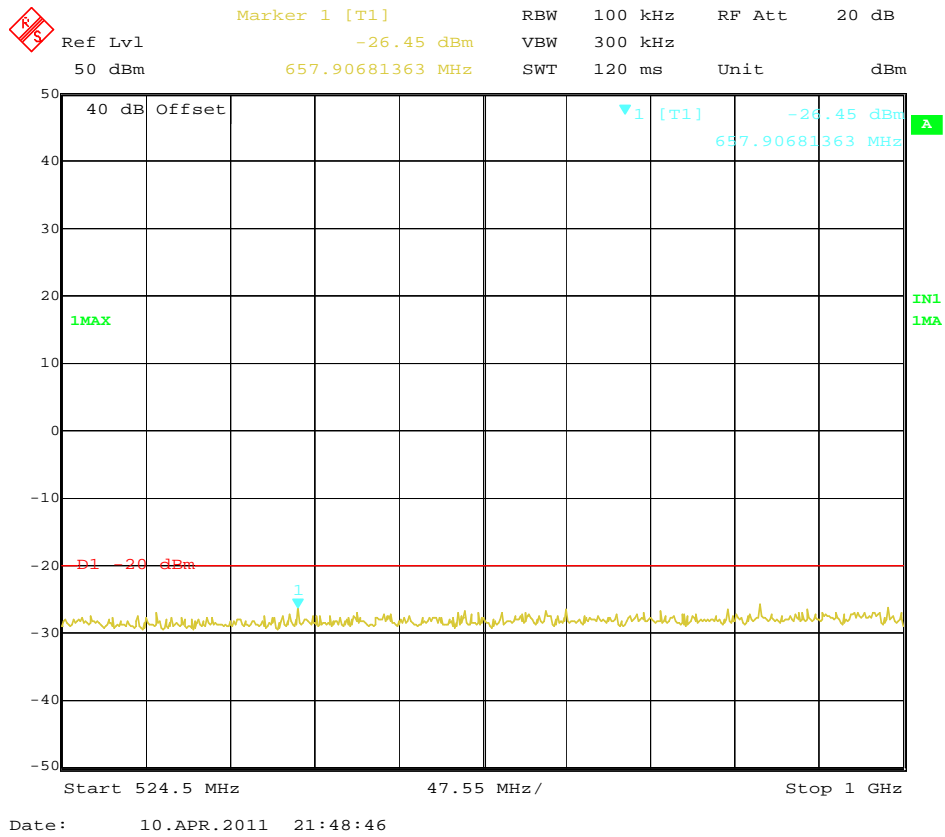


For Rated Low Power (5Watt)

Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Low	450.5000	986.39	-26.33	5979.96	-26.05	-20dBm
Test Results				Compliance				

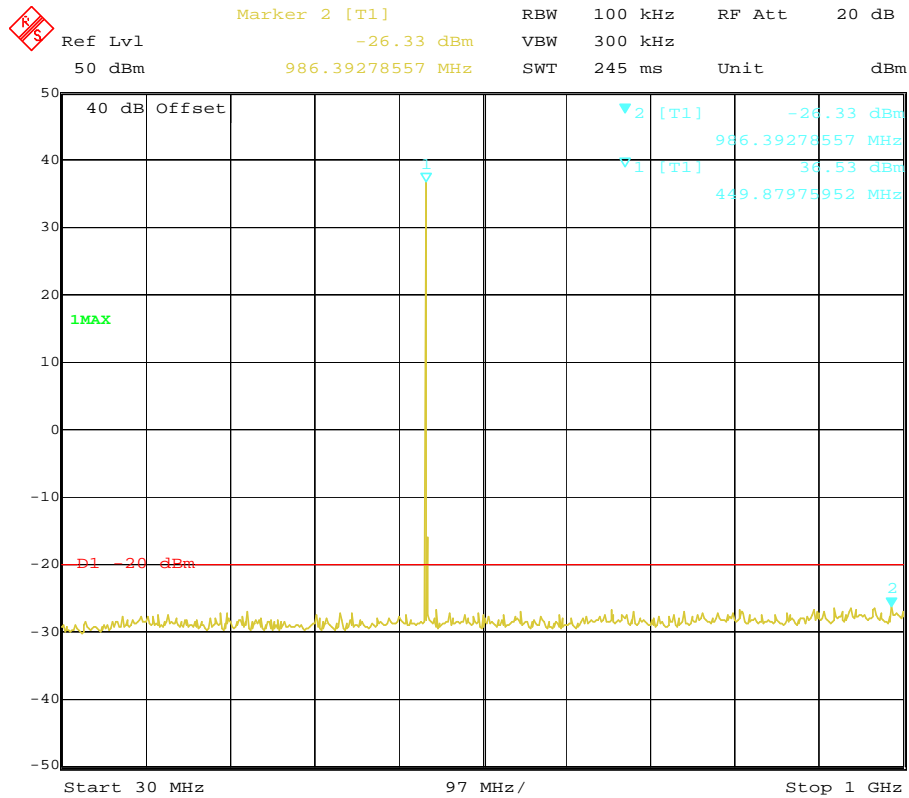


Date: 10.APR.2011 21:10:27

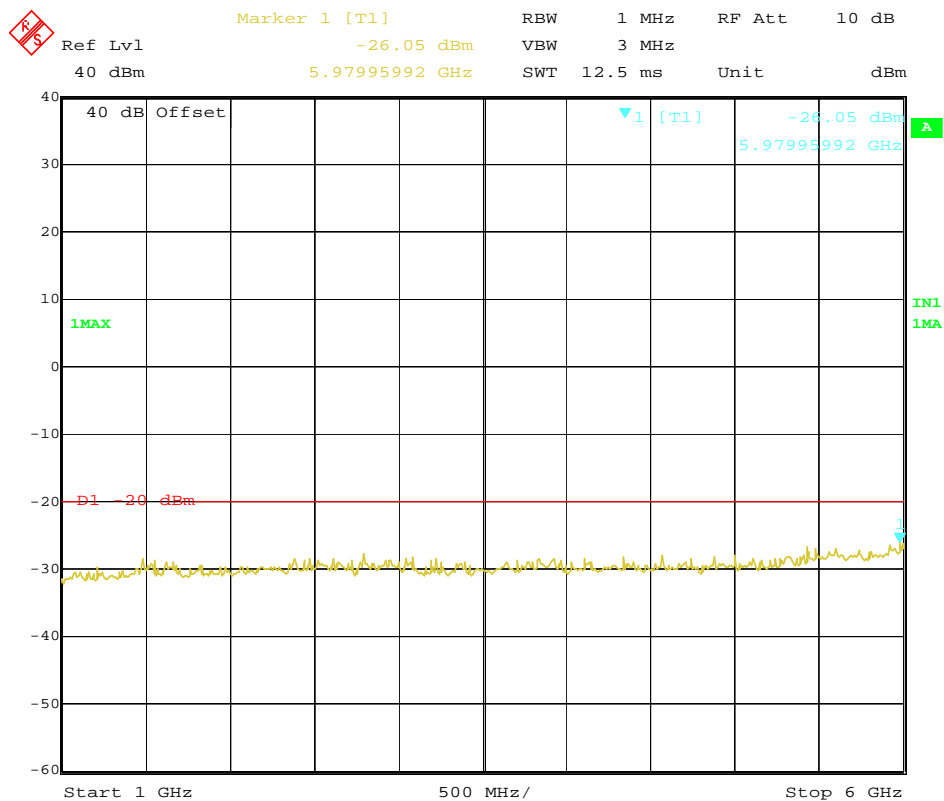


Date: 10.APR.2011 21:11:01

Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	Middle	485.0000	815.33	-26.29	5869.74	-26.44	-20dBm
Test Results				Compliance				

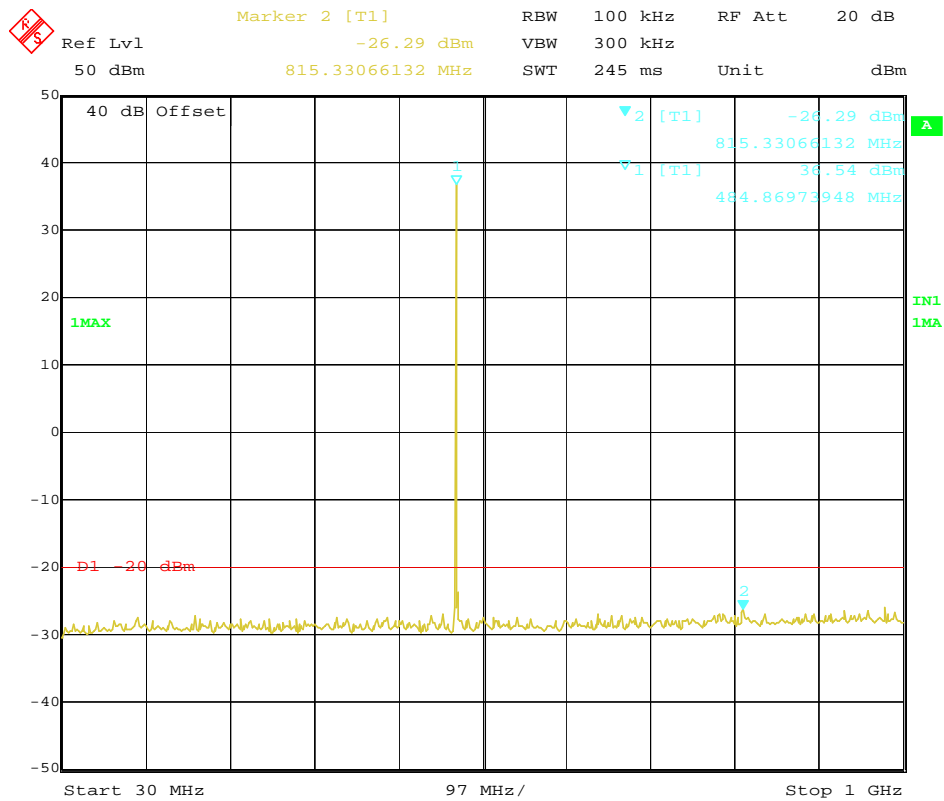


Date: 10.APR.2011 21:13:15

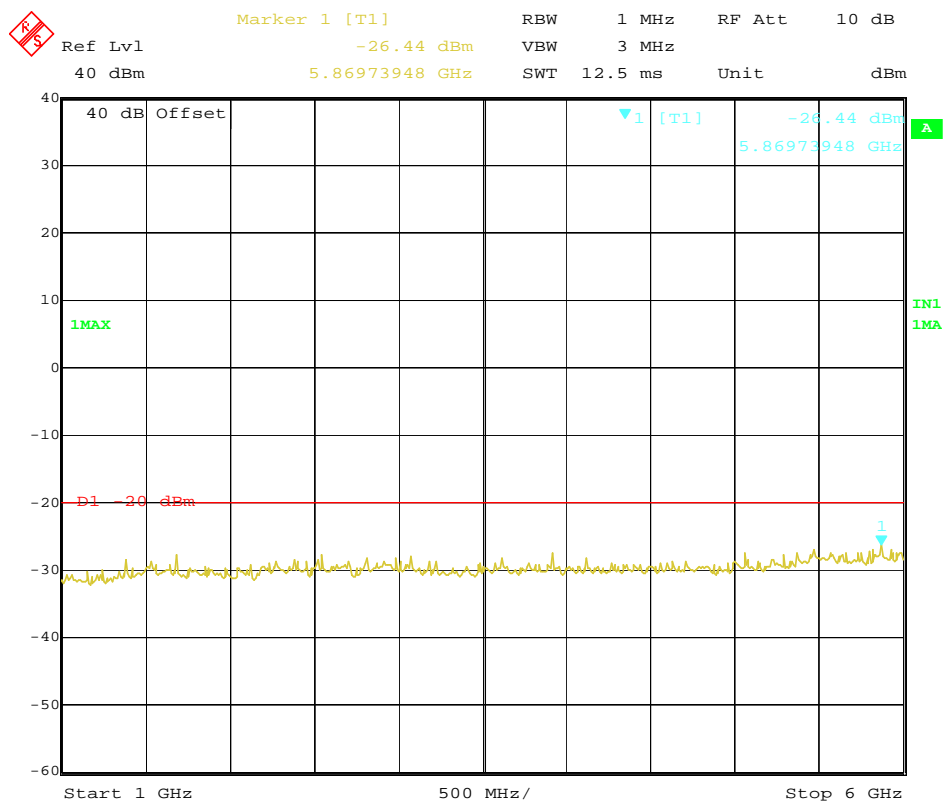


Date: 10.APR.2011 21:12:39

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
FM	12.5KHz	High	519.5000	918.36	-25.97	5649.30	-26.69	-20dBm
Test Results				Compliance				

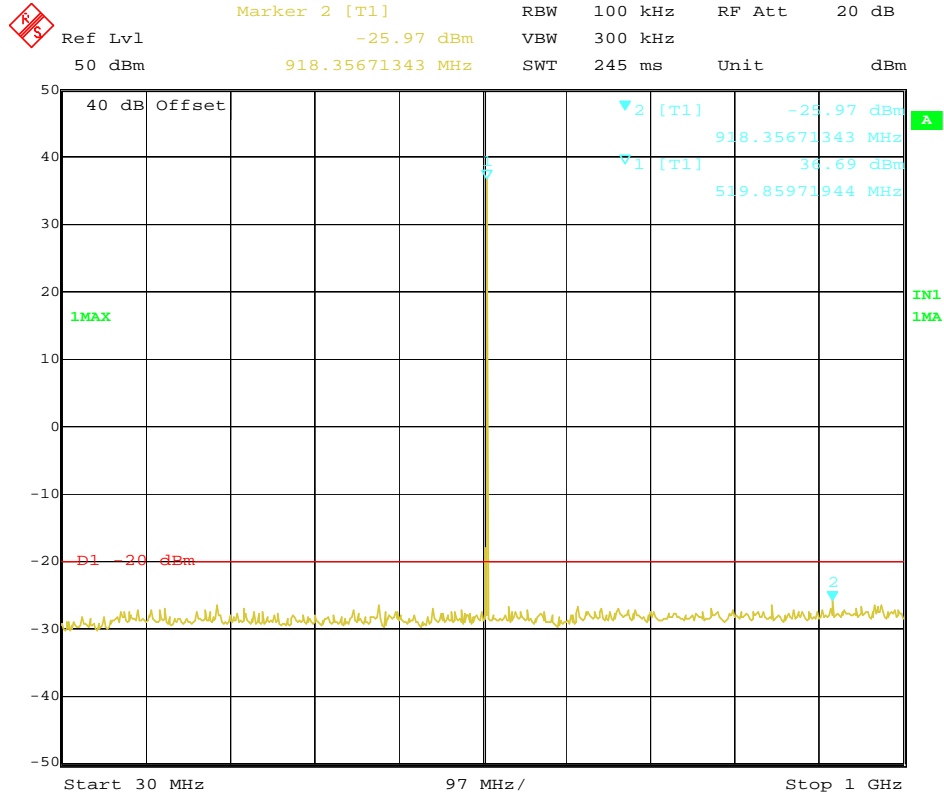


Date: 10.APR.2011 21:13:40

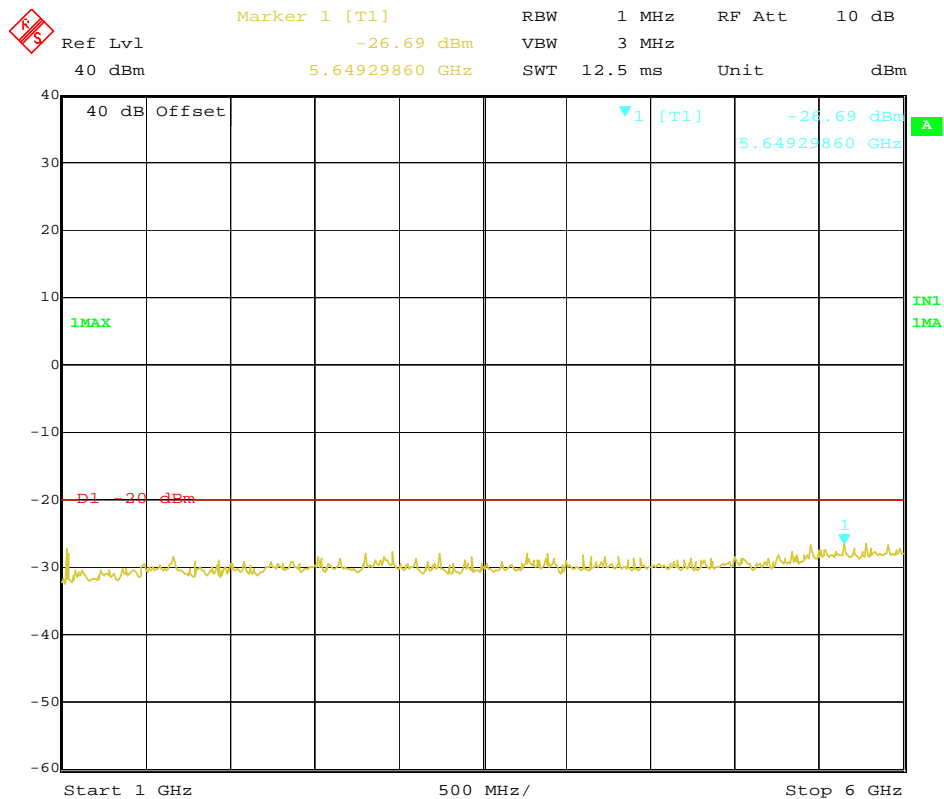


Date: 10.APR.2011 21:14:09

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
4FSK	12.5KHz	Low	450.5000	848.38	-26.48	5929.86	-26.92	-20dBm
Test Results				Compliance				

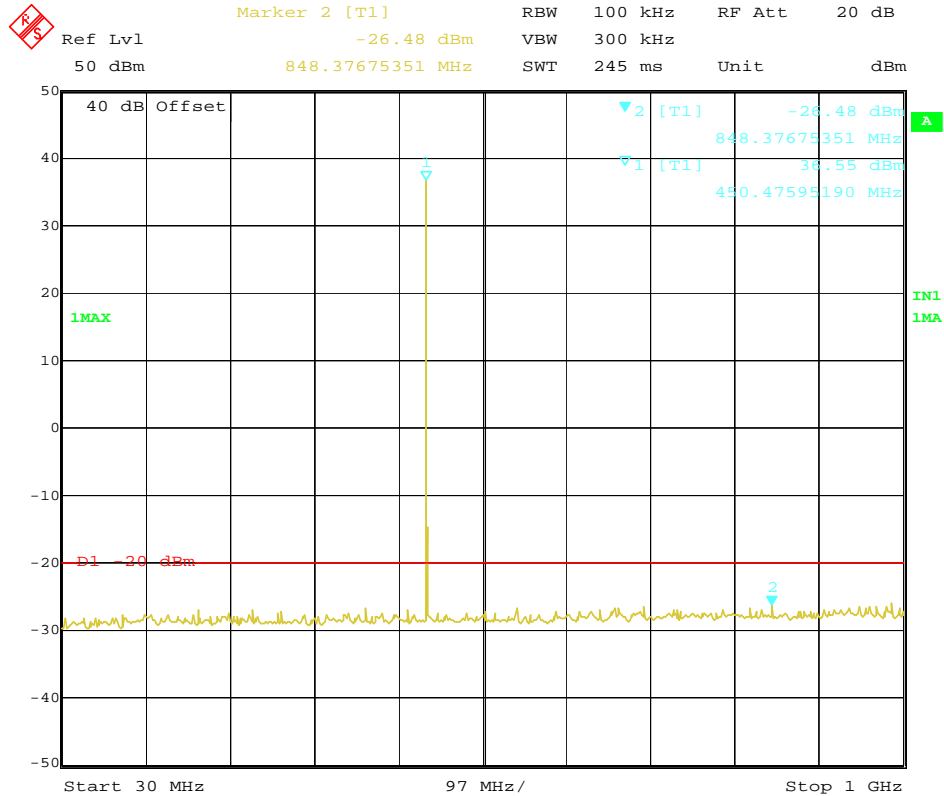


Date: 10.APR.2011 21:41:37

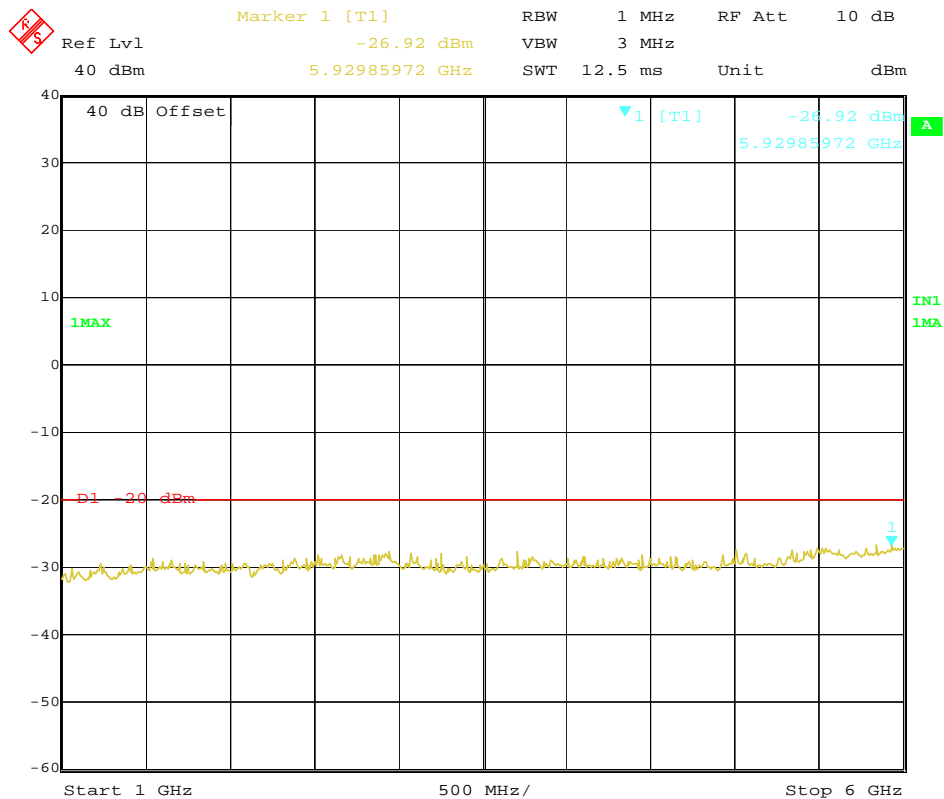


Date: 10.APR.2011 21:42:19

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
4FSK	12.5KHz	Middle	485.0000	663.71	-26.47	5979.96	-26.87	-20dBm
Test Results				Compliance				

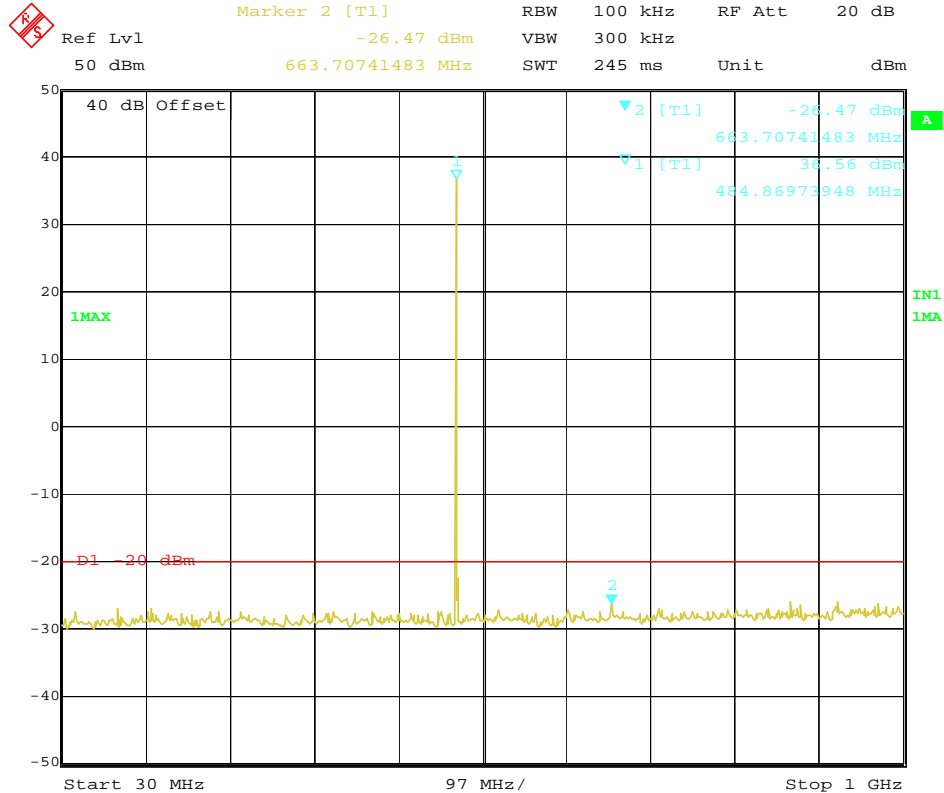


Date: 10.APR.2011 21:46:12

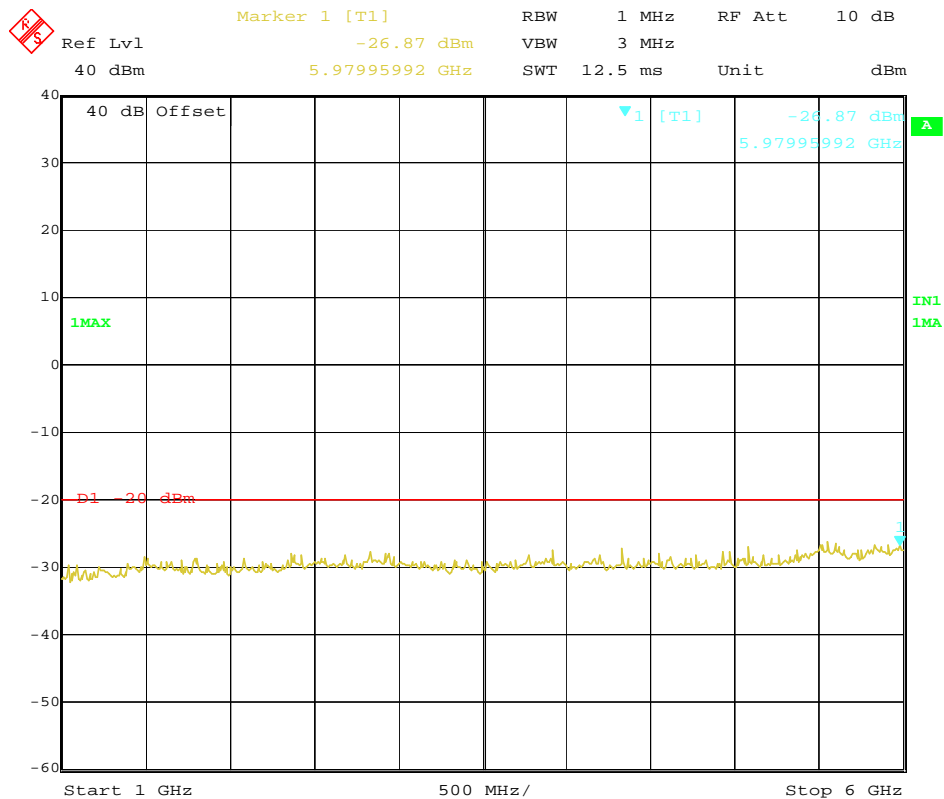


Date: 10.APR.2011 21:45:38

Modulation Type	Channel Sparation	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		FCC Limit
				Frequency (MHz)	Datum (dBm)	Frequency (MHz)	Datum (dBm)	
4FSK	12.5KHz	High	519.5000	922.24	-26.56	5569.14	-26.41	-20dBm
Test Results				Compliance				

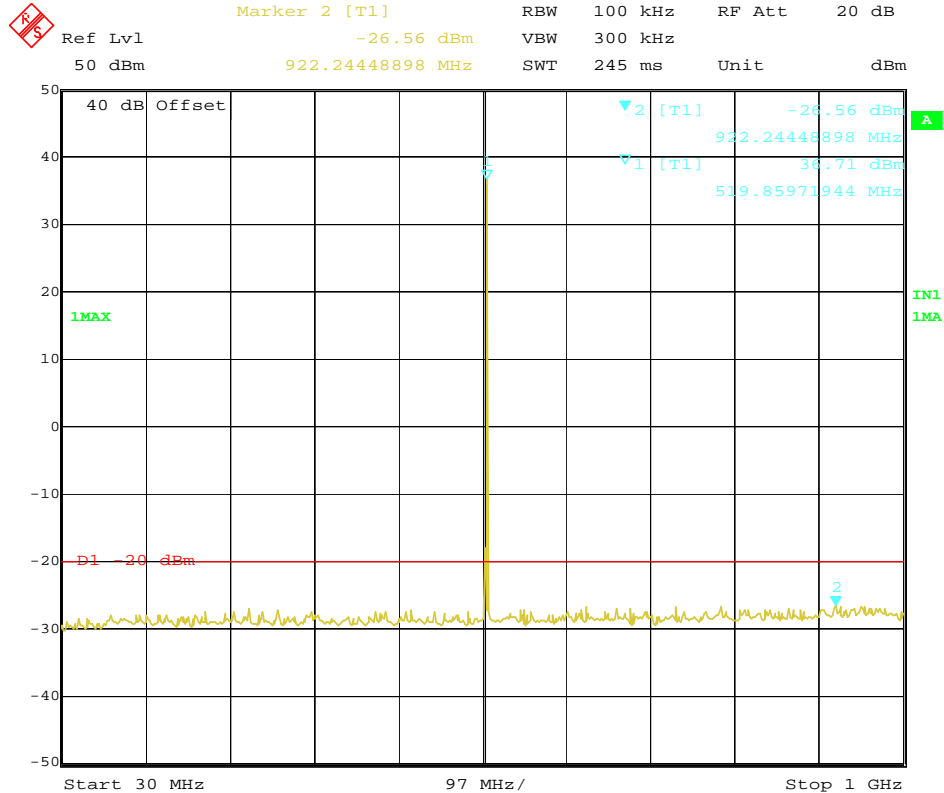

Date: 10.APR.2011 21:46:35

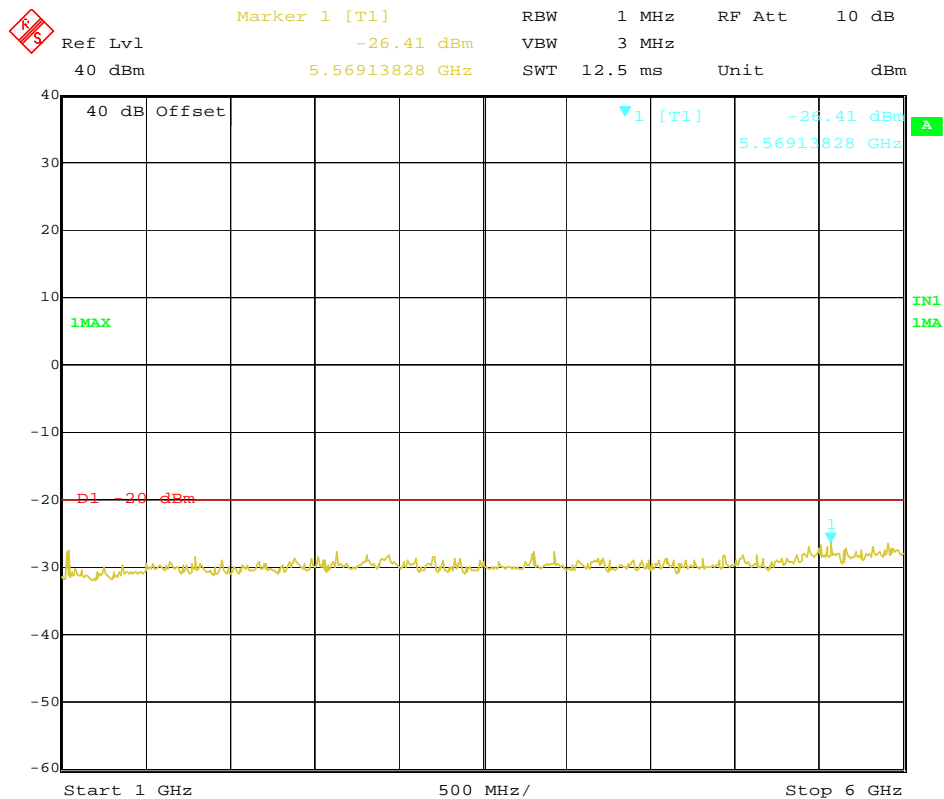

Date: 10.APR.2011 21:47:04

4.5. Modulation Characteristics

TEST APPLICABLE

According to CFR47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

TEST PROCEDURE


Modulation Limit

- 1 Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- 2 Repeat step 1 with input frequency changing to 300, 1004, 1500 and 2500Hz in sequence.

Audio Frequency Response

- 1 Configure the EUT as shown in figure 1.
- 2 Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0dB).
- 3 Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- 4 Audio Frequency Response = $20\log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1 KHz reference})$.

TEST CONFIGURATION

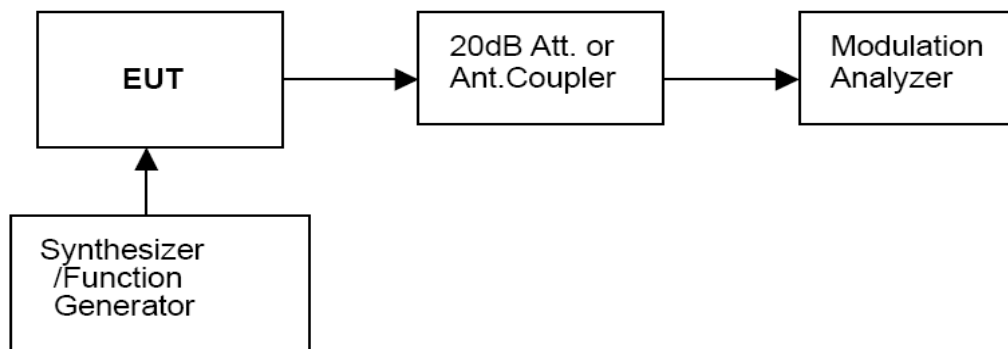


TEST RESULTS

Modulation Type: FM

12.5 KHz Channel Separation

Modulation Level(dB)	Peak Freq. Deviation At 300 Hz(KHz)	Peak Freq. Deviation At 1004 H(KHz)	Peak Freq. Deviation At 1500 Hz(KHz)	Peak Freq. Deviation At 2500 Hz(KHz)
-20	0.08	0.18	0.26	0.39
-15	0.12	0.30	0.44	0.68
-10	0.17	0.49	0.75	1.19
-5	0.28	0.86	1.30	2.11
0	0.48	1.51	2.20	2.15
+5	0.82	2.17	2.22	2.18
+10	1.42	2.16	2.20	2.14
+15	2.13	2.16	2.19	2.12
+20	1.87	2.15	2.22	2.13

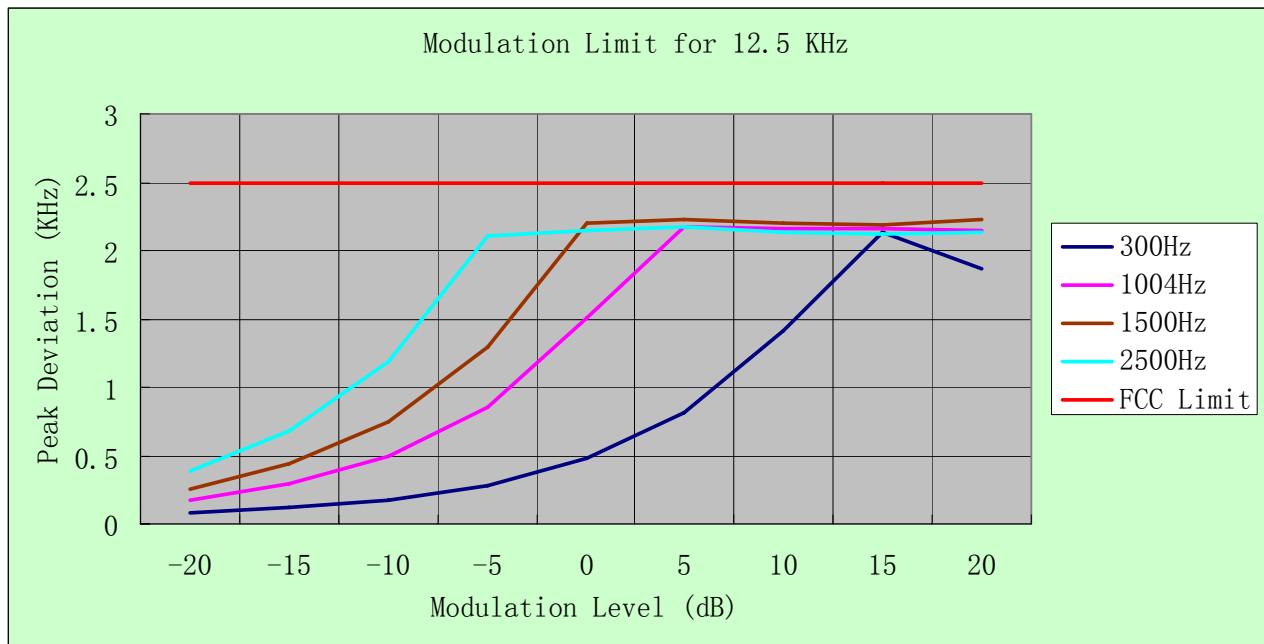

Modulation type: 4FSK

Channel bandwidth: 12.5 kHz

It is not applicable for devices which operate with the digitized voice/data modulation type.

b). Audio Frequency Response:

Rule Part No.: Part 2.1407(a) (b)

Method of Measurement:

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 300-3000Hz shall be submitted and Audio Post Limiter Low Pass Filter Response from 3.0 KHz to 50KHz. However, the audio frequency response should test from 100Hz to 5.0 KHz according to FCC Part 90.

Modulation Type: FM

The audio frequency response curve is show below.and


Test Audio Level (1 KHz and 20% maximum deviation) is 19mv for 12.5 KHz channel separation.

Note:

- 1 Not applicable to new standard. However, tests are conducted under FCC's recommendation.
- 2 The Audio Frequency Response is identical for 12.5 KHz channel separation

For 12.5 KHz Channel Separation

Frequency (KHz)	Frequency Deviation (KHz)	1KHz Refenerce Deviation (KHz)	Audio Frequency Response (dB)
0.1	0.04	0.51	-22.11
0.2	0.04	0.51	-22.11
0.3	0.15	0.51	-10.63
0.4	0.21	0.51	-7.71
0.5	0.27	0.51	-5.52
0.6	0.32	0.51	-4.05
0.7	0.37	0.51	-2.79
0.8	0.43	0.51	-1.48
0.9	0.47	0.51	-0.71
1.0	0.51	0.51	0.00
1.2	0.61	0.51	1.56
1.4	0.70	0.51	2.75
1.6	0.83	0.51	4.23
1.8	0.91	0.51	5.03
2.0	1.01	0.51	5.94
2.2	1.10	0.51	6.68
2.4	1.20	0.51	7.43
2.6	1.23	0.51	7.65
2.7	1.28	0.51	7.99
2.8	1.32	0.51	8.26
3.0	1.35	0.51	8.46
3.5	0.05	0.51	-20.17
4.0	0.05	0.51	-20.17
4.5	0.05	0.51	-20.17
5.0	0.05	0.51	-20.17

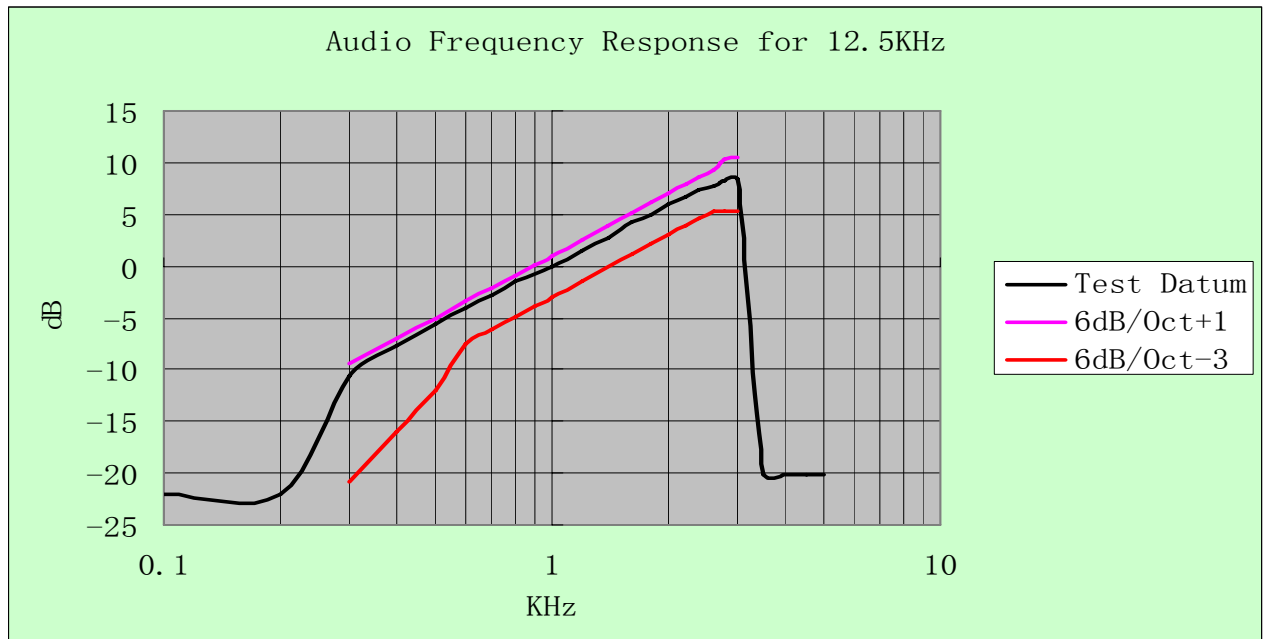**Modulation type: 4FSK**

Channel bandwidth: 12.5 kHz

It is not applicable for devices which operate with the digitized voice/data modulation type.

4.6. Frequency Stability Test


TEST APPLICABLE

- 1 According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +60°C centigrade.
- 2 According to FCC Part 2 Section 2.1055 (a) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- 3 Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 4 According to §90.213, the frequency stability limit is 1.5 ppm for 12.5 KHz channel separation.

TEST PROCEDURE

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer ESI 26. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

TEST CONFIGURATION

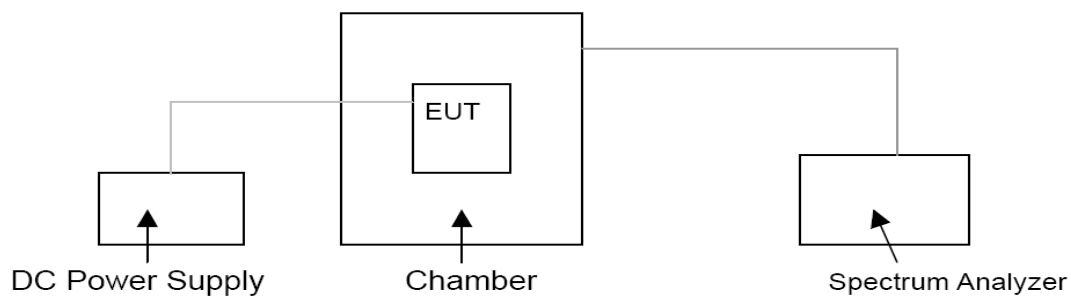

TEST LIMITS

According to 90.213, Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
150-174 MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

TEST RESULTS

Modulation Type	Channel Separation	Test conditions		Frequency error (ppm)		
		Voltage(V)	Temp(°C)	Low Channel	Middle Channel	High Channel
Analog/FM	12.5KHz	13.60	-30	1.17	1.20	1.18
			-20	1.02	1.05	1.09
			-10	1.02	0.99	1.04
			0	0.96	0.99	0.99
			10	0.90	0.95	0.99
			20	0.85	0.91	0.93
			30	0.85	0.91	0.93
			40	0.89	0.99	0.99
			50	1.00	1.08	1.09
		11.54 (85% Rated)	20	0.85	0.91	0.93
		15.64 (115% Rated)	20	0.89	0.91	0.93
Limit			1.5 ppm			
Conclusion			Complies			

Modulation Type	Channel Separation	Test conditions		Frequency error (ppm)		
		Voltage(V)	Temp(°C)	Low Channel	Middle Channel	High Channel
Digital/4FSK	12.5KHz	13.60	-30	1.16	1.20	1.20
			-20	1.02	1.09	1.09
			-10	1.00	1.02	1.06
			0	0.97	0.97	1.02
			10	0.92	0.97	0.99
			20	0.87	0.91	0.93
			30	0.87	0.89	0.93
			40	0.91	0.99	1.00
			50	1.02	1.05	1.10
		11.56 (85% Rated)	20	0.89	0.91	0.93
		15.64 (115% Rated)	20	0.89	0.91	0.93
		Limit		1.5 ppm		
Conclusion		Complies				

4.7. Maximum Transmitter Power

TEST APPLICABLE

Per FCC «2.1046 and «90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

TEST PROCEDURE

Measurements shall be made to establish the radio frequency power delivered by the transmitter the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The EUT connect to the Receiver through 40 dB attenuator.

Measurement with Spectrum Analyzer ESI 26 conducted, external power supply with 13.60 V stabilized supply voltage.

TEST CONFIGURATION

EUT		Attenuator		Spectrum Analyzer/Receiver


The EUT was directly connected to a RF Communication
Test set by a 40 dB attenuator

TEST RESULTS

Modulation Type	Channel Separation	Test Channel	Test Frequency	Maximum Transmitter Power at Rated High Power Level(dBm)	Maximum Transmitter Power at Rated Low Power Level(dBm)
Analog/FM	12.5KHz	Low	450.5000 MHz	46.82	36.63
		Middle	485.0000 MHz	46.99	36.74
		High	519.5000 MHz	46.85	36.92
Digital/4FSK	12.5KHz	Low	450.5000 MHz	46.82	36.71
		Middle	485.0000 MHz	47.02	36.72
		High	519.5000 MHz	46.92	36.86
Limit		The limit is dependent upon the station's antenna HAAT and required service area.			
Test Results		Compliance			


Plots of Maximum Transmitter Power Measurement

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
FM	12.5 KHz	450.5000	50	46.82	Varies	Compliance

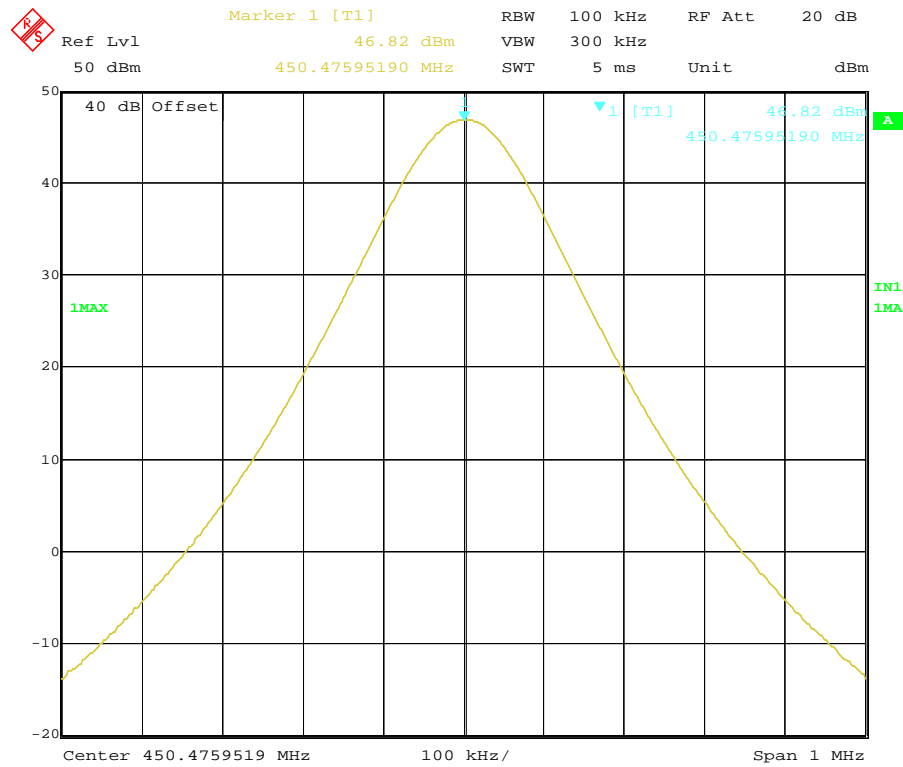


Date: 10.APR.2011 18:07:05

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
FM	12.5 KHz	485.0000	50	46.99	Varies	Compliance

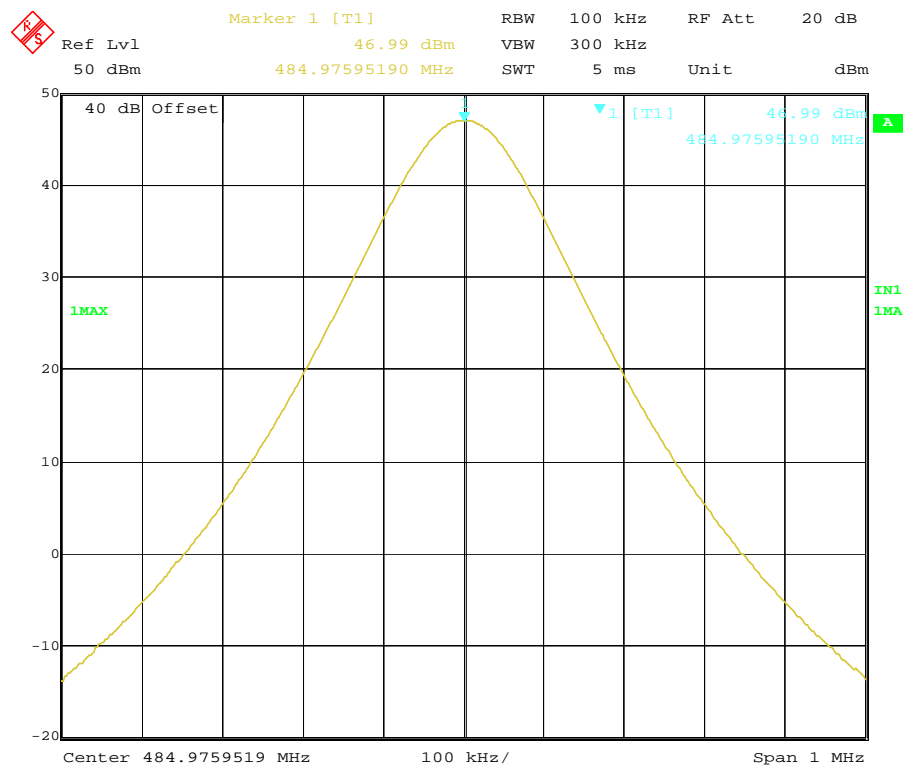


Date: 10.APR.2011 19:36:10

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
FM	12.5 KHz	519.5000	50	46.85	Varies	Compliance

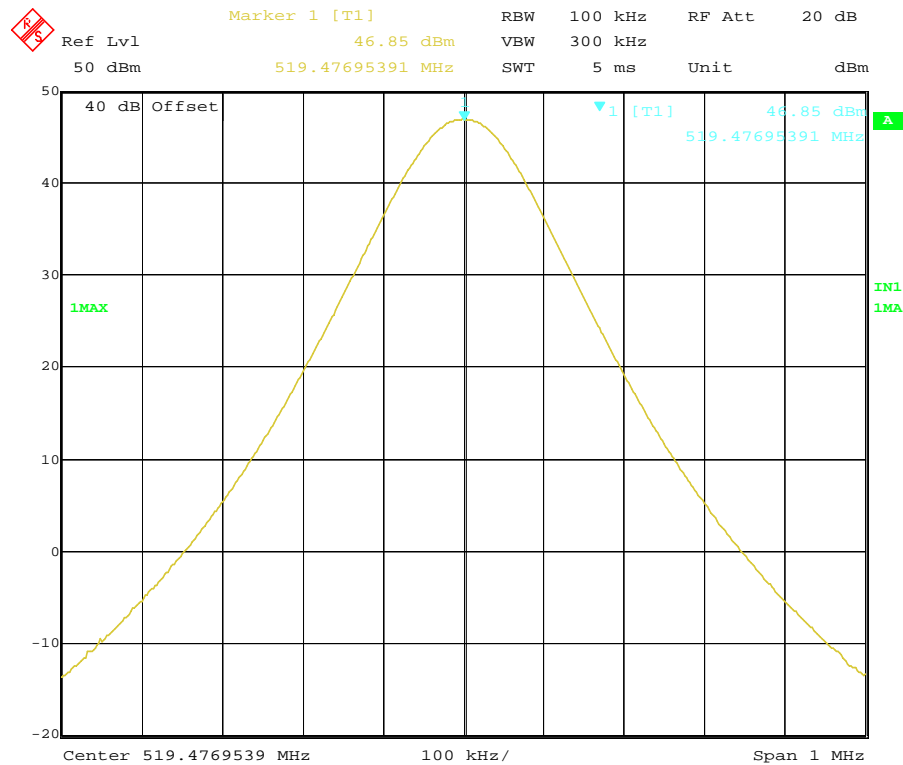


Date: 10.APR.2011 19:36:33

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
4FSK	12.5 KHz	450.5000	50	46.82	Varies	Compliance

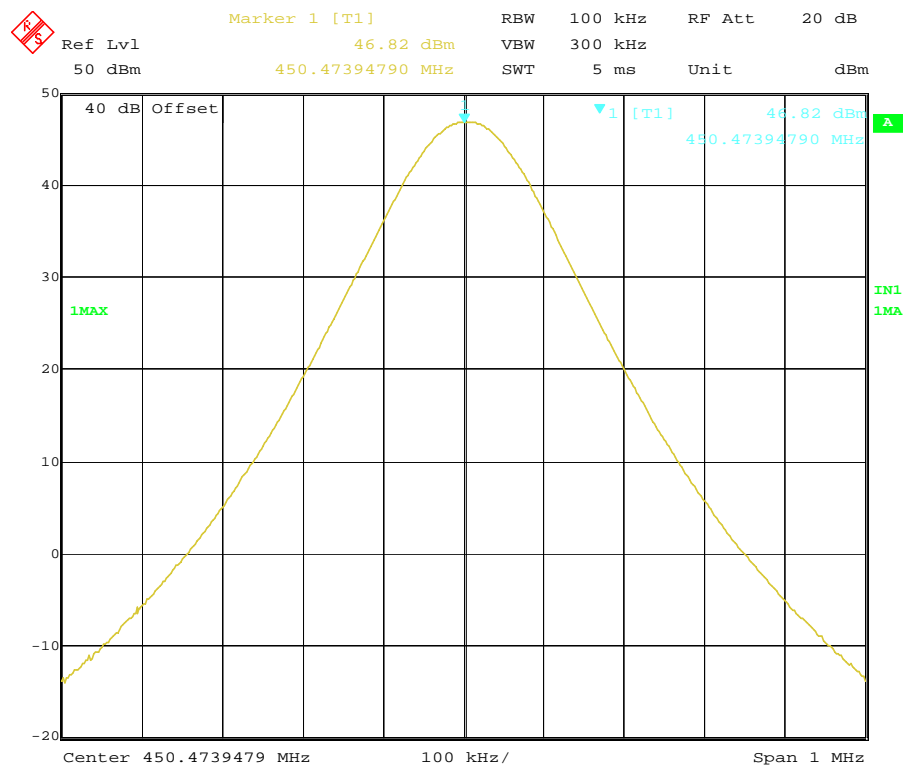


Date: 10.APR.2011 21:36:14

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
4FSK	12.5 KHz	485.0000	50	47.02	Varies	Compliance

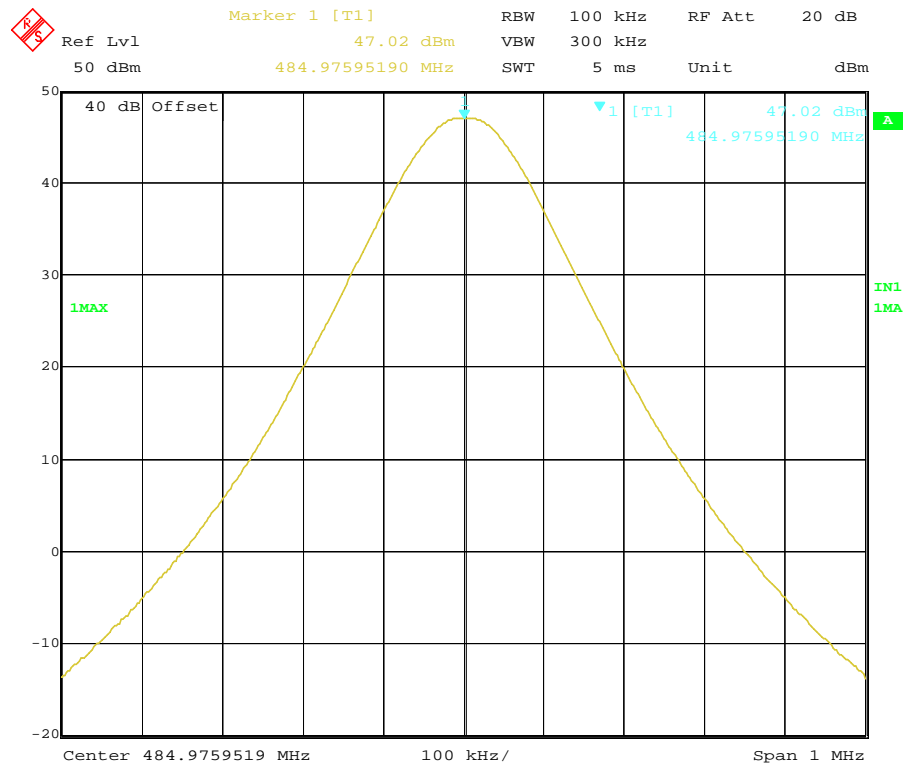


Date: 10.APR.2011 21:37:58

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
4FSK	12.5 KHz	519.5000	50	46.92	Varies	Compliance

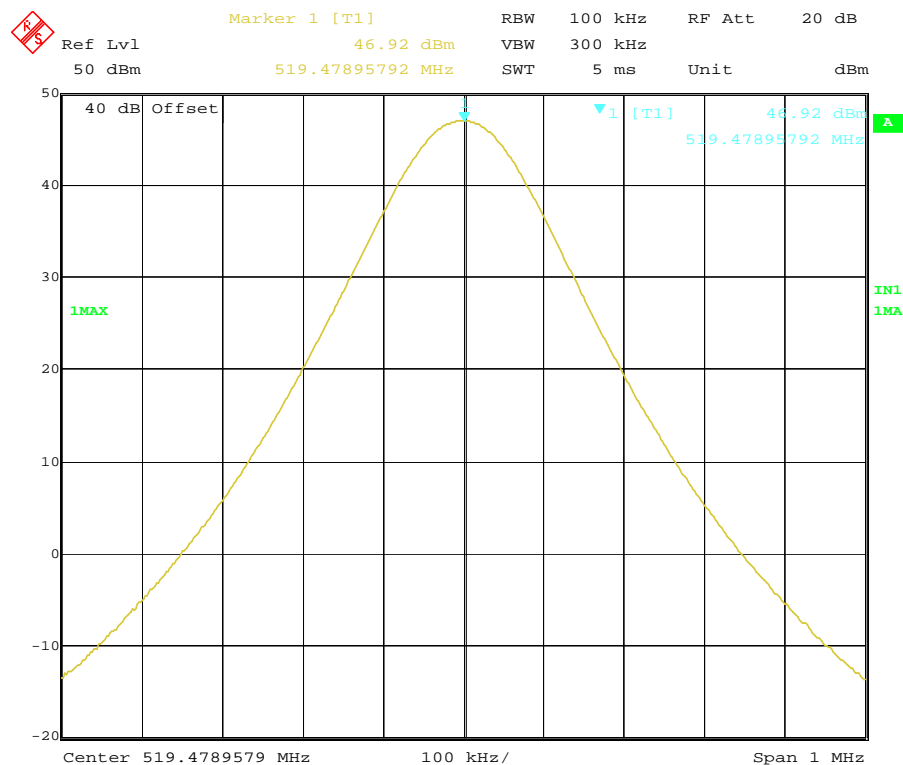


Date: 10.APR.2011 21:38:20


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
FM	12.5 KHz	450.5000	5	36.63	Varies	Complicance

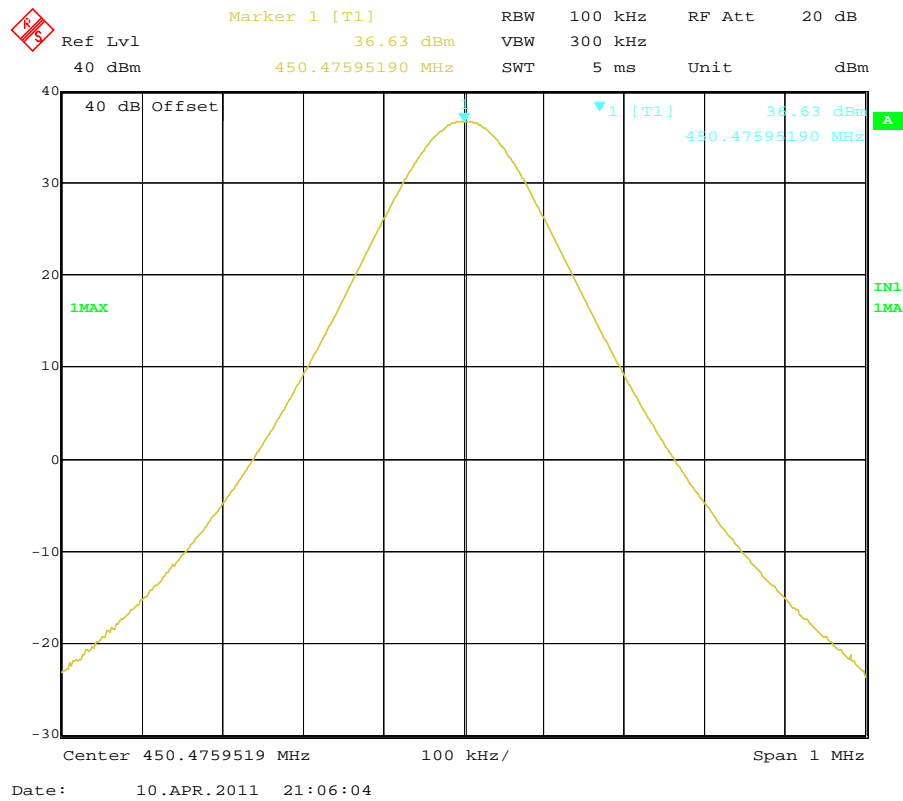


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
FM	12.5 KHz	485.0000	5	36.74	Varies	Complicance

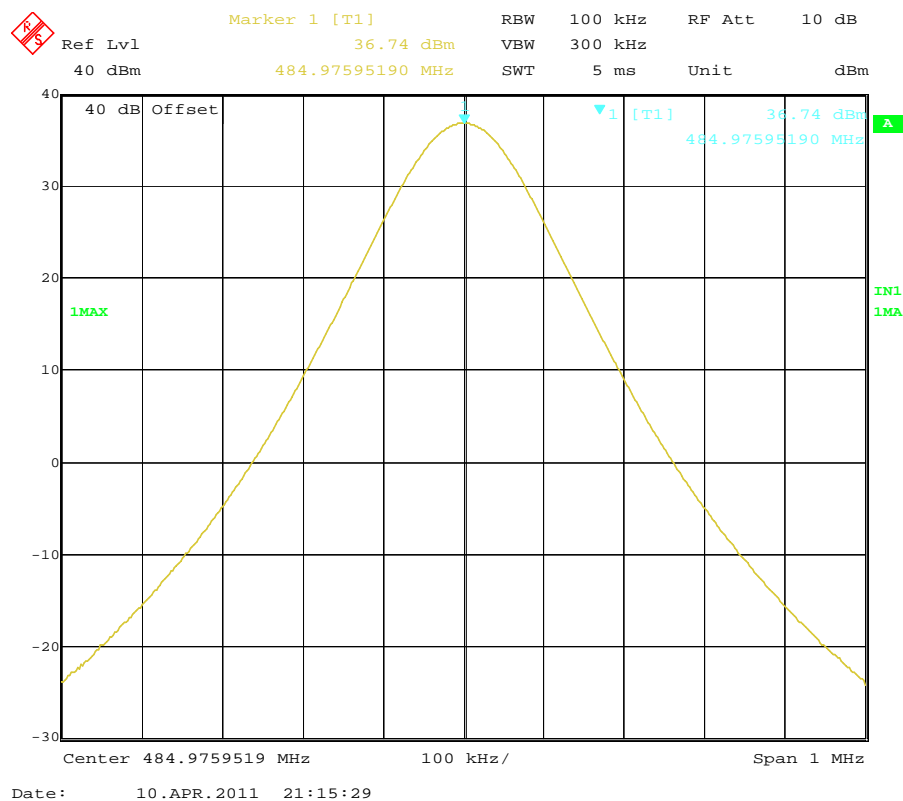


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
FM	12.5 KHz	519.5000	5	36.92	Varies	Compliance

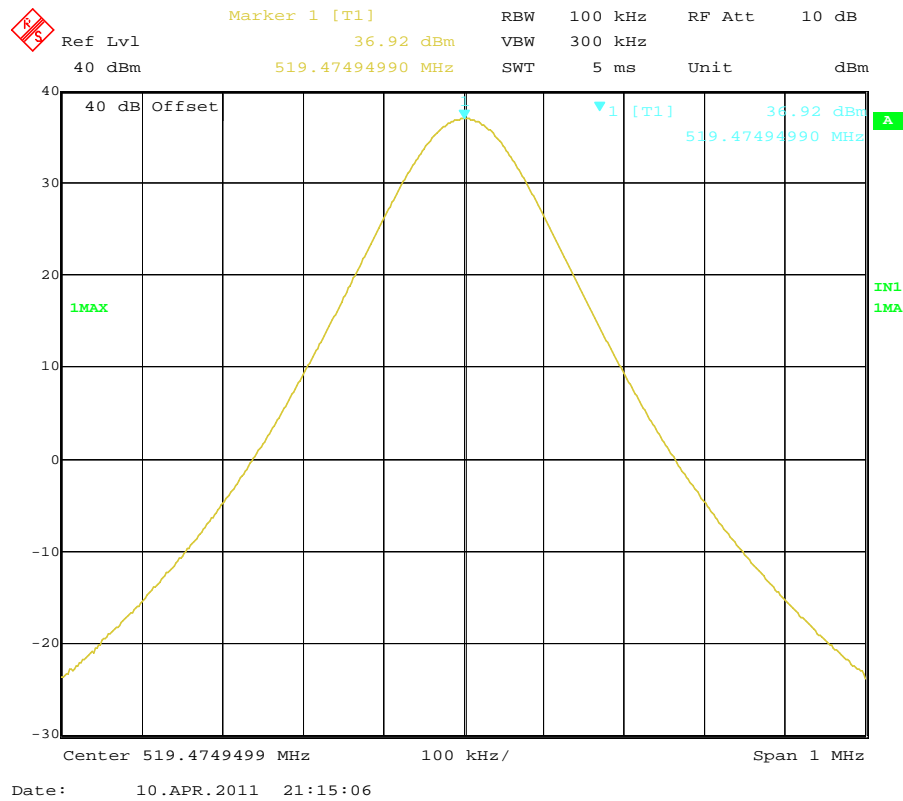


Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
4FSK	12.5 KHz	450.5000	5	36.71	Varies	Compliance

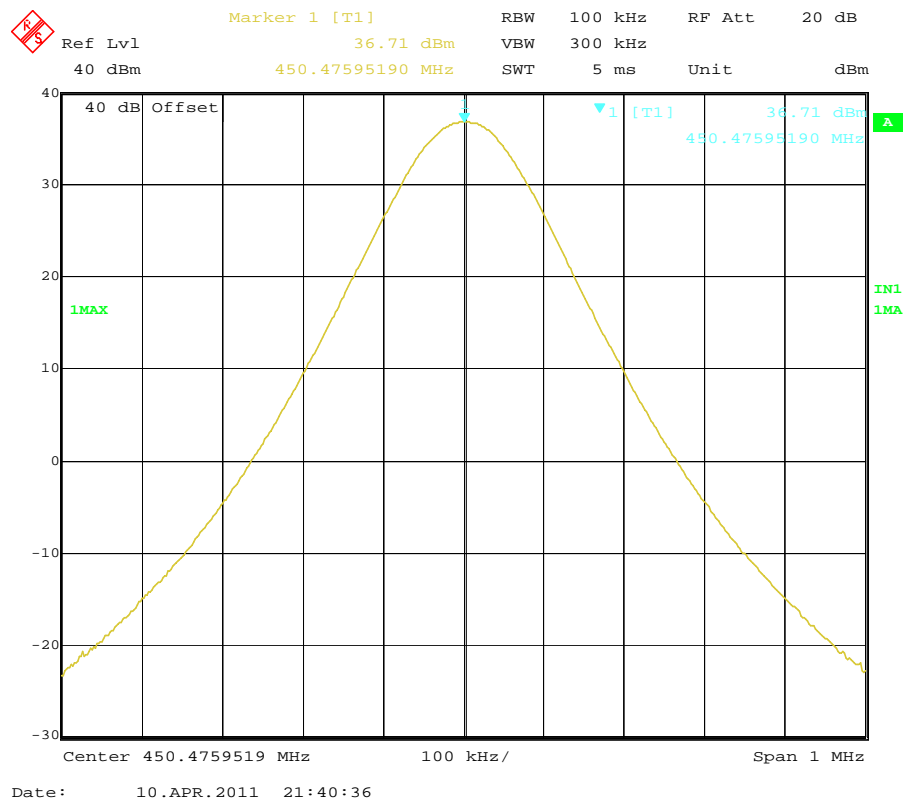

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
4FSK	12.5 KHz	485.0000	5	36.72	Varies	Compliance

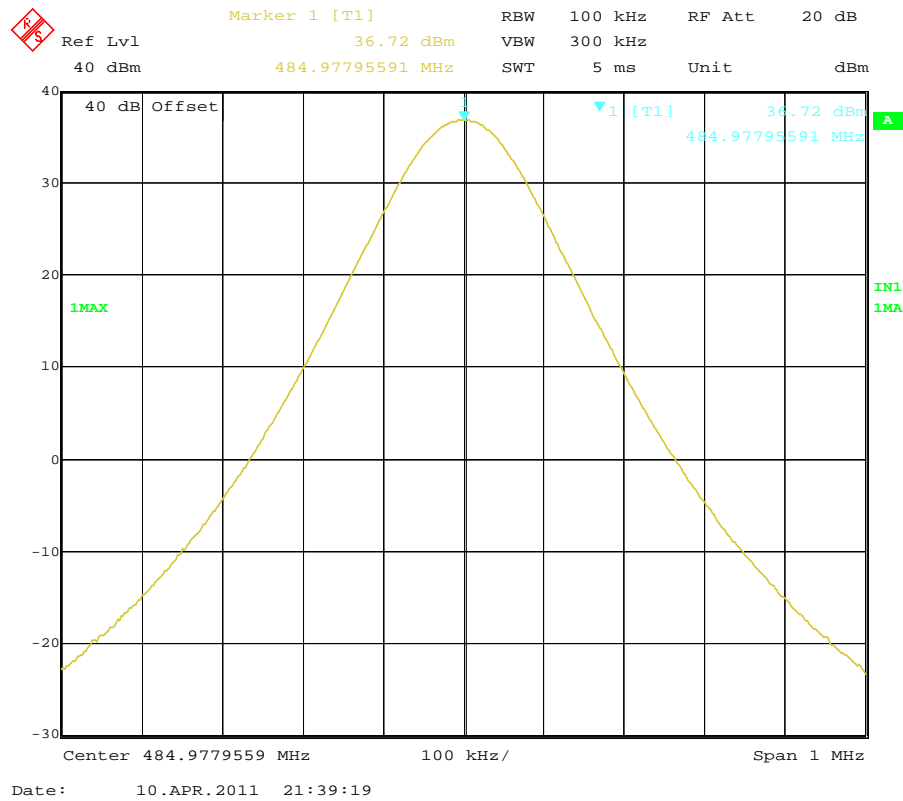

Modulation Type	Channel Separation	Freq.(MHz)	Rated Power (Watt)	Measurement (dBm)	FCC Limit	Results
4FSK	12.5 KHz	519.5000	5	36.86	Varies	Compliance

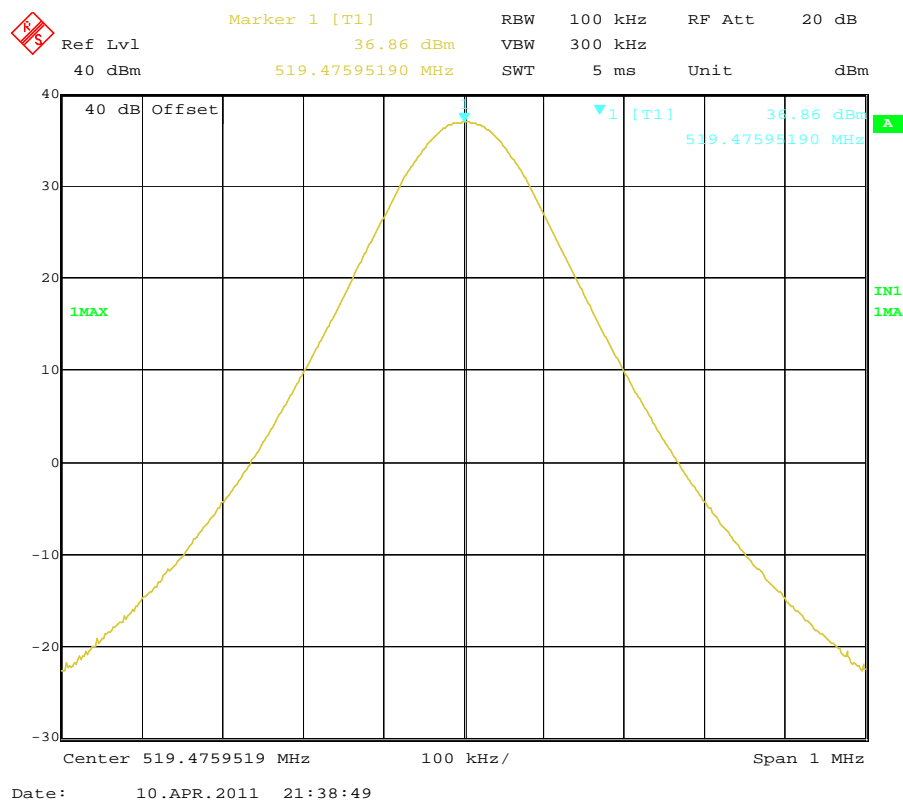

4.8. Transmitter Frequency Behavior

TEST APPLICABLE

Section 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:


Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t ₁ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
t ₂	± 12.5 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t ₁ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
t ₂	± 6.25 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t ₁ ⁴	±6.25 KHz	5.0 ms	10.0 ms
t ₂	±3.125 KHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 KHz	5.0 ms	10.0 ms

- t_{on} is the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.
 t_1 is the time period immediately following t_{on} .
 t_2 is the time period immediately following t_1 .
 t_3 is the time period from the instant when the transmitter is turned off until t_{off} .
 t_{off} is the instant when the 1 KHz test signal starts to rise.
- During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

TEST PROCEDURE

TIA/EIA-603 2.2.19

TEST CONFIGURATION

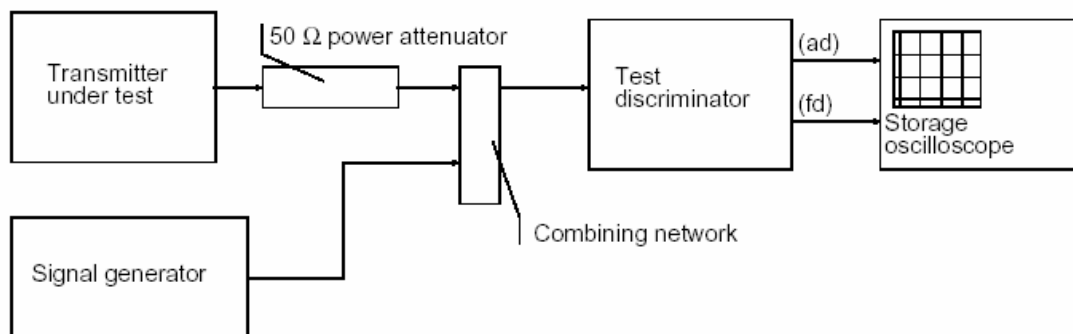


TEST RESULTS


Please refer to the following plots.

Modulation Type: FM

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----Off – On

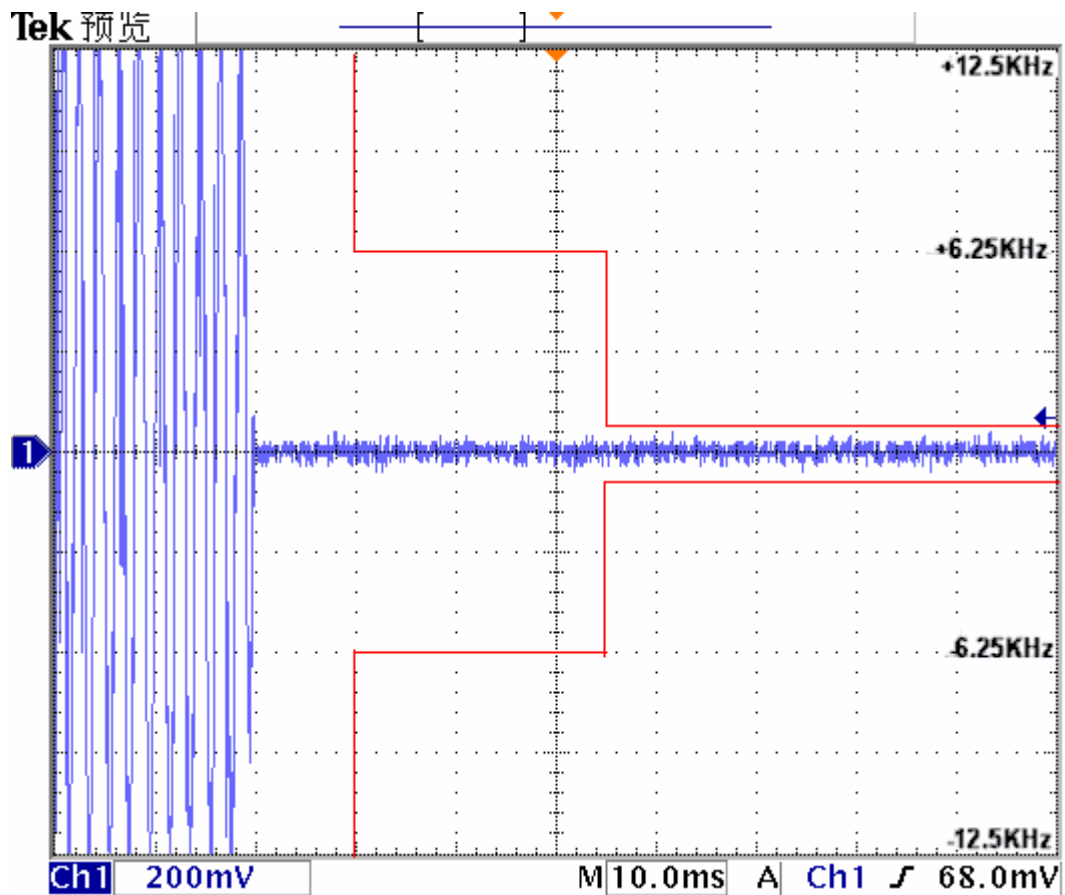


Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----On - Off

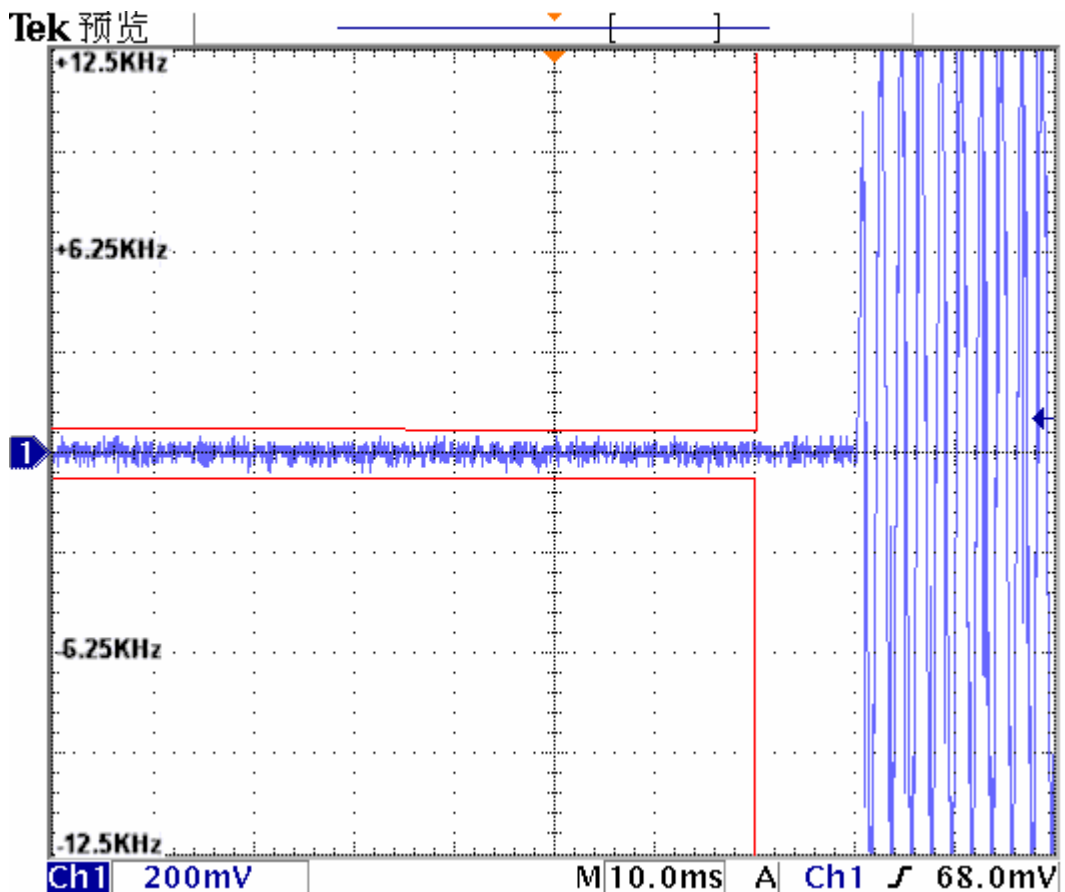

Modulation Type: 4FSK

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----Off – On

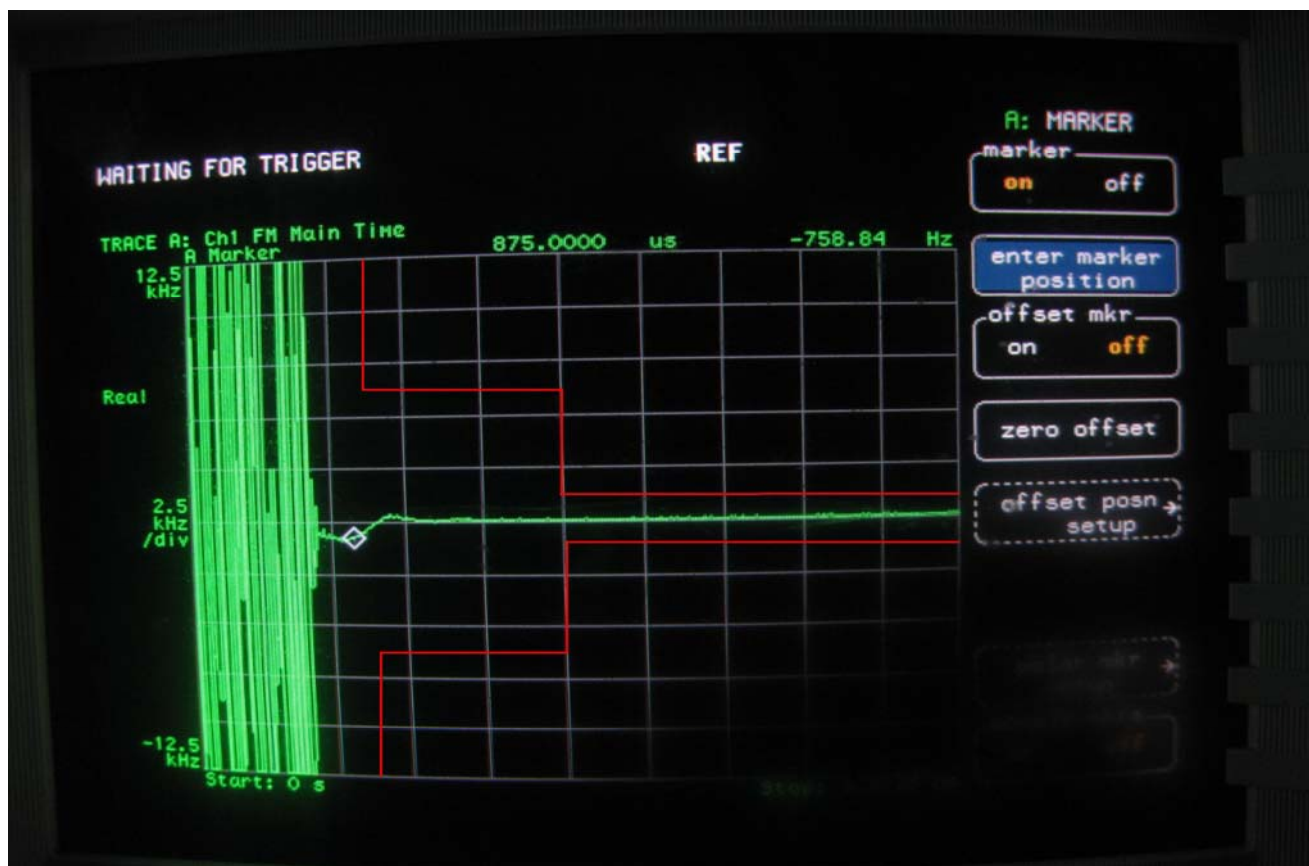

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----On - Off

