

Conducted test results

No.1-7493/24-01-02_TR1-A201-R1

April 05, 2024

Test Standard(s) FCC 15.247, ISED RSS247 - NI
 FCC 15.247 - NI
 NA - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski

Lab Manager
Radio Labs

Table of Content

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ Generic 2G4	3
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ Generic 2G4	7
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ Generic 2G4	11
FCC 15.247 # Maximum peak conducted output power FHSS ~ Generic 2G4	15
FCC 15.247 # Maximum peak conducted output power FHSS ~ Generic 2G4	18
FCC 15.247 # Maximum peak conducted output power FHSS ~ Generic 2G4	21
NA # Peak output power 3MHz/3MHz ~ Generic 2G4	24
NA # Peak output power 3MHz/3MHz ~ Generic 2G4	27
NA # Peak output power 3MHz/3MHz ~ Generic 2G4	30
FCC 15.247 # TX spurious conducted 20dBc ~ Generic 2G4	33
FCC 15.247 # TX spurious conducted 20dBc ~ Generic 2G4	36
FCC 15.247 # TX spurious conducted 20dBc ~ Generic 2G4	39
NA # Hardcopy SA ~	42
NA # Hardcopy SA ~	44
NA # Hardcopy SA ~	46
NA # Hardcopy SA ~	48
NA # Hardcopy SA ~	50
NA # Hardcopy SA ~	52
FCC 15.247 # TX Emissions on band edge FCC ~ Generic 2G4 hopp	54
NA # Peak output power 3MHz/3MHz ~ Generic 2G4	57
NA # Peak output power 3MHz/3MHz ~ Generic 2G4	60
NA # Peak output power 3MHz/3MHz ~ Generic 2G4	63

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ Generic 2G4

References

TC start	03.04.2024 16:16:10
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT - 20DB FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2403 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.13	dBm	INFO
Ref. frequency	--	--	2402.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.13 8.26 35
Start [MHz] Stop [MHz]	2401.000 2405.000
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

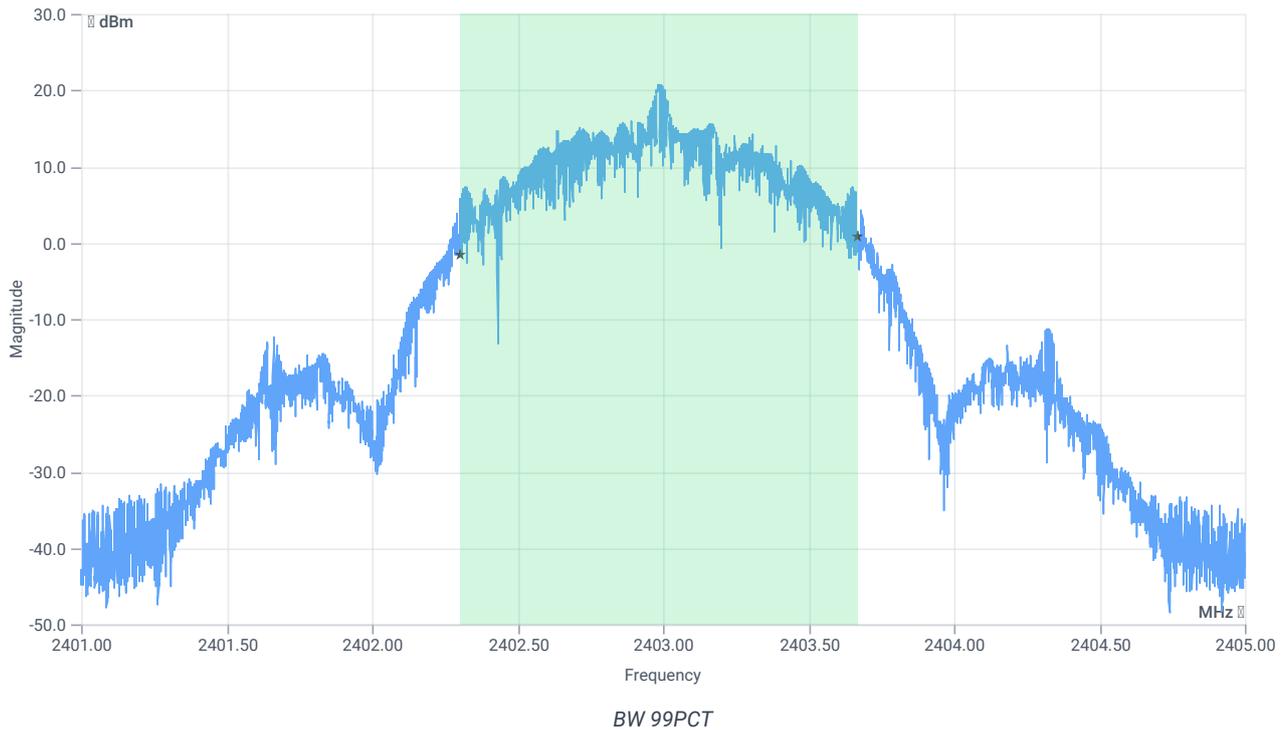


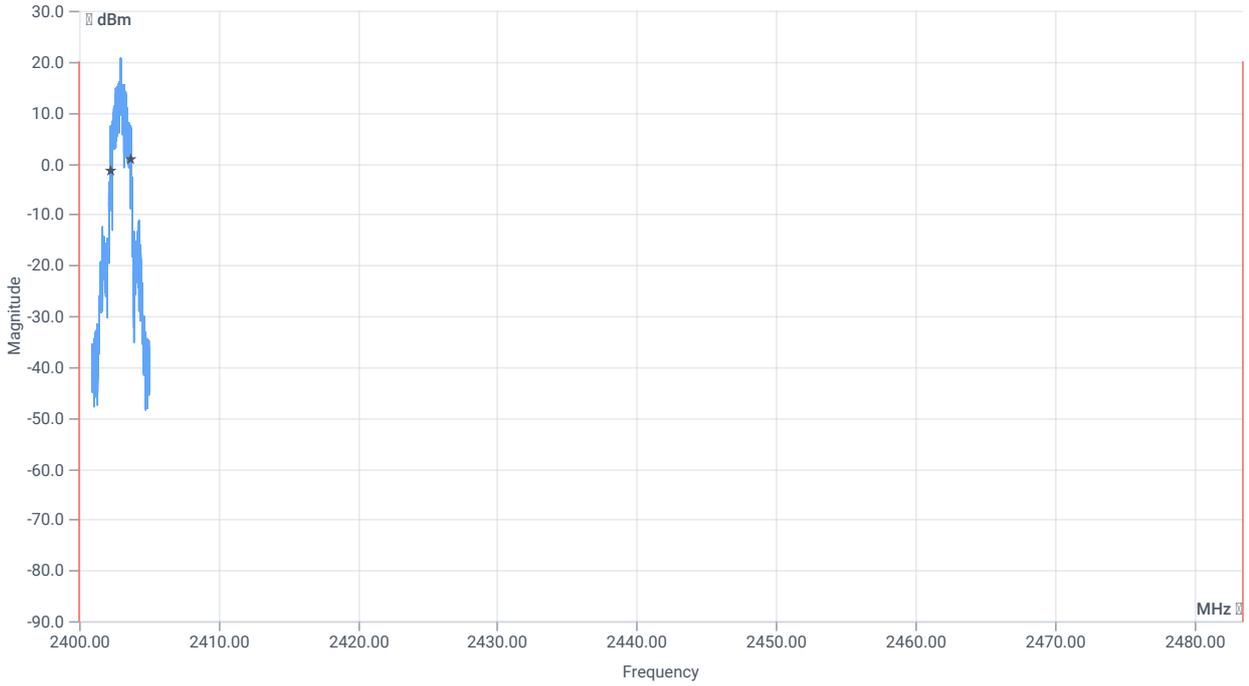


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	1364.000	kHz	INFO
T1 99%	2400.000000	--	2402.3045	MHz	PASS
T2 99%	--	2483.500000	2403.6687	MHz	PASS

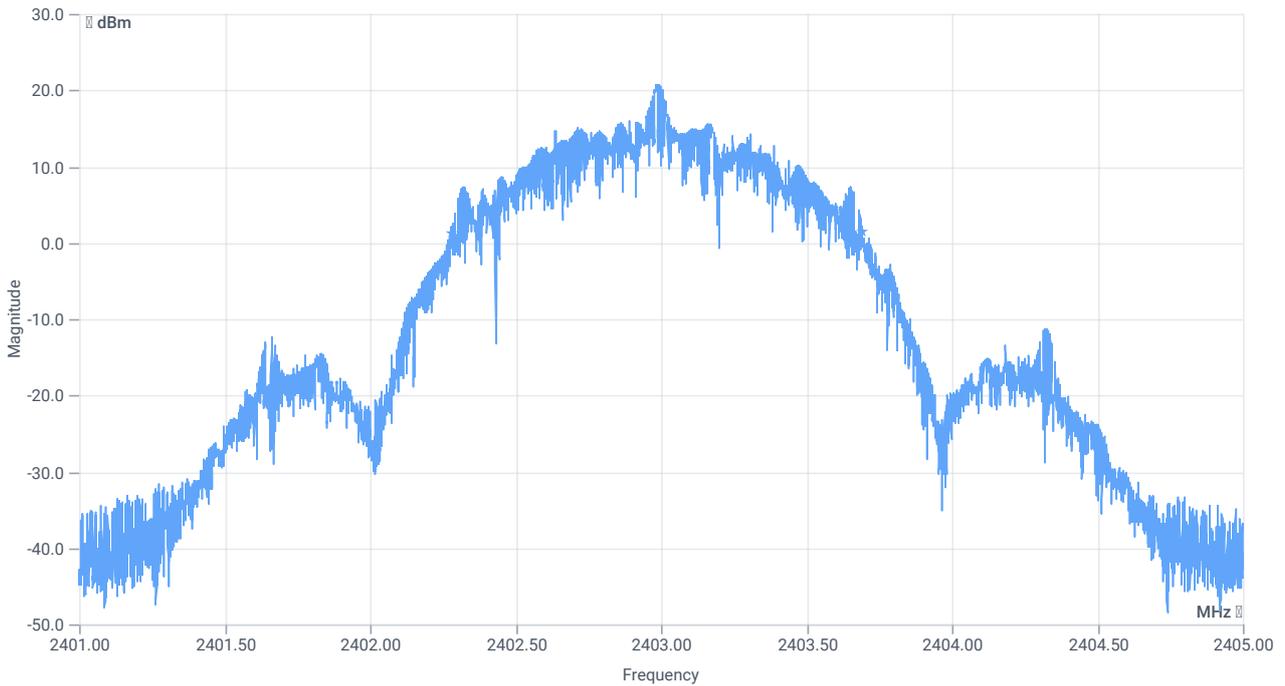

BW 20dB

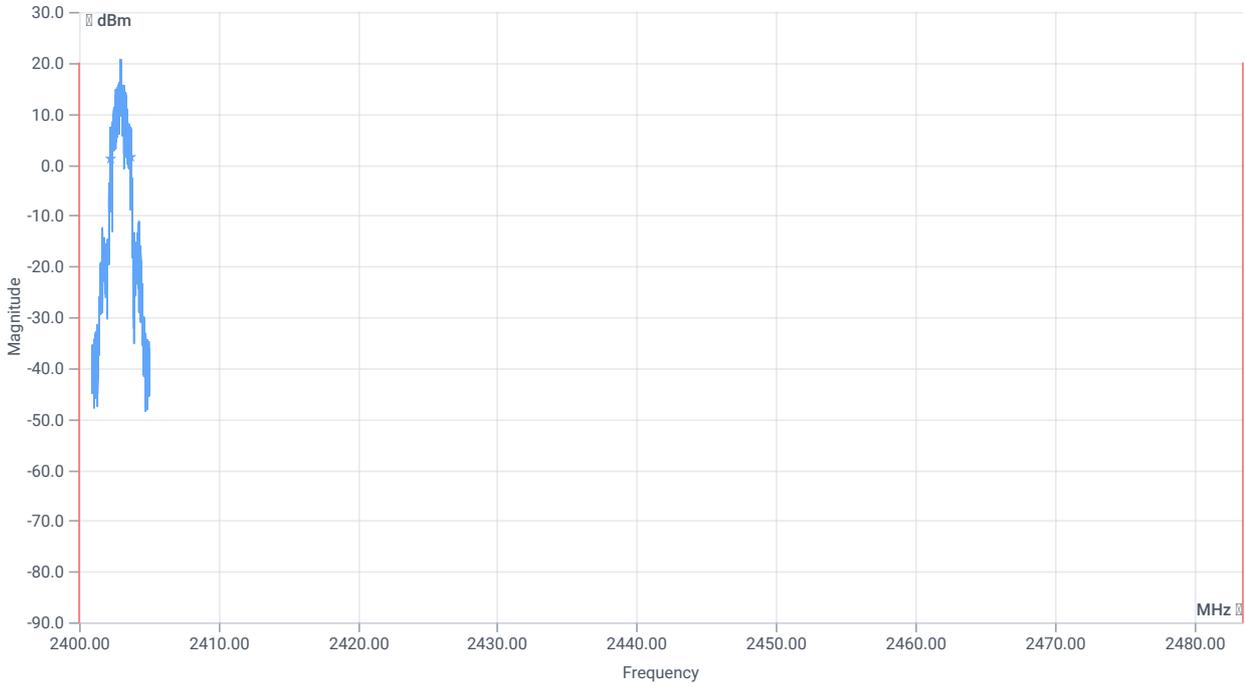

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	1415	kHz	INFO
T1 20dB	2400.000000	--	2402.2776	MHz	PASS
T2 20dB	--	2483.500000	2403.6924	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ Generic 2G4

References

TC start	03.04.2024 16:34:40
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT - 20DB FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2441 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.45	dBm	INFO
Ref. frequency	--	--	2441.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.45 8.3 35
Start [MHz] Stop [MHz]	2439.000 2443.000
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

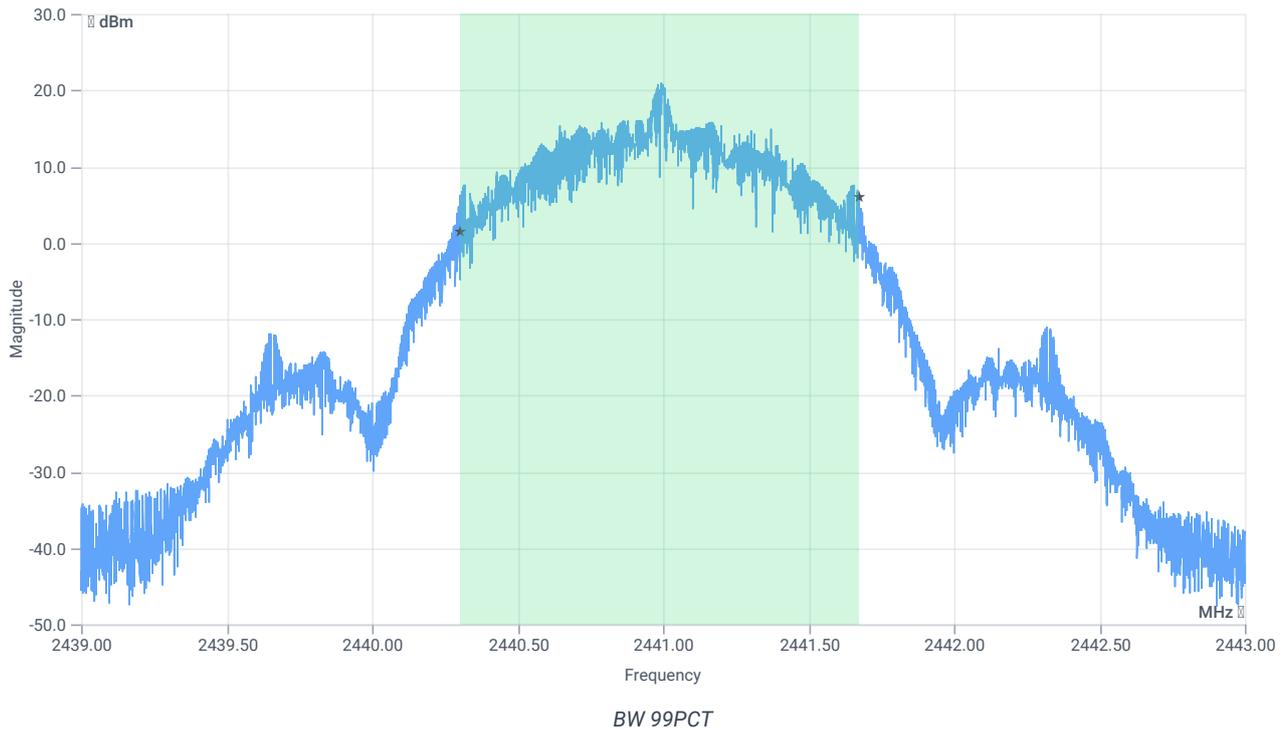


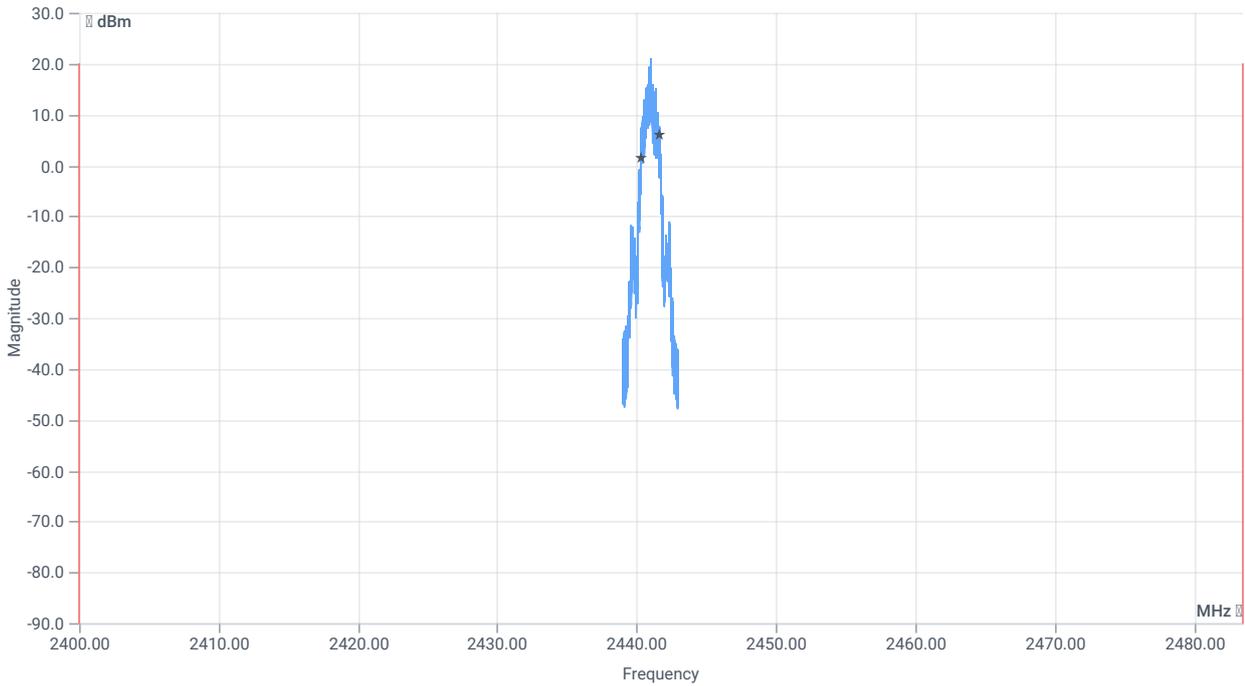


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	1367.000	kHz	INFO
T1 99%	2400.000000	--	2440.3057	MHz	PASS
T2 99%	--	2483.500000	2441.6723	MHz	PASS

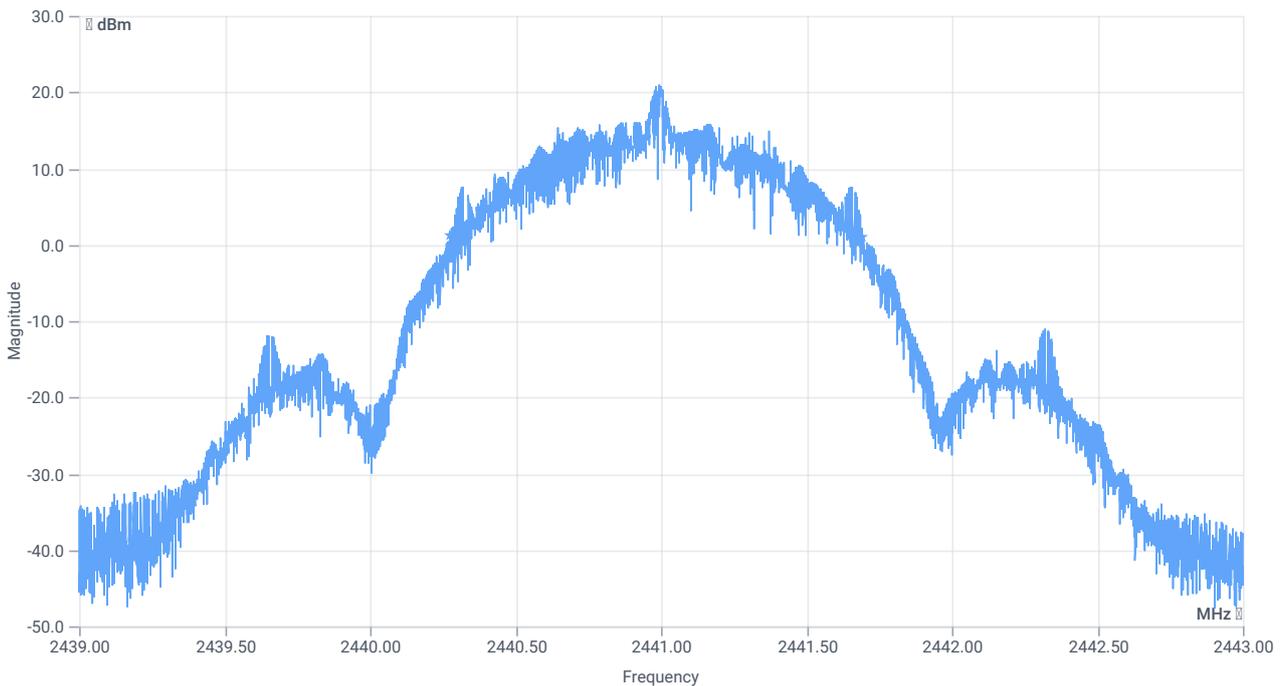

BW 20dB

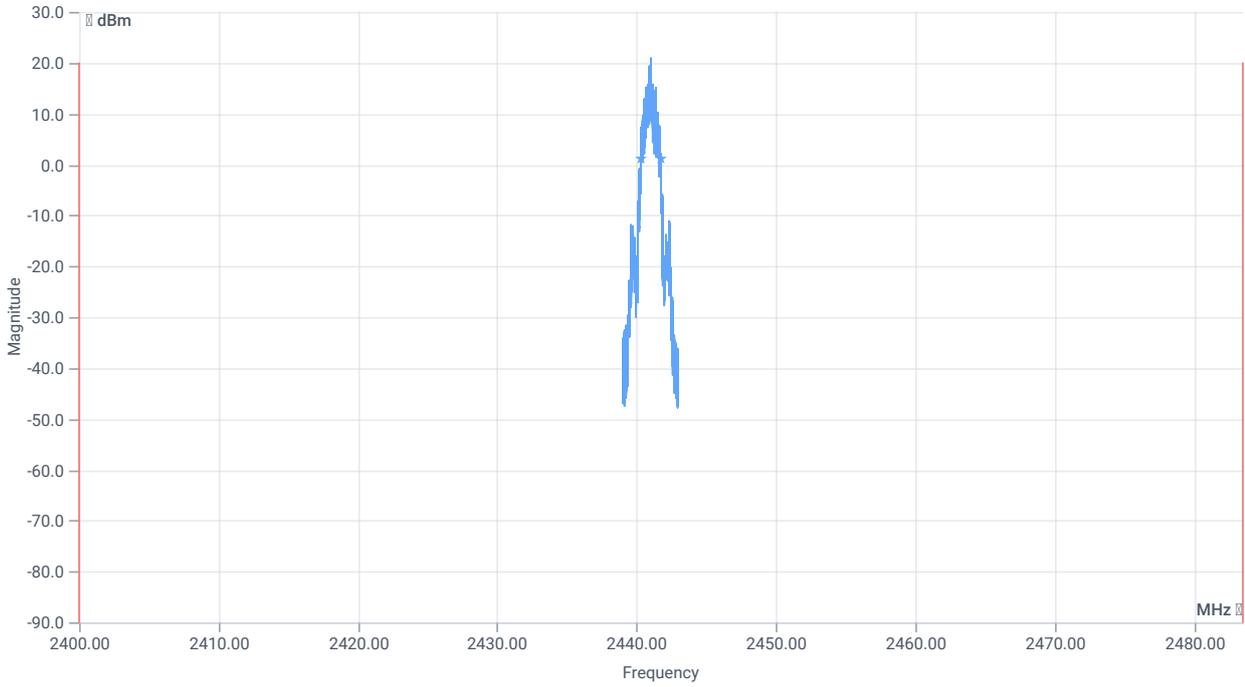

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	1420	kHz	INFO
T1 20dB	2400.000000	--	2440.2744	MHz	PASS
T2 20dB	--	2483.500000	2441.6940	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ Generic 2G4

References

TC start	03.04.2024 16:49:29
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT - 20DB FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2479 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.54	dBm	INFO
Ref. frequency	--	--	2479.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	24.54 8.39 35
Start [MHz] Stop [MHz]	2477.000 2481.000
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

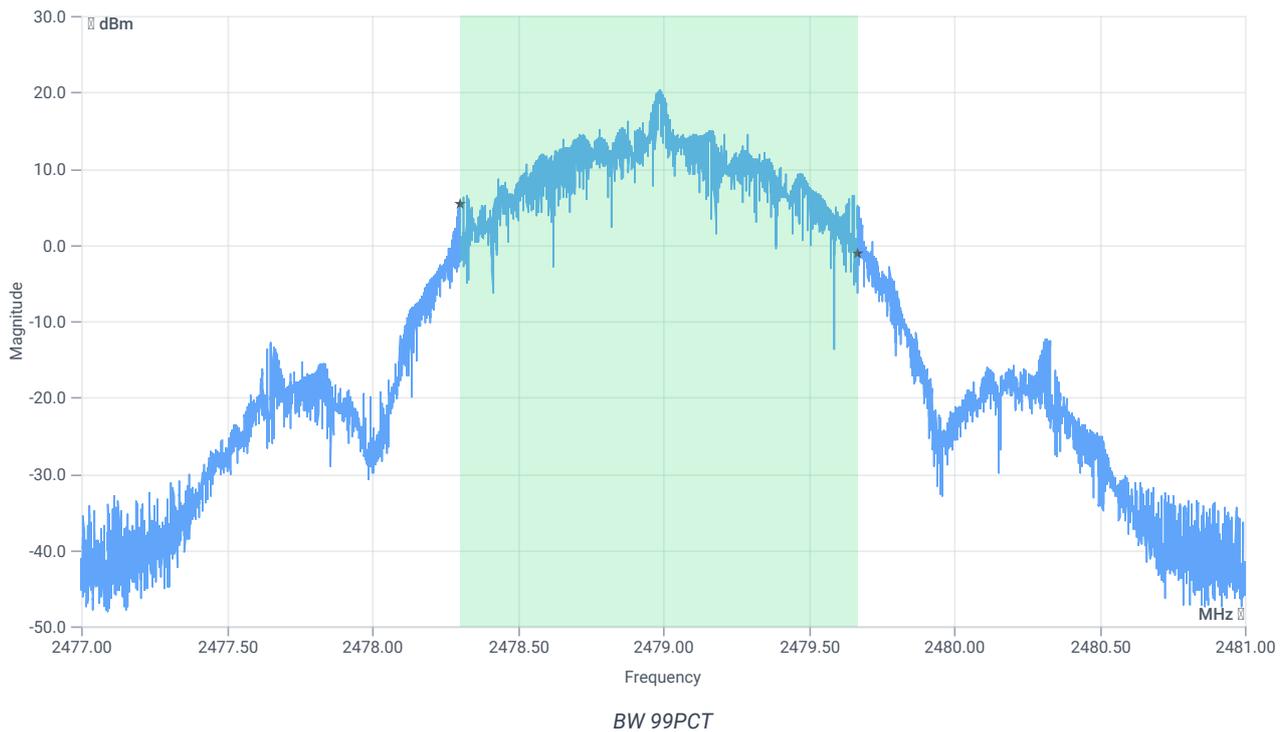


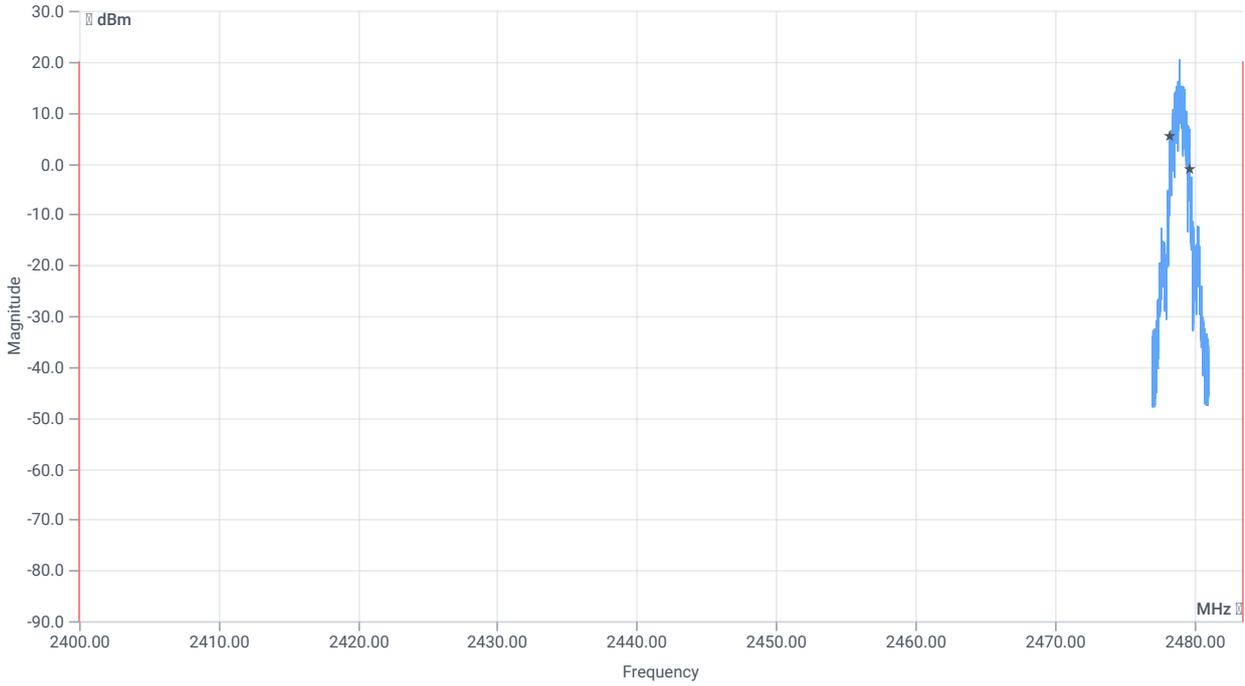


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	1365.000	kHz	INFO
T1 99%	2400.000000	--	2478.3029	MHz	PASS
T2 99%	--	2483.500000	2479.6675	MHz	PASS

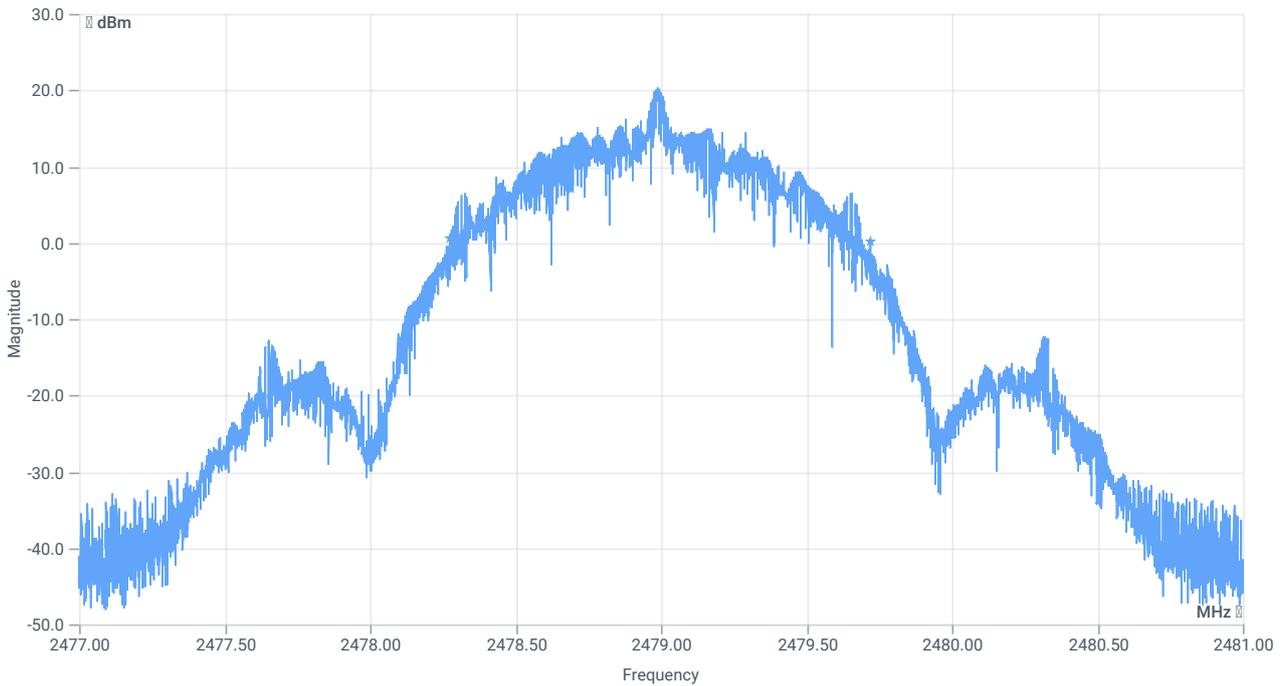

BW 20dB

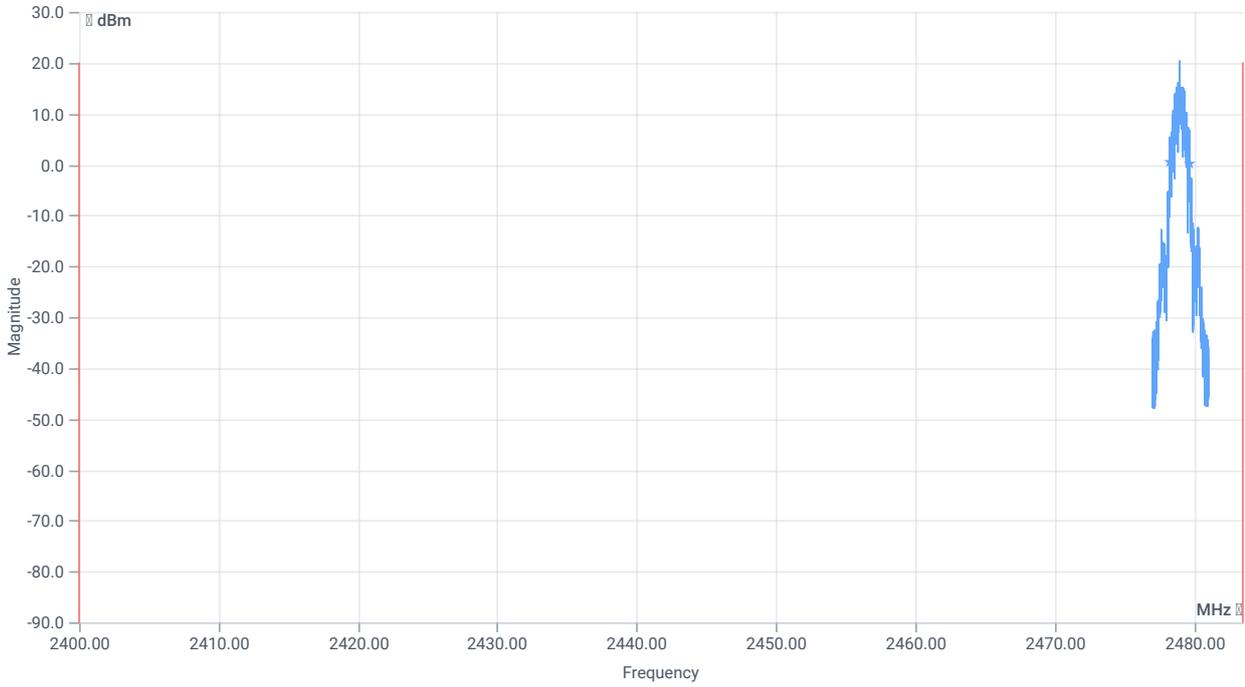

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	1444	kHz	INFO
T1 20dB	2400.000000	--	2478.2744	MHz	PASS
T2 20dB	--	2483.500000	2479.7184	MHz	PASS

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ Generic 2G4

References

TC start	03.04.2024 16:02:35
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.MP.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 2403 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.10	dBm	INFO
Ref. frequency	--	--	2403.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.10 8.31 40
Start [MHz] Stop [MHz]	2398.000 2408.000
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

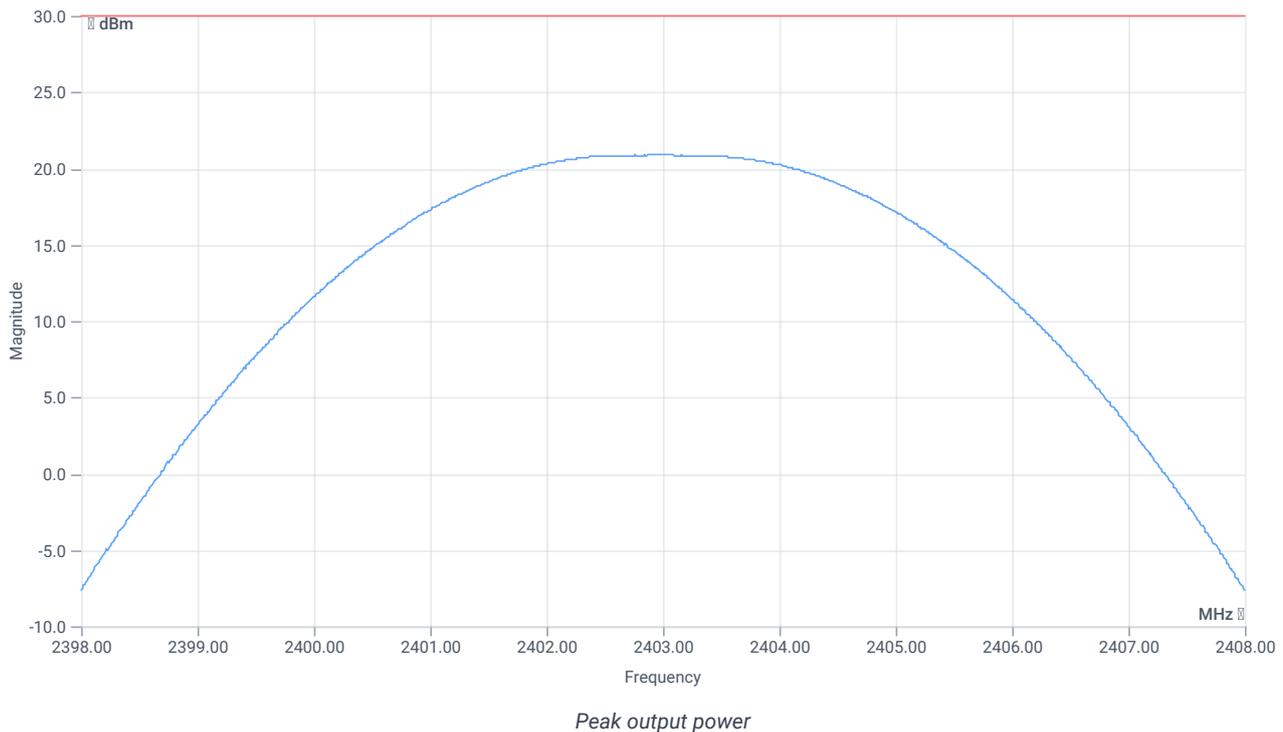

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30.00	20.89	dBm	PASS
Peak power	--	1000	122.743923	mW	PASS
Frequency at peak	--	--	2402.98	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ Generic 2G4

References

TC start	03.04.2024 16:21:09
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.97	dBm	INFO
Ref. frequency	--	--	2441.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.97 8.3 40
Start [MHz] Stop [MHz]	2436.000 2446.000
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

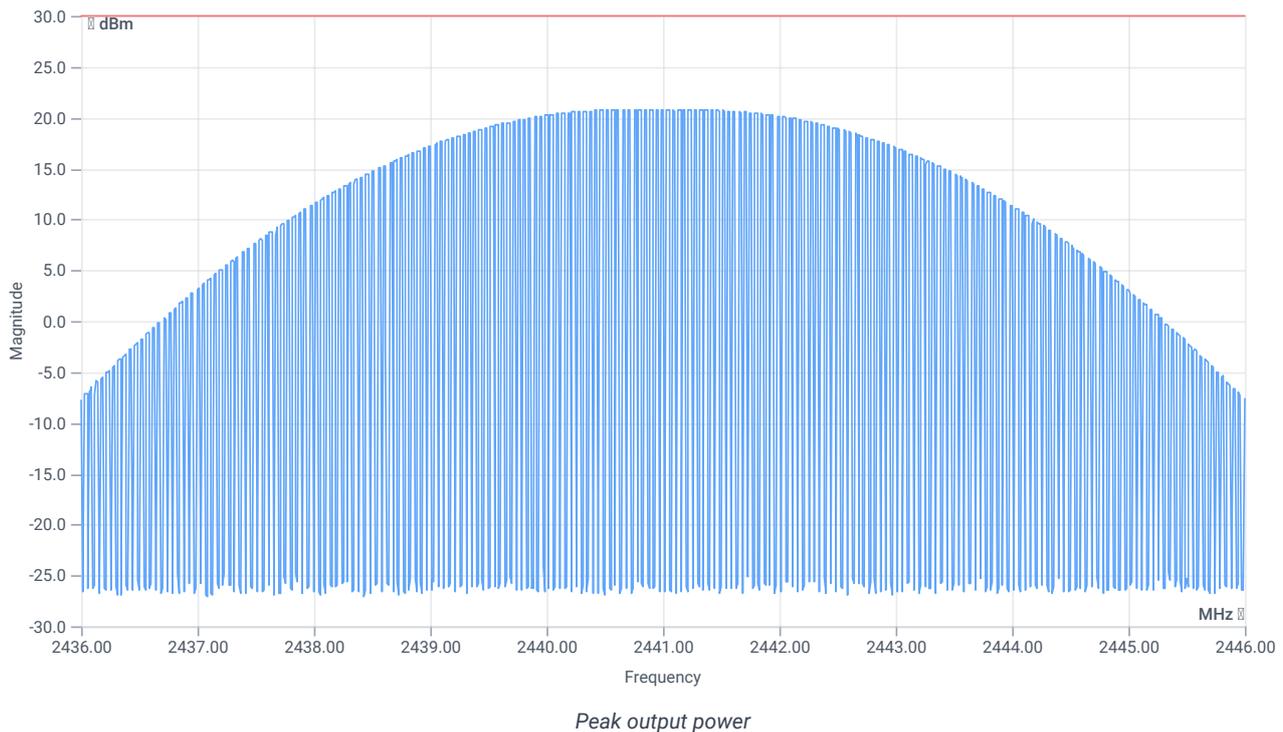

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30.00	20.81	dBm	PASS
Peak power	--	1000	120.503594	mW	PASS
Frequency at peak	--	--	2441	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ Generic 2G4

References

TC start	03.04.2024 15:46:30
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2479 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.42	dBm	INFO
Ref. frequency	--	--	2479.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.42 8.39 40
Start [MHz] Stop [MHz]	2474.000 2484.000
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

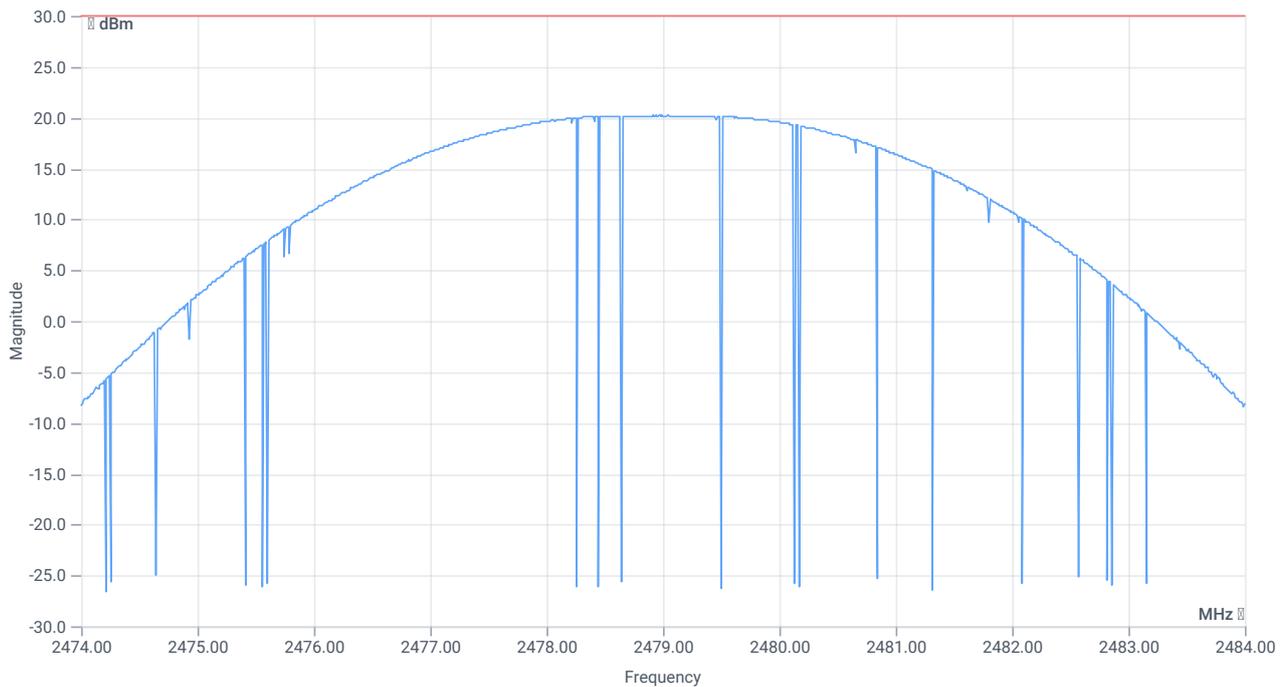

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30.00	20.19	dBm	PASS
Peak power	--	1000	104.472022	mW	PASS
Frequency at peak	--	--	2478.92	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ Generic 2G4

References

TC start	03.04.2024 16:02:04
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2403 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.20	dBm	INFO
Ref. frequency	--	--	2403.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.20 8.26 40
Start [MHz] Stop [MHz]	2398.000 2408.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

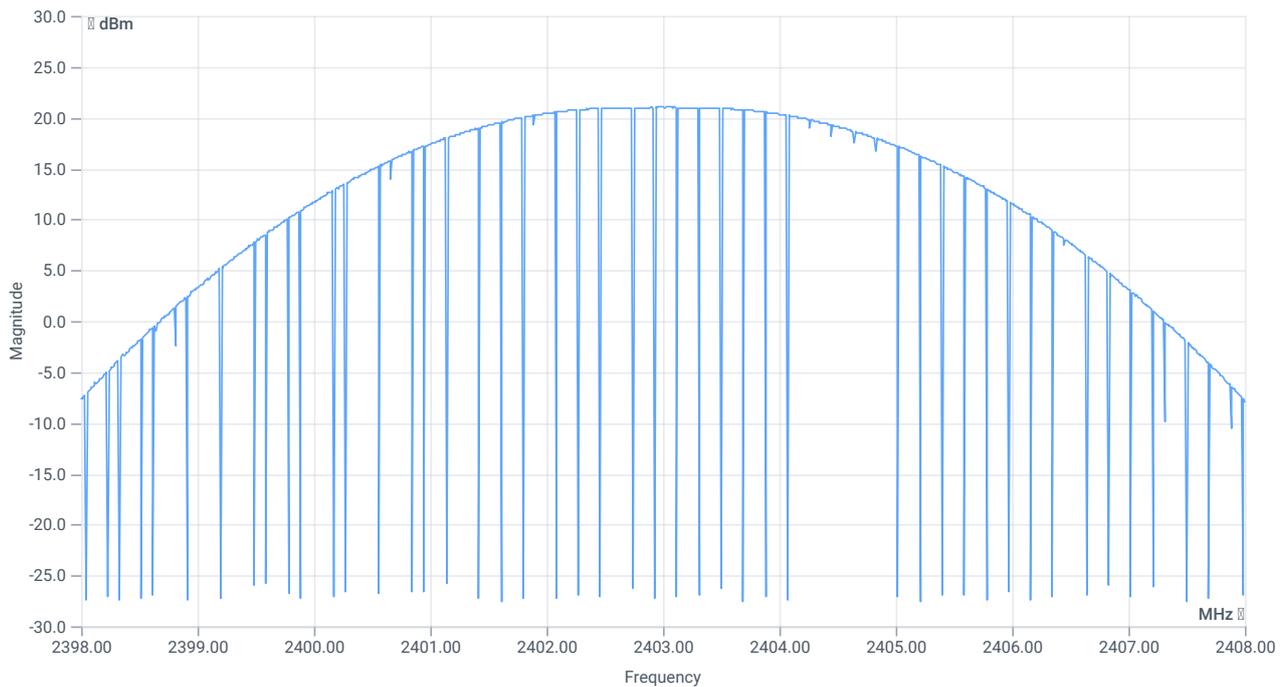

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	--	21.02	dBm	INFO
Peak power	--	--	126.473635	mW	INFO
Frequency at peak	--	--	2402.98	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ Generic 2G4

References

TC start	03.04.2024 16:20:39
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.41	dBm	INFO
Ref. frequency	--	--	2441.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.41 8.3 40
Start [MHz] Stop [MHz]	2436.000 2446.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

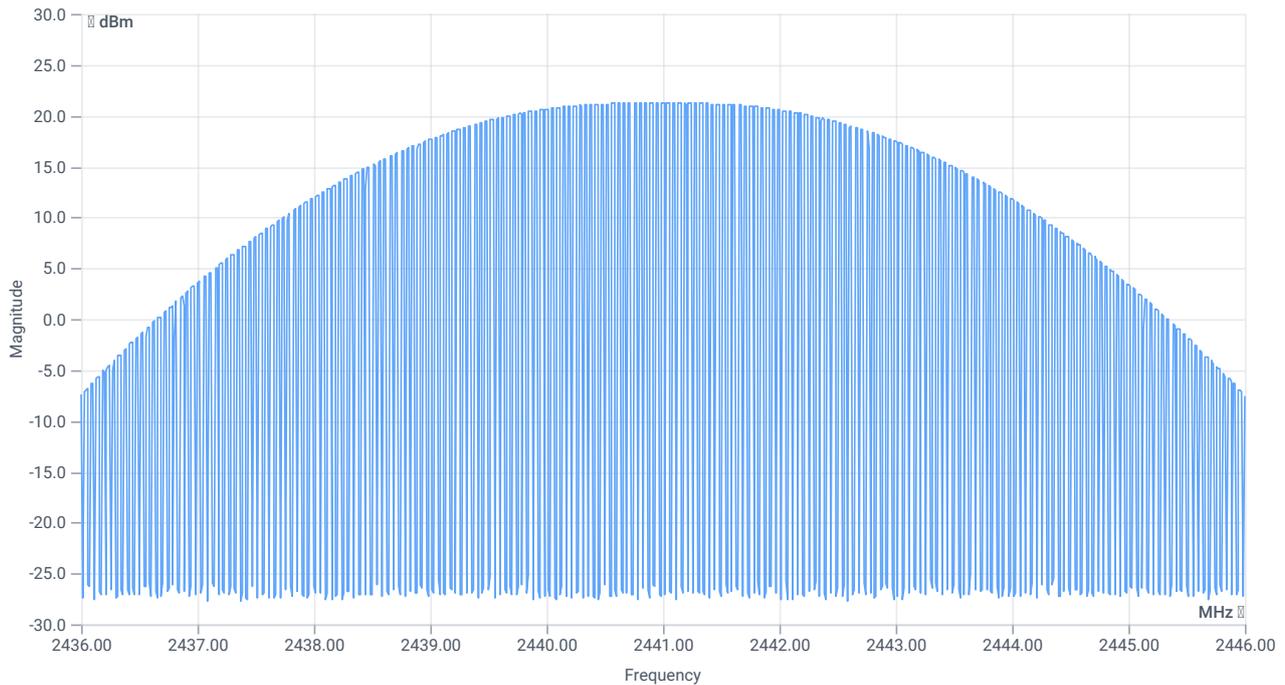

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	--	21.23	dBm	INFO
Peak power	--	--	132.739446	mW	INFO
Frequency at peak	--	--	2441	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ Generic 2G4

References

TC start	03.04.2024 16:35:27
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2479 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.60	dBm	INFO
Ref. frequency	--	--	2479.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.60 8.39 40
Start [MHz] Stop [MHz]	2474.000 2484.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

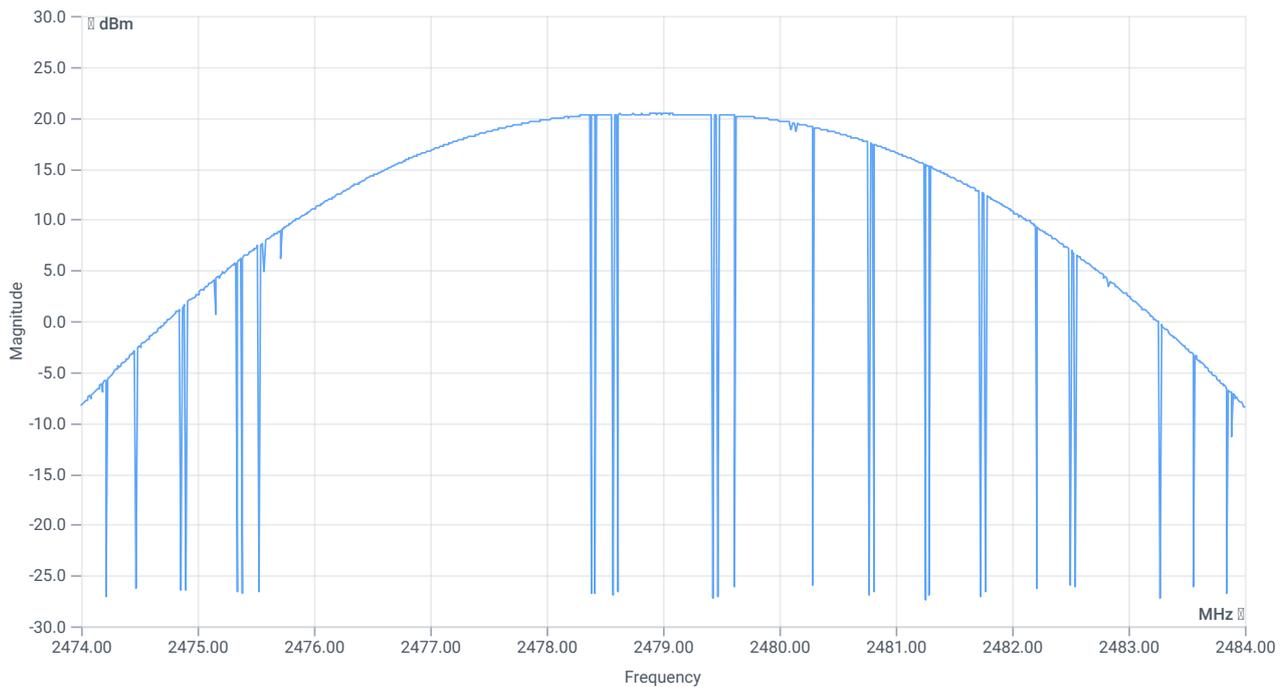

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	--	20.37	dBm	INFO
Peak power	--	--	108.893009	mW	INFO
Frequency at peak	--	--	2478.98	MHz	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ Generic 2G4

References

TC start	03.04.2024 16:03:06
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2403 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.21	dBm	INFO
Ref. frequency	--	--	2403.500	MHz	INFO

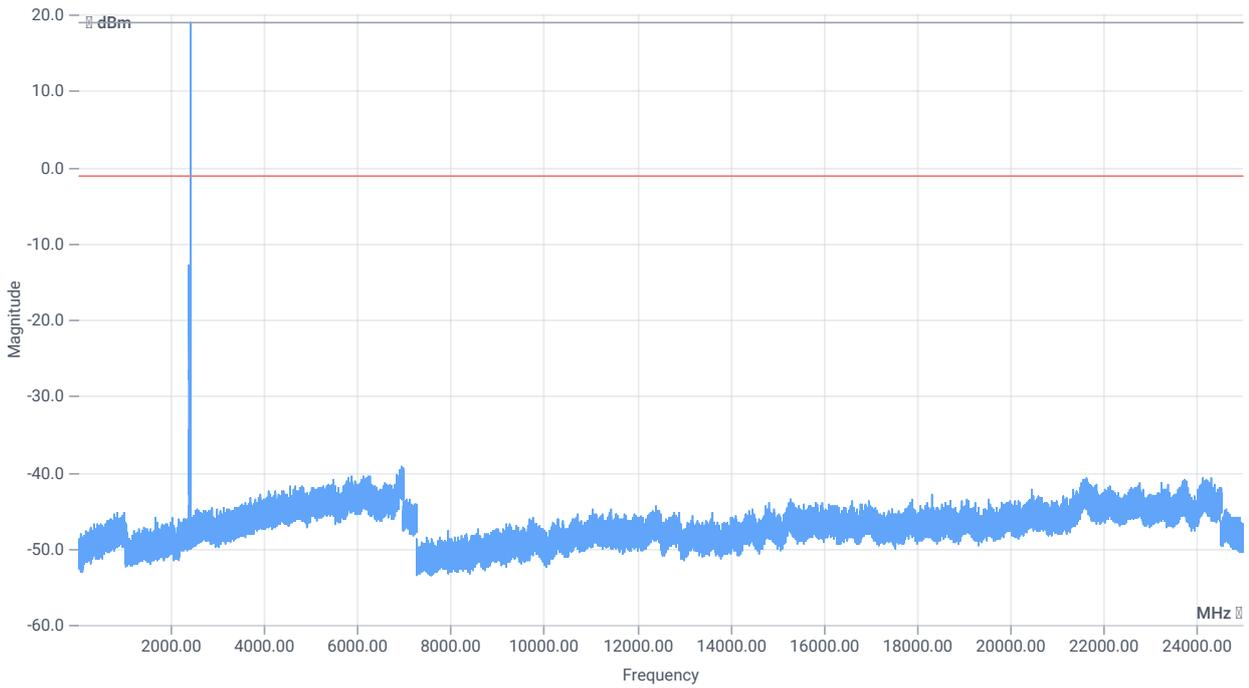

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.21 15.22 20
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

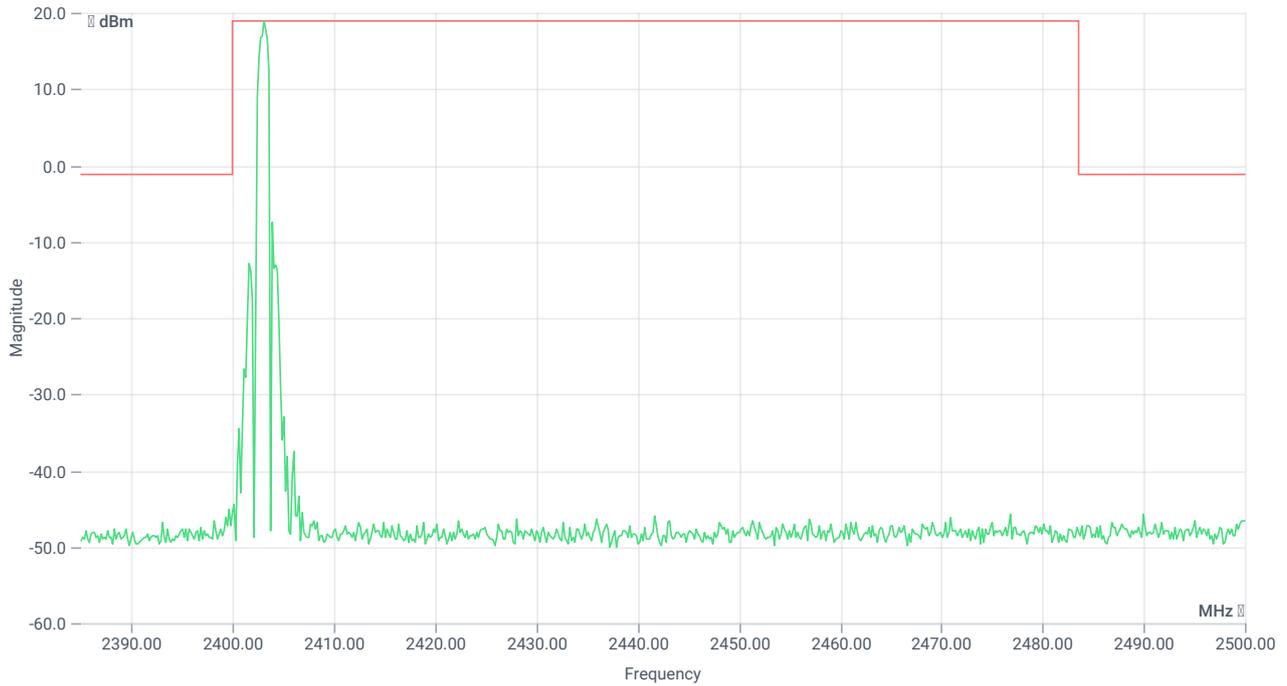

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2403.00 MHz	--	--	18.82	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 6958.833 MHz	0	--	38.02	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ Generic 2G4

References

TC start	03.04.2024 16:21:40
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2441 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.36	dBm	INFO
Ref. frequency	--	--	2441.500	MHz	INFO

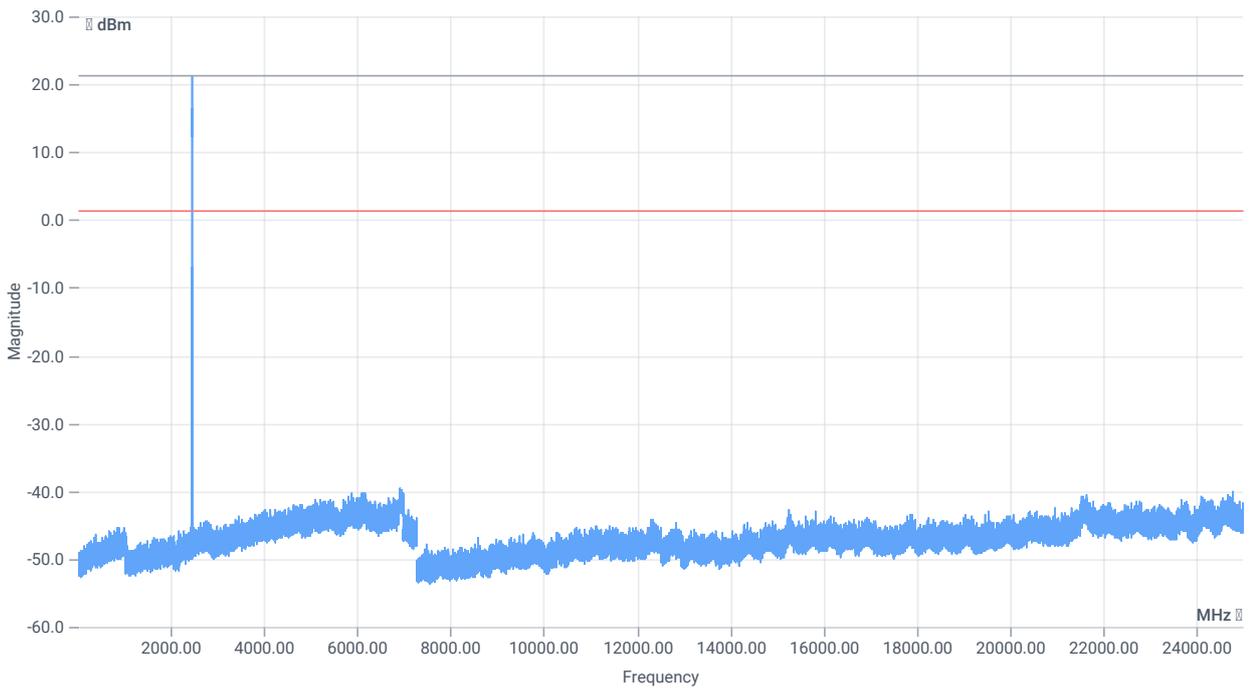

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.36 15.22 25
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

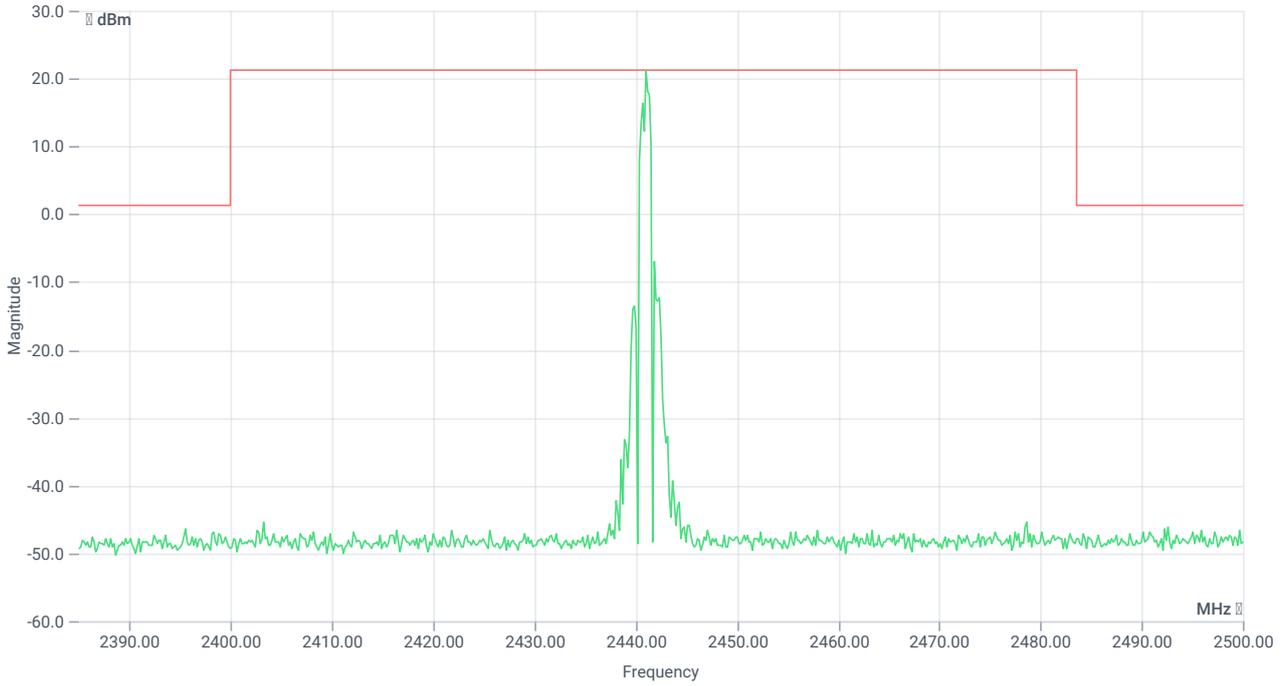

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2441.00 MHz	--	--	21.36	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 6927.5 MHz	0	--	41.03	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ Generic 2G4

References

TC start	03.04.2024 16:36:29
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted FHSS - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0


Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2479 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.59	dBm	INFO
Ref. frequency	--	--	2479.500	MHz	INFO

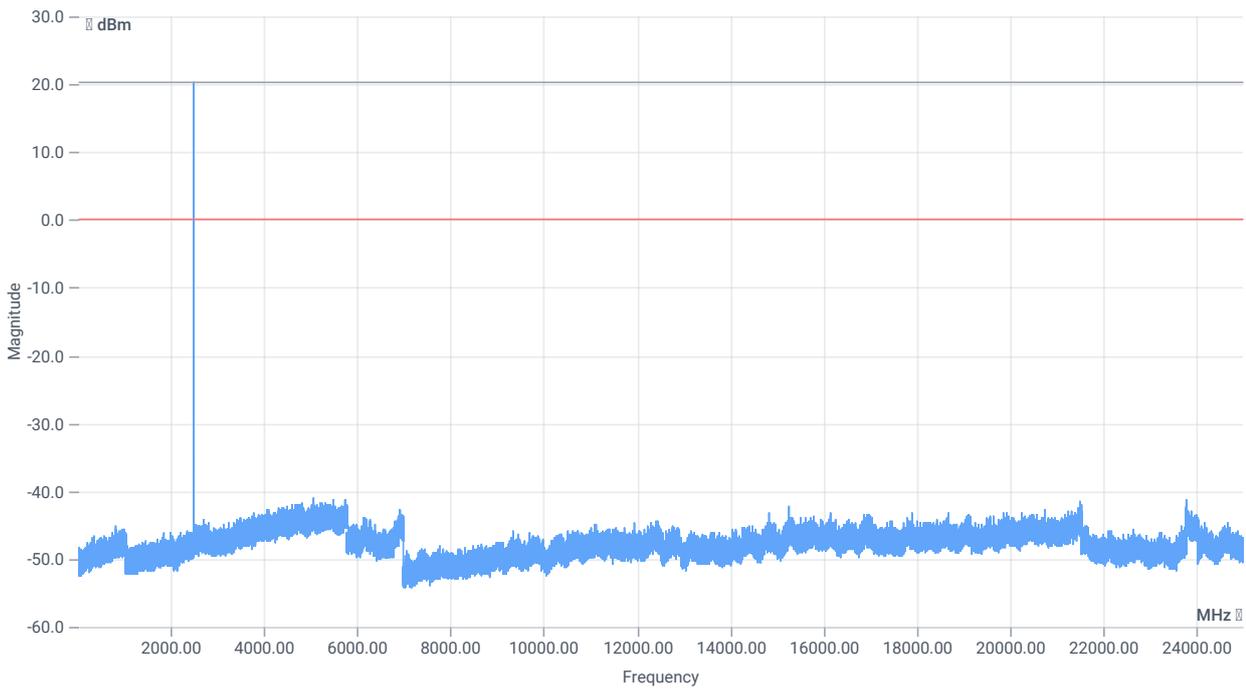

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.59 15.22 20
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

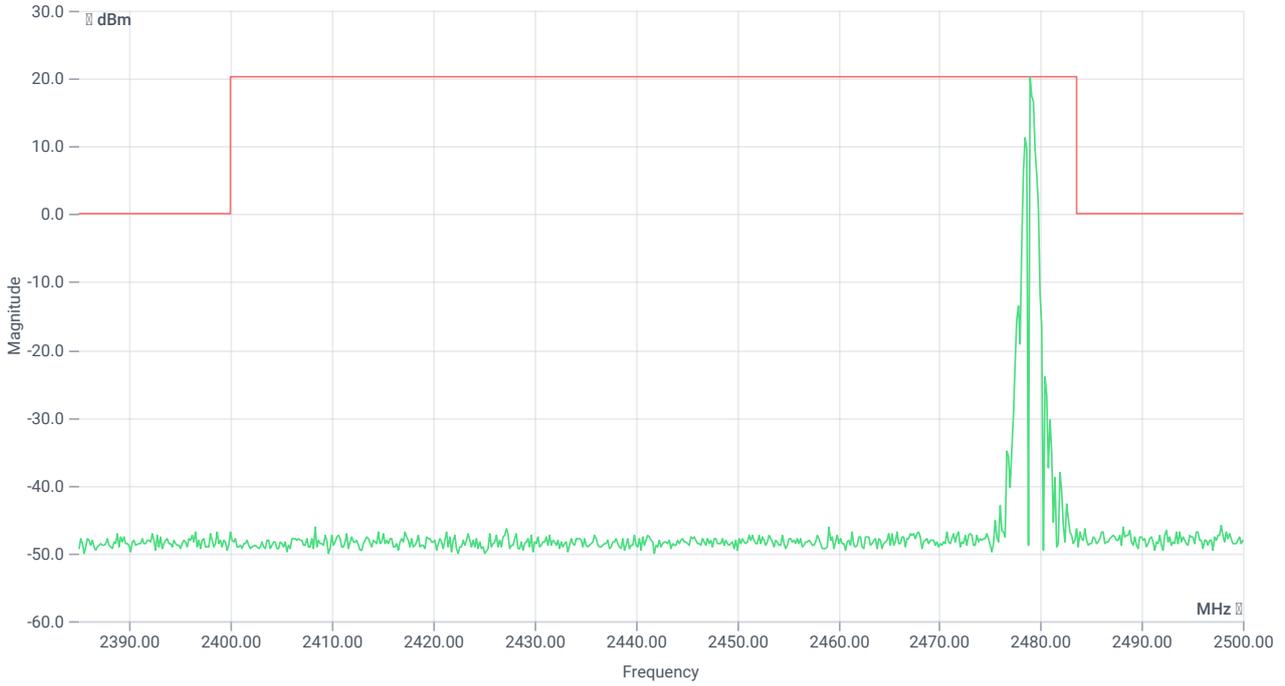

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2479.00 MHz	--	--	20.19	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 5066.167 MHz	0	--	41.31	dB	INFO

Verdict

PASS

NA # Hardcopy SA ~

References

TC start	05.04.2024 13:11:09
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Hardcopy spectrum analyzer
Information	

Equipment


Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test Parameter

Technology to test

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.33 8.33 30
Start [MHz] Stop [MHz]	2403.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	APE WRIT
Sweep: time [ms] count points per Section type	10 0 691 SWE

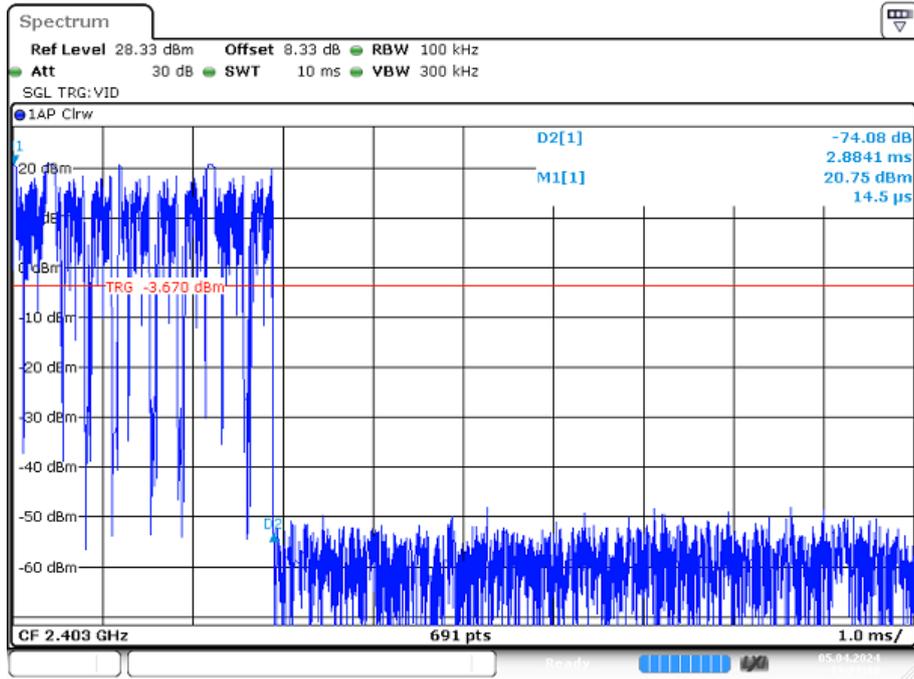

Date: 5 APR 2024 13:21:11

NA # Hardcopy SA ~

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Marker Readout					
Marker 1 Time	---	---	0.014	ms	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Delta Marker Readout					
Delta Marker 2 Time	---	---	2.884	ms	INFO
Delta Marker 2 Level	---	---	-74.080	dB	INFO

Verdict

INFO

NA # Hardcopy SA ~

References

TC start	05.04.2024 13:11:40
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Hardcopy spectrum analyzer
Information	

Equipment


Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test Parameter

Technology to test

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.33 8.33 30
Start [MHz] Stop [MHz]	2441.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	APE WRIT
Sweep: time [ms] count points per Section type	10 0 691 SWE

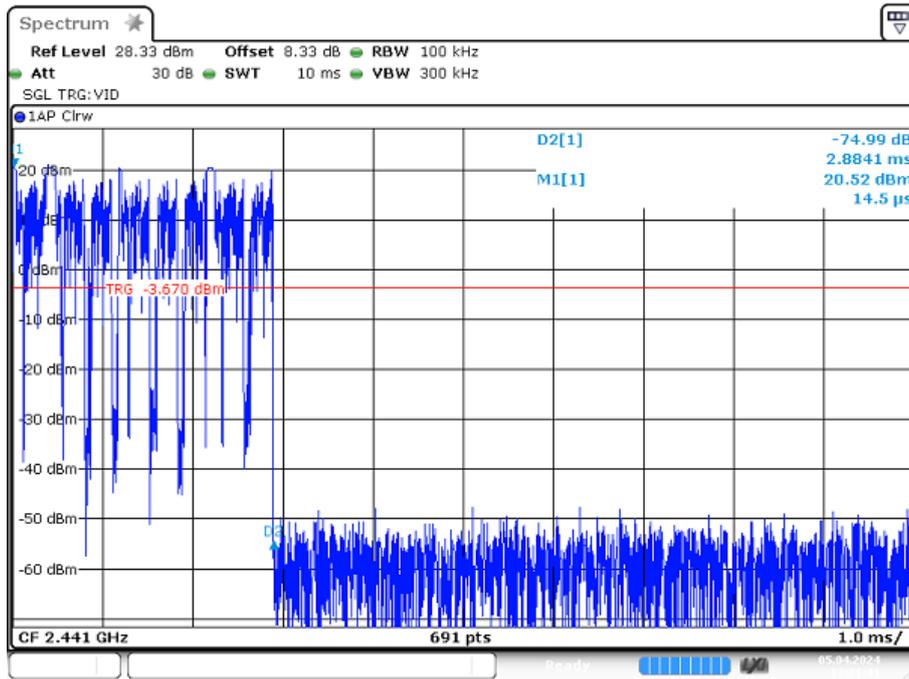

Date: 5 APR 2024 13:21:41

NA # Hardcopy SA ~

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Marker Readout					
Marker 1 Time	---	---	0.014	ms	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Delta Marker Readout					
Delta Marker 2 Time	---	---	2.884	ms	INFO
Delta Marker 2 Level	---	---	-74.986	dB	INFO

Verdict

INFO

NA # Hardcopy SA ~

References

TC start	05.04.2024 13:12:15
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Hardcopy spectrum analyzer
Information	

Equipment


Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test Parameter

Technology to test

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.33 8.33 30
Start [MHz] Stop [MHz]	2479.000 2479.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	APE WRIT
Sweep: time [ms] count points per Section type	10 0 691 SWE

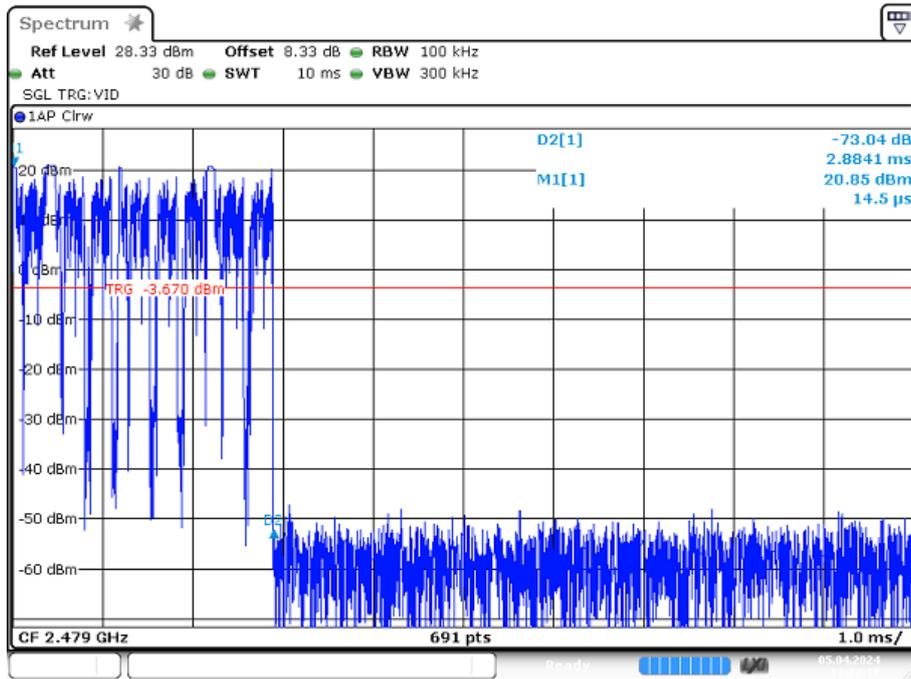

Date: 5 APR 2024 13:22:17

NA # Hardcopy SA ~

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Marker Readout					
Marker 1 Time	---	---	0.014	ms	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Delta Marker Readout					
Delta Marker 2 Time	---	---	2.884	ms	INFO
Delta Marker 2 Level	---	---	-73.043	dB	INFO

Verdict

INFO

NA # Hardcopy SA ~

References

TC start	05.04.2024 13:13:29
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Hardcopy spectrum analyzer
Information	

Equipment


Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test Parameter

Technology to test

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.33 8.33 30
Start [MHz] Stop [MHz]	2403.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	APE WRIT
Sweep: time [ms] count points per Section type	10000 0 691 SWE

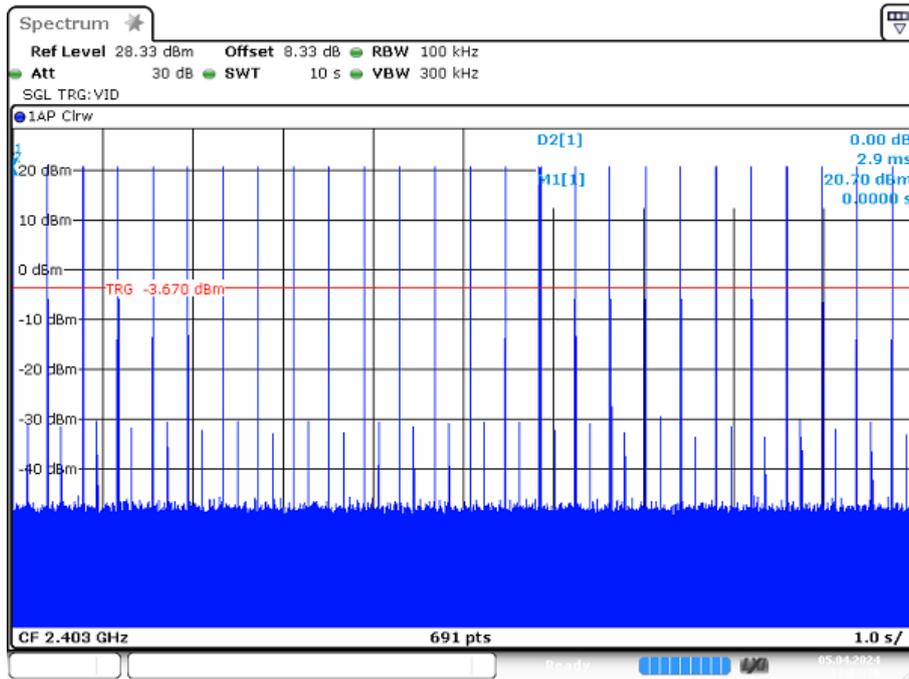

Date: 5 APR 2024 13:23:30

NA # Hardcopy SA ~

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Marker Readout					
Marker 1 Time	---	---	0.014	ms	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Delta Marker Readout					
Delta Marker 2 Time	---	---	2.884	ms	INFO
Delta Marker 2 Level	---	---	0.000	dB	INFO

Verdict

INFO

NA # Hardcopy SA ~

References

TC start	05.04.2024 13:14:18
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Hardcopy spectrum analyzer
Information	

Equipment


Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test Parameter

Technology to test

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.33 8.33 30
Start [MHz] Stop [MHz]	2441.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	APE WRIT
Sweep: time [ms] count points per Section type	10000 0 691 SWE

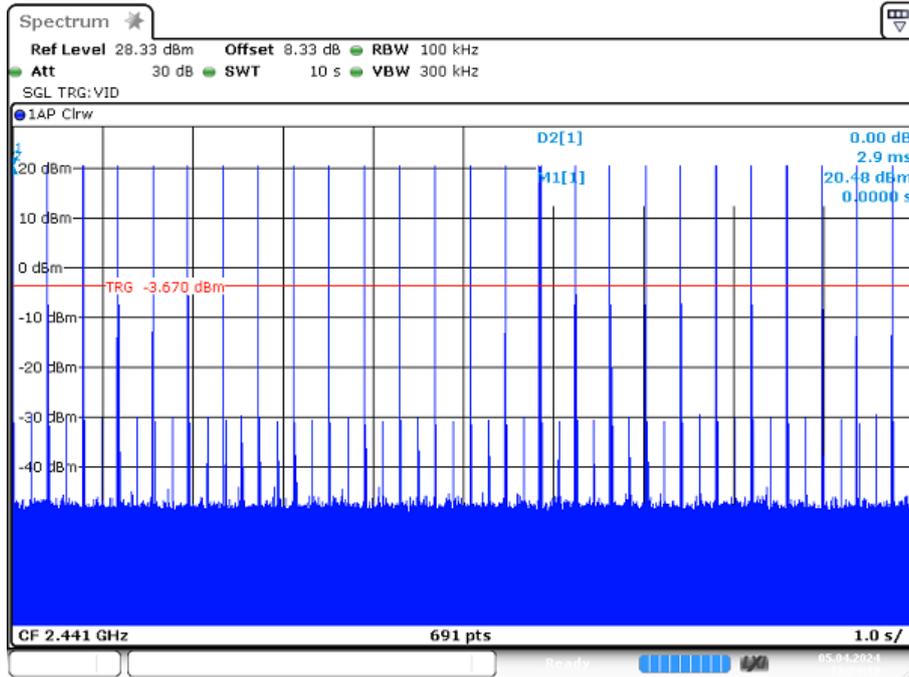

Date: 5 APR 2024 13:24:20

NA # Hardcopy SA ~

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Marker Readout					
Marker 1 Time	---	---	0.014	ms	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Delta Marker Readout					
Delta Marker 2 Time	---	---	2.884	ms	INFO
Delta Marker 2 Level	---	---	0.000	dB	INFO

Verdict

INFO

NA # Hardcopy SA ~

References

TC start	05.04.2024 13:15:41
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Hardcopy spectrum analyzer
Information	

Equipment


Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Test Parameter

Technology to test

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	28.33 8.33 30
Start [MHz] Stop [MHz]	2479.000 2479.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	APE WRIT
Sweep: time [ms] count points per Section type	10000 0 691 SWE

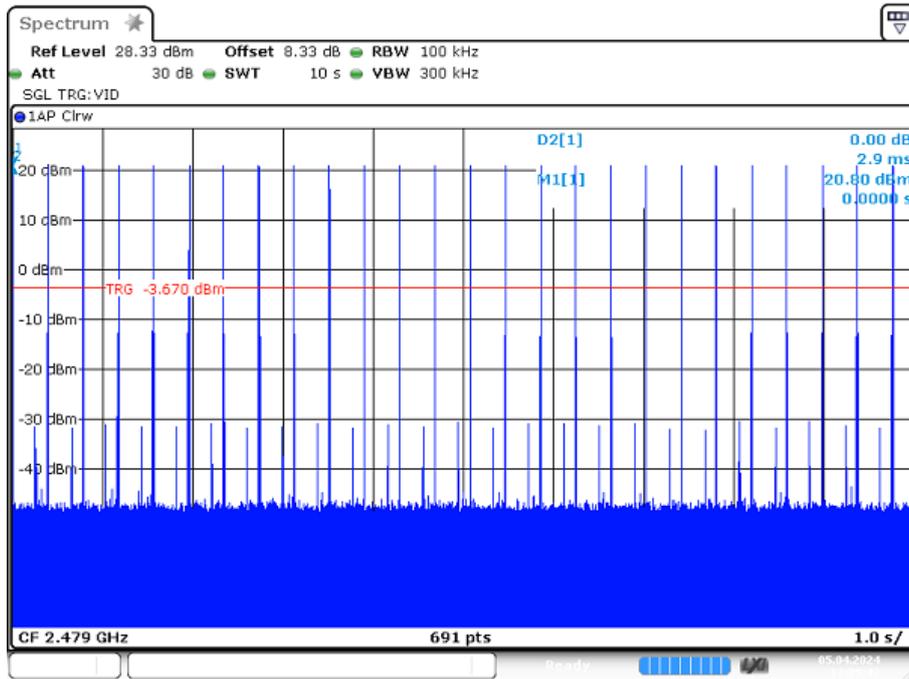

Date: 5 APR 2024 13:25:42

NA # Hardcopy SA ~

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Marker Readout					
Marker 1 Time	---	---	0.014	ms	INFO

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Delta Marker Readout					
Delta Marker 2 Time	---	---	2.884	ms	INFO
Delta Marker 2 Level	---	---	0.000	dB	INFO

Verdict

INFO

FCC 15.247 # TX Emissions on band edge FCC ~ Generic 2G4 hopp

References

TC start	05.04.2024 13:21:56
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 TX Emissions conducted on band edge FHSS - Generic 2G4 hopp
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4 hopp
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX hopping MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.78	dBm	INFO
Ref. frequency	--	--	2466.970	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	25.78 8.3 35
Start [MHz] Stop [MHz]	2385.000 2500.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	30 1800 1001 SWE

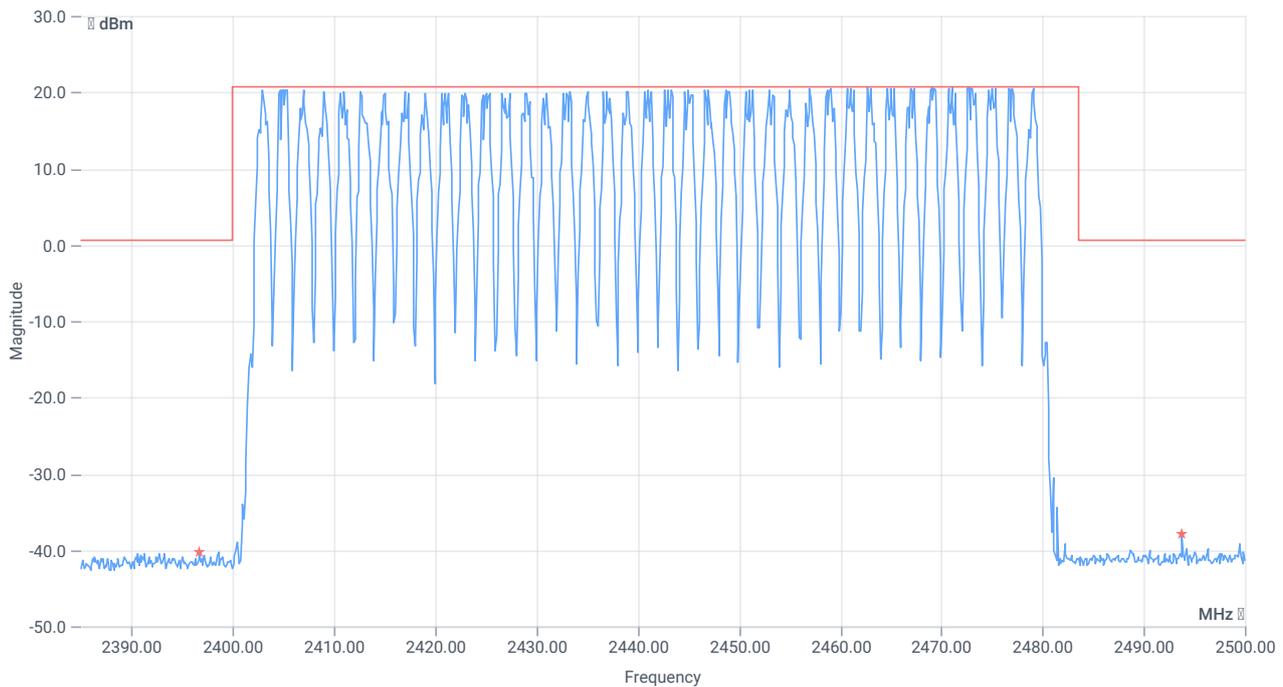

TX emissions on band edge

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max peak lower Band	--	0.69	-40.23	dBm	PASS
Max peak upper Band	--	0.69	-37.99	dBm	PASS

Verdict

NA # Peak output power 3MHz/3MHz ~ Generic 2G4

References

TC start	03.04.2024 15:14:58
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2403 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.99	dBm	INFO
Ref. frequency	--	--	2403.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.99 8.26 40
Start [MHz] Stop [MHz]	2398.000 2408.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

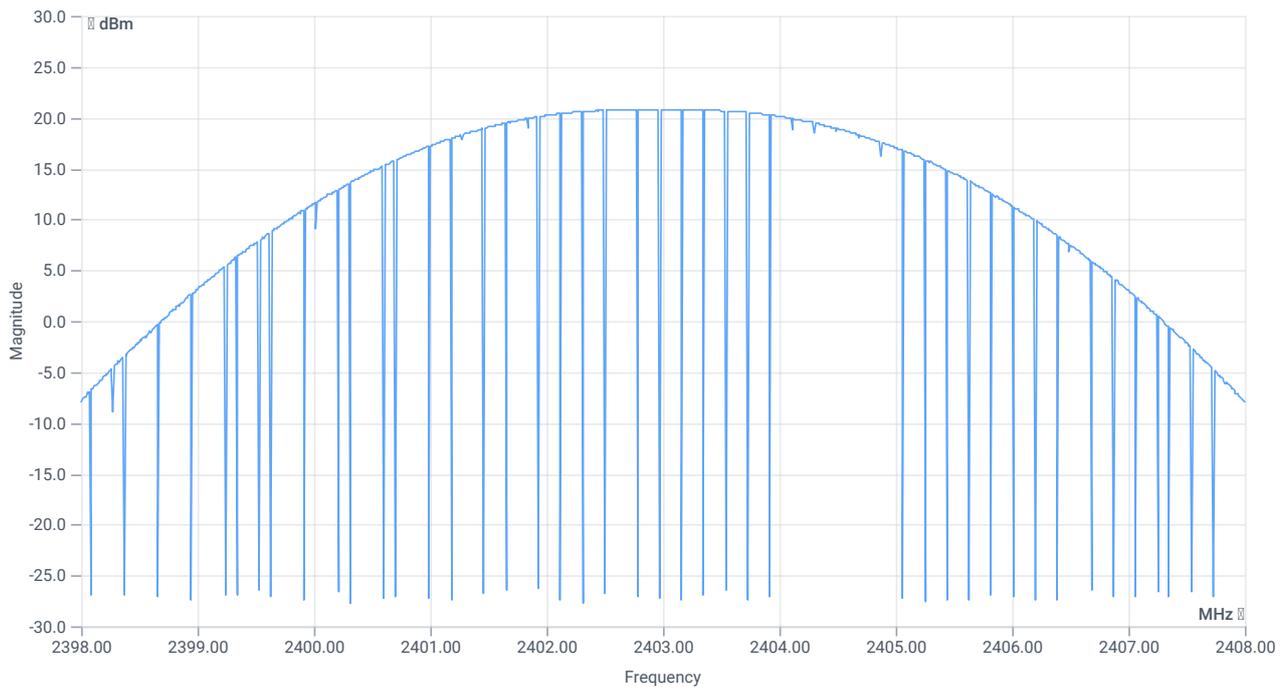

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	--	20.77	dBm	INFO
Peak power	--	--	119.39881	mW	INFO
Frequency at peak	--	--	2403	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ Generic 2G4

References

TC start	03.04.2024 15:30:25
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	19.62	dBm	INFO
Ref. frequency	--	--	2441.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	29.62 8.3 40
Start [MHz] Stop [MHz]	2436.000 2446.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

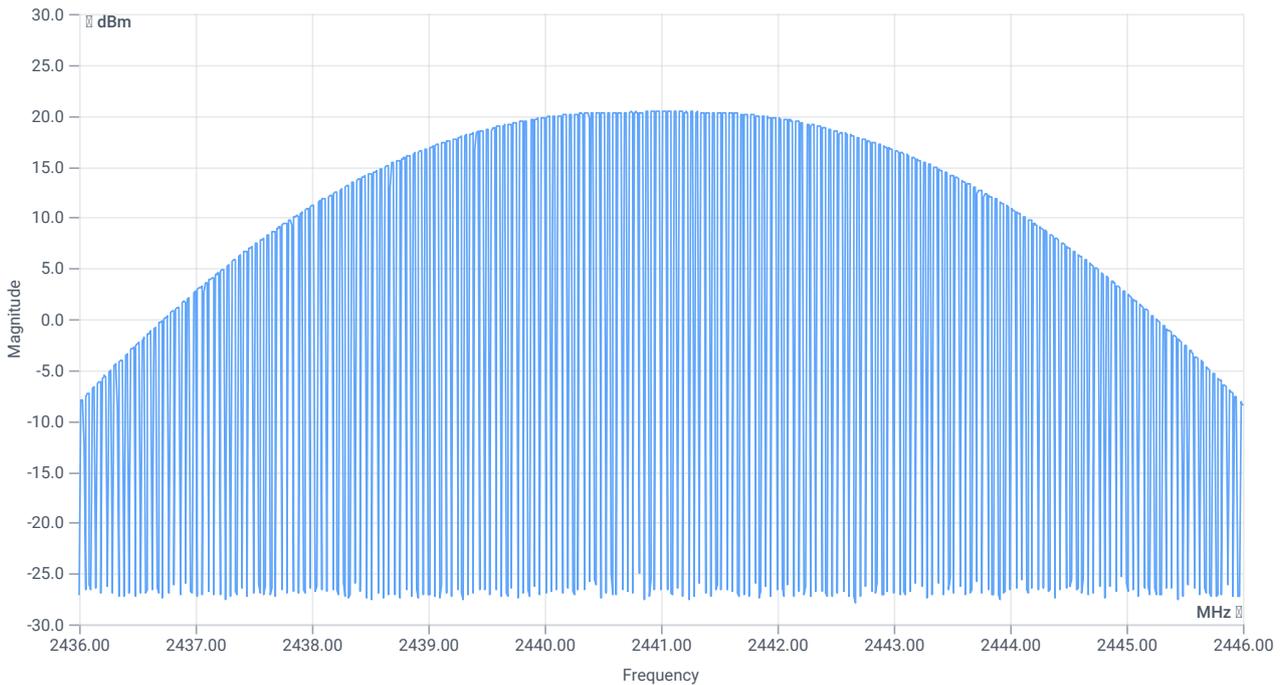

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	--	20.4	dBm	INFO
Peak power	--	--	109.64782	mW	INFO
Frequency at peak	--	--	2441.03	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ Generic 2G4

References

TC start	03.04.2024 15:45:57
Ambit temp [°C] humidity [rel%]	0.0 0
System version	5.0.3.6
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - Generic 2G4
Information	

EUT Common settings 2G4

Hopping supported	No
Burst length [ms]	10
Nominal bandwidth [MHz]	2
User interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	Generic 2G4
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2403
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2479
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2479 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	20.24	dBm	INFO
Ref. frequency	--	--	2479.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	30.24 8.39 40
Start [MHz] Stop [MHz]	2474.000 2484.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

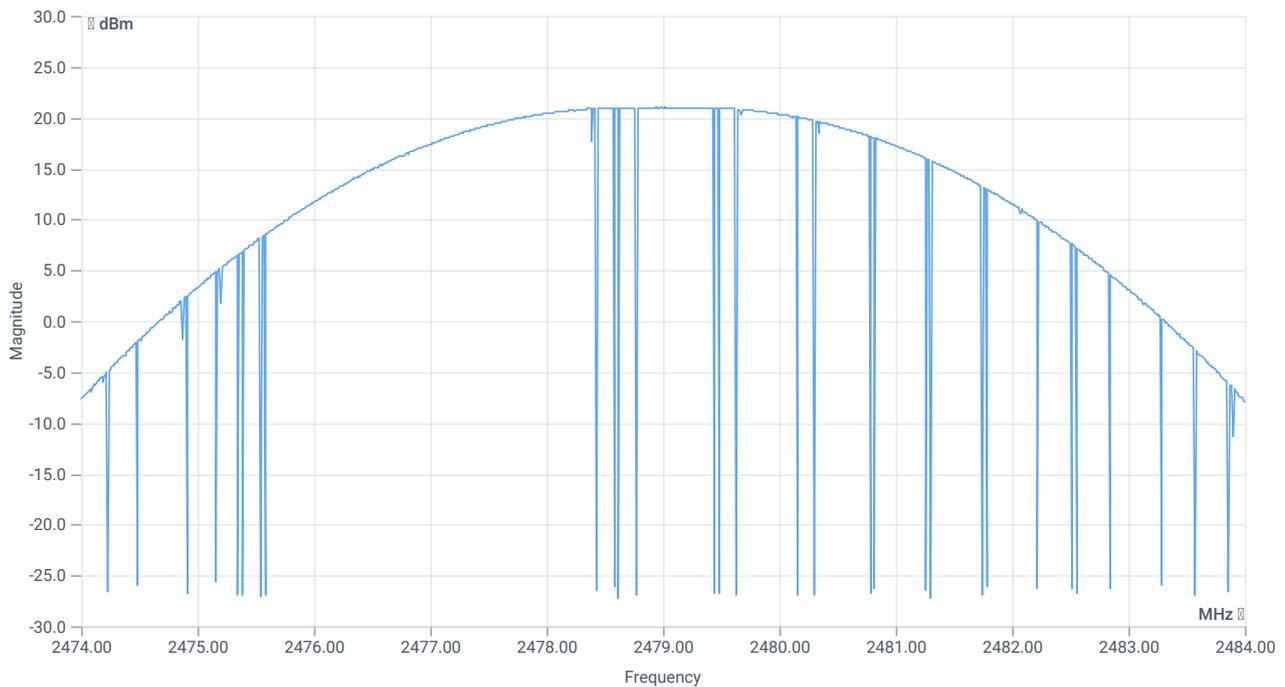

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	--	21.01	dBm	INFO
Peak power	--	--	126.182753	mW	INFO
Frequency at peak	--	--	2478.99	MHz	INFO

Verdict

PASS

- END OF DOCUMENT -